

USER MANUAL

MDU2750L


FCC-ID: ROO-MDU2750L

IC: 10829A-MDU2750L

Description

The Microwave Solutions MDU2750L Motion Detector Unit is an X-Band microwave transceiver that utilises the Doppler shift phenomenon to "sense" motion. The unit, contained in a lightweight metal housing, features a dielectric resonator stabilised FET oscillator, which provides stable operation over a broad temperature range in either CW or low duty cycle pulse mode and a balanced mixer for enhanced sensitivity and reliability.

The basic principle of operation consists of detecting the frequency shift between a transmitted and a received signal reflected back from a moving object within the field of view of the unit. The unit produces a low level output signal which can be amplified and processed to provide an audible or visual alarm signal. The MDU2750L employs low cost surface mount manufacturing techniques which are field proven as being rugged and reliable.

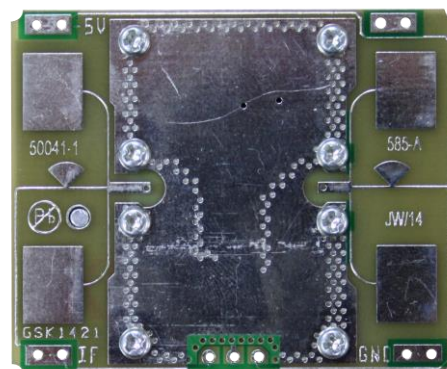


Absolute Maximum Ratings

Parameter	Symbol	Rating	Units	Comment
Supply Voltage	V _{CC}	+5.25	V	
Operating Temperature	T _{OP}	-40 to +70	°C	Performance level not guaranteed
Storage Temperature	T _{STG}	-40 to +80	°C	


Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units	Comment
Transmit Frequency	f _T	10.500	10.525	10.550	GHz	Pre-set during manufacture.
Temperature Stability	Δf			5	MHz	Over T _{OP} range below
Output Power	P _{OUT}		12		dBm	EIRP
Antenna Beamwidth			72		°	-3dB, horizontal with tab down
			36		°	-3dB, vertical with tab down
IF Output Offset	V _{DC}	-150	0	+150	mV	Into free space
Sensitivity			-83		dBm	10dB S/N ratio
Noise				10	μV	In 3Hz – 80Hz bandwidth
Supply Voltage	V _{CC}	4.75	5.00	5.25	V	
Supply Current	I _{CC}		22	25	mA	
Pulse Width		5			μs	Min. duty cycle – 1%
Operating Temp	T _{OP}	-20		+55	°C	Full specification compliance

Coverage Patterns

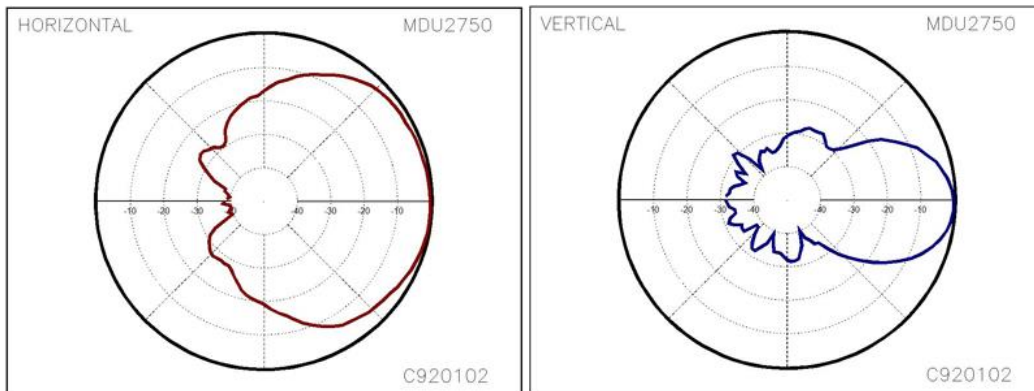

Connections & Mechanical Outline

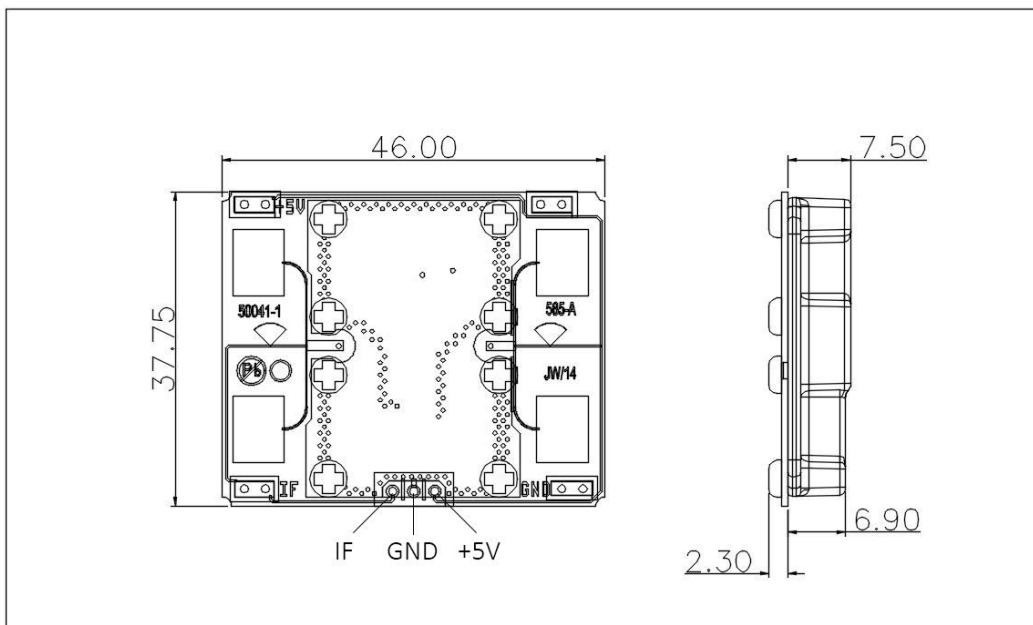

Handling Precautions

The MDU2750L is sensitive to damage from ESD.

- Normal precautions as usually applied to CMOS devices are sufficient when handling the module.
- Touching the connection points should be avoided before soldering the module into circuit.
- Using a multimeter (e.g. for resistance measurement) between any of the connection points may cause damage to the module.



Certification

Microwave Solutions Ltd. has established and maintains a Quality System that has been audited by BSI and holds ISO 9001:2008 approval under certificate FM56058.

The MDU2750L complies with the requirements of the RoHS Directive European Union Directive 2011/65/EU and with the requirements of the REACH Regulations EC 1907/2006.

OEM Responsibilities

Manufacturers of mobile or fixed devices incorporating MDU2750L modules are authorized to use the FCC Grants and IC Certificates of the MDU2750L modules for their own final products under the conditions referenced in this document. It is the responsibility of the manufacturer of the final product to ensure that the MDU2750L module is operated within the approved conditions shown below. If the FCC/IC label of the module is not visible when the module is installed inside the final product then the outside of the final product must also display a label stating "Contains FCC ID: ROO-MDU2750L" and "Contains IC: 10829A-MDU2750L".

Approved Operating Conditions to meet FCC/IC requirements

The MDU2750L module can be operated in full compliance with FCC/IC requirements (depending on the characteristics of the final product) under the following conditions:

- 1) The power supply voltage provided to the module (at the module terminals) must be maintained within the specified range of $+5 \pm 0.25$ volts under all conditions of AC line voltage irregularities, battery voltages, ambient temperatures and worst case load conditions.
- 2) If the module is operated under pulsed conditions, the rise and fall times of the power pulse shall be less than 1 μ s and, during the pulse, the power supply voltage shall be maintained within the limits of 1) above under all conditions.
- 3) A minimum separation distance of 1.2cm is required between the user and the module when operating at 100% duty cycle.
- 4) If the final product is designed for use in any situation except in motor vehicles or on aircraft the module can be operated with any duty cycle up to and including 100%.
- 5) If the final product is designed for use in motor vehicles or on aircraft, the module can be operated continuously with a maximum duty cycle of 25.8% (averaged over 100ms) or with any duty cycle up to and including 100% (averaged over 100ms) if the final product includes features to prevent continuous operation (as defined in the FCC Rules and Industry Canada Standards).

FCC and Industry Canada statements:

- This device complies with Part 15 of the FCC Rules and Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:
 - (1) This device may not cause harmful interference, and
 - (2) This device must accept any interference received, including interference that may cause undesired operation.
- This device may only be operated using the approved integral antenna.
- This device complies with FCC and Industry Canada radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance.
- This device must not be co-located or operating in conjunction with any other antenna or transmitter.
- Changes or modifications not expressly approved by Microwave Solutions Ltd. may void the user's authority to operate this equipment
- In the event that these conditions or the Approved Operating Conditions above cannot be met, then the FCC and Industry Canada certifications are no longer considered valid and the FCC ID and IC Certification Number cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate certification.