

Register your product and get support at
www.philips.com/welcome

ID555



EN Telephone Answering Machine



Warning

Use only rechargeable batteries.
Charge the handset for 24 hours before use.

PHILIPS







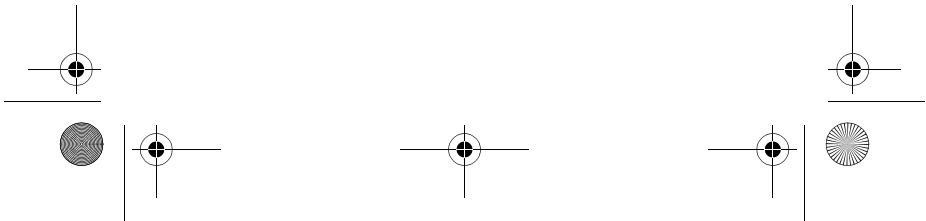




Table of contents

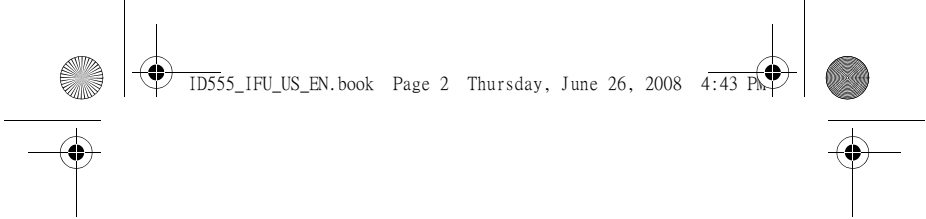

1	Safety information	3	4.3	Menu structure	17
1.1	Equipment Approval Information	3	5	Using your phone	20
1.2	Interference Information	4	5.1	Make a call	20
1.3	Hearing Aid Compatibility (HAC)	5	5.2	Answer a call	21
1.4	FCC RF Radiation Exposure Statement	5	5.3	End a call	21
2	Important	7	6	Use more of your phone	22
2.1	Power requirements	7	6.1	Switch the handset on/off	22
2.2	Safety Information	8	6.2	Keypad lock/unlock	22
2.3	Conformity	8	6.3	Text or number entry	22
2.4	Electric, Magnetic and Electromagnetic Fields ("EMF")	8	6.4	Call in progress	22
2.5	Recycle your batteries	9	6.5	Call waiting	23
2.6	Service Centers	9	6.6	Caller Line Identification	23
3	Your phone	10	6.7	Using your Phonebook	24
3.1	What's in the box	10	6.8	Using the Redial list	26
3.2	Overview of your phone	11	6.9	Using the Call log	27
3.3	Display icons	13	6.10	Using the Intercom	28
3.4	Overview of the base station	14	6.11	Paging	29
4	Getting started	15	7	Personal settings	30
4.1	Connect the base station	15	7.1	Change the Handset Name	30
4.2	Install your phone	15	7.2	Handset Tones	30
			7.3	Change the Display Language	31
			7.4	Set Contrast Level	31



7.5	Activate/Deactivate Auto Hang-up	31	10	Telephone answering machine (TAM)	41
8	Clock and Alarm settings	32	10.1	Play	41
8.1	Set date and time	32	10.2	Delete all messages	43
8.2	Set date/time format	32	10.3	Set the Answer mode	43
8.3	Set alarm	33	10.4	Personalised Outgoing Message	43
8.4	Set alarm tone	33	10.5	Switch the Answering Machine On/Off via handset	44
9	Advanced settings	34	10.6	Answering Machine settings	44
9.1	Easy Call	34	10.7	Call Screening	46
9.2	Activate/Deactivate Conference mode	34	11	Technical data	48
9.3	Call Barring	35	12	Frequently asked questions	49
9.4	Change master PIN	35	13	Index	52
9.5	Registration	36			
9.6	Unregister a handset	37			
9.7	Reset Unit	37			
9.8	Default settings	37			
9.9	Set area code	38			
9.10	Set Auto Prefix	38			
9.11	Change Flash time	39			
9.12	Change the Dial Mode	39			
9.13	Set first ring	39			



1 Safety information

1.1 Equipment Approval Information

Your telephone equipment is approved for connection to the Public Switched Telephone Network and is in compliance with parts 15 and 68, FCC Rules and Regulations and the Technical Requirements for Telephone Terminal Equipment published by ACTA.

1.1.1 Notification to the Local Telephone Company

On the bottom of this equipment is a label indicating, among other information, the US number and Ringer Equivalence Number (REN) for the equipment. You must, upon request, provide this information to your telephone company.

The REN is useful in determining the number of devices you may connect to your telephone line and still have all of these devices ring when your telephone number is called. In most (but not all) areas, the sum of the RENs of all devices connected to one line should not exceed 5. To be certain of the number of devices you may connect to your line as determined by the REN, you should contact your local telephone company.

Safety information





A plug and jack used to connect this equipment to the premises wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by the ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible modular jack that is also compliant. See installation instructions for details.

Notes

- This equipment may not be used on coin service provided by the telephone company.
- Party lines are subject to state tariffs, and therefore, you may not be able to use your own telephone equipment if you are on a party line. Check with your local telephone company.
- Notice must be given to the telephone company upon permanent disconnection of your telephone from your line.
- If your home has specially wired alarm equipment connected to the telephone line, ensure the installation of this product does not disable your alarm equipment. If you have questions about what will disable alarm equipment, consult your telephone company or a qualified installer.

US Number is located on the cabinet bottom.

REN Number is located on the cabinet bottom.






1.1.2 Rights of the Telephone Company




Should your equipment cause trouble on your line which may harm the telephone network, the telephone company shall, where practicable, notify you that temporary discontinuance of service may be required. Where prior notice is not practicable and the circumstances warrant such action, the telephone company may temporarily discontinue service immediately. In case of such temporary discontinuance, the telephone company must: (1) promptly notify you of such temporary discontinuance; (2) afford you the opportunity to correct the situation; and (3) inform you of your right to bring a complaint to the Commission pursuant to procedures set forth in Subpart E of Part 68, FCC Rules and Regulations.

The telephone company may make changes in its communications facilities, equipment, operations or procedures where such action is required in the operation of its business and not inconsistent with FCC Rules and Regulations. If these changes are expected to affect the use or performance of your telephone equipment, the telephone company must give you adequate notice, in writing, to allow you to maintain uninterrupted service.



1.2 Interference Information

This equipment generates and uses radio frequency energy which may interfere with residential radio and television reception if not properly installed and used in accordance with instructions contained in this manual. Reasonable protection against such interference is ensured, although there is no guarantee this will not occur in a given installation. If interference is suspected and verified by switching this equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient the radio/television receiver's antenna, relocate the equipment with respect to the receiver, plug the equipment and receiver into separate circuit outlets. The user may also wish to consult a qualified radio/television technician for additional suggestions. This equipment has been fully tested and complies with all limits for Class B computing devices pursuant to part 15 FCC Rules and Regulations. This device complies with RSS-210 of Industry Canada. Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device. This device complies with Part 15 of the FCC Rules. Operation is subject





to the following two conditions:
 (1) This device may not cause harmful interference; and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

Privacy of Communications may not be ensured when using this product. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna (that is, the antenna for radio or television that is "receiving" the interference).
- Reorient or relocate and increase the separation between the telecommunications equipment

and receiving antenna.

- Connect the telecommunications equipment into an outlet on a circuit different from that to which the receiving antenna is connected.

If these measures do not eliminate the interference, please consult your dealer or an experienced radio/television technician for additional suggestions. Also, the Federal Communications Commission has prepared a helpful booklet, "How To Identify and Resolve Radio/TV Interference Problems." This booklet is available from the U.S. Government Printing Office, Washington, D.C. 20402. Please specify stock number 004-000-00345-4 when ordering copies.

Notice: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


1.3 Hearing Aid Compatibility (HAC)

This telephone system meets FCC/ Industry Canada standards for Hearing Aid Compatibility.

1.4 FCC RF Radiation Exposure Statement







This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed

Safety information





and operated with a minimum distance of 20 centimeters between the radiator and your body. This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter. For body worn operation, this phone has been tested and meets the FCC RF exposure guidelines when used with the belt clip supplied with this product. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.





2 Important

Take time to read this user manual before you use your phone. It contains important information and notes regarding your phone.

NOTICE: This product meets the applicable Industry Canada technical specifications.

The equipment must be installed using an acceptable method of connection. The customer should be aware that compliance with the above conditions may not prevent degradation of service in some situations.

Repairs to certified equipment should be made by an authorized Canadian maintenance facility designated by the supplier. Any repairs or alterations made by the user to this equipment, or equipment malfunctions, may give the telecommunications company cause to request the user to disconnect the equipment.

Users should ensure for their own protection that the electrical ground connections of the power utility, telephone lines and internal metallic water pipe systems, if present, are connected together. This precaution may be particularly important in rural areas.

CAUTION: Users should not attempt to make such connections themselves, but should contact the

appropriate electric inspection authority, or electrician, as appropriate.

NOTES: This equipment may not be used on coin service provided by the telephone company.



2.1 Power requirements

- This product requires an electrical supply of 220-240 volts AC. In case of power failure, the communication can be lost.
- The Electrical network is classified as hazardous. The only way to power down the charger is to unplug the power supply from the electrical outlet. Ensure that the electrical outlet is always easily accessible.
- The voltage on the network is classified as TNV-3 (Telecommunication Network Voltages), as defined in the standard EN 60-950.



Warning

To avoid damage or malfunction:

- Do not allow the charging contacts or the battery to come into contact with metal objects.
- Do not open it as you could be exposed to high voltages.
- Never use any other battery than the one delivered with the product or recommended by Philips: risk of explosion.
- Always use the cables provided with the product.



Important



- Use only with provided batteries:
 - a) TCL, PL-043043, Li-ion polymer battery, 3.7V 500mAH
 - b) Mcnair, MC-163-500, Li-ion polymer battery, 3.7V 500mAH
- Use only with provided adaptor:
 - Base Station**
 - a) Electronic Sales Ltd, IW507, 7.5V 500mA
 - b) Electronic Sales Ltd, TR5075G, 7.5V 500mA
 - Charger pod**
 - a) Electronic Sales Ltd, TR1575G, 7.5V 150mA
 - b) Electronic Sales Ltd, IW157, 7.5V 150mA
- Do not use the product in places where there are explosive hazards.
- Do not let small metal objects come into contact with the product. This can deteriorate audio quality and damage the product.
- Do not allow the charger to come into contact with liquids.
- Active mobile phones in the vicinity may cause interference.

About operating and storage temperatures:

- Operate in a place where temperature is always between 0 and 35° C (32 to 95° F).
- Store in a place where temperature is always between -20 and 45° C (-4 to 113° F).
- Battery life may be shortened in low temperature conditions.

2.2 Safety Information

- Handsfree activation could suddenly increase the volume in the earpiece to a very high level: make sure the handset is not too close to your ear.
- This equipment is not designed to make emergency calls when the power fails. An alternative has to be made available to allow emergency calls.
- Do not expose the phone to excessive heat caused by heating equipment or direct sunlight.
- Do not drop your phone or allow objects to fall on your phone.
- Do not use any cleaning agents containing alcohol, ammonia, benzene, or abrasives as these may harm the set.

2.3 Conformity

We, Philips declare that the product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. This product can only be connected to the analogue telephone networks of the countries mentioned on the packaging. You can find the Declaration of Conformity on www.p4c.philips.com.


2.4 Electric, Magnetic and Electromagnetic Fields ("EMF")

1. Philips Royal Electronics manufactures and sells many



consumer oriented products which usually, as with any electronic apparatus, have the ability to emit and receive electro magnetic signals.

2. One of Philips' leading Business Principles is to take all necessary health and safety precautions for our products, to comply with all applicable legal requirements and to stay well within the EMF standards applicable at the time of producing the products.
3. Philips is committed to develop, produce and market products that cause no adverse health effects.
4. Philips confirms that if its products are handled properly for their intended use, they are safe to use according to scientific evidence available today.
5. Philips plays an active role in the development of international EMF and safety standards, enabling Philips to anticipate further developments in standardisation for early integration in its products.




participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service within the United States and Canada.

The RBRC® program provides a convenient alternative to placing used nickel metal hydride batteries into the trash or municipal waste, which may be illegal in your area.

Philips's participation in RBRC® makes it easy for you to drop off the spent battery at local retailers participating in the RBRC® program or at authorized Philips product service centers.

Please call 1-800-8-BATTERY for information on Ni-MH battery recycling and disposal bans/restrictions in your area. Philips's involvement in this program is part of its commitment to protecting our environment and conserving natural resources.

RBRC® is a registered trademark of Rechargeable Battery Recycling Corporation.





2.5 Recycle your batteries

Do not dispose your rechargeable batteries. Call the toll free number 1-800-822-8837 to get instructions on how to recycle your batteries.

The RBRC® Seal on the nickel metal hydride battery indicates that Philips Royal Electronics is voluntarily



Important



3 Your phone

Congratulations on your purchase and welcome to Philips!

To fully benefit from the support that Philips offers, register your product at www.philips.com/welcome.

3.1 What's in the box



Handset



Base station



Battery door



1 Li-ion rechargeable battery



Power supply



Line cord*



User manual



Guarantee




Quick Start Guide

Note

*You may find in the box the line adaptor delivered separately from the line cable. In this case, you have to connect the line adaptor to the line cord first before plugging the line cord to the line socket.

In multihandset packs, you will find one or more additional handsets, chargers with power supply units and additional rechargeable batteries.

3.2 Overview of your phone

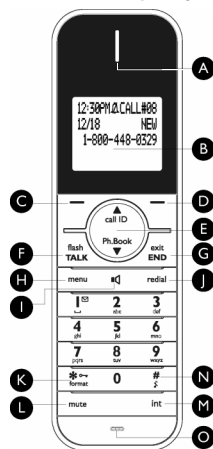

- A Earpiece**
- B Display**
See page 13 for an overview of the display icons.
- C Left Softkey**
Select the function displayed on the handset screen directly above it.
During a call: Initiate a second call, consult phonebook or transfer a call. Switch on the backlight.
- D Right Softkey**
Select the function displayed on the handset screen directly above it. Switch on the backlight.

- E Navigation keys**
In idle mode: Scroll up to access the Call log and scroll down to access the Phonebook.
During a call: Scroll up/down to increase or decrease earpiece and speaker volume.
In editing mode: Scroll up/down to go to the previous character or next character.
In other modes: Scroll up/down a menu list or go to the previous or next record in the Phonebook, Redial list or Call log.
- F Talk key**
In idle mode: Answer an incoming external or internal call.
During a call: Activate the recall function.
- G Hang-up key**
In idle mode: Long press to switch on/off the handset.
During a call: Hang up a call.
In other modes: Return to the idle mode.
- H Menu key**
In idle mode: Go to the main menu.
- I Loudspeaker key**
In idle mode: Turn on the loudspeaker and dial the number.
Answer an incoming call using handsfree mode.
During a call: Toggle the loudspeaker on/off.
- J Redial key**
In idle mode: Access the Redial list.

Your phone