

BL-BKB78HA BT3.0 Instruction Manual

• Contents

- 1、Bluetooth keyboard 1PCS
- 2、Instruction manual 1PCS
- 3、USB Charging cable 1PCS

• Product Features


- 1、 use Broadcom20730 main control chip, have Bluetooth3.0 interface.
- 2、 industry leading bluetooth solutions, WIDCOMM BTW (Microsoft officially designated software) bluetooth software
- 3、 Ultra slim body with scissors –switch keys frame design. The ergonomic design enable users to work long time without fatigue and comfortable handling feel.
- 4、 With aluminum back plate design, the keyboard is super light and durable.
- 5、 Mute design: effectively avoid other person sleeping (especially for one room with several person).
- 6、 Support iPad, Iphone, Mac, Windows and Android system etc. It' s more convenient for you.
- 7、 Work Environment: Temperature 0-55 °C, humidity: 20%-80%
- 8、 Built in lithium battery, avoid changing battery frequently.

• Specification


- 1、 executive standard: bluetooth V3.0
- 2、 maximum operating distance: 10 meters
- 3、 modulation mode: 2.4 G straight sequence fh (FHSS)
- 4、 transmit power: Class 2 levels
- 5、 working voltage: 3.7V
- 6、 working current: <2.0 MA
- 7、 standby current: 1.0 MA
- 8、 sleep current 55uA
- 9、 charging current: 150MA
- 10、 standby time: 160days
- 11、 theoretical use time: 30days
- 12、 continuous uninterrupted use time: 120hours
- 13、 theoretical charging time: 2.5 hours
- 14、 lithium battery capacity: 230mAh
- 15、 lithium battery life span: three years
- 16、 the lithium battery type: 4.0 * 20 * 35MM
- 17、 the key dynamics: 60 + 10g
- 18、 buttons life: 5 million times
- 19、 Dimension: L246mm*W191.5mm*H9.6mm

• Bluetooth keyboard installation

1. Keyboard pair with iPad procedure:
 - (1)、 Turn on the switch " ON" , the blue indicator light 5 seconds then extinguished which advise you the keyboard be turned on. Please see below instruction picture.

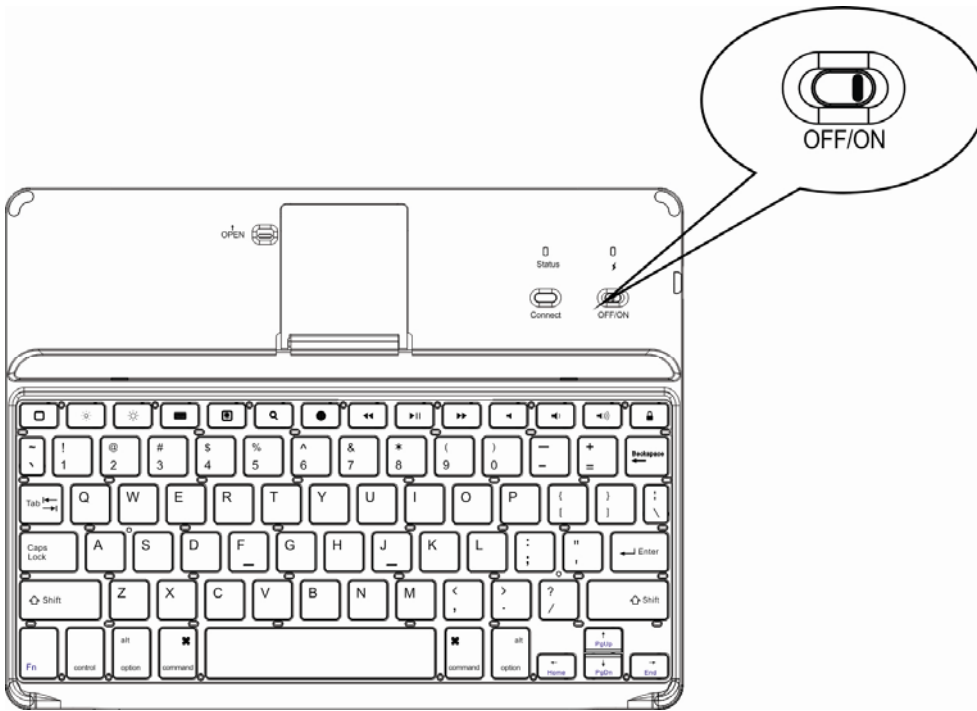

(2)、 Press “Connect” button, ” Status” indicator twinkle which advise you is pairing.

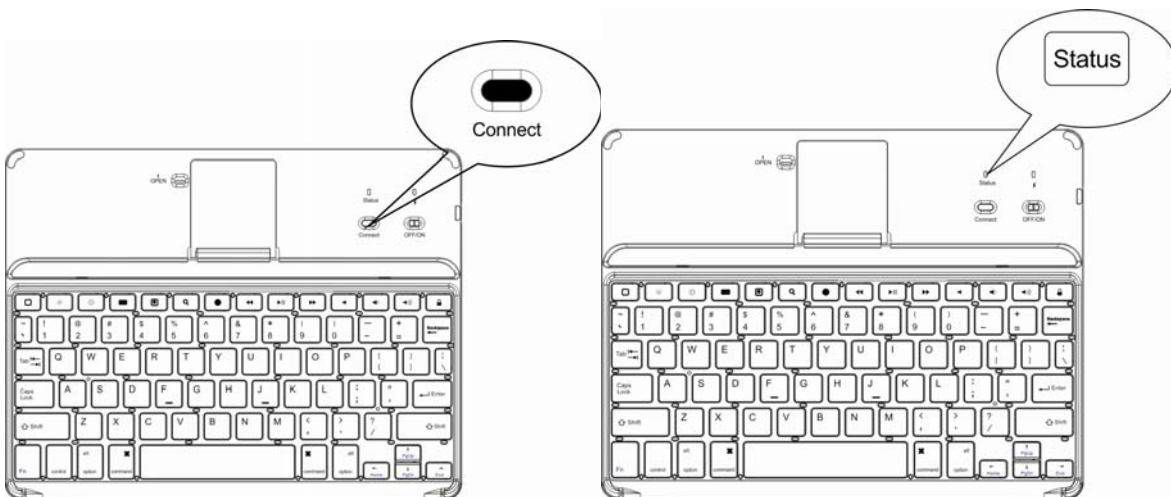


(3)、 Click the setting button of IPAD and IPHONE, Then choose the General and bluetooth. Turn on the bluetooth, then the IPAD will searching bluetooth device .



(4)、 After the IPAD and IPHNE find out the bluetooth device and connect the bluetooth keyboard(see blow

picture), IPAD will advise you input the password. Then press “Enter” key.

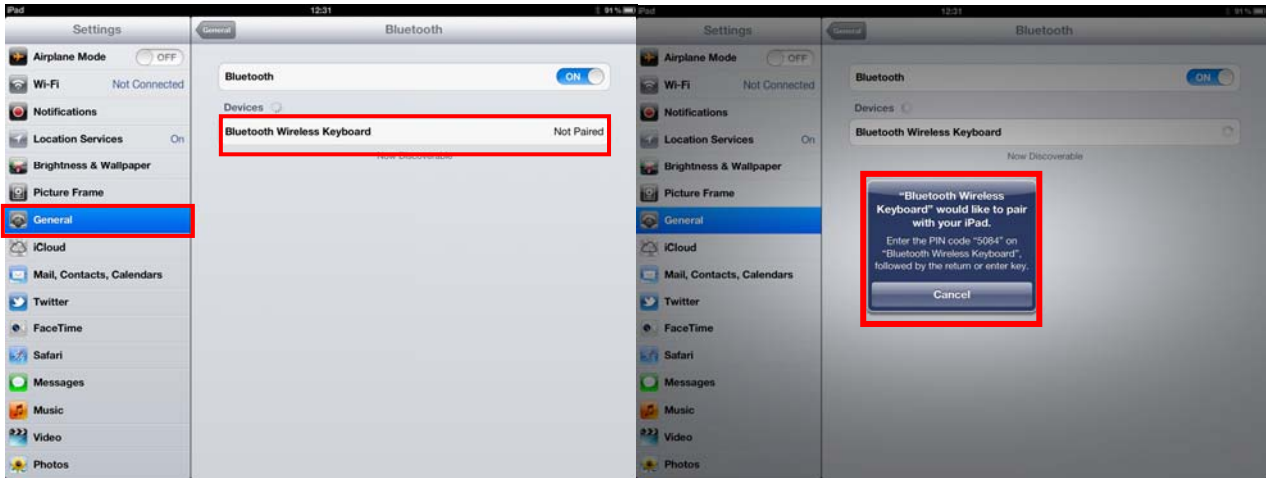


Warning : There are no advise when you input the password. Please make sure input correct and press enter button.


(5) 、 If IPAD and keyboard connect success. The Status indicator will extinguished .You can use the keyboard.

• **How to place iPad and keyboard.**

1、 Turn on the” open” switch,the stand will stand up automatically as follow pictures:

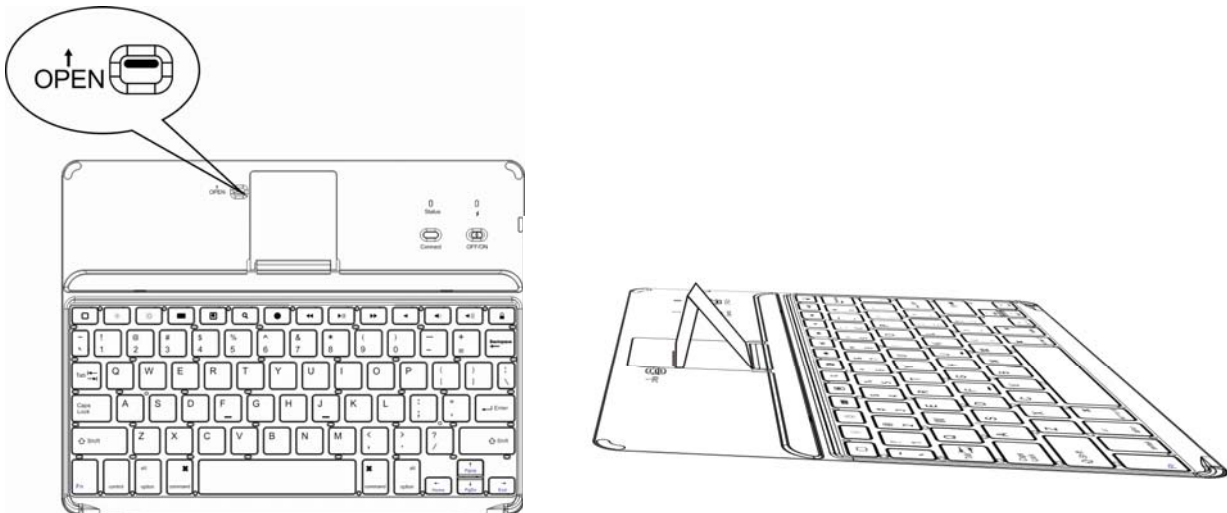

2、 Put your iPad into the groove of keyboard.The stand will support the iPad perfect.

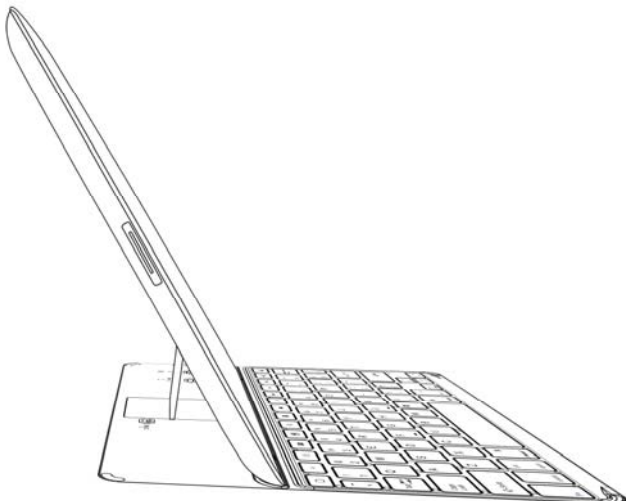

• Keyboard and iPad hotkeys specification.



Press this button can return iPad home page.



Press this button can control IPAD screen brightness dark.



Press this button can control IPAD screen brightness light.



When in use IPAD edit the document by this button to call up and hidden IPAD virtual keyboard.



IPAD locked in on this key, IPAD into the screen saver pictures interface



IPAD in boot state, press this button can enter the IPAD search page.



Press this button can change the input language of iPad.



When the IPAD in music broadcast, click this button can control music upgrade .



IPAD in boot state, press this button can control the play/pause music.



When the IPAD in music broadcast, click this button can control music downwards.



Press this button can be mute, click again, hold "cancel mute .



Press this button can increase the volume.





Press this button can lock IPAD screen.

• Charging

When you use keyboard in process, the status tinkle which advise you the battery is shortage. You should charging.

(1)、Separate put the USB terminal cable plug into the PC and keyboard.As follow picture.

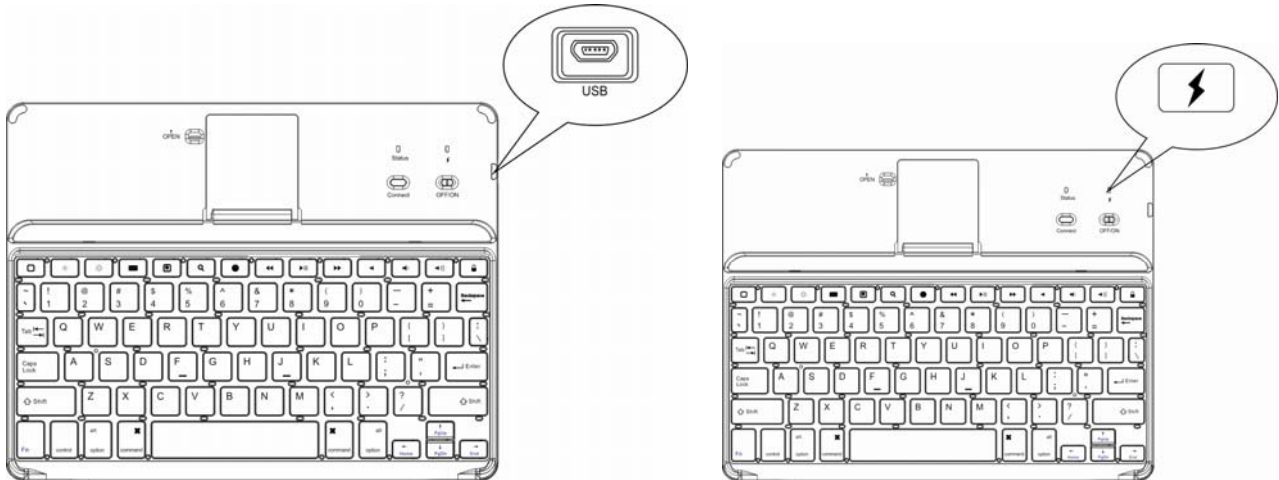

(2)、When you charging, the  red light on. When the light off, the battery is full enough. (theoretical charging time 2hours)

• Storage

(1)、When you don' t want to use the keyboard and carry,please close the back stand. Then put iPad cover the keyboard,the screen of iPad will turn off automatically.

(2)、When you don' t want to use the keyboard and carry. Don' t forget turn off the power switch of keyboard. In order to extend your battery life span.

(3)、If you want to store the keyboard long time. Don' t forget charging the keyboard around 1hour till the battery half which can extend your battery life span.

• Troubleshooting

Keyboard and IPAD cannot establish connections

- ①、 please check your iPad bluetooth device is already open and went in search of state.
- ②、 Press and release the"connect" button of keyboard ,check the Status indicator flash or not.
- ③、 keyboard and iPad connected within 10 meters from working range.
- ④、 Bluetooth devices of iPad changing or not, if it is,need to match again.
- ⑤、 Your iPad bluetooth device is also connected to the other bluetooth terminal and confirm Ipad bluetooth device speed.
- ⑥、 Checking your battery, if there is electricity shortage, please charge.

This equipment already through the class B digital equipment testing

The FCC, the federal communications commission interference statements:

This equipment already through the class B digital equipment testing

The FCC regulations in accordance with article 15 for the regulations set is to give the installation process may cause harm on the environment to provide the necessary protection. This equipment in use process will produce radio radiation. If do not follow the instructions

for installation and use may affect the radio and TV receiving signal, can pass open and close this equipment to test. Users can try to use the following measures to avoid such interference:

- 1、 change the direction of receiving antenna or is rearrange the antenna position.
- 2、 the admiral equipment in circuit with the antenna connection distinguishes the connection.
- 3、 Ask for distributor or experienced people.

This device complies with Part 15 of the FCC Rules Operation is subject to the following tow conditions:

- 1、 This device may not cause harmful interference
- 2、 This device must accept any interference received, including interference that may caus undesired operation.

15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.105 Information to the user.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.