


Catalog | March 2015

Catalog 2015
Electronic Products and Relays

Power and productivity
for a better world™

Machine Safety
Jokab Safety products

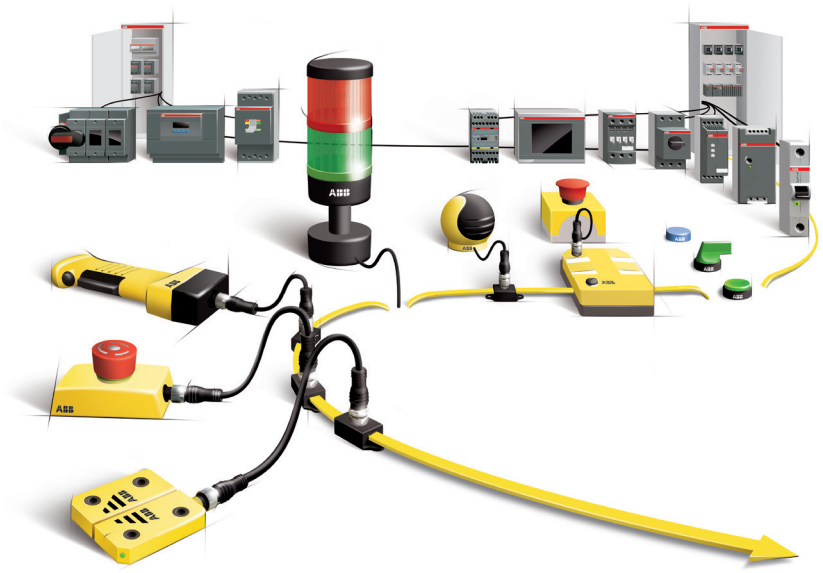

Productivity and safety go hand in hand


Jokab Safety was acquired by ABB in 2010. This gives us extra strength and a sales network in 120 countries. Our goal is to become even better at supporting you as a customer through cooperation within ABB Jokab Safety globally and locally. The fact that the leading power and automation technology company, ABB, and a leader in machine safety, Jokab Safety, have joined forces means a lot more than just a new organizational chart. ABB has a huge footprint in the industry - from power supply to the control of each individual motor - and has been delivering reliable solutions for decades that boost productivity in the industry. The acquisition of Jokab Safety means the last building block is in place. We can now offer our customers tailored, turnkey solutions where machine safety is an integral and value-enhancing component.

Jokab Safety offering:

- **Safety PLC**
  Pluto, Pluto AS-i, Gateways, Safe Encoder
- **Safety controller**
  Vital and Tina safety systems
- **Safety relays**
  RT series, JSB series, safety timers, expansion relays
- **Light curtains, light grids, light beams and scanner**
  Focus II, Spot, Look
- **Sensors, switches and locks**
  Eden, Sense, MKey, Magne, Dalton, Knox
- **Control devices**
  JSHD4, Safeball, Fox2
- **Emergency stop devices**
  Inca, Smile, EStrong, LineStrong
- **Contact rails, bumpers and safety mats**
- **Fencing systems**
  Quick-Guard, SafeCad, Roller doors

Further information: „ABB Safety Handbook“ - Order code: 2TLC172001C0202

Electronic Products and Relays
News



Thermistor motor protection relays in new housing

The thermistor motor protection relays of the CM-MSS range monitor the winding temperature of motors which have PTC temperature sensors installed. These sensors are incorporated in the motor windings thus measuring the motor heat directly. This direct temperature measurement enables the thermistor motor protection relays to evaluate various motor conditions such as overheating, overload and insufficient cooling. Depending on the product also the ATEX approval is available for the use in hazardous areas.
The new housing provides two different connection terminals: The proven double-chamber cage connection terminals and the Easy Connect Technology with Push-in terminals.



CR-S Range pluggable small interface relays

The pluggable interface relays of the CR-S Range are used for electrical isolation, amplification and signal matching between the electronic controlling, e.g. PLC, iPC or field bus systems and the sensor / actuator level. The CR-S Range combines the flexibility of a modular system and the ability of switching high currents on a small footprint thus can be used in applications where space saving is essential.



Universal Motor Controller UMC100.3 now available

The intelligent ABB Motor Controllers for motor protection, motor control, fieldbus and Ethernet communication and fault diagnosis. Due to the benefits it provides, the UMC is used worldwide in many segments and in Projects with several thousand motor controllers. Beside the proven UMC100 the new UMC100.3 offers even more capabilities like 24 V DC or 110-220 V AC/DC supply voltage and fieldbus communication interfaces.



Grid feeding monitoring relays from the CM-UFD.Mx range

The multifunctional grid feeding monitoring relays of the CM-UFD range are designed to monitor several grid parameters when feeding energy into the public grid. The intention is to trip a section switch which is connected between the distributed generation and the public grid in order to disconnect the distributed generation in case of problems (e.g. unstable grid), faults or maintenance on the grid. Different monitoring functions such as 10-minutes average value, real time over- and undervoltage as well as over- and underfrequency are configurable via the front face display.

- CM-UFD.M22: Third party certificate confirming accordance with CEI 0-21: 2012-06 + CEI 0-21; V1: 2012-12 + A70 Terna
- CM-UFD.M31: Third party certificate confirming accordance with VDE-AR-N 4105: 2011-08; BDEW, June 2008 “Technische Richtlinie – Erzeugungsanlagen am Mittelspannungsnetz” including supplementary provisions of January 2013
- CM-UFD.M33: Factory certificate confirming accordance with Engineering Recommendation G59 Issue 3 - September 2013; Engineering Recommendation G83 Issue 2 - December 2012

Electronic Products and Relays
Table of contents

Electronic timers 1/1

Measuring and monitoring relays 2/1

Primary switch mode power supplies 3/1

Analog signal converters, serial data converters 4/1

Interface relays and optocouplers 5/1

Logic relays 6/1

Index 7/1

Approvals and marks for the world market
Overview

ABB low-voltage switching devices are developed and produced in accordance with the applicable regulations as stated in the international IEC publications, the European EN specifications and the national VDE standards.

In most countries, low-voltage switching devices are produced according to such regulations under the responsibility of the manufacturers. This is why the devices are not subject to further approval. However, for those devices which are intended for use in household or for public use our customers can request test reports of our internal laboratory for presentation to the various qualified local organizations. In other countries, approvals are prescribed by law.

For devices installed in ships, an approval issued by independent shipping companies, such as the GL, are demanded by the maritime insurance companies.

Marks of conformity and examples of approvals (device-dependent)

International

CB scheme

The CB (Certification Body) Scheme is a system designed to facilitate international trade by establishing mutual acceptance of test reports among participating safety certification organizations (the National Certification Bodies) in more than 30 countries. The CB Scheme was established by the International Electrotechnical Committee for Conformity Testing to Standards for Electrical Equipment (IECEE).

Europe

Conformité Européen (CE)

All devices which comply with the European low voltage directive and which are intended for sale within the European Union must have the CE sign applied. All products in this catalog are CE marked.

The CE sign must not be confused with a certificate of quality issued by the EU. It is solely used to confirm that the respective product complies with the applicable European directives *). The CE sign is part of an administrative procedure to guarantee free movement of goods within the European Community.

*) **Directives:**
Low Voltage Directive 2006/95/EC
EMC Directive 2004/108/EC
Machinery Directive 98/37/EEC

Verband der Elektrotechnik Elektronik Informationstechnik (VDE)

Applicable for technical instruments covered by the German Gerätesicherheitsgesetz (GSG) as well as for single parts and electrical wiring devices.

Berufsgenossenschaft der Feinmechanik und Elektrotechnik (BGFE)

The BG-PRÜFZERT sign is a voluntary safety mark, awarded by the BGFE following successful safety testing.

Explosion protection (EX)

Explosion protection acc. to Directive 94/9/EG (ATEX 100a)

Swiss insurance institution (SUVA)

Department accident prevention suvaPRO

Germanischer Lloyd (GL)

Shipping approval

Lloyds Register

Shipping approval

Russia

In Russia, low-voltage switching devices are subject to certification and have to be provided with a sign.

Eurasian Conformity

EAC certification is mandatory for many products. This certification is based on a safety test (IEC standards with Russia-specific deviations) and an EMC test.

Russian Maritime Register of Shipping RMRS

Shipping approval

Australia, New Zealand

C-Tick Mark

The C-Tick Mark certifies compliance with the Australian EMC requirements. The Mark is also recognized in New Zealand.

China

CCC (China Compulsory Certification)

In China the CCC certification mark is a compulsory certification mark in the field of safety and quality for products sold on the Chinese market.

North America

Canadian and US standards are more or less equivalent but considerably differ from the IEC and VDE regulations.

USA

Underwriters Laboratories (UL) Listing

Released for installation in systems and for sale as individual component in the USA.

Recognition

Released for installation in systems, if the respective system has been completely mounted and wired by qualified personnel.

Canada

Canadian Standards Association (CSA)

USA and Canada

The combined UL signs for the USA and Canada are recognized by the authorities of both countries. Devices with this certificate meet the requirements of both countries.


Listing

Recognition


Find Electronic Products and Relays product information and documentation on our web page

The following steps will guide you to the **documentation** and **product search** section of the Electronic Products and Relays portfolio on www.ABB.com.

Enter **http://new.abb.com/low-voltage/products/epr** in your internet browser.
You will be redirected to the following page:

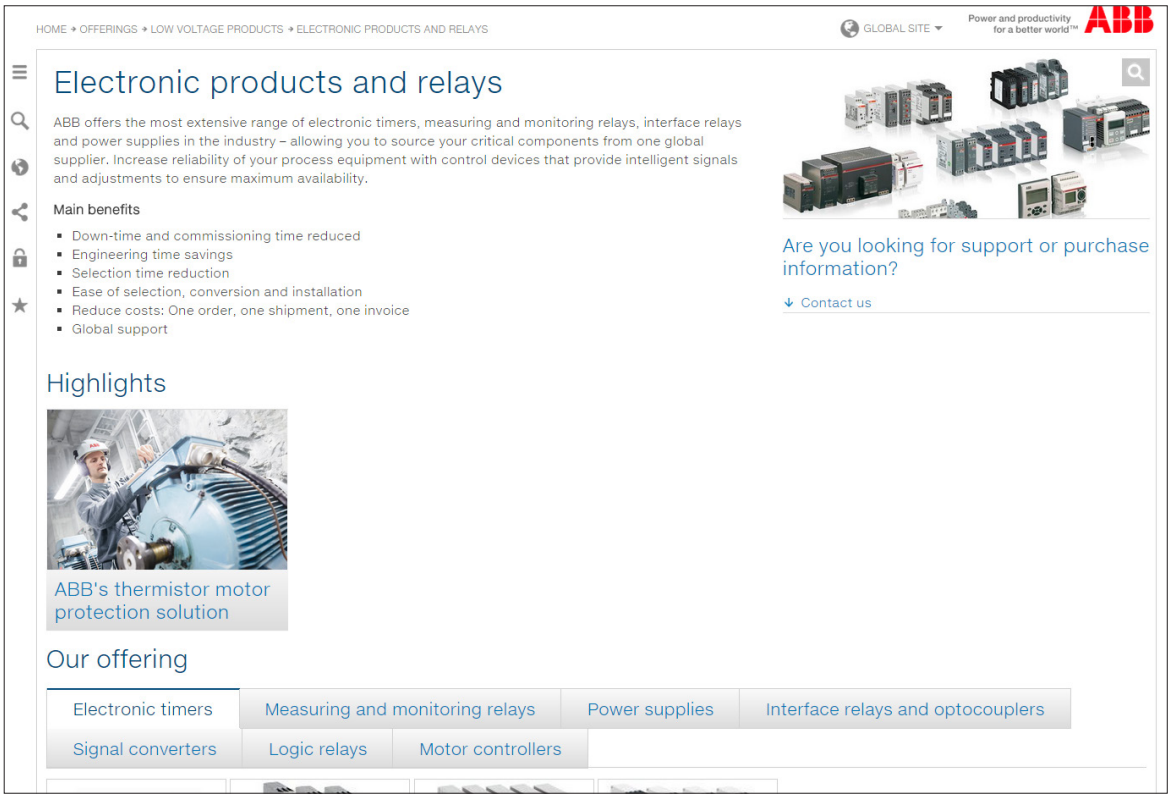


Latest information about the Electronic Products and Relays product range could be found in the **Highlights** section.
In the lower area of the web page you can find the **Our offering** section.
The assortment of the Electronic Products and Relays range is listed here as shown in the screenshot below:

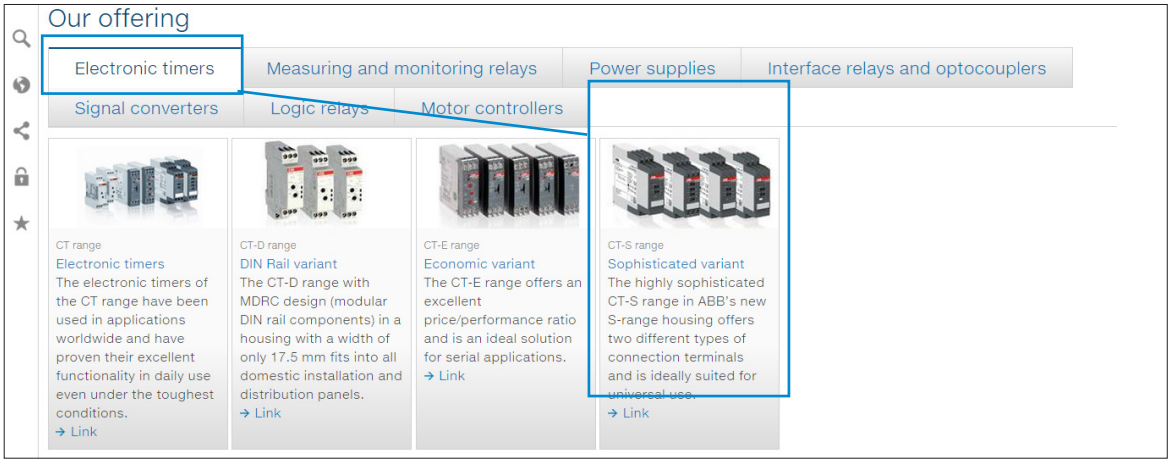


Select the register of the relevant product group to see all the products related to the product group.
Choose a product range from which you want to see the documentation or from which you want to choose a specific product.
In this example the **CT-S range** from the register **Electronic timers** has been selected as shown on the screenshot.

Find Electronic Products and Relays product information and documentation on our web page

You will be redirected to the following page:

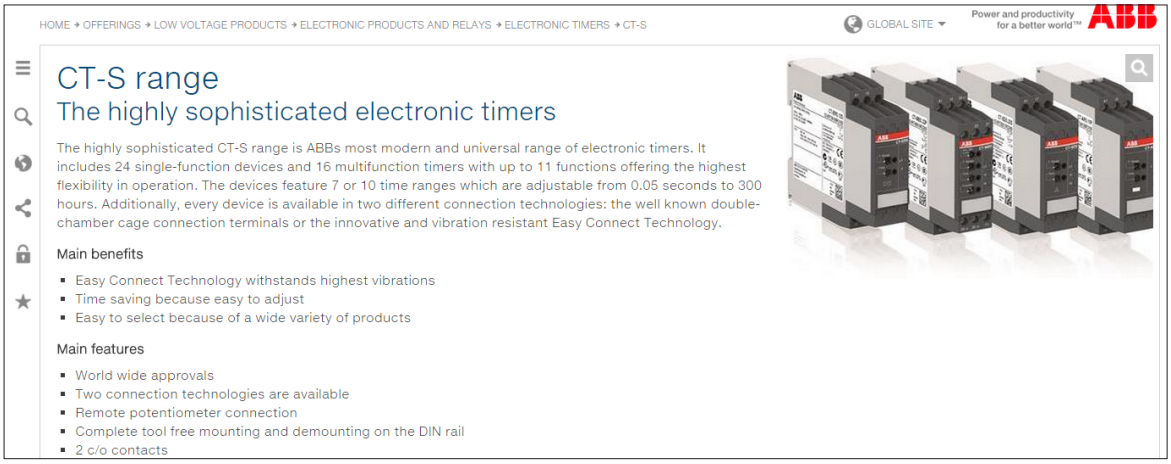

Latest information about the Electronic Products and Relays product range could be found in the **Highlights** sections.
In the lower area of the web page you can find the **Products and documents** section.
The functions to choose a product or a document are listed here as in the screenshot below:

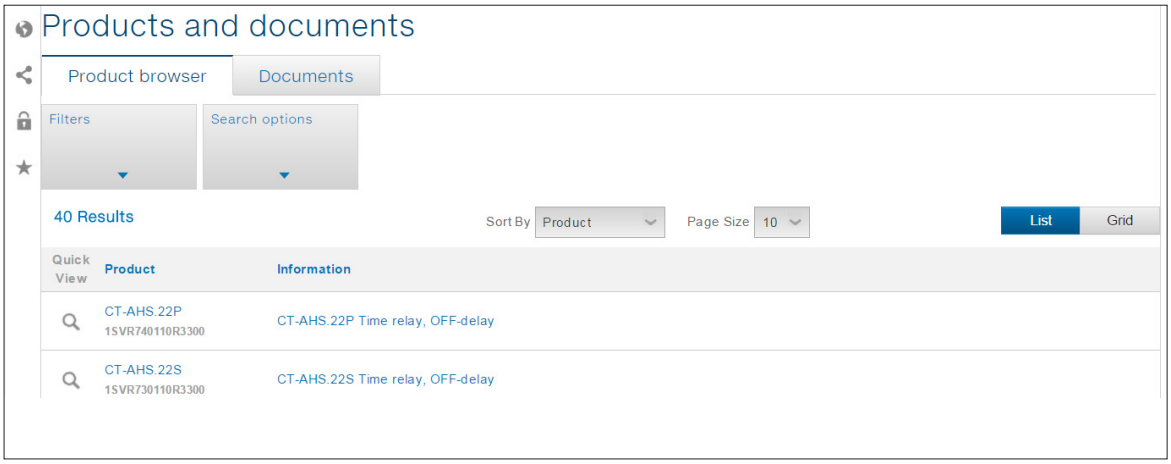


To search for a product continue **on page 9.**
To search for documentation continue **on page 10.**


Find Electronic Products and Relays product information and documentation on our web page

How to find the right product

Click on **Filters** to see the different search attributes for the selected product range.
The filter section will be expanded as shown below.

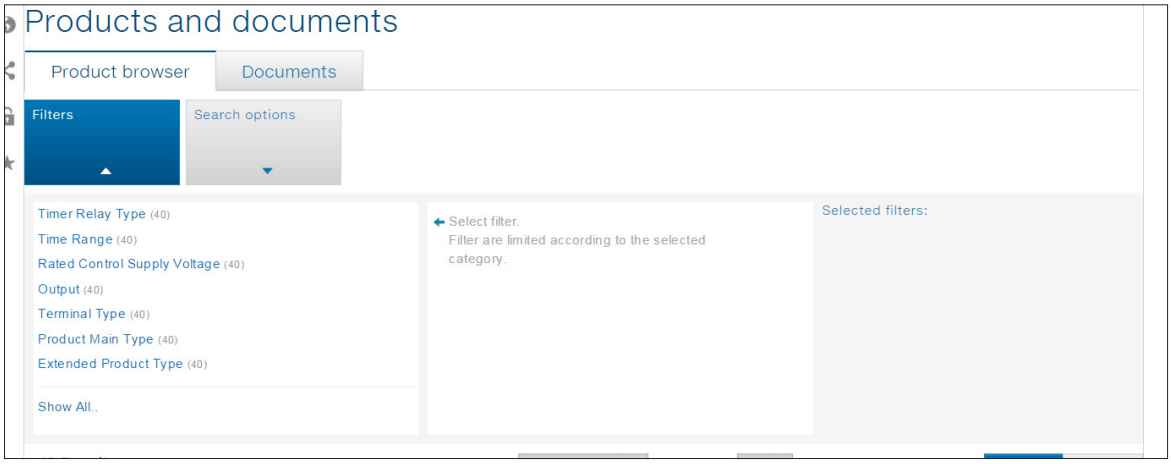

The different product filters are shown.
Click on the filter attribute to continue the product search process.
In this example **Output** has been chosen.

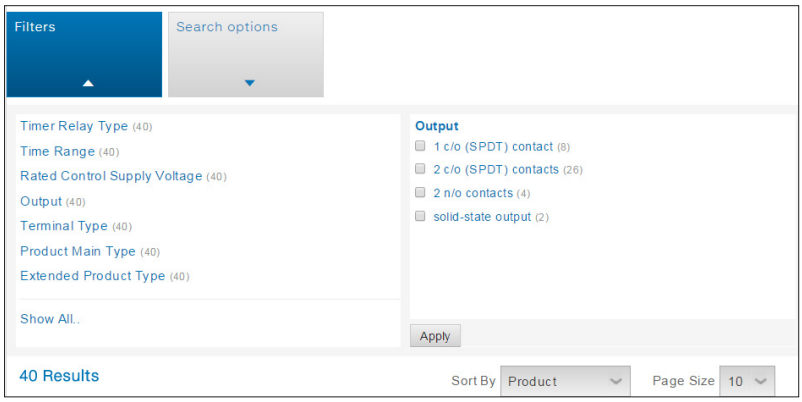


In the right part mark the corresponding check box to narrow down the search. You can also select several check boxes.
Click on **Apply** to submit your filter.
The search results are now listed according to your selection.
Proceed this approach with different filters until the right product is listed.
Click on the product in the **Result section** to get the dedicated product information listed in your browser.

Find Electronic Products and Relays product information and documentation on our web page

How to find the right documentation

Click on **Documents** to see the different types of documentation for the product.
The document section will be expanded as shown below.

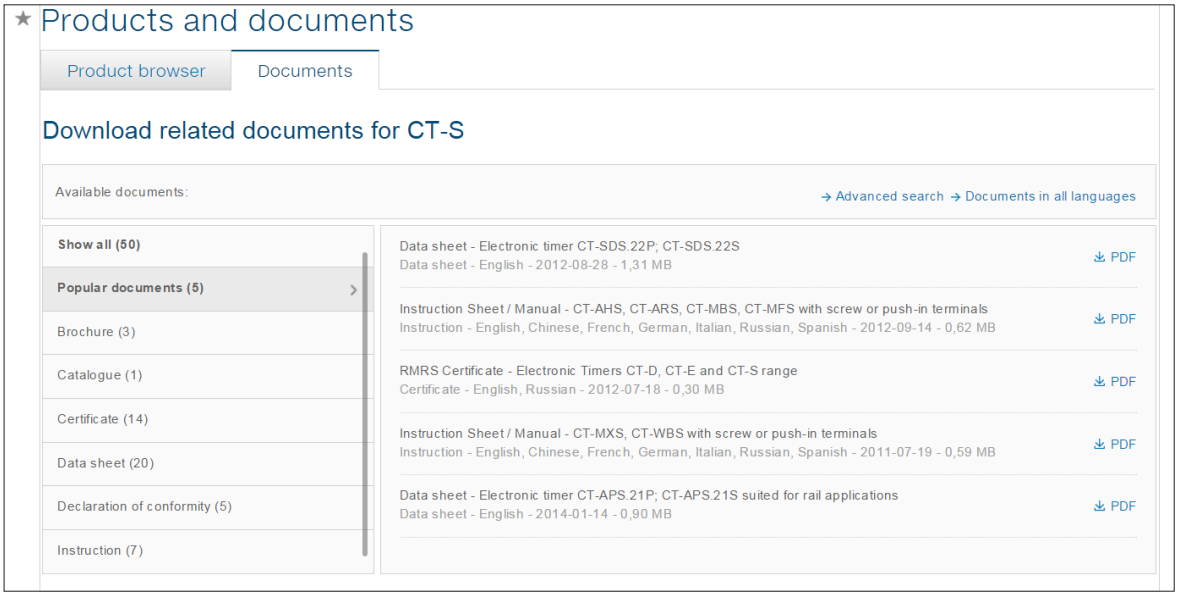

On the left side select the type of document related to the product. In the example **Popular documents** has been selected.
In the right area click on the document related to the product.
The document is opened or downloaded, depending on the individual browser settings.

EPR Catalog 2015
Notes

Electronic timers
Product group picture

1



Electronic timers
Table of contents

Electronic timers

Table of contents	1/2
Overview	1/3
Approvals and marks	1/4
CT-D range	1/5
Table of contents	1/6
Benefits and advantages	1/7
Ordering details	1/8
Function diagrams	1/9
Connection diagrams	1/12
Technical data	1/13
Technical data, Technical diagrams	1/15
Wiring notes, Dimensional drawings	1/16
CT-E range	1/17
Table of contents	1/18
Benefits and advantages	1/19
Ordering details	1/20
Function diagrams	1/22
Connection diagrams	1/27
Connection diagrams, Technical diagrams	1/28
Technical data	1/29
Wiring notes, Dimensional drawings	1/31
CT-S range	1/33
Table of contents	1/34
Benefits and advantages	1/35
Ordering details - multifunctional	1/37
Ordering details - singlefunctional	1/38
Ordering details - Accessories	1/39
Function diagrams	1/41
Connection diagrams	1/49
Technical data	1/52
Technical diagrams	1/55
Wiring notes, Dimensional drawings	1/56

Electronic timers
Overview




CT-D range




CT-E range




CT-S range

Timing function	multifunctional	single-functional	multifunctional	single-functional	multifunctional	single-functional
ON-delay	CT-MFD	CT-ERD	CT-MFE, CT-MKE	CT-ERE, CT-EKE	CT-MVS, CT-MFS, CT-MBS, CT-WBS	CT-ERS
OFF-delay	CT-MFD	CT-AHD	CT-MFE	CT-AHE, CT-ARE, CT-AKE	CT-MVS, CT-MFS, CT-MBS	CT-APS, CT-AHS, CT-ARS
ON- and OFF-delay					CT-MVS, CT-MXS, CT-MFS, CT-MBS	
1 Impulse-ON	CT-MFD	CT-VWD	CT-MFE, CT-MKE	CT-VWE	CT-MVS, CT-MFS, CT-MBS, CT-WBS	
1 Impulse-OFF	CT-MFD			CT-AWE	CT-MVS, CT-MFS, CT-MBS	
1 Impulse-ON and OFF					CT-MXS	
Flasher starting with ON	CT-MFD	CT-EBD	CT-MFE, CT-MKE		CT-MFS, CT-MBS, CT-WBS	
Flasher staring with OFF	CT-MFD		CT-MFE, CT-MKE	CT-EBE	CT-MFS, CT-MBS, CT-WBS	
Flasher starting with ON or OFF					CT-MVS	
Pulse generator starting with ON or OFF		CT-TGD			CT-MXS	
Pulse former	CT-MFD		CT-MFE		CT-MVS, CT-MFS, CT-MBS	
Star-delta change-over		CT-SDD, CT-SAD				CT-SDS
Star-delta change-over with impulse				CT-SDE	CT-MVS.2x, CT-MFS, CT-MBS	
Star-delta change-over twice ON-delayed				CT-YDE		
+ 1 1 further functions (depending on device)					CT-MVS, CT-MXS, CT-MFS, CT-MBS, CT-WBS	

Technical data (extract)				
Time ranges	7 (0.05 s - 100 h) CT-SDD, CT-SAD: 4 (0.05 s - 10 min)	Multifunction devices: 8 (0.05 s - 100 h) Single-function devices: 5 single ranges (0.05-1 s, 0.1-10 s, 0.3-30 s, 3-300 s, 0.3-300 min)		10 (0.05 s - 300 h) CT-ARS, CT-SDS: 7 (0.05 s- 10 min)
Control supply voltage	Wide and multi ranges	Wide ranges	Single and dual ranges	Wide, multi and single ranges
Type and number of contacts	1 or 2 c/o contacts CT-SDD, CT-SAD: 2 n/o contacts	1 c/ o contact CT-SDE: 1 n/o contact and 1 n/c contact CT-MKE, CT-EKE, CT-AKE: 1 thyristor		1 or 2 c/o contacts CT-MVS.21, CT-MFS, CT-MBS: 2nd c/o contact selectable as inst. contact CT-SDS: 2 n/o contacts
Control inputs	voltage-related triggering, polarized, capable of switching a parallel load	voltage-related triggering, polarized CT-MFE, CT-AHE, CT-AWE: with auxiliary voltage		voltage-related triggering, non-polarized, capable of switching a parallel load CT-MFS, CT-MBS, CT-AHS: volt-free triggering

Electronic timers
Approvals and marks

■ existing
□ pending

Approvals		CT-D													
		CT-MFD.12	CT-MFD.21	CT-ERD.12	CT-ERD .22	CT-AHD.12	CT-AHD.22	CT-VWD.12	CT-EBD.12	CT-TGD.12	CT-TGD.22	CT-SDD.22	CT-SAD.22		
	UL 508, CAN/CSA C22.2 No.14	■	■	■	■	■	■	■	■	■	■	■	■		
	CB scheme	■		■		■		■	■	■					
	EAC	■	■	■	■	■	■	■	■	■	■	■	■		
	CCC	■	■	■	■	■	■	■	■	■	■	■	■		
	RMRS	■	■	■	■	■	■	■	■	■	■				
Marks															
	CE	■	■	■	■	■	■	■	■	■	■	■	■		
	C-Tick	■	□	■	□	■	□	■	■	■	□	□	□		

■ existing
□ pending

Approvals		CT-E													
		CT-MFE	CT-ERE	CT-AHE	CT-ARE	CT-VWE	CT-AWE	CT-EBE	CT-YDE	CT-SDE	CT-MKE	CT-EKE	CT-AKE		
	UL 508, CAN/CSA C22.2 No.14	■	■	■	■	■	■	■	■	■	■	■	■		
	GL	■	■	■	■	■	■	■	■	■	■	■	■		
	CB scheme	■	■	■	■	■	■	■	■	■					
	EAC	■	■	■	■	■	■	■	■	■	■	■	■		
	CCC	■	■	■	■	■	■	■	■	■					
	RMRS	■	■	■	■	■	■	■	■	■	■	■	■		
Marks															
	CE	■	■	■	■	■	■	■	■	■	■	■	■		
	C-Tick	■	■	■	■	■	■	■	■	■	■	■	■		

■ existing
□ pending

Approvals		CT-S													
		CT-MVS.12S/P	CT-MVS.2xS/P	CT-MXS.22S/P	CT-MFS.21S/P	CT-MBS.22S/P	CT-WBS.22S/P	CT-ERS.12S/P	CT-ERS.2xS/P	CT-APS.12S/P	CT-APS.2xS/P	CT-AHS.22S/P	CT-ARS.11S/P	CT-ARS.21S/P	CT-SDS.2xS/P
	UL 508, CAN/CSA C22.2 No.14	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	GL	■	■	■	■	■	■	■	■	■	■	■	□	□	■
	EAC	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	CB scheme	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	CCC	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	RMRS	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Rail applications [1]		■	■	■				■		■			■	
Marks															
	CE	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	C-Tick	■	■	■	■	■	■	■	■	■	■	■	■	■	■

[1] Applicable in rail application following the latest standards for rail applications. Further information are available in our rail segment brochure 2CDC110084B0201.

CT-D range
Product group picture

1



CT-D range
Table of contents

CT-D Range

Benefits and advantages 1/7
Ordering details 1/8
Function diagrams 1/9
Connection diagrams 1/12
Technical data 1/13
Technical data, Technical diagrams 1/15
Wiring notes, Dimensional drawings 1/16

CT-D range
Benefits and advantages

1

Characteristics
- Diversity:
  - 2 multifunction timers
  - 10 single-function timers
- Control supply voltages:
  - Wide range: 12-240 V AC/DC
  - Multi range: 24-48 V DC, 24-240 V AC
- 7 time ranges from 0.05 s to 100 h or
  4 time ranges from 0.05 s to 10 min
- Width of only 17.5 mm
- Light-grey housing in RAL 7035
- Devices with:
  1 c/o contact (250 V / 6 A) or 2 c/o contacts (250 V / 5 A)
  Control input: voltage-related triggering, polarized, capable of switching parallel loads
- Approvals / Marks (partly pending, details see page 1/4)
  – cULus LISTED, CB[1], EAC, RCM / CE, KC

[1] Only for devices with 1 c/o (SPDT) contact

Benefits


Direct reading scales ①
Direct setting of the time delay without any additional calculation provides accurate time delay adjustment.

LEDs for status indication ②
All actual operational states are displayed by front-face LEDs, thus simplifying commissioning and troubleshooting.

Switching currents
The CT-D range timers allow an output load of up to 6 A on devices with 1 c/o contact and up to 5 A on devices with 2 c/o contacts.

Connection terminals ③
Wide terminal spacing allows connection of wires:
2 x 1.5 mm² (2 x 16 AWG) with wire end ferrules or 2 x 2.5 mm² (2 x 14 AWG) without ferrules.

Width 17.5 mm ④
With their width of 17.5 mm only, the CT-D range timers are ideally suited for installation in distribution panels.

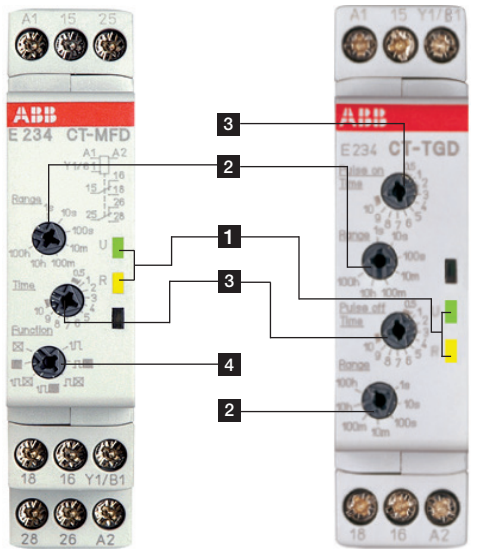



multifunctional single-functional


Operating controls


1 LEDs for status indication
U - green LED: ⎍ control supply voltage applied
⎍⎍ timing
R, R1, R2 - yellow LED: ⎍ output relay energized

2 Time range adjustment
3 Fine adjustment of the time delay
4 Preselection of the timing function









CT-D range
Ordering details

Description

The CT-D range in MDRC design with a width of only 17.5 mm fits into all domestic installation and distribution panels.
The CT-D range represents a link between industry and the installation types. For maximum flexibility in operation, 10 single-function as well as 2 multifunction devices with 7 timing functions are available. The devices offer 4 or 7 time ranges from 0.05 seconds up to 100 hours. Their wide input range allows the use in applications worldwide.



CT-MFD.12



CT-ERD.22

Ordering details

Timing function	Rated control supply voltage	Time ranges	Control input	Output	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
Multifunctional[1]	24-240 V AC 24-48 V DC	7 (0.05 s - 100 h)	■	1 c/o	CT-MFD.12	1SVR500020R0000		0.060 (0.132)
Multifunctional[1]	12-240 V AC/DC	7 (0.05 s - 100 h)	■	2 c/o	CT-MFD.21	1SVR500020R1100		0.065 (0.143)
ON-delay	24-240 V AC 24-48 V DC	7 (0.05 s - 100 h)	-	1 c/o	CT-ERD.12	1SVR500100R0000		0.060 (0.132)
			-	2 c/o	CT-ERD.22	1SVR500100R0100		0.065 (0.143)
OFF-delay			■	1 c/o	CT-AHD.12	1SVR500110R0000		0.060 (0.132)
			■	2 c/o	CT-AHD.22	1SVR500110R0100		0.065 (0.143)
Impulse-ON			-	1 c/o	CT-VWD.12	1SVR500130R0000		0.060 (0.132)
Flasher starting with ON			-		CT-EBD.12	1SVR500150R0000		
Pulse generator		2x7 (0.05 s - 100 h)	■		CT-TGD.12[2]	1SVR500160R0000		0.060 (0.132)
			■	2 c/o	CT-TGD.22[2]	1SVR500160R0100		0.065 (0.143)
Star-delta change-over		4 (0.05 s - 10 min)	-	2 c/o	CT-SDD.22[3]	1SVR500211R0100		0.065 (0.143)
			-		CT-SAD.22[4]	1SVR500210R0100		

[1] Functions: ON-delay, OFF-delay with auxiliary voltage, Impulse-ON, Impulse-OFF with auxiliary voltage, Flasher starting with ON, Flasher starting with OFF, Pulse former
[2] ON and OFF times adjustable independently: 2 x 7 time ranges 0.05 s - 100 h
[3] Transition time 50 ms fixed
[4] Transition time adjustable

■ Control input with voltage-related triggering
- no triggering

ON-delay
OFF-delay
Impulse-ON
Impulse-OFF
Flasher starting with ON
Flasher staring with OFF
Pulse former
Pulse generator
Star-delta change-over

Synonyms

used expression	alternative expression(s)	used expression	alternative expression(s)
1 c/o contact	SPDT	voltage-related	wet / non-floating
2 c/o contacts	DPDT	volt-free	dry / floating

CT-D range
Function diagrams

1

Remarks

Legend

Control supply voltage not applied / Output contact open

Control supply voltage applied / Output contact closed

A1-Y1/B1 Control input with voltage-related triggering

Terminal designations on the device and in the diagrams


The 1st c/o contact is always designated 15-16/18.
The 2nd c/o contact is designated 25-26/28.
The n/o contacts of the star-delta timers are designated with 17-18 and 17-28.
Control supply voltage is always applied to terminals A1-A2.

Function of the yellow LED

The yellow LED R glows as soon as the output relay energizes and turns off when the output relay de-energizes.

ON-delay (Delay on make)
CT-ERD, CT-MFD


This function requires continuous control supply voltage for timing.
Timing begins when control supply voltage is applied.
The green LED flashes during timing. When the selected time delay is complete, the output relay energizes and the flashing green LED turns steady.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.
Control input A1-Y1/B1 of the CT-MFD is disabled when this function is selected.

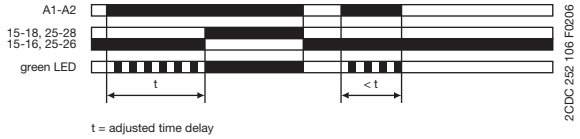

t = adjusted time delay

OFF-delay with auxiliary voltage (Delay on break)
CT-AHD, CT-MFD


This function requires continuous control supply voltage for timing. If control input A1-Y1/B1 is closed, the output relay energizes immediately. If control input A1-Y1/B1 is opened, the time delay starts. The green LED flashes during timing. When the selected time delay is complete, the output relay de- energizes and the flashing green LED turns steady.
If control input A1-Y1/B1 recloses before the time delay is complete, the time delay is reset and the output relay does not change state. Timing starts again when control input A1-Y1/B1 re-opens.If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

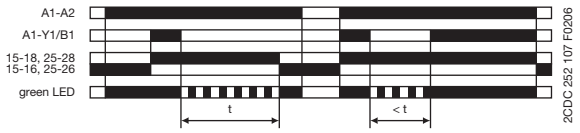

t = adjusted time delay

Impulse-ON (Interval)
CT-VWD, CT-MFD


This function requires continuous control supply voltage for timing. The output relay energizes immediately when control supply voltage is applied and de-energizes after the set pulse time is complete. The green LED flashes during timing. When the selected pulse time is complete, the flashing green LED turns steady. If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset. Control input A1-Y1/B1 of the CT-MFD is disabled when this function is selected.

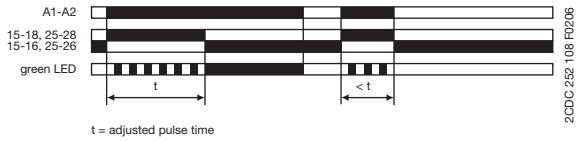

t = adjusted pulse time

Impulse-OFF with auxiliary voltage (Trailing edge interval)
CT-MFD

This function requires continuous control supply voltage for timing. If control supply voltage is applied, opening control input A1-Y1/B1 energizes the output relay immediately and starts timing. The green LED flashes during timing. When the selected pulse time is complete, the output relay de-energizes and the flashing green LED turns steady. Closing control input A1-Y1/B1, before the time delay is complete, de-energizes the output relay and resets the time delay. If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

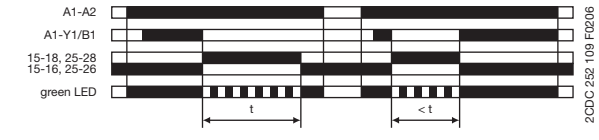


t = adjusted pulse time

CT-D range
Function diagrams

Flasher, starting with the ON time (Recycling equal times, ON first) CT-EBD, CT-MFD


Applying control supply voltage starts timing with symmetrical ON & OFF times. The cycle starts with an ON time first. The ON & OFF times are displayed by the flashing green LED, which flashes twice as fast during the OFF time.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.
Control input A1-Y1/B1 of the CT-MFD is disabled when this function is selected.

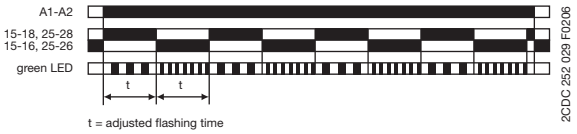

t = adjusted flashing time

Flasher, starting with the OFF time (Recycling equal times, OFF first) CT-MFD


Applying control supply voltage starts timing with symmetrical ON & OFF times. The cycle starts with an OFF time first. The ON & OFF times are displayed by the flashing green LED, which flashes twice as fast during the OFF time.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.
Control input A1-Y1/B1 of the CT-MFD is disabled when this function is selected.

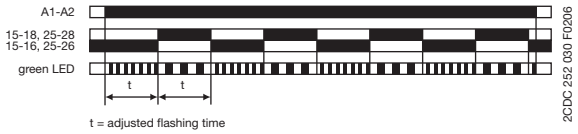

t = adjusted flashing time

Pulse former (Single shot) CT-MFD


This function requires continuous control supply voltage for timing.
Closing control input A1-Y1/B1 energizes the output relay immediately and starts timing. Operating the control contact switch A1-Y1/B1 during the time delay has no effect. The green LED flashes during timing. When the selected ON time is complete, the output relay de-energizes and the flashing green LED turns steady. After the ON time is complete, it can be restarted by closing control input A1-Y1/B1.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

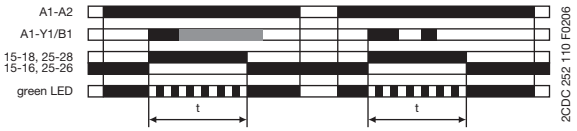

t = adjusted pulse time

Pulse generator, starting with the ON or OFF time (Recycling unequal times, ON or OFF first) CT-TGD

This function requires continuous control supply voltage for timing.
Applying control supply voltage, with open control input A1-Y1/B1, starts timing with an ON time first. Applying control supply voltage, with closed control input A1-Y1/B1, starts timing with an OFF time first. The ON & OFF times are displayed by the flashing green LED, which flashes twice as fast during the OFF time.
The ON & OFF times are independently adjustable.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

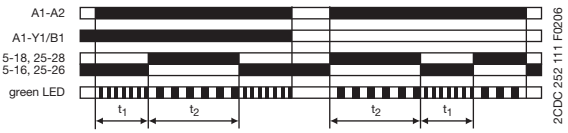


t_1 = adjusted OFF time
t_2 = adjusted ON time

CT-D range
Function diagrams


1

Star-delta change-over (Star-delta starting) CT-SDD, CT-SAD


This function requires continuous control supply voltage for timing.
Applying control supply voltage to terminals A1-A2, energizes the star contactor connected to terminals 17-18 and begins the set starting time t_1. The green LED flashes during timing. When the starting time is complete, the first output contact de-energizes the star contactor.
Now, the transition time t_2 starts. When the transition time is complete, the second output contact energizes the delta contactor connected to terminals 17-28. The delta contactor remains energized as long as control supply voltage is applied to the unit.

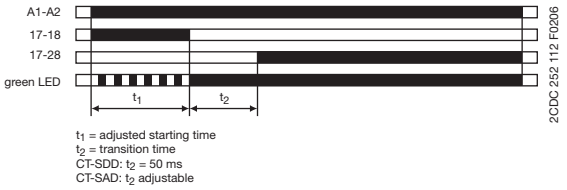

t_1 = adjusted starting time
t_2 = transition time
CT-SDD: t_2 = 50 ms
CT-SAD: t_2 adjustable

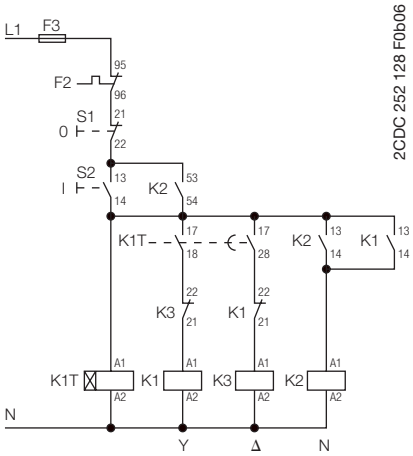


Control circuit diagram

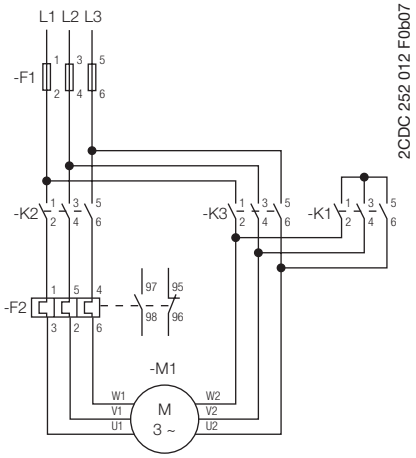

Power circuit diagram


CT-D range
Connection diagrams

CT-MFD.21




A1-A2	Supply: 12-240 V AC/DC
A1-Y1/B1	Control input
15-16/18	1. c/o contact
25-26/28	2. c/o contact

CT-MFD.12




A1-A2	Supply: 24-48 V DC or 24-240 V AC
A1-Y1/B1	Control input
15-16/18	1. c/o contact

CT-ERD.22




A1-A2	Supply: 24-48 V DC or 24-240 V AC
15-16/18	1. c/o contact
25-26/28	2. c/o contact

CT-ERD.12




A1-A2	Supply: 24-48 V DC or 24-240 V AC
15-16/18	1. c/o contact

CT-AHD.22




A1-A2	Supply: 24-48 V DC or 24-240 V AC
A1-Y1/B1	Control input
15-16/18	1. c/o contact
25-26/28	2. c/o contact

CT-AHD.12




A1-A2	Supply: 24-48 V DC or 24-240 V AC
A1-Y1/B1	Control input
15-16/18	1. c/o contact

CT-VWD.12




A1-A2	Supply: 24-48 V DC or 24-240 V AC
15-16/18	1. c/o contact

CT-EBD.12




A1-A2	Supply: 24-48 V DC or 24-240 V AC
15-16/18	1. c/o contact

CT-TGD.22




A1-A2	Supply: 24-48 V DC or 24-240 V AC
A1-Y1/B1	Control input
15-16/18	1. c/o contact
25-26/28	2. c/o contact

CT-TGD.12




A1-A2	Supply: 24-48 V DC or 24-240 V AC
A1-Y1/B1	Control input
15-16/18	1. c/o contact

CT-SDD.22



A1-A2	Supply: 24-48 V DC or 24-240 V AC
17-18	1. n/o contact (star contactor)
17-28	2. n/o contact (delta contactor)

CT-SAD.22



A1-A2	Supply: 24-48 V DC or 24-240 V AC
17-18	1. n/o contact (star contactor)
17-28	2. n/o contact (delta contactor)

CT-D range
Technical data

1

Data at T_a = 25 °C and rated values, unless otherwise indicated

		CT-D with 1 c/o contact	CT-D with 2 c/o contacts	CT-MFD.21
Input circuit - Supply circuit				
Rated control supply voltage U_s		24-240 V AC / 24-48 V DC		12-240 V AC/DC
Rated control supply voltage U_s tolerance		-15...+10 %		
Rated frequency		DC or 50/60 Hz		
Frequency range AC		47-63 Hz		
Typical current / power consumption		see data sheet		
Power failure buffering time		min. 20 ms		
Release voltage		> 10 % of the minimum rated control supply voltage U_s		
Input circuit - Control circuit				
Control input, control function	A1-Y1/B1	start timing external		
Kind of triggering		voltage-related triggering		
Resistance to reverse polarity		yes		
Parallel load / polarized		yes / yes		
Maximum cable length to the control inputs		50 m - 100 pF/m		
Minimum control pulse length		20 ms		
Control voltage potential		see rated control supply voltage		
Current consumption of the control input		see data sheet		
Timing circuit				
Time ranges	7 time ranges 0.05 s - 100 h	1.) 0.05-1 s 2.) 0.5-10 s 3.) 5-100 s 4.) 0.5-10 min 5.) 5-100 min 6.) 0.5-10 h 7.) 5-100 h		
	4 time ranges 0.05 s - 10 min (CT-SDD, CT-SAD)	1.) 0.05-1 s 2.) 0.5-10 s 3.) 5-100 s 4.) 0.5-10 min		
Recovery time		< 50 ms		
Accuracy within the rated control supply voltage tolerance		Δt < 0.005 % / V		
Accuracy within the temperature range		Δt < 0.06 % / °C		
Repeat accuracy (constant parameters)		Δt < ± 0.5 %		
Setting accuracy of time delay	IEC/EN 61812-1	± 10% of full-scale value		
Star-delta transition time	CT-SDD / CT-SAD	fixed 50 ms / adjustable: 20 ms, 30 ms, 40 ms, 50 ms, 60 ms, 80 ms or 100 ms		
Star-delta transition time tolerance	CT-SDD / CT-SAD	±3 ms		
Indication of operational states				
Control supply voltage / timing	U: green LED	⎍: control supply voltage applied ⎍⎍: timing		
Relay energized (1 c/o contact / 2 c/o contacts or inst. contact)	R: yellow LED	⎍: output relay energized		
Operating elements and controls				
Adjustment of the time range		front-face rotary switch, direct reading scales		
Fine adjustment of the time value		front-face potentiometer		
Preselection of the timing function at multifunction devices		front-face rotary switch, direct reading scales		
Adjustment of the transition time	CT-SAD	front-face potentiometer		
Output circuit				
Kind of output	15-16/18	Relay, 1 c/o contact	-	
	15-16/18; 25-26/28	-	Relay, 2 c/o contacts	
	17-18; 17-28		Relay, 2 n/o contacts (CT-SDD, CT-SAD)	
Contact material		AgNi alloy, Cd free		
Rated operational voltage U_e		250 V		
Minimum switching voltage / minimum switching current		12 V / 100 mA		
Maximum switching voltage / maximum switching current		250 V AC / 6 A	250 V AC / 5 A	
Rated operational current I_e (IEC/EN 60947-5-1)	AC-12 (resistive) at 230 V	6 A	5 A	
	AC-15 (inductive) at 230 V	3 A	3 A	n/o: 3 A n/c: 0.75 A
	DC-12 (resistive) at 24 V	6 A	5 A	
	DC-13 (inductive) at 24 V	2 A	2 A	1 A
AC rating (UL 508)	utilization category (Control Circuit Rating Code)	B 300		n/o: B 300 n/c: C 300
	max. rated operational voltage	300 V AC		
	Maximum continuous thermal current at B300	5 A		n/o: 5 A
	Maximum continuous thermal current at C300	-		n/c: 2.5 A
	max. making/breaking apparent power at B300	3600 VA / 360 VA		n/o: 3600/360 VA
	max. making/breaking apparent power at C300	-		n/c: 1800/180 VA
Mechanical lifetime		30 x 10^6 switching cycles		
Electrical lifetime		0.1 x 10^6 switching cycles		
Max. fuse rating to achieve short-circuit protection (IEC/EN 60947-5-1)	n/c contact	6 A fast-acting		
	n/o contact	10 A fast-acting		6 A fast-acting

CT-D range
Technical data

		CT-D with 1 c/o contact	CT-D with 2 c/o contacts	CT-MFD.21
General data				
Mean time between failures (MTBF)		on request		
Duty time		100%		
Dimensions (W x H x D)		17.5 x 70 x 58 mm (0.69 x 2.76 x 2.28 in)	17.5 x 80 x 58 mm (0.69 x 3.15 x 2.28 in)	
Weight		see ordering details		
Mounting		DIN rail (IEC/EN 60715), snap-mounting without any tool		
Mounting position		any		
Minimum distance to other units	horizontal / vertical	no / no		
Degree of protection	housing / terminals	IP50 / IP20		
Electrical connection				
Wire size	fine-strand with(out) wire end ferrule	2 x 0.5-1.5 mm² (2 x 20-16 AWG) 1 x 0.5-2.5 mm² (1 x 20-14 AWG)		
	rigid	2 x 0.5-1.5 mm² (2 x 20-16 AWG) 1 x 0.5-4 mm² (1 x 20-12 AWG)		
Stripping length		7 mm (0.28 in)		
Tightening torque		0.5-0.8 Nm (4.43-7.08 lb.in)		
Environmental data				
Ambient temperature range	operation / storage	-20 ... +60 °C / -40 ... +85 °C		
Climatic class	IEC/EN 60068-2-30	3K3		
Relative humidity range		25-85%		
Shock (half-sine)	IEC/EN 60068-2-27	150 m/s², 11 ms		
Isolation data				
Rated impulse withstand voltage U_{imp} between all isolated circuits	IEC/EN 60664-1	type test: 4 kV; 1.2/50 µs		
Pollution category	IEC/EN 60664-1	3		
Overvoltage category	IEC/EN 60664-1	III		
Rated insulation voltage U_i	input circuit / output circuit	300 V		
	output circuit 1 / output circuit 2	not available	300 V	300 V
Basic insulation (IEC/EN 61140)	input circuit / output circuit	300 V		
Protective separation (IEC/EN 61140, EN 50178)	input circuit / output circuit	250 V		
Power-frequency withstand voltage test (test voltage)	between all isolated circuits	routine test: 2.5 kV; 50 Hz; 1 s type test: 2.5 kV; 50 Hz; 60 s		
Standards				
Product standard		IEC/EN 61812-1		
Low Voltage Directive		2006/95/EC		
EMC Directive		2004/108/EC		
RoHS Directive		2011/65/EC		
Electromagnetic compatibility				
Interference immunity to		IEC/EN 61000-6-1, IEC/EN 61000-6-2		
electrostatic discharge	IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)		
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V / m)		
electrical fast transient / burst	IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)		
surge	IEC/EN 61000-4-5	Level 4 (2 kV L-L)		
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)		
Interference emission		IEC/EN 61000-6-3, IEC/EN 61000-6-4		
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B		
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B		


„Approvals and marks“ see page 1/4.

CT-D range
Technical data, Technical diagrams

Technical diagrams


Load limit curves

AC load (resistive)

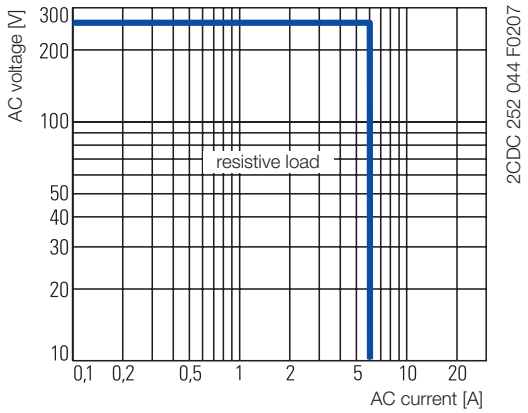


CT-D.1x


DC load (resistive)

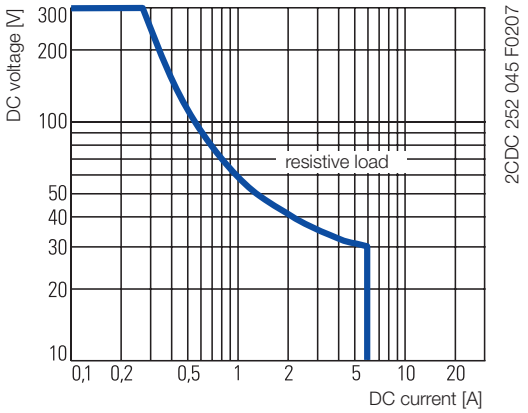

CT-D.1x

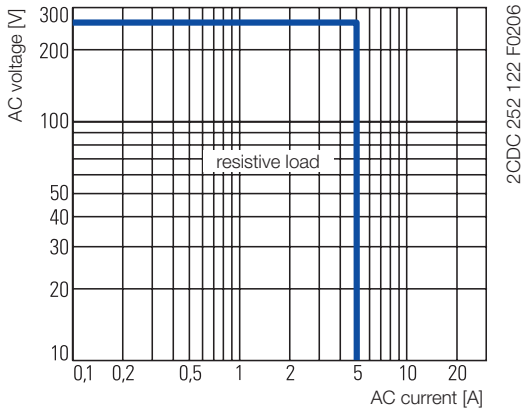


CT-D.2x

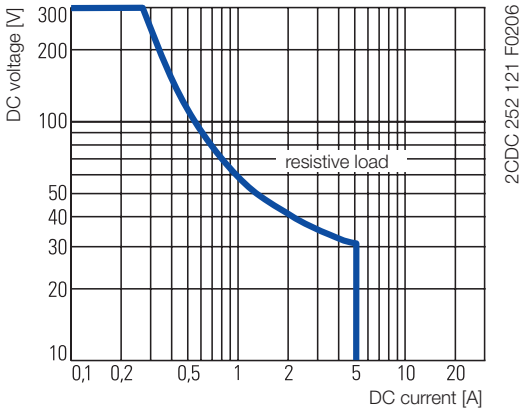


CT-D.2x

Derating factor F
for inductive AC load

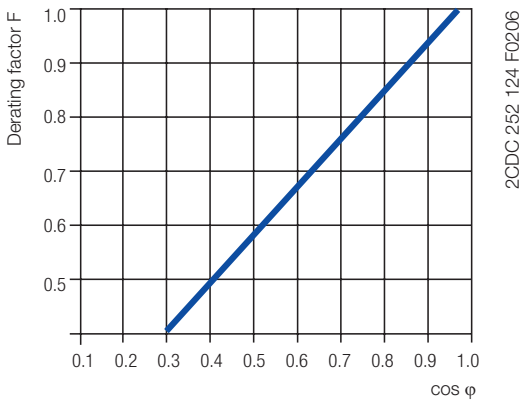


Contact lifetime

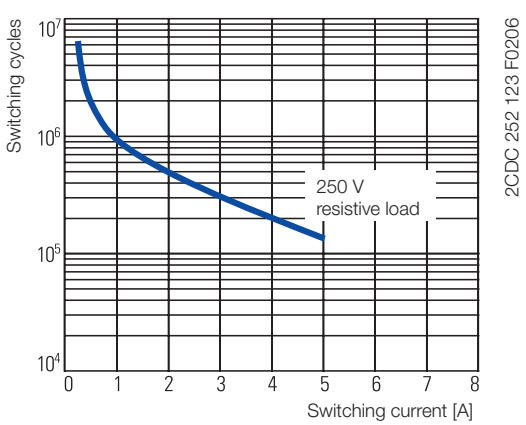

CT-D range
Wiring notes, Dimensional drawings


Wiring notes for devices with control input

A parallel load to the control input is possible

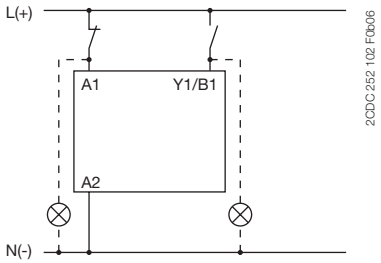


Dimensional drawings

dimensions in mm

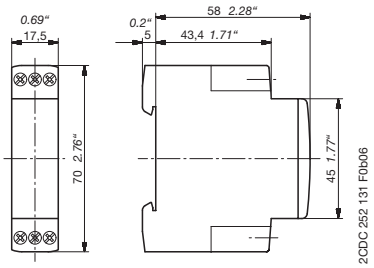

CT-D devices with 1 c/o contact or 2 n/o contacts

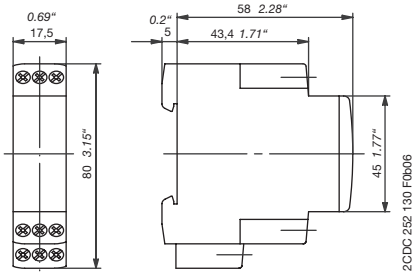

CT-D devices with 2 c/o contacts

CT-E range
Product group picture

1



CT-E range
Table of contents

CT-E Range

Product group picture	1/17
Table of contents	1/18
Benefits and advantages	1/19
Ordering details	1/20
Function diagrams	1/22
Connection diagrams	1/27
Connection diagrams, Technical diagrams	1/28
Technical data	1/29
Wiring notes, Dimensional drawings	1/31
Notes	1/32

CT-E range
Benefits and advantages

1

Characteristics
- Diversity:
  - 2 multifunction timers
  - 56 single-function timers
- Control supply voltages:
  - Dual range: 24 V AC/DC
  - Single range: 110-130 V AC, 220-240 V AC
  - Wide range: 24-240 V AC/DC (CT-MFE)
- Time ranges
  - 5 single ranges: 0.05-1 s, 0.1-10 s, 0.3-30 s, 3-300 s, 0.3-30 min
  - 8 time ranges: 0.05 s - 100 h (CT-MFE)
- Devices with 1 c/o (SPDT) contact (250 V / 4 A) or solid-state output for high switching frequencies (thyristor 0.8 A)
- Approvals / Marks (details see page 1/4)
  - cULus LISTED, GL, EAC, CB, KC, RCM / CE, EAC

Benefits

Direct reading scales ①
Direct setting of the time delay without any additional calculation provides accurate time delay adjustment.


LEDs for status indication ②
All actual operational states are displayed by front-face LEDs, thus simplifying commissioning and troubleshooting.

Connection screws in M3 (Pozidrive 1) ③
Easy and fast tightening and release of the connection screws with pozidrive, pan- or crosshead screwdriver.

Solid-state output ④
Devices with solid-state output are the perfect solution for high operation cycles.

Synonyms

used expression	alternative expression(s)	used expression	alternative expression(s)
1 c/o contact	SPDT	voltage-related	wet / non-floating
2 c/o contacts	DPDT	volt-free	dry / floating

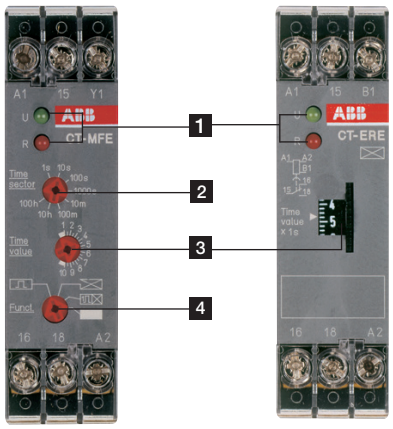


Operating controls

1 LEDs for status indication
U - green LED: ⌐¬ control supply voltage applied
R2: red LED: ⌐¬ output relay energized

2 Time range adjustment (only multifunctional devices)


3 Fine adjustment of the time delay

4 Preselection of the timing function (only multifunctional devices)









CT-E range
Ordering details

Description

The CT-E range with its excellent price/performance ratio offers an ideal solution for serial applications. 56 single-function devices with 5 different time ranges as well as 2 multifunction timers with 6 functions and 8 time ranges offer the highest possible flexibility for almost every application. For high operating cycles, contact-free CT-E timers with solid-state output are available.



CT-MFE



CT-AHE

ON-delay
OFF-delay
Impulse-ON
Impulse-OFF
Flasher starting with ON
Flasher staring with OFF
Pulse former

Ordering details

Timing function	Rated control supply voltage	Time ranges	Control Input	Output	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
Multifunctional [1]	24-240 V AC/DC	8 (0.05 s - 100 h)	■	1 c/o	CT-MFE	1SVR550029R8100		0.08 (0.18)
ON-delay	24 V AC/DC, 220-240 V AC	0.1-10 s	-	1 c/o	CT-ERE	1SVR550107R1100		0.08 (0.18)
		0.3-30 s				1SVR550107R4100		
		3-300 s				1SVR550107R2100		
		0.3-30 min				1SVR550107R5100		
	110-130 V AC	0.1-10 s	-			1SVR550100R1100		
		0.3-30 s				1SVR550100R4100		
		3-300 s				1SVR550100R2100		
		0.3-30 min				1SVR550100R5100		
OFF-delay	24 V AC/DC	0.1-10 s	■	1 c/o	CT-AHE	1SVR550118R1100		0.08 (0.18)
		0.3-30 s				1SVR550118R4100		
		3-300 s				1SVR550118R2100		
	110-130 V AC	0.1-10 s				1SVR550110R1100		
		0.3-30 s				1SVR550110R4100		
		3-300 s				1SVR550110R2100		
	220-240 V AC	0.1-10 s				1SVR550111R1100		
		0.3-30 s				1SVR550111R4100		
		3-300 s				1SVR550111R2100		
OFF-delay[2]	24 V AC/DC, 220-240 V AC	0.1-10 s	-	1 c/o	CT-ARE	1SVR550127R1100		0.08 (0.18)
		0.3-30 s				1SVR550127R4100		
	110-130 V AC	0.1-10 s				1SVR550120R1100		
		0.3-30 s				1SVR550120R4100		
Impulse-ON	24 V AC/DC, 220-240 V AC	0.1-10 s	-	1 c/o	CT-VWE	1SVR550137R1100		0.08 (0.18)
		0.3-30 s				1SVR550137R4100		
		3-300 s				1SVR550137R2100		
	110-130 V AC	0.1-10 s				1SVR550130R1100		
		0.3-30 s				1SVR550130R4100		
		3-300 s				1SVR550130R2100		
Impulse-OFF[2]	24 V AC/DC	0.05-1 s	-	1 c/o	CT-AWE	1SVR550158R3100		0.08 (0.18)
	110-130 V AC					1SVR550150R3100		
	220-240 V AC					1SVR550151R3100		

1) Functions: ON-delay, OFF-delay with auxiliary voltage, Impulse-ON, Flasher starting with ON, Flasher starting with OFF, Pulse former
2) without auxiliary voltage, True Off-delay timer

■ Control input with voltage-related triggering
- no triggering

CT-E range
Ordering details

1


2CDC 251 125 F0004

CT-AWE


2CDC 251 059 F0003

CT-SDE

Bestellangaben

Timing function	Rated control supply-voltage	Time ranges	Control Input	Output	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
Impulse-OFF	24 V AC/DC	0.1-10 s	■	1 c/o	CT-AWE	1SVR550148R1100		0.08 (0.18)
		0.3-30 s				1SVR550148R4100		
		3-300 s				1SVR550148R2100		
	110-130 V AC	0.1-10 s				1SVR550140R1100		
		0.3-30 s				1SVR550140R4100		
		3-300 s				1SVR550140R2100		
	220-240 V AC	0.1-10 s				1SVR550141R1100		
		0.3-30 s				1SVR550141R4100		
		3-300 s				1SVR550141R2100		
Flasher staring with OFF	24 V AC/DC, 220-240 V AC	0.1-10 s	-	1 c/o	CT-EBE [4]	1SVR550167R1100		0.08 (0.18)
	110-130 V AC					1SVR550160R1100		
Star-delta change-over twice ON-delayed	24 V AC/DC, 220-240 V AC	0.1-10 s	-	1 c/o	CT-YDE [1] [2]	1SVR550207R1100		0.08 (0.18)
		0.3-30 s				1SVR550207R4100		
		3-300 s				1SVR550207R2100		
	110-130 V AC	0.1-10 s				1SVR550200R1100		
		0.3-30 s				1SVR550200R4100		
		3-300 s				1SVR550200R2100		
Star-delta change-over with impuls	24 V AC/DC, 220-240 V AC	0.3-30 s	-	1 n/o + 1 n/c	CT-SDE [2] [5]	1SVR550217R4100		0.08 (0.18)
	110-130 V AC					1SVR550210R4100		
	380-415 V AC					1SVR550212R4100		
Multifunctional [8]	24-240V AC/DC	0.1-10 s, 3-300 s	-	solide-state	CT-MKE [3] [6]	1SVR550019R0000		0.08 (0.18)
ON-delay	24-240 V AC/DC	0.1-10 s	-		CT-EKE	1SVR550509R1000		0.08 (0.18)
		0.3-30 s				1SVR550509R4000		
		3-300 s				1SVR550509R2000		
OFF-delay	24-240 V AC	0.1-10 s	-		CT-AKE	1SVR550519R1000		0.08 (0.18)
		0.3-30 s				1SVR550519R4000		
		3-300 s				1SVR550519R2000		

⊠ ON-delay
■ OFF-delay
1⎍⊠ Impulse-ON
1⎍■ Impulse-OFF
⎍⊠ Flasher starting with ON
⎍■ Flasher staring with OFF
1⎍ Pulse former
△⊠ Star-delta change-over twice ON-delayed
△1⎍ Star-delta change-over with impulse
⎍⊠ Pulse generator starting with ON or OFF

[1] without auxiliary voltage
[2] with fixed transition time
[3] solid-state output, functions and time range selection via external jumpers
[4] symetric ON & OFF times
[5] common contact
[6] Functions: ON-delay (AC/DC), Impuls-ON (AC only), Flasher starting with OFF (AC only)

■ Control input with voltage-related triggering
- no triggering

Notice
CT-…KE are solid-state timers with thyristor output for 2-wire applications. They are connected directly in series with the control coil of contactors or relays. Voltage should not be applied without a load connected, because there is no current limiting in the unit.

CT-E range
Function diagrams

Remarks

Legend

▭ Control supply voltage not applied / Output contact open
▬ Control supply voltage applied / Output contact closed
A1-Y1/B1: Control input with voltage-related triggering

Terminal designations on the device and in the diagrams


The c/o contact is always designated 15-16/18.
The n/o contacts are designated with 15-16 and 15-18.
Control supply voltage is always applied to terminals A1-A2/B1.

Function of the red LED

The red LED R glows as soon as the output relay energizes and turns off when the output relay de-energizes.

⊠ ON-delay (Delay on make) CT-ERE, CT-MFE


Applying control supply voltage starts timing. When the selected time delay is complete, the output relay energizes. If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset. Interrupting control supply voltage before the time delay is complete, resets the time delay. The output relay does not energize.

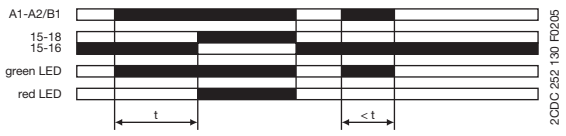

t = adjusted time delay

▬ OFF-delay, with auxiliary voltage (Delay on break) CT-AHE, CT-MFE

This function requires continuous control supply voltage for timing.
Timing is controlled by control input A1-Y1. If the control input is closed, the output relay energizes. If control input A1-Y1 is opened, the selected time delay starts. When the time delay is complete, the output relay de-energizes. If control input A1-Y1 is closed before the time delay is complete, the time delay is reset. Timing starts again when the control input re-opens.

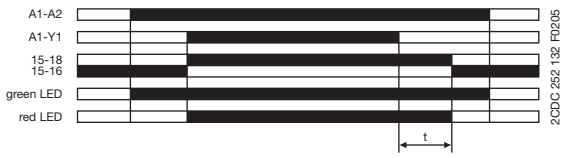


t = adjusted time delay
Minimum control pulse length: 20 ms

CT-E range
Function diagrams

OFF-delay, without auxiliary voltage (true delay on break) CT-ARE

The OFF-delay function without auxiliary voltage does not require continuous control supply voltage for timing.
Applying control supply voltage, energizes the output relay.
If control supply voltage is interrupted, the OFF-delay starts. When timing is complete, the output relay de-energizes. If control supply voltage is re-applied before the time delay is complete, the time delay is reset and the output relay remains energized.
Control supply voltage must be applied for the minimum energizing time (200 ms), for proper operation.

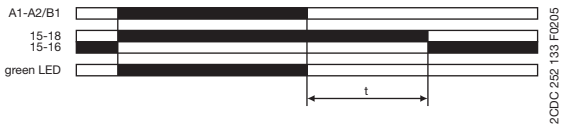


t = adjusted time delay

Impulse-ON (Interval) CT-VWE, CT-MFE


The output relay energizes immediately when control supply voltage is applied and de-energizes after the selected time delay is complete. If control supply voltage is interrupted before the time delay is complete, the output relay de-energizes and the time delay is reset.
Control input A1-Y1 has to be jumpered, when this timing function is selected.

CT-VWE:

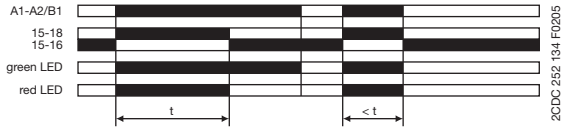

t = adjusted pulse time


CT-MFE:

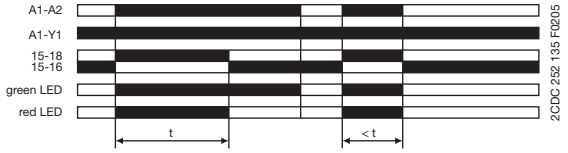

t = adjusted pulse time

Impulse-OFF, without auxiliary voltage (True trailing edge interval) CT-AWE


The Impulse-OFF function without auxiliary voltage does not require continuous control supply voltage for timing.
If control supply voltage is interrupted, the output relay energizes and the OFF time starts. When timing is complete, the output relay de-energizes. If control supply voltage is re-applied before the time delay is complete, the time delay is reset and the output relay de-energizes.
Control supply voltage must be applied for the minimum energizing time (200 ms), for proper operation.

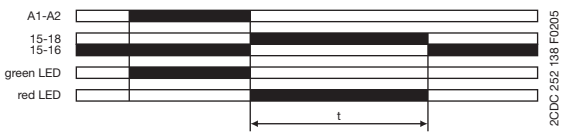

t = adjusted pulse time

Impulse-OFF, with auxiliary voltage (Trailing edge interval) CT-AWE

This function requires continuous control supply voltage for timing. Timing is controlled by control input A1-Y1. If the control input is opened, the output relay energizes and timing begins. When the selected time delay is complete, the output relay de-energizes. Interrupting control supply voltage or closing control input A1-Y1, before the time delay is complete, de-energizes the output relay and resets the time delay.

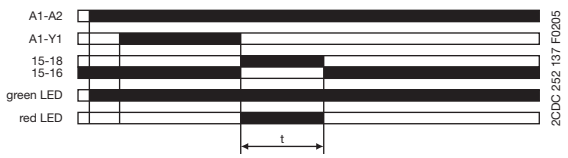


t = adjusted pulse time

CT-E range
Function diagrams

Flasher starting with ON (Recycling equal times, ON first) CT-MFE

Applying control supply voltage starts timing with symmetrical ON & OFF times. The cycle starts with an ON time first.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.
Control input A1-Y1 has to be open, when this timing function is selected.

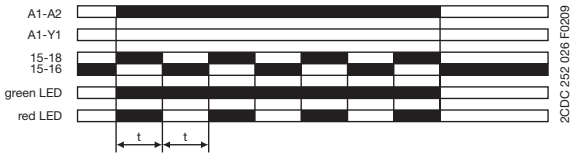


t = adjusted flashing time

Flasher starting with OFF (Recycling equal times, OFF first) CT-EBE, CT-MFE


Applying control supply voltage starts timing with symmetrical ON & OFF times. The cycle starts with an OFF time first.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.
Control input A1-Y1 has to be jumpered, when this timing function is selected.

CT-EBE:

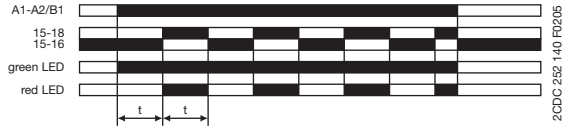

t = adjusted flashing time


CT-MFE:

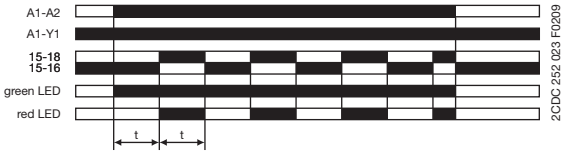

t = adjusted flashing time

Pulse former (Single shot) CT-MFE

Closing the control input A1-Y1, with control supply voltage applied, energizes the output relay for the selected ON time. Operating the control input during timing has no effect. When the ON time is complete, the output relay de-energizes.
Timing can be restarted by re-closing control input A1-Y1. If control supply voltage is interrupted during timing, the output relay de-energizes and the ON time is reset.

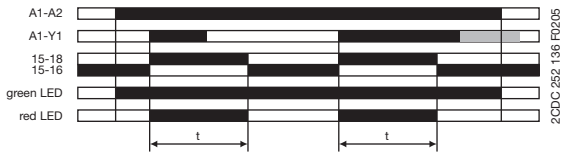


t = adjusted pulse time

CT-E range
Function diagrams


1

Star-delta change-over
CT-YDE


Applying control supply voltage energizes the star contactor (K1) and the line contactor (K2) and begins the set starting time. When the starting time is complete, contact 15-16 de-energizes the star contactor (K1) Now, the fix transition time starts. When the transition time is complete, contact 15-16 energizes the delta contactor (K3).

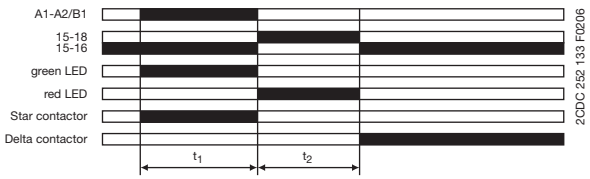

t_1 = adjustable starting time
t_2 = fixed transition time of 50 ms

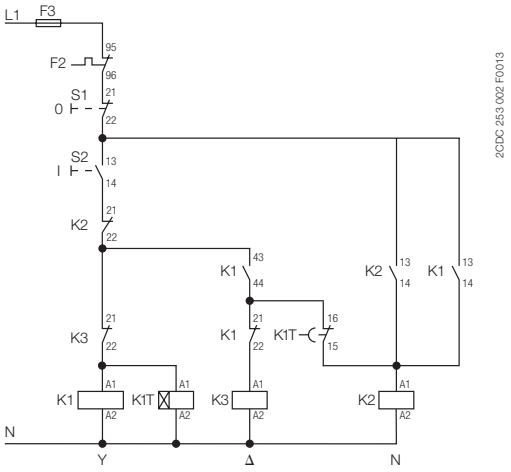


Control circuit diagram

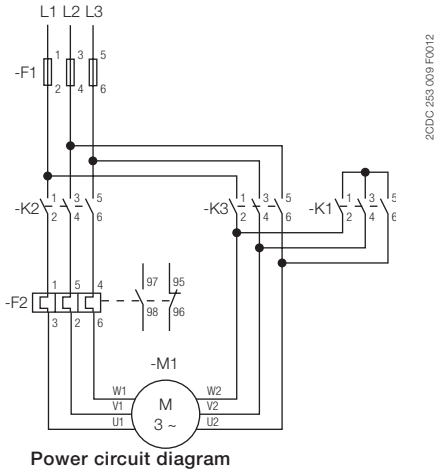


Power circuit diagram

Star-delta change-over
CT-SDE

Applying control supply voltage energizes the star contactor (K1) and the line contactor (K2) and begins the set starting time. When the starting time is complete, contact 15-16 de-energizes the star contactor (K1). Now, the fix transition time starts. When the transition time is complete, contact 15-18 energizes the delta contactor (K3).

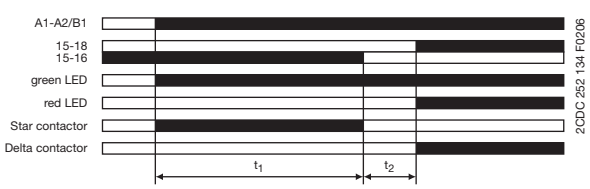

t_1 = adjustable starting time
t_2 = fixed transition time of 30 ms

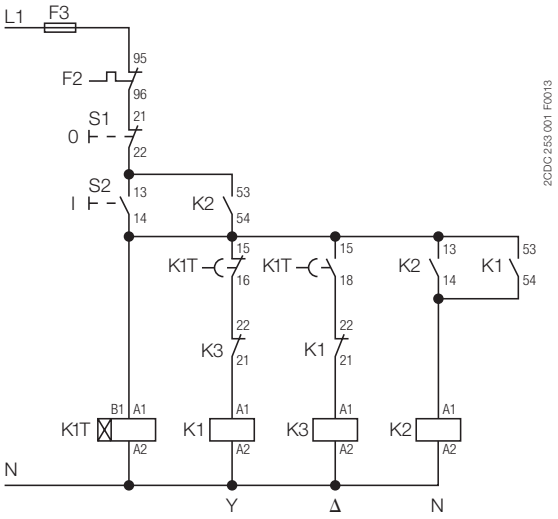

Control circuit diagram


CT-E range
Function diagrams

Multifunction timer CT-MKE

Functions and time ranges are programmed by simply plugging in external wire jumpers.

ON-delay (Delay on Make)


Without external connection. Timing begins when control supply voltage is applied to terminal A1 and the load connected in series with A2. When the selected time delay is complete, the load energizes. If control supply voltage is interrupted, the load de-energizes and the time delay is reset. Interrupting supply voltage before the time delay is complete, resets the time delay. The load does not energize.

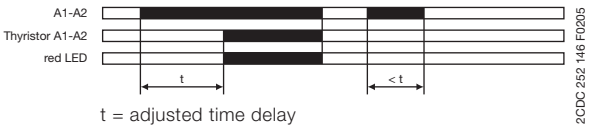

t = adjusted time delay

Impulse-ON (Interval)


External connection X1-X4 required. The load energizes and timing starts when control supply voltage is applied to terminal A1 and the load connected in series with A2. When the selected time delay is complete, the load de-energizes. Interrupting control supply voltage before the time delay is complete, de-energizes the load and resets the time delay.



t = adjusted pulse time

Flasher, starting with ON


External connection X1-X4 and X2-X4 required. When control supply voltage is applied to terminal A1 and the load connected in series with A2, the load energizes and de-energizes with the selected ON & OFF times. The ON & OFF times are equal. The cycle starts with an ON time first (load energized). If control supply voltage is interrupted, the load de-energizes and the time delay is reset.



t = adjusted flashing time

Flasher, starting with OFF

External connection X2-X4 required. When control supply voltage is applied to terminal A1 and the load connected in series with A2, the load energizes and de-energizes with the selected ON & OFF times. The ON & OFF times are equal. The cycle starts with an OFF time first (load de-energized). If control supply voltage is interrupted, the load de-energizes and the time delay is reset.




t = adjusted flashing time

Programming the time ranges

X3-X4 jumpered: 0.1-10 s
X3-X4 open: 3-300 s

ON-delay (Delay on make) CT-EKE

Timing begins when control supply voltage is applied to terminal A1 and the load connected in series with AL. When the selected time delay is complete, the load energizes. The green LED glows as long as the load is energized.
If control supply voltage is interrupted, the load de-energizes and the time delay is reset. Interrupting control supply voltage before the time delay is complete, resets the time delay. The load does not energize.

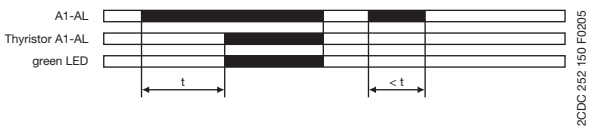

t = adjusted time delay

OFF-delay, with auxiliary voltage (Delay on break) CT-AKE

The OFF-delay function with auxiliary voltage requires continuous control supply voltage at terminal A1, and the load connected in series with AL, for timing.
Timing is controlled by control input Y2-A2. When the control input is closed, the load energizes. If the control input is opened, the selected time delay starts (minimum control pulse length is 20 ms). The green LED glows as long as the load is energized. When the selected time delay is complete, the load de-energizes. If control input Y2-A2 is closed before the time delay is complete, the time delay is reset and the load remains energized. Timing starts again when the control input is re-opened. Interrupting control supply voltage resets the time delay and de-energizes the load.




t = adjusted time delay

Notice:
CT-…KE are solid-state timers with thyristor output for 2-wire applications. They are connected directly in series with the control coil of contactors or relays. Voltage should not be applied without a load connected, because there is no current limiting in the unit.

CT-E range
Connection diagrams


CT-MFE



2CDC 252 152 F0005

A1-A2 Supply: 24-240 V AC/DC
A1-Y1 Control input
15-16/18 c/o contact


CT-ERE



2CDC 252 153 F0005

A1-A2 Supply: 220-240 V AC or 110-130 V AC
A1-B1 Supply: 24 V AC/DC
15-16/18 c/o contact


CT-AHE [1)]



2CDC 252 154 F0005

A1-A2 Supply: 24 V AC/DC or 110-240 V AC or 220-240 V AC
A1-Y1 Control input
15-16/18 c/o contact


CT-ARE



2CDC 252 155 F0005

A1-A2 Supply: 220-240 V AC or 110-130 V AC
A1-B1 Supply: 24 V AC/DC
15-16/18 c/o contact


CT-VWE



2CDC 252 156 F0b05

A1-A2 Supply: 220-240 V AC or 110-130 V AC
A1-B1 Supply: 24 V AC/DC
15-16/18 c/o contact

CT-AWE




2CDC 252 157 F0b05

Device without aux. voltage

A1(+)-A2(-) Supply: 24 V AC/DC or 110-240 V AC or 220-240 V AC
15-16/18 c/o contact

CT-AWE [1)]




2CDC 252 158 F0b05

Device with aux. voltage

A1-A2 Supply: 24 V AC/DC or 110-240 V AC or 220-240 V AC
A1-Y1 Control input
15-16/18 c/o contact


CT-EBE



2CDC 252 159 F0005

A1-A2 Supply: 220-240 V AC or 110-130 V AC
A1-B1 Supply: 24 V AC/DC
15-16/18 c/o contact


CT-YDE



2CDC 252 160 F0005

A1-A2 Supply: 220-240 V AC or 110-130 V AC
A1-B1 Supply: 24 V AC/DC
15-16/18 c/o contact

CT-SDE




2CDC 252 161 F0005

Device: 1SVR 550 217 R4100

A1-A2 Supply: 220-240 V AC
A1-B1 Supply: 24 V AC/DC
15-16 n/c contact
15-18 n/o contact
with common contact

CT-SDE




2CDC 252 162 F0005

Devices: 1SVR 550 210 R4100, 1SVR 550 212 R4100

A1-A2 Supply: 110-130 V AC or 380-415 V AC
15-16 n/c contact
15-18 n/o contact
with common contact

CT-MKE




2CDC 252 165 F0005

A1-A2 Supply: 24-240 V AC/DC
A1-A2 Thyristor
X1-X4 Timing function adjustment
X2-X4 Timing function adjustment
X3-X4 Time range adjustment
(Details see function diagrams)

[1)] "„Wiring notes, Dimensional drawings" see page 1/31.

CT-E range
Connection diagrams, Technical diagrams


CT-EKE



2CDC 252 166 F0005

A1-AL	Supply: 24-240 V AC/DC
A1-AL	Thyristor

CT-AKE




2CDC 252 167 F0005

A1-AL	Supply: 24-240 V AC
A1-AL	Thyristor
Y2-A2	Control input

Technical diagrams


Load limit curves

AC load (resistive)

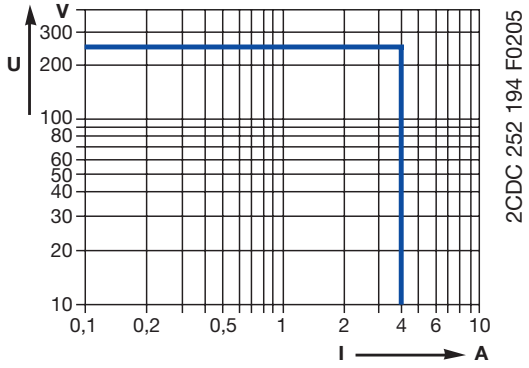

2CDC 252 194 F0205


DC load (resistive)

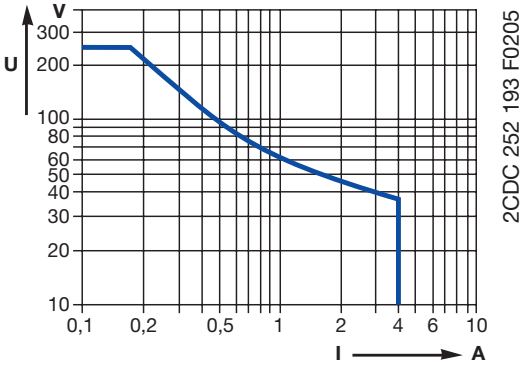

2CDC 252 193 F0205


220 V 50 Hz AC1
360 cycles/h

Derating factor F for inductive AC load

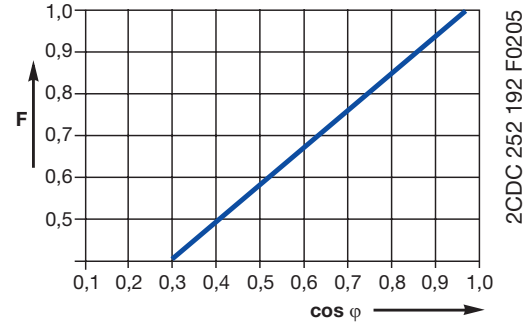

2CDC 252 192 F0205

Contact lifetime

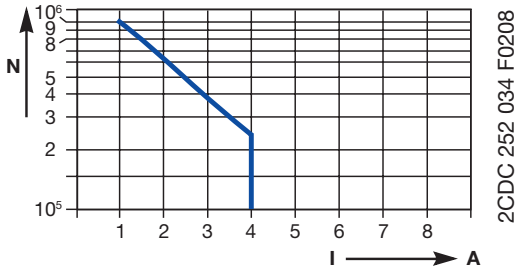

2CDC 252 034 F0208

CT-E range
Technical data

1

Technical data

Data at T_a = 25 °C and rated values, unless otherwise indicated

			CT-E (relays)	CT-E (solid-state)
Input circuit - Supply circuit				
Rated control supply voltage U_s		A1-A2, A1-AL	24-240 V AC/DC	
		A1-A2, A1-AL	24-240 V AC	
		A1-A2	110-130 V AC	-
		A1-A2	220-240 V AC	-
		A1-A2	380-415 V AC	-
		A1-B1	24 V AC/DC	-
Rated control supply voltage U_s tolerance			-15...+10 %	
Rated frequency		AC/DC versions	DC or 50/60 Hz	
		AC versions	50/60 Hz	
Typical current / power consumption		24-240 V AC/DC, 24-240 V AC	approx. 1.0-2.0 VA/W	
		110-130 V AC, 220-240 V AC	approx. 2.0 VA	-
		380-415 V AC	approx. 3.0 VA	-
		24 V AC/DC	approx. 1.0 VA/W	-
Minimum energizing time		CT-ARE, CT-AWE w/o aux. voltage	200 ms	-
Current consumption while timing			-	≤ 2 mA (24-60 V AC/DC) ≤ 8 mA (60-240 V AC/DC) (CT-AKE only AC)
Input circuit - Control circuit				
Kind of triggering			voltage-related triggering	-
Control input, Control function		A1-Y1	start timing external	-
Parallel load / polarized			no / yes [1]	-
Minimum control pulse length			20 ms	-
Control voltage potential			see rated control supply voltage	-
Timing circuit				
Time ranges	1 of 5 time ranges per single-function device		0.05-1 s / 0.1-10 s / 0.3-30 s / 3-300 s / 0.3-30 min	
	8 time ranges 0.05 s - 100 h (CT-MFE)		1.) 0.05-1 s 2.) 0.5-10 s 3.) 5-100 s 4.) 50-1000 s 5.) 0.5-10 min 6.) 5-100 min 7.) 0.5-10 h 8.) 5-100 h	-
	2 time ranges 0.1-300 s (CT-MKE)		-	1.) 0.1-10 s 2.) 3-300 s
Recovery time			<50 ms CT-ARE: <200 ms CT-AWE, CT-SDE: <400 ms CT-YDE: <500 ms	CT-EKE: <50 ms CT-MKE: <100 ms CT-AKE: <300 ms
Accuracy within the rated control supply voltage tolerance			Δt < 0.5 % / V	
Accuracy within the temperature range			Δt < 0.1 % / °C	
			CT-MFE: Δt <0.06 % / °C	-
Repeat accuracy (constant parameters)			Δt < 1 %	
Star-delta transition time		CT-YDE / CT-SDE	50 ms / 30 ms	-
Output circuit				
Kind of output		15-16/18	Relay, 1 c/o contact	-
		CT-SDE: 15-16, 15-18	1 n/c, 1 n/o contact with common contact	
		A1-A2. A1-AL	-	Thyristor
Contact material			AgCdO	-
Rated operational voltage U_e		IEC/EN 60947-1	250 V	
Maximum switching voltage			250 V AC, 250 V DC	
Rated operational current I_e (IEC/EN 60947-5-1)		AC-12 (resistive) at 230 V	4 A	-
		AC-15 (inductive) at 230 V	3 A	-
		DC-12 (resistive) at 24 V	4 A	-
		DC-13 (inductive) at 24 V	2 A	-

[1] CT-MFE: yes / no

CT-E range
Technical data


			CT-E (relays)	CT-E (solid-state)
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)		B 300	-
	max. rated operational voltage		300 V AC	-
	Maximum continuous thermal current at B300		5 A	-
	max. making/breaking apparent power at B300		3600 VA / 360 VA	-
Mechanical lifetime			30 x 10^6 switching cycles	-
Electrical lifetime	at AC-12, 230 V, 4 A		0.1 x 10^6 switching cycles	-
Max. fuse rating to achieve short-circuit protection (IEC/EN 60947-5-1)	n/c contact		10 A fast-acting, CT-ARE: 5 A	-
	n/o contact		10 A fast-acting, CT-ARE: 5 A	-
Minimum load current			-	CT-MKE: 20 mA CT-EKE, CT-AKE: 10 mA
Maximum load current			-	CT-MKE: 0.8 A at T_a = 20 °C CT-EKE, CT-AKE: 0.7 A
Load current reduction / Derating			-	10 mA/°C
Maximum surge current			-	CT-MKE: ≤ 20 A for t ≤ 20 ms CT-EKE, CT-AKE: ≤ 15 A
Voltage drop in connected state			-	≤ 3 V
Cable length between solid-state timer and connected load at 50 Hz and a cable capacity of 100 pF/m :		at 24 V AC	-	220 m / 22 nF
		at 42 V AC	-	100 m / 10 nF
		at 60 V AC	-	65 m / 6.5 nF
		at 110 V AC	-	50 m / 5 nF
		at 240 V AC	-	22 m / 2.2 nF
General data				
Duty time			100%	
Dimensions (W x H x D)			22.5 x 78 x 78.5 mm (0.886 x 3.07 x 3.09 in)	
Weight			approx. 80 g (0.176 lb)	
Mounting			DIN rail (IEC/EN 60715)	
Mounting position			any	
Minimum distance to other units		horizontal / vertical	no / no	
Degree of protection		housing / terminals	IP50 / IP20	
Electrical connection				
Wire size	fine-strand with wire end ferrule		2 x 0.75-1.5 mm² (2 x 18-16 AWG)	
	fine-strand without wire end ferrule		2 x 1-1.5 mm² (2 x 18-16 AWG)	
	rigid		2 x 0.75-1.5 mm² (2 x 18-16 AWG)	
Stripping length			10 mm (0.39 in)	
Tightening torque			0.6-0.8 Nm (5.31-7.08 lb.in)	
Environmental data				
Ambient temperature ranges		operation / storage	-20...+60 °C / -40...+85 °C	
Damp heat		IEC/EN 60068-2-30	24 h cycle, 55 °C, 93 % rel., 96 h	
Operational reliability		IEC/EN 60068-2-6	6 g	
Mechanical resistance		IEC/EN 60068-2-6	10 g	
Isolation data				
Rated impulse withstand voltage U_{imp} between all isolated circuits		IEC/EN 60664-1	type test: 4 kV; 1.2/50 µs	-
Pollution category		IEC/EN 60664-1	3	
Overvoltage category		IEC/EN 60664-1	III	
Power-frequency withstand voltage (test voltage) between all isolated circuits			routine test: 2.5 kV; 50 Hz; 1 s type test: 2.5 kV; 50 Hz; 60 s	-
Basic insulation (IEC/EN 61140)		input circuit / output circuit	300 V	-
Rated insulation voltage U_i		input circuit / output circuit	300 V (supply up to 240 V)	-
			500 V (supply up to 440 V)	-
Test voltage between all isolated circuits		routine test	2.5 kV, 50 Hz, 1 s	-
Standards				
Product standard			IEC 61812-1, EN 61812-1 + A11, DIN VDE 0435 Teil 2021	
Low Voltage Directive			2006/95/EC	
EMC Directive			2004/108/EC	
Electromagnetic compatibility				
Interference immunity to			IEC/EN 61000-6-2	
	electrostatic discharge	IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)	
	radiated, radio-frequency electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)	
	electrical fast transient / burst	IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)	
	surge	IEC/EN 61000-4-5	Level 4 (2 kV L-L)	
	conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)	
Interference emission			IEC/EN 61000-6-4	

„Approvals and marks“ see page 1/4.


CT-E range
Wiring notes, Dimensional drawings

1


Wiring notes
for single-function devices with control contact (CT-AHE, CT-AWE with auxiliary voltage)

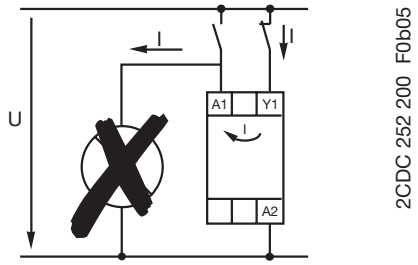


2CDC 252 200 F0b05

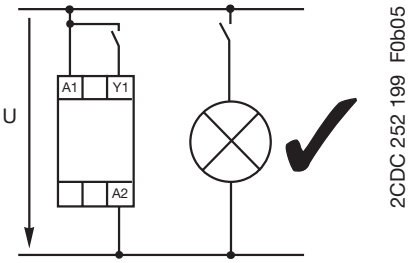

2CDC 252 199 F0b05

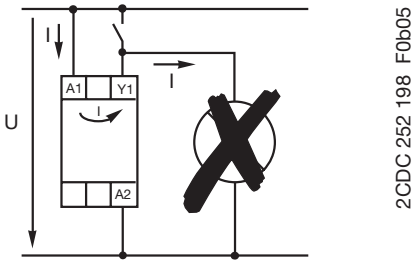


2CDC 252 198 F0b05

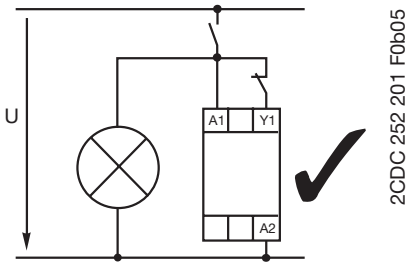

2CDC 252 201 F0b05

Dimensional drawing Dimensions in mm

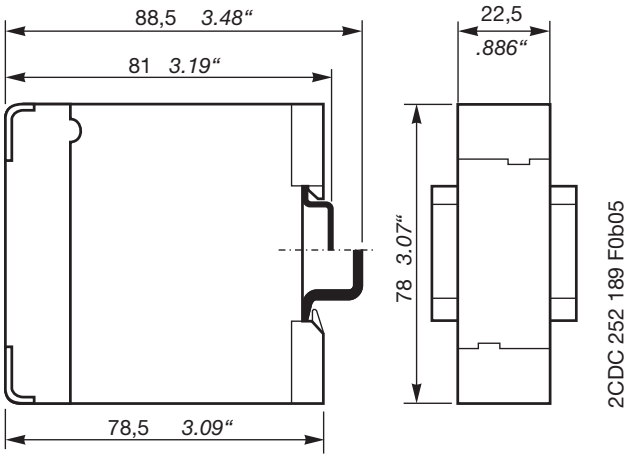

2CDC 252 189 F0b05

CT-E range
Notes

CT-S range
Product group picture

1



CT-S range
Table of contents

CT-S Range

Product group picture	1/33
Table of contents	1/34
Benefits and advantages	1/35
Ordering details - multifunctional	1/37
Ordering details - singlefunctional	1/38
Ordering details - Accessories	1/39
Ordering details - Accessories	1/40
Function diagrams	1/41
Connection diagrams	1/49
Technical data	1/52
Technical diagrams	1/55
Wiring notes, Dimensional drawings	1/56

CT-S range
Benefits and advantages


1

Characteristics

- Diversity:
  - 8 multifunction timers
  - 13 single-function timers
- Control supply voltages:
  - Multi range: 24-48 V DC, 24-240 V AC
  - Wide range: 24-240 V AC/DC
  - Single range: 380-440 V AC
- Innovative connection technology
  - Double-chamber cage connection terminals
  - Easy Connect Technology
- Devices with:
  - 1 or 2 c/o (SPDT) contacts
  - 2nd c/o contact can be selected as instantaneous contact [1)]
  - Remote potentiometer connection [1)]
  - Control input with volt-free or voltage-related triggering e.g. to start timing, pause timing
  - Extended operating temperature range down to -40 °C [1)]
- Sealable transparent cover for protection against unauthorized changes of time values
- Integrated marker label
- Approvals / Marks (partly pending, details see page 1/4)
  - , , EAC, , CB, / CE,

1) selected devices

Operating controls

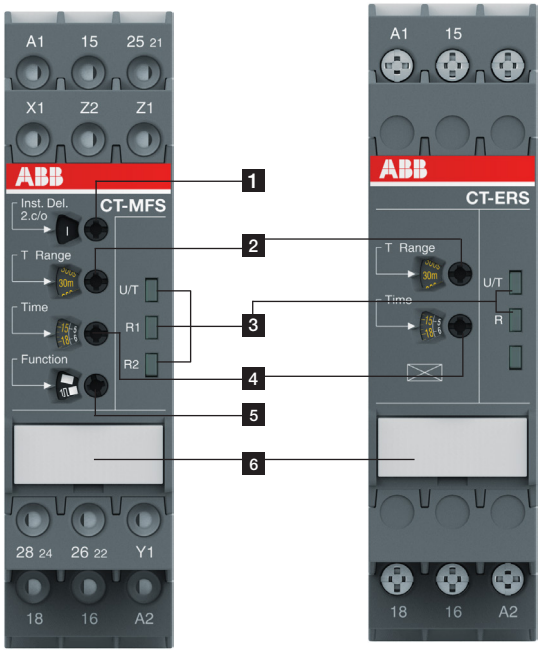

1 **2nd contact as an instantaneous contact**

2 **Preselection of the time range**

3 **Indication of operational states**

U/T: control supply voltage applied / timing

R: Output relay energized

4 **Fine adjustment of time delay**

5 **Preselection of timing function**

6 **Marker label**

CT-S range
Benefits and advantages

Easy Connect Technology ①
Tool-free wiring and excellent vibration resistance. Push-in terminals provide connection of wires up to 2 x 0.5 - 1.5 mm² (2 x 20 -16 AWG), rigid or fine-strand with or without wire end ferrules. The extended type designators for products with push-in terminals are indicated by a **P** following the extended type designator e.g. CT-xxS.xx**P**.

Double-chamber cage connection terminals ②
Double-chamber cage connection terminals provide connection of wires up to 2 x 0.5-2.5 mm² (2 x 20-14 AWG) rigid or fine-strand, with or without wire end ferrules. Potential distribution does not require additional terminals. The extended type designators for products with double-chamber cage connection terminals are indicated by a **S** following the extended type designator e.g. CT-xxS.xx**S**.

Time range preselection and fine adjustment ③
Direct assignment of the preselected time range to the fine adjustment potentiometer scale by multicolor scales.


Higher utility class ④
The Easy Connect Technology provides excellent vibration resistance with gas tight push-in terminals – the right solution for harsh environment. Selected products of the electronic timers and measuring and monitoring relays comply to the latest rail standards NF F 16-101/102, EN 45545, EN 50155 and more standards which are relevant for railway applications. Find more inforamtion in the rail brochure 2CDC110084B0201.


LEDs for status indication ⑤
All actual operational states are displayed by front-face LEDs, thus simplifying commissioning and troubleshooting.


Integrated marker label ⑥
Integrated marker labels allow the product to be marked quickly and simply. No additional marker labels are required.


Sealable transparent cover ⑦
Protection against unauthorized changes of time and threshold values. Available as an accessory.


Snap-On housing ⑧
Tool-free DIN rail installation and deinstallation of the electronic timer.





















CT-S range
Ordering details - multifunctional



CT-MVS.21P



CT-MBS.22P

Description
The highly sophisticated CT-S range in ABB's new S-range housing offers two different types of connection terminals and is ideally suited for universal use. Two different connection technologies are available:
– Double-chamber cage connection terminals
– Easy Connect Technology

Accessories:
The CT-S range offers the possibility of using accessories such as a remote potentiometer to adjust the time delay or a sealable, transparent cover to protect against unauthorized changes. of time and threshold values.

Ordering details

Timing function	Rated control supply voltage	Time ranges	Control input	Output	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
Multifunctional [5]	24- 240 V AC/DC	10 (0.05 - 300 h)	■	2 c/o	CT-MVS.21S [1) 2) 3)]	1SVR730020R0200		0.148 (0.326)
					CT-MVS.21P [1) 2) 3)]	1SVR740020R0200		0.136 (0.30)
	24-48 V DC, 24-240 V AC				CT-MVS.22S	1SVR730020R3300		0.142 (0.313)
					CT-MVS.22P	1SVR740020R3300		0.131 (0.289)
	380-440 V AC				CT-MVS.23S	1SVR730021R2300		0.144 (0.317)
					CT-MVS.23P	1SVR740021R2300		0.133 (0.293)
Multifunctional [6]	24-48 V DC, 24-240 V AC	10 (0.05 s - 300 h)	■	1 c/o	CT-MVS.12S	1SVR730020R3100		0.107 (0.236)
					CT-MVS.12P	1SVR740020R3100		0.102 (0.225)
Multifunctional [7]	24-48 V DC, 24-240 V AC	2×10 (0.05 s - 300 h)	■	2 c/o	CT- MXS.22S [4)]	1SVR730030R3300		0.142 (0.313)
					CT-MXS.22P [4)]	1SVR740030R3300		0.131 (0.289)
Multifunctional [8]	24- 240 V AC/DC	10 (0.05 s - 300 h)	□ / □	2 c/o	CT-MFS.21S [1) 2) 3)]	1SVR730010R0200		0.145 (0.32)
					CT-MFS.21P [1) 2) 3)]	1SVR740010R0200		0.133 (0.293)
	24-48 V DC, 24-240 V AC	10 (0.05 s - 300 h)	□ / □	2 c/o	CT-MBS.22S [2) 3)]	1SVR730010R3200		0.14 (0.309)
					CT-MBS.22P [2) 3)]	1SVR740010R3200		0.129 (0.284)
Multifunctional [9]	24-48 V DC, 24-240 V AC	10 (0.05 s - 300 h)	-	2 c/o	CT-WBS.22S	1SVR730040R3300		0.123 (0.271)
					CT-WBS.22P	1SVR740040R3300		0.115 (0.254)

(+) ON-delay (accumulative)
OFF-delay without aux. voltage
Impulse-ON
Impulse-OFF
Symmetrical ON-delay and OFF-delay
Flasher starting with ON
Flasher staring with OFF
Pulse generator starting
Star-delta change-over with impulse
Pulse former
ON/OFF-function
Star-delta change-over twice ON-delayed with ON or OFF
Pulse generator starting with ON or OFF
Single-pulse generator
Impulse-ON/OFF
Flasher starting with ON
Flasher starting with OFF
fixed impulse with adjustable time delay
Adjustable impulse with fixed time delay

■ Control input with voltage-related triggering
□ Control input with volt-free triggering
□ / □ two control input with volt-free triggering
- no triggering

S: screw connection
P: push-in / easy connect

[1)] Extended temperature range -40 °C
[2)] Remote potentiometer connection
[3)] 2nd c/o contact selectable as instantaneous contact
[4)] 2 remote potentiometer connections
[5)] Functions: ON-delay, OFF-delay with auxiliary voltage, Impulse-ON, Impulse-OFF with auxiliary voltage, Symmetrical ON- and OFF-delay, Flasher starting with ON or OFF, Star-delta change-over with impulse, Pulse former, Accumulative ON-delay, ON/OFF-function
[6)] Functions: ON-delay, OFF-delay with auxiliary voltage, Impulse-ON, Impulse-OFF with auxiliary voltage, Symmetrical ON- and OFF-delay, Flasher starting with ON or OFF, Pulse former, Accumulative ON-delay, ON/OFF-function
[7)] Functions: Select function via DIP switches behind the marker label on the front of the unit, asymmetrical ON- and OFF-delay, Impulse-ON/OFF, Pulse generator starting with ON or OFF, Single pulse generator, ON/OFF-function
[8)] Functions: ON-delay, OFF-delay with auxiliary voltage, Impulse-ON, Impulse-OFF with auxiliary voltage, Symmetrical ON- and OFF-delay, Flasher starting with ON, Flasher starting with OFF, Star-delta change-over with impulse, Pulse former, ON/OFF-function
[9)] Functions: Flasher starting with ON, Flasher starting with OFF, Impulse-ON, ON-delay, fixed impulse with adjustable time delay, Adjustable impulse with fixed time delay, ON/OFF-function

CT-S range
Ordering details - singlefunctional



CT-ERS.21P



CT-AHS.22P



CT-SDS.23P

Timing function	Rated control supply voltage	Time ranges	Control input	Output	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
ON-delay	24-240 V AC/DC	10 (0.05 s - 300 h)	-	2 c/o	CT-ERS.21S[1]	1SVR730100R0300		0.13 (0.287)
					CT-ERS.21P[1]	1SVR740100R0300		0.121 (0.267)
	24-48 V DC, 24-240 V AC				CT-ERS.22S	1SVR730100R3300		0.121 (0.267)
					CT-ERS.22P	1SVR740100R3300		0.113 (0.249)
	24-48 V DC, 24-240 V AC		-	1 c/o	CT-ERS.12S	1SVR730100R3100		0.106 (0.234)
					CT-ERS.12P	1SVR740100R3100		0.101 (0.222)
OFF-delay	24-240 V AC/DC	10 (0.05 s - 300 h)	■	2 c/o	CT-APS.21S[1]	1SVR730180R0300		0.146 (0.322)
					CT-APS.21P[1]	1SVR740180R0300		0.125 (0.276)
	24-48 V DC, 24-240 V AC				CT-APS.22S	1SVR730180R3300		0.138 (0.304)
					CT-APS.22P	1SVR740180R3300		0.127 (0.28)
			■	1 c/o	CT-APS.12S	1SVR730180R3100		0.109 (0.24)
					CT-APS.12P	1SVR740180R3100		0.103 (0.227)
	24-48 V DC, 24-240 V AC	10 (0.05 s - 300 h)	■	2 c/o	CT-AHS.22S	1SVR730110R3300		0.136 (0.30)
					CT-AHS.22P	1SVR740110R3300		0.125 (0.276)
OFF-delay[5]	24-240 V AC/DC	7 (0.05 s - 10 min)	-	1 c/o	CT-ARS.11S	1SVR730120R3100		0.106 (0.234)
					CT-ARS.11P	1SVR740120R3100		0.10 (0.22)
			-	2 c/o	CT-ARS.21S	1SVR730120R3300		0.124 (0.273)
					CT-ARS.21P	1SVR740120R3300		0.115 (0.254)
Star-delta change-over[6]	24-48 V DC, 24-240 V AC	7 (0.05 s - 10 min)	-	2 n/o	CT-SDS.22S	1SVR730210R3300		0.114 (0.251)
					CT-SDS.22P	1SVR740210R3300		0.108 (0.238)
	380-440 V AC				CT-SDS.23S	1SVR730211R2300		0.118 (0.26)
					CT-SDS.23P	1SVR740211R2300		0.112 (0.247)


[1] Extended temperature range -40 °C
[2] Remote potentiometer connection
[3] 2nd c/o contact selectable as instantaneous contact
[4] 2 remote potentiometer connections
[5] Without auxiliary voltage
[6] 50 ms transition time

■ Control input with voltage-related triggering
☐ Control input with volt-free triggering
☐ / ☐ two control input with volt-free triggering
- no triggering


S: screw connection
P: push-in / easy connect

⊠(+) ON-delay (accumulative)
■ OFF-delay without aux.voltage
1⎍⊠ Impulse-ON
⎍⊠ Flasher starting with ON
⎍■ Flasher staring with OFF
1⎍■ Impulse-ON/OFF
⎍⊠ Flasher starting with ON
⎍■ Flasher starting with OFF
⊠1⎍ fixed impulse with adjustable time delay
■1⎍ Adjustable impulse with fixed time delay
⚠ Star-delta change-over


CT-S range
Ordering details - Accessories




MT-x50B




30 mm adapters



Marker label 29.6 x 44.5 mm



Marker label with scale 0-10
48.5 x 44.5 mm





Marker label with scale 0-30
48.5 x 44.5 mm

Remote potentiometer

50 kΩ ±20 % - 0.2 Ω, degree of protection IP66

Material	Diameter in mm	Type	Order code	Price 1 piece	Pack.-unit pieces	Weight 1 piece g / oz
Plastic, black	22.5	MT-150B	1SFA611410R1506		1	0.040
Plastic, chrome	22.5	MT-250B	1SFA611410R2506		1	0.040
Metal, chrome	22.5	MT-350B	1SFA611410R3506		1	0.048



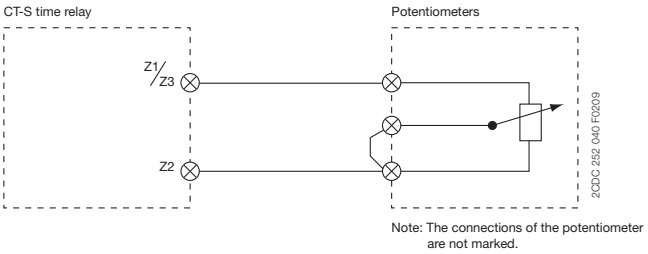

Note: The connections of the potentiometer are not marked.

Note: Technical specifications see data sheet


30 mm adapter for attaching the potentiometer 22 mm in 30 mm mounting hole

Material	Type	Order code	Price 1 piece	Pack.-unit pieces	Weight 1 piece g / oz
Plastic, black	KA1-8029	1SFA616920R8029		1	
Metal, chrome	KA1-8030	1SFA616920R8030		1	


Marker label

Caption	Type	Order code	Price 1 piece	Pack.-unit pieces	Weight 1 piece g / oz
Symbol (see illustration)	SK 615 562-87	GJD6155620R0087		1	0.002
Scale 0 - 10	SK 615 562-88	GJD6155620R0088		1	0.002
Scale 0 - 30	MA16-1060	1SFA611940R1060		1	0.002


CT-S range
Ordering details - Accessories




ADP.01




COV.01




MAR.01



COV.11



MAR.02



MAR.12

Accessories for CT-S in new housing (1SVR7...)

Description	Type	Order code	Price 1 piece	Pack.-unit pieces	Weight 1 piece g / oz
Adapter for screw mounting	ADP.01	1SVR430029R0100		1	0.018 (0.040)
Sealable transparent cover	COV.11	1SVR730005R0100		1	0.004 (0.009)
Marker label for devices w/o DIP switches	MAR.01	1SVR366017R0100		10	0.001 (0.002)
Marker label for devices with DIP switches	MAR.12	1SVR730006R0000		10	0.001 (0.002)

Accessories for CT-S in old housing (1SVR4...)

Description	Type	Order code	Price 1 piece	Pack.-unit pieces	Weight 1 piece g / oz
Adapter for screw mounting	ADP.01	1SVR430029R0100		1	0.018 (0.040)
Sealable transparent cover	COV.01	1SVR430005R0100		1	0.004 (0.009)
Marker label for devices w/o DIP switches	MAR.01	1SVR366017R0100		10	0.001 (0.002)
Marker label for devices with DIP switches	MAR.02	1SVR430043R0000		10	0.001 (0.002)

CT-S range
Function diagrams

1

Remarks

Legend

Control supply voltage not applied / Output contact open

Control supply voltage applied / Output contact closed

A1-Y1/B1 Control input with voltage-related triggering
Y1-Z2 Control input with volt-free triggering
X1-Z2 Control input with volt-free triggering

Remote potentiometer connection:

When an external potentiometer is connected to the remote potentiometer connection (terminals Z1-Z2, Z3-Z2 respectively), the internal, front-face potentiometer is disabled and the time adjustment is made via the external potentiometer.

2nd c/o contact selectable as instantaneous contact:

When switch position Inst. “I” is selected, the functionality of the 2nd c/o contact changes to an instantaneous contact. It acts like the c/o contacts of a switching relay, i.e. applying or interrupting the control supply voltage energizes or de-energizes the c/o contact. The designation of the 2nd c/o contact changes from 25-26/28 to 21-22/24, when selected as instantaneous contact.

Terminal designations on the device and in the diagrams:

The 1st c/o contact is always designated 15-16/18.
The 2nd c/o contact is designated 25-26/28, if it responds to the time delay.
If the 2nd c/o contact is selected as an instantaneous contact, the designation 25-26/28 is replaced by 21-22/24.
Control supply voltage is always applied to terminals A1-A2.


Function of the yellow LEDs:

On devices without the function ‘2nd c/o contact selectable as instantaneous contact’, the yellow LED R glows as soon as the output relay energizes and turns off when the output relay de-energizes.

Devices with the function ‘2nd c/o contact selectable as instantaneous contact’ have two yellow LEDs, designated R1 and R2. LED R1 shows the status of the 1st c/o contact (15-16/18) and LED R2 shows the status of the 2nd c/o contact (25-26/28, 21-22/24 resp.). LED R1 or R2 glow as soon as the corresponding output relay energizes and turns off when the corresponding output relay de-energizes.

ON-delay
(Delay on make)
CT-MVS, CT-ERS, CT-WBS


This function requires continuous control supply voltage for timing.
Timing begins when control supply voltage is applied. The green LED flashes during timing. When the selected time delay is complete, the output relay energizes and the flashing green LED turns steady.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

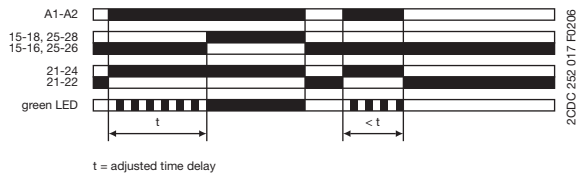

t = adjusted time delay

ON-delay
(Delay on make)
CT-MFS, CT-MBS

This function requires continuous control supply voltage for timing.
If control input Y1-Z2 is open, timing begins when control supply voltage is applied. Or, if control supply voltage is already applied, opening control input Y1-Z2 also starts timing. The green LED flashes during timing. When the selected time delay is complete, the output relay energizes and the flashing green LED turns steady.
If control input Y1-Z2 closes before the time delay is complete, the time delay is reset and the output relay remains de-energized.
Pause timing / Accumulative ON-delay (CT-MFS):
Timing can be paused by closing control input X1-Z2. The elapsed time t1 is stored and continues from this time value when X1-Z2 is re-opened. This can be repeated as often as required.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

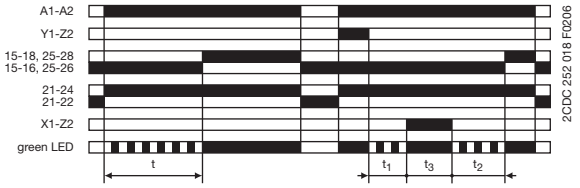


t = adjusted time delay

$t_1 + t_2 = t$
t_3 = pause timing

CT-S range
Function diagrams


Accumulative ON-delay (Accumulative delay on make) CT-MVS

This function requires continuous control supply voltage for timing.
Timing begins when control supply voltage is applied. The green LED flashes during timing. When the selected time delay is complete, the output relay energizes and the flashing green LED turns steady.
Timing can be paused by closing control input A1-Y1/B1. The elapsed time t1 is stored and continues from this time value when A1-Y1/B1 is re-opened.
This can be repeated as often as required.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

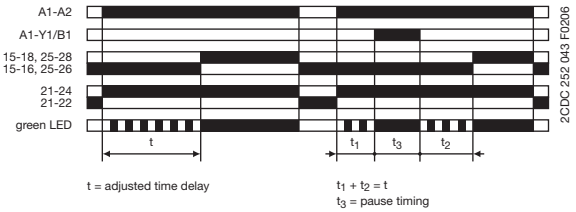


OFF-delay with auxiliary voltage (Delay on break) CT-MFS, CT-MBS, CT-AHS

This function requires continuous control supply voltage for timing.
If control input Y1-Z2 is closed, the output relay energizes immediately. If control input Y1-Z2 is opened, the time delay starts. The green LED flashes during timing. When the selected time delay is complete, the output relay de- energizes and the flashing green LED turns steady.
If control input Y1-Z2 closes before the time delay is complete, the time delay is reset and the output relay does not change state. Timing starts again when control input Y1-Z2 re-opens.
Pause timing / Accumulative OFF-delay (CT-MFS):
Timing can be paused by closing control input X1-Z2. The elapsed time t1 is stored and continues from this time value when X1-Z2 is re-opened.
This can be repeated as often as required.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

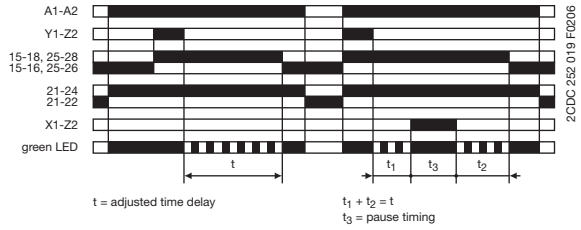


OFF-delay with auxiliary voltage (Delay on break) CT-MVS, CT-APS

This function requires continuous control supply voltage for timing.
If control input A1-Y1/B1 is closed, the output relay energizes immediately. If control input A1-Y1/B1 is opened, the time delay starts. The green LED flashes during timing. When the selected time delay is complete, the output relay de-energizes and the flashing green LED turns steady.
If control input A1-Y1/B1 recloses before the time delay is complete, the time delay is reset and the output relay does not change state. Timing starts again when control input A1-Y1/B1 re-opens.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

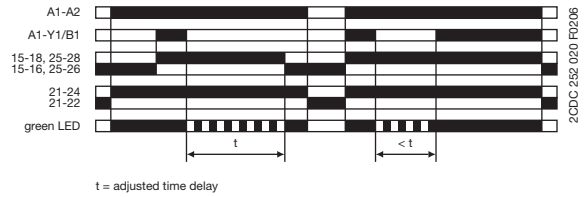

OFF-delay without auxiliary voltage (True delay on break) CT-ARS


The OFF-delay function without auxiliary voltage does not require continuous control supply voltage for timing. After a storage time of several months without any voltage, a formatting time of about 5 minutes is necessary.
Applying control supply voltage energizes the output relay immediately. Applied control supply voltage is displayed by the glowing green LED. If control supply voltage is interrupted, the OFF-delay starts and the LED turns off. When timing is complete, the output relay de-energizes.
For correct operation of the unit, it is necessary to complete the minimum energizing time. As soon as timing starts, the LED turns off.

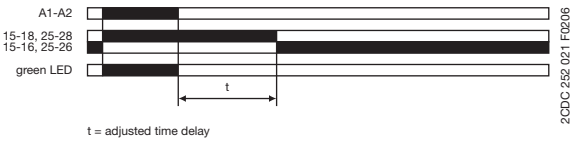

CT-S range
Function diagrams

Symmetrical ON-delay and OFF-delay (Symmetrical delay on make and delay on break) CT-MFS, CT-MBS

This function requires continuous control supply voltage for timing.
Closing control input Y1-Z2 starts the ON-delay t_1. When timing is complete, the output relay energizes. Opening control input Y1-Z2 starts the OFF-delay t_2. Both timing functions are displayed by the flashing green LED. When the OFF-delay t_2 is complete, the output relay de-energizes.
If control input Y1-Z2 opens before the ON-delay t_1 is complete, the time delay is reset and the output relay remains de-energized. If control input Y1-Z2 closes before the OFF-delay t_2 is complete, the time delay is reset and the output relay remains energized.
Pause timing / Accumulative, symmetrical ON-delay and OFF-delay (CT-MFS): Timing can be paused by closing control input X1-Z2. The elapsed time t_{1a} or t_{2a} is stored and continues from this time value when X1-Z2 is re-opened. This can be repeated as often as required.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

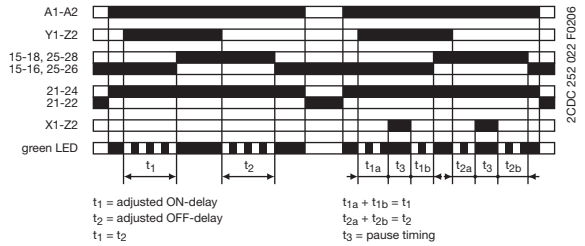


t_1 = adjusted ON-delay
t_2 = adjusted OFF-delay
$t_1 = t_2$

$t_{1a} + t_{1b} = t_1$
$t_{2a} + t_{2b} = t_2$
t_3 = pause timing

Symmetrical ON-delay and OFF-delay (Symmetrical delay on make and delay on break) CT-MVS

This function requires continuous control supply voltage for timing.
Closing control input A1-Y1/B1 starts the ON-delay t_1. When timing is complete, the output relay energizes. Opening control input A1-Y1/B1 starts the OFF-delay t_2. Both timing functions are displayed by the flashing green LED. When the OFF-delay t_2 is complete, the output relay de-energizes.
If control input A1-Y1/B1 opens before the ON-delay t_1 is complete, the time delay is reset and the output relay remains de-energized. If control input A1-Y1/B1 closes before the OFF-delay t_2 is complete, the time delay is reset and the output relay remains energized.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

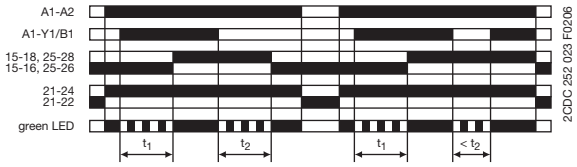


t_1 = adjusted ON-delay
t_2 = adjusted OFF-delay
$t_1 = t_2$

CT-S range
Function diagrams

Asymmetrical ON-delay and OFF-delay (Asymmetrical delay on make and delay on break) CT-MXS


This function requires continuous control supply voltage for timing.
Closing control input A1-Y1/B1 starts the ON-delay t_1. When timing is complete, the output relay energizes. Opening control input A1-Y1/B1 starts the OFF-delay t_2. When the OFF-delay is complete, the output relay de-energizes. Both timing functions are displayed by the flashing green LED. The ON-delay and OFF-delay are independently adjustable.
If control input A1-Y1/B1 opens before the ON-delay is complete ($<t_1$), the time delay is reset and the output relay remains de-energized.
If control input A1-Y1/B1 closes before the OFF-delay is complete ($<t_2$), the time delay is reset and the output relay remains energized.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

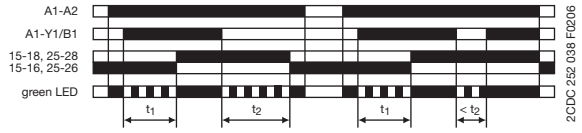

t_1 = adjusted ON-delay
t_2 = adjusted OFF-delay
t_1 and t_2 independently adjustable

Impulse-ON (Interval) CT-MVS, CT-WBS


This function requires continuous control supply voltage for timing.
The output relay energizes immediately when control supply voltage is applied and de-energizes after the set pulse time is complete. The green LED flashes during timing. When the selected pulse time is complete, the flashing green LED turns steady.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

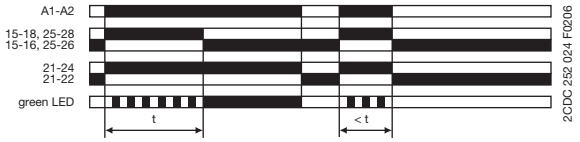

t = adjusted pulse time

Impulse-ON (Interval) CT-MFS, CT-MBS


This function requires continuous control supply voltage for timing.
The output relay energizes immediately when control supply voltage is applied and de-energizes after the set pulse time is complete. If control input Y1-Z2 is open, timing begins when control supply voltage is applied. Or, if control supply voltage is already applied, opening control input Y1-Z2 starts timing.
The green LED flashes during timing. When the selected pulse time is complete, the output relay de-energizes and the flashing green LED turns steady.
Closing control input Y1-Z2, before the pulse time is complete, de-energizes the output relay and resets the pulse time.
Pause timing / Accumulative impulse-ON (CT-MFS):
Timing can be paused by closing control input X1-Z2. The elapsed time t_1 is stored and continues from this time value when X1-Z2 is re-opened.
This can be repeated as often as required.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

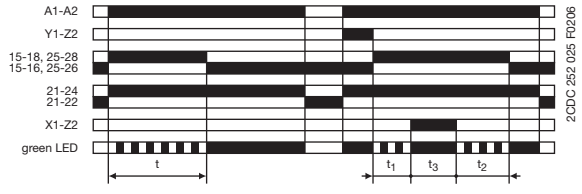

t = adjusted pulse time
$t_1 + t_2 = t$
t_3 = pause timing

Impulse-OFF with auxiliary voltage (Trailing edge interval) CT-MFS, CT-MBS

This function requires continuous control supply voltage for timing.
If control supply voltage is applied, opening control input Y1-Z2 energizes the output relay immediately and starts timing.
The green LED flashes during timing. When the selected pulse time is complete, the output relay de-energizes and the flashing green LED turns steady.
Closing control input Y1-Z2, before the pulse time is complete, de-energizes the output relay and resets the pulse time.
Pause timing / Accumulative impulse-OFF (CT-MFS):
Timing can be paused by closing control input X1-Z2. The elapsed time t_1 is stored and continues from this time value when X1-Z2 is re-opened.
This can be repeated as often as required.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

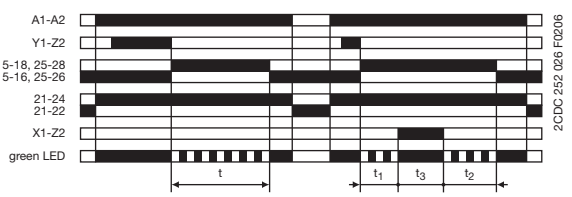


t = adjusted pulse time
$t_1 + t_2 = t$
t_3 = pause timing

CT-S range
Function diagrams

Impulse-OFF with auxiliary voltage (Trailing edge interval) CT-MVS


This function requires continuous control supply voltage for timing.
If control supply voltage is applied, opening control input A1-Y1/B1 energizes the output relay immediately and starts timing. The green LED flashes during timing. When the selected pulse time is complete, the output relay de-energizes and the flashing green LED turns steady.
Closing control input A1-Y1/B1, before the pulse time is complete, de-energizes the output relay and resets the pulse time.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

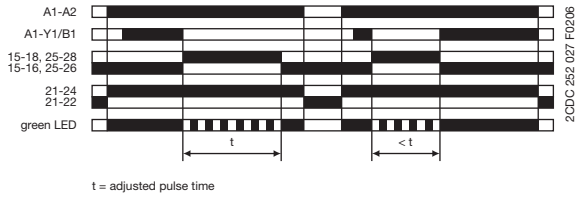

t = adjusted pulse time

Impulse-ON and impulse-OFF (Interval and trailing edge interval) CT-MXS


This function requires continuous control supply voltage for timing. If control supply voltage is applied, closing control input A1-Y1/B1 energizes the output relay immediately and starts the pulse time t_1. The green LED flashes during timing. When t_1 is complete, the output relay de-energizes and the flashing green LED turns steady. Re-opening control input A1-Y1/B1 energizes the output relay immediately and starts the pulse time t2. The green LED flashes during timing. When t_2 is complete, the output relay de-energizes and the flashing green LED turns steady. t_1 and t_2 are independently adjustable. If control input A1-Y1/B1 changes state before the pulse time is complete, the output relay de-energizes and the pulse time is reset. If control input A1-Y1/B1 changes state again, the interrupted pulse time restarts. If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

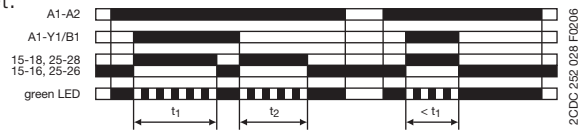

t_1 = adjusted pulse time 1
t_2 = adjusted pulse time 2

Flasher, starting with the ON time (Recycling equal times, ON first) CT-WBS


Applying control supply voltage starts timing with symmetrical ON & OFF times. The cycle starts with an ON time first. The ON & OFF times are displayed by the flashing green LED, which flashes twice as fast during the OFF time.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

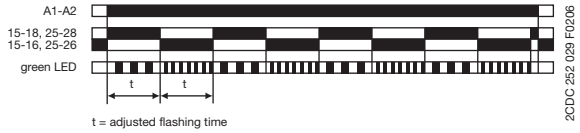

t = adjusted flashing time

Flasher, starting with the OFF time (Recycling equal times, OFF first) CT-WBS


Applying control supply voltage starts timing with symmetrical ON & OFF times. The cycle starts with an OFF time first. The ON & OFF times are displayed by the flashing green LED, which flashes twice as fast during the OFF time.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

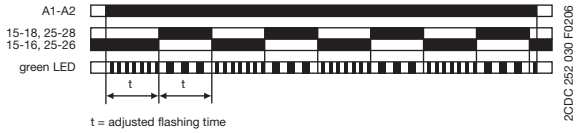

t = adjusted flashing time

Flasher with reset, starting with the ON time (Recycling equal times with reset, ON first) CT-MFS, CT-MBS


Applying control supply voltage starts timing with symmetrical ON & OFF times. The cycle starts with an ON time first. The ON & OFF times are displayed by the flashing green LED, which flashes twice as fast during the OFF time.
The time delay can be reset by closing control input Y1-Z2. Opening control input Y1-Z2 starts the timer pulsing again with symmetrical ON & OFF times.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

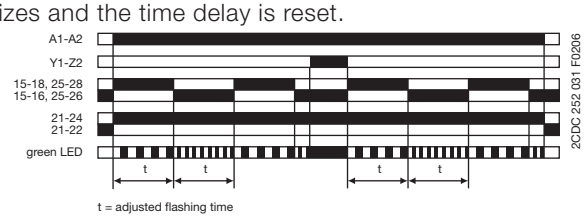

t = adjusted flashing time

Flasher with reset, starting with the OFF time (Recycling equal times with reset, OFF first) CT-MFS, CT-MBS

Applying control supply voltage starts timing with symmetrical ON & OFF times. The cycle starts with an OFF time first. The ON & OFF times are displayed by the flashing green LED, which flashes twice as fast during the OFF time.
The time delay can be reset by closing control input Y1-Z2. Opening control input Y1-Z2 starts the timer pulsing again with symmetrical ON & OFF times.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

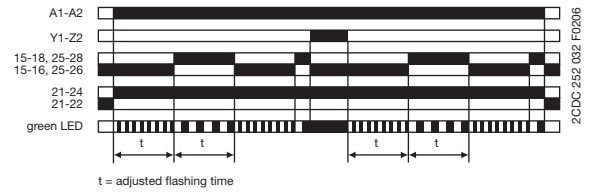


t = adjusted flashing time

CT-S range
Function diagrams

Flasher, starting with the ON or OFF time (Recycling equal times, ON or OFF first) CT-MVS


Applying control supply voltage starts timing with symmetrical ON & OFF times. The cycle starts with an ON time first. Closing control input A1-Y1/B1, with control supply voltage applied, starts the cycle with an OFF time first. The ON & OFF times are displayed by the flashing green LED, which flashes twice as fast during the OFF time.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

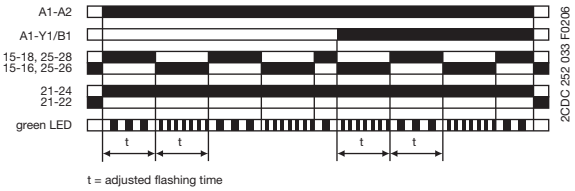

t = adjusted flashing time

Pulse former (Single shot) CT-MFS, CT-MBS


This function requires continuous control supply voltage for timing.
Closing control input Y1-Z2 energizes the output relay immediately and starts timing. Operating the control contact switch Y1-Z2 during the time delay has no effect. The green LED flashes during timing. When the selected ON time is complete, the output relay de-energizes and the flashing green LED turns steady. After the ON time is complete, it can be restarted by closing control input Y1-Z2.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

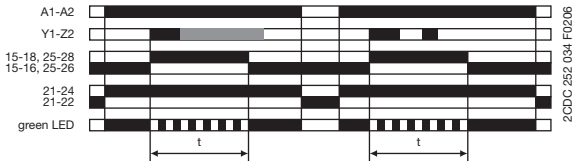

t = adjusted pulse time

Pulse former (Single shot) CT-MVS


This function requires continuous control supply voltage for timing.
Closing control input A1-Y1/B1 energizes the output relay immediately and starts timing. Operating the control contact switch A1-Y1/B1 during the time delay has no effect. The green LED flashes during timing. When the selected ON time is complete, the output relay de-energizes and the flashing green LED turns steady. After the ON time is complete, it can be restarted by closing control input A1-Y1/B1.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

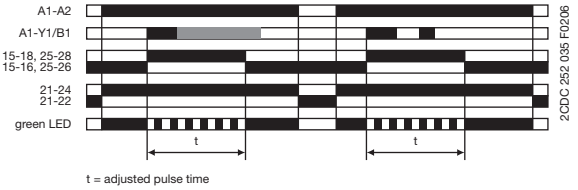

t = adjusted pulse time

Pulse generator, starting with the ON or OFF time (Recycling unequal times, ON or OFF first) CT-MXS

This function requires continuous control supply voltage for timing.
Applying control supply voltage, with open control input A1-Y1/B1, starts timing with an ON time t_2 first. Applying control supply voltage, with closed control input A1-Y1/B1, starts timing with an OFF time t_1 first. The ON & OFF times are displayed by the flashing green LED, which flashes twice as fast during the OFF time.
The ON & OFF times are independently adjustable.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

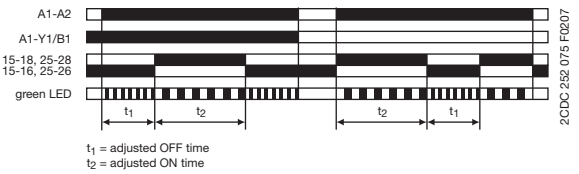


t_1 = adjusted OFF time
t_2 = adjusted ON time

CT-S range
Function diagrams

Single-pulse generator, starting with the OFF time (Delay on make with interval output) CT-MXS


This function requires continuous control supply voltage for timing.
Applying control supply voltage, or, if control supply voltage is already applied, opening control input A1-Y1/B1 energizes the output relay after the OFF time t_1 is complete. When the following ON time t_2 is complete, the output relay de-energizes.
The ON & OFF times are displayed by the flashing green LED, which flashes twice as fast during the OFF time.
The ON & OFF times are independently adjustable.
Closing control input A1-Y1/B1, with control supply voltage applied, de-energizes the output relay and resets the time delay.
If control supply voltage is interrupted, the output relay de-energizes and the time delay is reset.

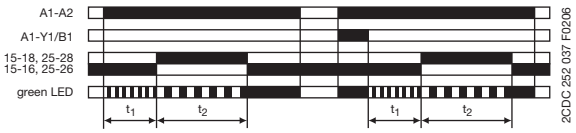

t_1 = adjusted OFF time
t_2 = adjusted ON time
t_1 and t_2 independently adjustable

Fixed impulse with adjustable time delay (Delayed pulse output) CT-WBS


This function requires continuous control supply voltage for timing.
The time delay t_1 starts when control supply voltage is applied. The green LED flashes during timing. When t_1 is complete, the output relay energizes for the fixed impulse time t_2 of 500 ms and the flashing green LED turns steady.
If control supply voltage is interrupted, the time delay is reset. The output relay does not change state.

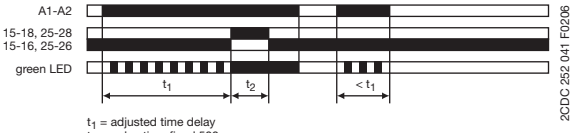

t_1 = adjusted time delay
t_2 = pulse time fixed 500 ms

Adjustable impulse with fixed time delay (Delayed Interval) CT-WBS


This function requires continuous control supply voltage for timing.
Applying control supply voltage starts the fixed time delay t_2 of 500 ms. When t_2 is complete, the output relay energizes and the selected pulse time t_1 starts. The green LED flashes during timing. When t_1 is complete, the output relay de-energizes and the flashing green LED turns steady.
If control supply voltage is interrupted, the pulse time is reset. The output relay does not change state.

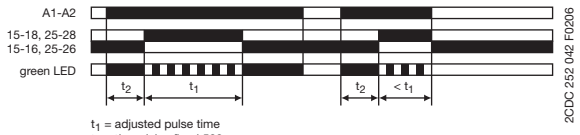

t_1 = adjusted pulse time
t_2 = time delay fixed 500 ms

ON/OFF-Function CT-MFS, CT-MBS, CT-MVS, CT-MXS, CT-WBS


This function is used for test purposes during commissioning and troubleshooting.
If the selected max. value of the time range is smaller than 300 h (front-face potentiometer “Time sector” ≠ 300 h), applying control supply voltage energizes the output relay immediately and the green LED glows. Interrupting control supply voltage, de-energizes the output relay.
If the selected max. value of the time range is 300 h (front-face potentiometer “Time sector” = 300 h) and control supply voltage is applied, the green LED glows, but the output relay does not energize.
Time settings and operating of the control inputs have no effect on the operation.

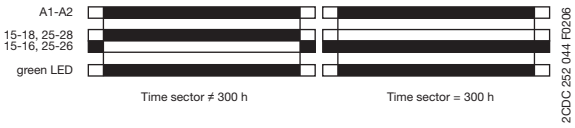


CT-S range
Function diagrams

Δ1⎍ Star-delta change-over with impulse function (Star-delta starting, interval/delay on make) CT-MFS, CT-MBS, CT-MVS.2x


This function requires continuous control supply voltage for timing. Applying control supply voltage to terminals A1-A2, energizes the star contactor connected to terminals 15-18 and begins the set starting time t_1. The green LED flashes during timing. When the starting time is complete, the first c/o contact de-energizes the star contactor.
Now, the fixed transition time t_2 of 50 ms starts. When the transition time is complete, the second c/o contact energizes the delta contactor connected to terminals 25-28. The delta contactor remains energized as long as control supply voltage is applied to the unit.

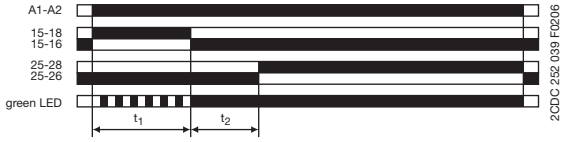

t_1 = adjusted starting time
t_2 = transition time (50 ms)

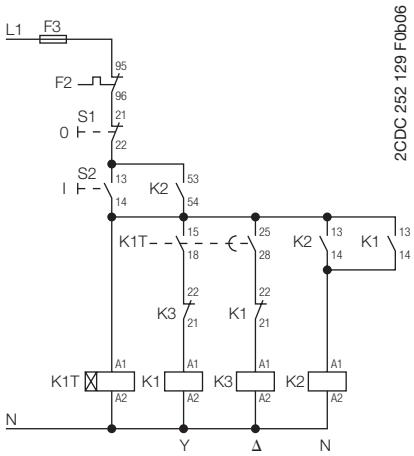


Control circuit diagram

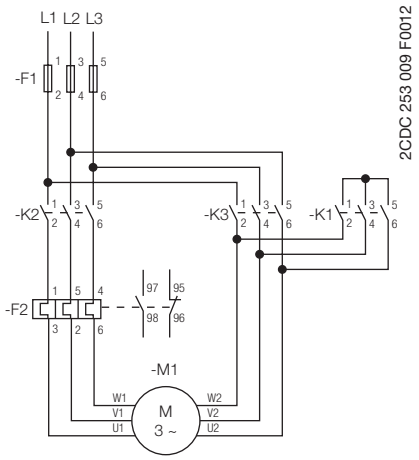


Power circuit diagram

Δ Star-delta change-over (Star-delta starting) CT-SDS

This function requires continuous control supply voltage for timing. Applying control supply voltage to terminals A1-A2, energizes the star contactor connected to terminals 17-18 and begins the set starting time t_1. The green LED flashes during timing. When the starting time is complete, the first output contact de-energizes the star contactor.
Now, the fixed transition time t_2 of 50 ms starts. When the transition time is complete, the second output contact energizes the delta contactor connected to terminals 17-28. The delta contactor remains energized as long as control supply voltage is applied to the unit.

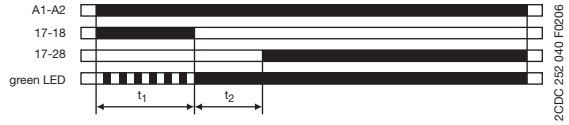


t_1 = adjusted starting time
t_2 = transition time (50 ms)

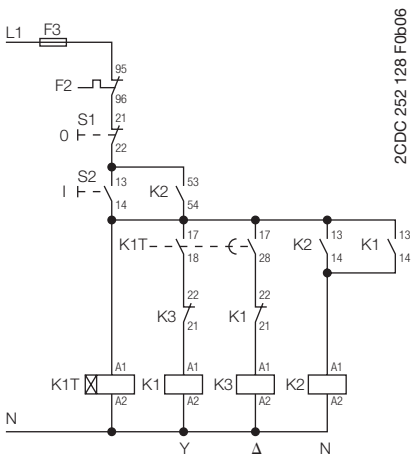

Control circuit diagram

CT-S range
Connection diagrams


CT-MVS.21



2CDC 252 002 F0b06

A1-A2 Supply: 24-240 V AC/DC
A1-Y1/B1 Control input
15-16/18 1. c/o contact
25-26/28 2. c/o contact
21-22/24 2. c/o contact as instantaneous contact
Z1-Z2 Remote potentiometer connection


CT-MVS.22



2CDC 252 003 F0b06

A1-A2 Supply: 224-48 V DC or 24-240 V AC
A1-Y1/B1 Control input
15-16/18 1. c/o contact
25-26/28 2. c/o contact


CT-MVS.23



2CDC 252 003 F0b06

A1-A2 Supply: 380-440V AC
A1-Y1/B1 Control input
15-16/18 1. c/o contact
25-26/28 2. c/o contact


CT-MVS.12



2CDC 252 004 F0b06

A1-A2 Supply: 24-48 V DC or 24-240 V AC
A1-Y1/B1 Control input
15-16/18 1. c/o contact


CT-MXS.22



2CDC 252 005 F0b06

A1-A2 Supply: 24-48 V DC or 24-240 V AC
A1-Y1/B1 Control input
15-16/18 1. c/o contact
25-26/28 2. c/o contact
Z1-Z2 Remote potentiometer connection
Z3-Z2 Remote potentiometer connection


CT-MFS.21



2CDC 252 006 F0b06

A1-A2 Supply: 24-240 V AC/DC
15-16/18 1. c/o contact
25-26/28 2. c/o contact
21-22/24 2. c/o contact as instantaneous contact
Y1-Z2 Control input
X1-Z2 Control input
Z1-Z2 Remote potentiometer connection


CT-MBS.22



2CDC 252 007 F0b06

A1-A2 Supply: 24-48 V DC or 24-240 V AC
15-16/18 1. c/o contact
25-26/28 2. c/o contact
21-22/24 2. c/o contact as instantaneous contact
Y1-Z2 Control input
Z1-Z2 Remote potentiometer connection


CT-WBS.22



2CDC 252 008 F0b06

A1-A2 Supply: 24-48 V DC or 24-240 V AC
15-16/18 1. c/o contact
25-26/28 2. c/o contact


✉ CT-ERS.21



2CDC 252 009 F0b06

A1-A2 Supply: 24-240 V AC/DC
15-16/18 1. c/o contact
25-26/28 2. c/o contact


✉ CT-ERS.22



2CDC 252 009 F0b06

A1-A2 Supply: 24-48 V DC or 24-240 V AC
15-16/18 1. c/o contact
25-26/28 2. c/o contact

✉ CT-ERS.12




2CDC 252 010 F0b06

A1-A2 Supply: 24-48 V DC or 24-240 V AC
15-16/18 1. c/o contact

CT-S range
Connection diagrams


CT-APS.21



2CDC 252 011 F0b06

A1-A2 Supply: 24-240 V AC/DC
A1-Y1/B1 Control input
15-16/18 1. c/o contact
25-26/28 2. c/o contact


CT-APS.22



2CDC 252 011 F0b06

A1-A2 Supply: 24-48 V DC or 24-240 V AC
A1-Y1/B1 Control input
15-16/18 1. c/o contact
25-26/28 2. c/o contact


CT-APS.12



2CDC 252 012 F0b06

A1-A2 Supply: 24-48 V DC or 24-240 V AC
A1-Y1/B1 Control input
15-16/18 1. c/o contact


CT-AHS.22



2CDC 252 013 F0b06

A1-A2 Supply: 24-48 V DC or 24-240 V AC
Y1-Z2 Control input
15-16/18 1. c/o contact
25-26/28 2. c/o contact


CT-ARS.11



2CDC 252 014 F0b06

A1-A2 Supply: 24-240 V AC/DC
15-16/18 1. c/o contact


CT-ARS.21



2CDC 252 015 F0b06

A1-A2 Supply: 24-240 V AC/DC
15-16/18 1. c/o contact
25-26/28 2. c/o contact


⚠ CT-SDS.22



2CDC 252 016 F0b06

A1-A2 Supply: 24-48 V DC or 24-240 V AC
17-18 1. n/o contact
17-28 2. n/o contact

⚠ CT-SDS.23



2CDC 252 016 F0b06

A1-A2 Supply: 380-440 V AC
17-18 1. n/o contact
17-28 2. n/o contact

CT-S range
Technical data

1

Data at T_a = 25 °C and rated values, unless otherwise indicated

		CT-S
Input circuit - Supply circuit		
Rated control supply voltage U_s	CT-xxx.x1	24-240 V AC/DC
	CT-xxx.x2	24-48 V DC, 24-240 V AC
	CT-xxx.x3	380-440 V AC
	CT-xxx.x4	110-240 V AC
	CT-xxx.x5	220-240 V AC
	CT-xxx.x6	24 V AC/DC
	CT-xxx.x7	100-127 V AC or 110 V DC
	CT-xxx.x8	200-240V AC/DC
Rated control supply voltage U_s tolerance		-15...+10 %
Rated frequency		DC or 50/60 Hz
Frequency range AC		47-63 Hz
Typical current / power consumption		depending on device, see data sheet
Power failure buffering time	24 V DC	min. 15 ms
	230/400 V AC	min. 20 ms
Input circuit - Control circuit		
Kind of triggering	CT-MVS, CT-MXS, CT-APS	voltage-related triggering
Control input, Control function	A1-Y1/B1	start timing external
Parallel load / polarized		yes / no
Maximum cable length to the control input		50 m - 100 pF/m
Minimum control pulse length		20 ms
Control voltage potential		see rated control supply voltage
Current consumption of the control input	24 V DC	1.2 mA
	230 V AC	8 mA
	400 V AC	6 mA
Kind of triggering	CT-MFS, CT-MBS, CT-AHS	volt-free triggering
Control input, Control function	Y1-Z2	start timing external
	X1-Z2	pause timing / accumulative functions (CT-MFS)
Maximum switching current in the control circuit		1 mA
Maximum cable length to the control input		50 m - 100 pF/m
Minimum control pulse length		20 ms
No-load voltage at the control inputs		10-40 V DC
Remote potentiometer		
Remote potentiometer connections, Resistance value	Z1-Z2	50 kΩ (CT-MFS, CT-MBS, CT-MVS.21, CT-MXS)
	Z3-Z2	50 kΩ (CT-MXS)
Maximum cable length to remote potentiometer		2 x 25 m, shielded with 100 pF/m
Shield connection		Z2
Timing circuit		
Time ranges	10 time ranges 0.05 s - 300 h	1.) 0.05-1 s 2.) 0.15-3 s 3.) 0.5-10 s 4.) 1.5-30 s 5.) 5-100 s 6.) 15-300 s 7.) 1.5-30 min 8.) 15-300 min 9.) 1.5-30 h 10.) 15-300 h
	7 time ranges 0.05 s - 10 min (CT-SDS, CT-ARS)	1.) 0.05-1 s 2.) 0.15-3 s 3.) 0.5-10 s 4.) 1.5-30 s 5.) 5-100 s 6.) 15-300 s 7.) 0.5-10 min
Recovery time	24-240 V AC/DC	< 50 ms
	24-48 V DC, 24-240 V AC	< 80 ms
	380-440 V AC	< 60 ms
Accuracy within the rated control supply voltage tolerance		Δt < 0.004 % / V
Accuracy within the temperature range		Δt < 0.03 % / °C
Repeat accuracy (constant parameters)		< ±0.2 %
Star-delta transition time		fixed 50 ms (CT-SDS, CT-MBS, CT-MFS, CT-MVS.2x)
Star-delta transition time tolerance		±2 ms
Minimum energizing time		100 ms (CT-ARS)
Formatting time [1]		5 min (CT-ARS)

[1] prior to first commisioning and after a six-month stop in operation

CT-S range
Technical data

Indication of operational states		
Control supply voltage / timing	U/T: green LED	⎍: control supply voltage applied / ⎍⎍: timing
Control supply voltage	U: green LED	⎍: control supply voltage applied
Relay state	R, R1, R2: yellow LED	⎍: output relay energized
Output circuit		
Kind of output	15-16/18	relay, 1 c/o contact
	15-16/18; 25-26/28	relay, 2 c/o contacts
	15-16/18; 25(21)-26(22)/28(24)	relay, 2 c/o contacts, 2nd c/o contact selectable as inst. contact
	17-18; 17-28	relay, 2 n/o contacts (CT-SDS)
Contact material		Cd-free, on request
Rated operational voltage U_e	IEC/EN 60947-1	250 V
Minimum switching voltage / minimum switching current		12 V / 10 mA
Maximum switching voltage / maximum switching current		see load limit curves
Rated operational current I_e (IEC/EN 60947-5-1)	AC-12 (resistive) at 230 V	4 A
	AC-15 (inductive) at 230 V	3 A
	DC-12 (resistive) at 24 V	4 A
	DC-13 (inductive) at 24 V	2 A (CT-ARS; 1.5 A)
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)	B 300
	max. rated operational voltage	300 V AC
	Maximum continuous thermal current at B300	5 A
	max. making/breaking apparent power at B300	3600 VA / 360 VA
Mechanical lifetime		30 x 10^6 switching cycles
Electrical lifetime	at AC-12, 230 V, 4 A	0.1 x 10^6 switching cycles
Max. fuse rating to achieve short-circuit protection (IEC/EN 60947-5-1)	n/c contact	6 A fast-acting
	n/o contact	10 A fast-acting
General data [2]		
MTBF		on request
Duty time		100%
Dimensions (W x H x D)	product dimensions	22.5 x 85.6 x 103.7 mm (0.89 x 3.37 x 4.08 in)
	packaging dimensions	97 x 109 x 30 mm (3.82 x 4.29 x 1.18 in)
Weight		depending on device, see ordering details
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool
Mounting position		any
Minimum distance to other units	vertical / horizontal	not necessary / not necessary
Material of housing		UL 94 V-0
Degree of protection	housing / terminals	IP50 / IP20

Electrical connection [2]

		Screw connection technology	Easy Connect Technology (Push-in)
Wire size	fine-strand with(out) wire end ferrule	1 x 0.5-2.5 mm² (1 x 20-14 AWG) 2 x 0.5-1.5 mm² (2 x 20-16 AWG)	2 x 0.5-1.5 mm² (2 x 20-16 AWG)
	rigid	1 x 0.5-4 mm² (1 x 20-12 AWG) 2 x 0.5-2.5 mm² (2 x 20-14 AWG)	2 x 0.5-1.5 mm² (2 x 20-16 AWG)
Stripping length		8 mm (0.32 in)	
Tightening torque		0.6-0.8 Nm (5.31-7.08 lb.in)	-

[2] Data for all references 1SVR 730 xxx xxx and 1SVR 740 xxx xxx. For devices with 1SVR 430 xxx xxx please refer to the data sheet.

CT-S range
Technical data

1

Environmental data			
Ambient temperature ranges	operation / storage	-25...+60 °C / -40...+85 °C, -40...+60 °C / -40...+85 °C (CT-MVS.21, CT-MFS.21, CT-ERS.21, CT-APS.21)	
Damp heat (cyclic) (IEC/EN 60068-2-30)		6 x 24 h cycle, 55 °C, 95 % RH	
Vibration, sinusoidal (IEC/EN 60068-2-6)	functioning	40 m/s², 10-58/60-150 Hz	
	resistance	60 m/s², 10-58/60-150 Hz, 20 cycles	
Vibration, seismic (IEC/EN 60068-3-3)	functioning	20 m/s²	
Shock, half-sine (IEC/EN 60068-2-27)	functioning	100 m/s², 11 ms, 3 shocks/direction	
	resistance	300 m/s² , 11 ms, 3 shocks/direction	
Isolation data		**CT-S with 1 c/o**	**CT-S with 2 c/o**
Rated insulation voltage U_i	input circuit / output circuit	500 V	
	output circuit 1 / output circuit 2	not available	300 V
Rated impulse withstand voltage U_{imp} between all isolated circuits	IEC/EN 60664-1	type test: 4 kV; 1.2/50 µs	
Power-frequency withstand voltage (test voltage) between all isolated circuits		routine test: 2.0 kV; 50 Hz; 1 s type test: 2.0 kV; 50 Hz; 60 s	
Basic insulation (IEC/EN 61140)	input circuit / output circuit	500 V	
Protective separation (IEC/EN 61140; EN 50178)	input circuit / output circuit	250 V	
Pollution degree	IEC/EN 60664-1	3	
Overvoltage category	IEC/EN 60664-1	III	
Standards			
Product standard		IEC 61812-1, EN 61812-1 + A11, DIN VDE 0435 part 2021	
Low Voltage Directive		2006/95/EC	
EMC Directive		2004/108/EC	
RoHS Directive		2011/65/EC	
Electromagnetic compatibility			
Interference immunity to		IEC/EN 61000-6-1, IEC/EN 61000-6-2	
electrostatic discharge	IEC/EN 61000-4-2	Level 3, 6 kV / 8 kV	
radiated, radio-frequency electromagnetic field	IEC/EN 61000-4-3	Level 3, 10 V/m (1 GHz) 3 V/m (2 GHz) 1 V/m (2.7 GHz)	
electrical fast transient / burst	IEC/EN 61000-4-4	Level 3, 2 kV / 5 kHz	
surge	IEC/EN 61000-4-5	Level 4, 2 kV A1-A2	
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3, 10 V	
harmonics and interharmonics	IEC/EN 61000-4-13	Class 3	
Interference emission		IEC/EN 61000-6-3, IEC/EN 61000-6-4	
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B	
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B	


„Approvals and marks“ see page 1/4.

CT-S range
Technical diagrams


Technical diagrams

Load limit curves


AC load (resistive)

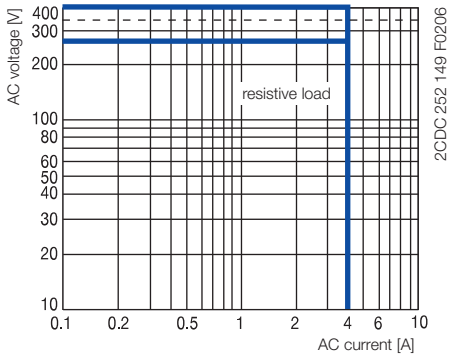


DC load (resistive)

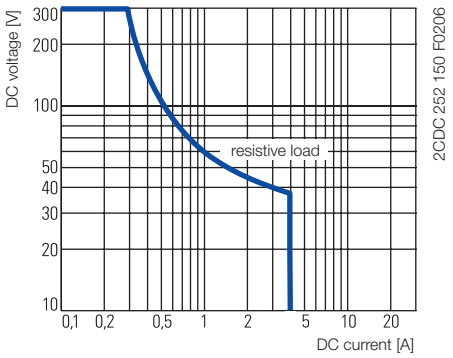

Derating factor F for inductive AC load

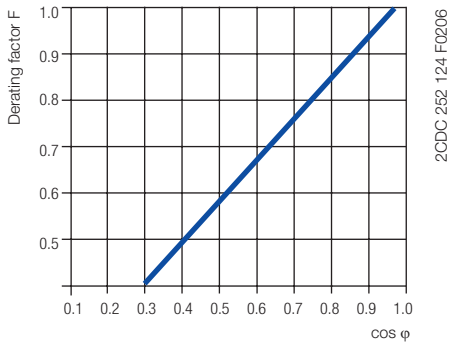


Contact lifetime

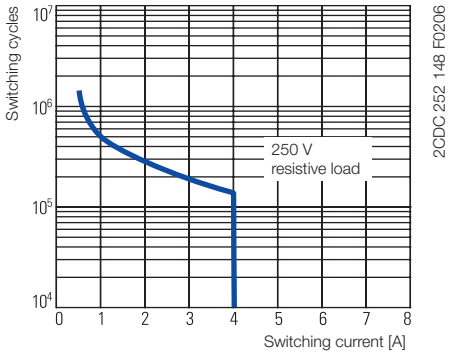


CT-S range
Wiring notes, Dimensional drawings

Wiring notes


Control inputs (volt-free triggering)

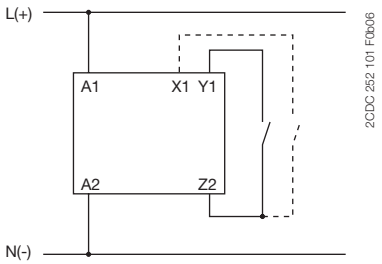


Triggering of the control inputs (volt-free) with a proximity switch (3 wire)

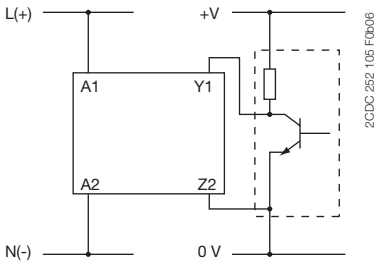


Control inputs (voltage-related triggering)

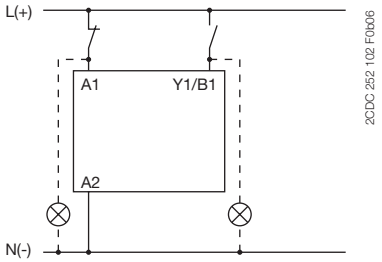

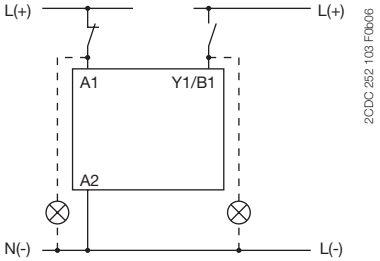


The control input Y1/B1 is triggered with electric potential against A2. It is possible to use the control supply voltage from terminal A1 or any other voltage within the rated control supply voltage range.


Remote potentiometer

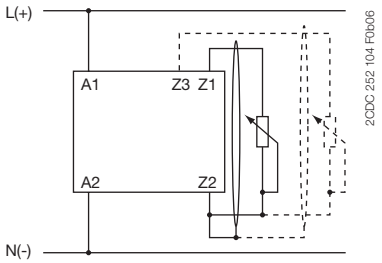

Dimensional drawing Dimensions in mm

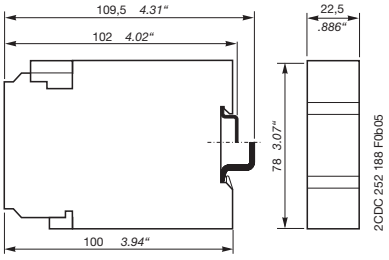

1SVR 430 xxx xxx

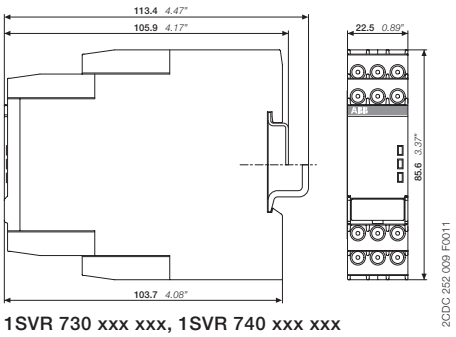

1SVR 730 xxx xxx, 1SVR 740 xxx xxx

Electronic timers
Notes

Measuring and monitoring relays
Product group picture

2



Measuring and monitoring relays
Table of contents

Measuring and monitoring relays

Benefits and advantages 2/3
Monitoring features and application ranges 2/5
Approvals and marks 2/7
Current and voltage monitoring relays, single-phase ... 2/9
Three-phase monitoring relays ... 2/27
Grid feeding monitoring relays -
Voltage and frequency monitoring functions ... 2/49
Insulation monitoring relays for unearthed supply systems ... 2/59
Motor load monitoring relays ... 2/73
Motor control and protection ... 2/79
Thermistor motor protection relays ... 2/85
Temperature monitoring relays ... 2/97
Liquid level monitors and controls ... 2/109
General technical data, Accessories, Current transformers ... 2/123

Measuring and monitoring relays
Benefits and advantages

CM-N range: Multifunctional



- 45 mm wide housing
- Output contacts: 2 c/o (SPDT) contacts
- Continuous voltage range (24-240 V AC/DC) or single-supply
- Setting and operation via front-face operating controls
- Adjustment of threshold values and switching hysteresis via direct reading scale
- Adjustable time delays
- Integrated and snap-fitted front-face marker label
- Sealable transparent cover (accessory)

CM-S range: Universal and multifunctional



- Only 22.5 mm wide housing
- Output contacts: 1 or 2 c/o (SPDT) contacts
- One supply voltage range or supplied by measuring circuit
- Setting and operation via front-face operating controls
- Adjustment of threshold values and switching hysteresis via direct reading scale
- Integrated and snap-fitted front-face marker
- Snap-on housing: The relays can be placed on a DIN rail tool-free - just snap it on or remove it tool-free
- Sealable transparent cover (accessory)

CM-E range: Economy



- Only 22.5 mm wide housing
- Output contacts: 1 c/o contact or 1 n/o contact
- One supply voltage range
- One monitoring function
- Cost-efficient solution for OEM applications
- Preset monitoring ranges

ABB‘s measuring and monitoring relays in a new housing

Benefits at a glance

Easy Connect Technology

New options:
Additionally to the existing well established screw connections a new innovative connection technology can be offered: Easy Connect Technology with push-in terminals.

Tool-free wiring:
The push-in terminals can be wired with rigid or fine stranded wires with wire end ferrules totally tool-free. The connection direction is exactly the same as the screw version.

Higher utility class:
The Easy Connect Technology provides excellent vibration resistance with gas tight push-in terminals – the right solution for harsh environment.

Extended features

Flammability:
The plastic housing material used meets the requirements for the highest flammability class. (UL94 V-0 rated)

Look and feel:
The new housing fits perfectly with ABB’s control products offer.

Measuring and monitoring relays
Benefits and advantages

Higher utility class ①
The Easy Connect Technology provides excellent vibration resistance with gas tight push-in terminals – the right solution for harsh environment. Selected products of the electronic timers and measuring and monitoring relays comply to the latest rail standards NF F 16-101/102, EN 45545, EN 50155 and more standards which are relevant for railway applications. Find more inforamtion in the rail brochure 2CDC110084B0201.

Safety ②
The „real distance“ is hidden.
The clearance and the creepage distances of our products exceed international standards and substantially increase the safety of our products.

Easy Connect Technology ③
Tool-free wiring and excellent vibration resistance. Push-in terminals provide connection of wires up to 2 x 0.5 - 1.5 mm² (2 x 20 -16 AWG), rigid or fine-strand with or without wire end ferrules. The extended type designators for products with push-in terminals are indicated by a **P** following the extended type designator e.g. CM-xxS.xx**P**.

Double-chamber cage connection terminals ④
Double-chamber cage connection terminals provide connection of wires up to 2 x 0.5-2.5 mm² (2 x 20-14 AWG) rigid or fine-strand, with or without wire end ferrules. Potential distribution does not require additional terminals. The extended type designators for products with double-chamber cage connection terminals are indicated by a **S** following the extended type designator e.g. CM-xxS.xx**S**.


LED‘s for status indication ⑤
All actual operational states are displayed by front-face LEDs, thus simplifying commissioning and troubleshooting.

Integrated marker label ⑥
Integrated marker labels allow the product to be marked quickly and simply. No additional marker labels are required.


Sealable transparent cover ⑦
Protection against unauthorized changes of time and threshold values. Available as an accessory.


Snap-On housing ⑧
Tool-free DIN rail installation and deinstallation of the monitoring relay.





















Measuring and monitoring relays
Monitoring features and application ranges


Single-phase current and voltage monitoring
- Over- or undercurrent monitoring CM-SRS and CM-SRS.M
- Over- and undercurrent monitoring CM-SFS
- Over- or undervoltage monitoring CM-ESS and CM-ESS.M
- Over- and undervoltage monitoring CM-EFS



Current monitoring
- Monitoring of motor current consumption
- Monitoring of lighting installations and heating circuits
- Monitoring of hoisting gear and transportation equipment overload
- Monitoring of locking devices, electromechanical brake gear and locked rotor


Voltage monitoring
- Speed monitoring of DC motors
- Monitoring of battery voltages and other supply networks
- Monitoring of upper and lower voltage threshold values

Insulation monitoring
- For electrically isolated AC systems: CM-IWS.2
- For electrically isolated AC, DC and mixed AC/DC systems: CM-IWS.1, CM-IWN.1 and especially for solar applications:
  ≤ 500 µF: CM-IWN.4
  ≤ 1000 µF: CM.IWN.5
  ≤ 2000 µF: CM-IWN.6




- Monitoring of electrically isolated supply mains for insulation resistance failure
- Detection of initial faults
- Protection against earth faults

Motor load monitoring
CM-LWN monitoring relays load states of single- and three-phase asynchronous motors.




- Detection of V-belt breaking
- Motor protection against overload
- Monitoring of filters for clogging
- Protection of pumps against dry running
- Detection of high pressure in conduit systems
- Monitoring for dulling blades in sawing and cutting machines

Three-phase monitoring
- Phase failure CM-PBE
- Over- and undervoltage CM-PVE
- Phase sequence and phase failure CM-PFE and CM-PFS
- Phase sequence and phase failure, over- and undervoltage CM-PSS.xx and CM-PVS.xx
- Phase sequence and phase failure, unbalance CM-PAS.xx
- Phase sequence and phase failure, unbalance, over- and undervoltage CM-MPS.xx and CM-MPN.xx
- Over- and undervoltage, over- and underfrequency CM-UFS.1




Three-phase voltage monitoring
- Voltage monitoring of mobile three-phase equipment
- Protection of personnel and installations against phase reversal
- Monitoring of the supply voltage to machines and installations
- Protection of equipment against damage caused by unstable supply voltage
- Switching to emergency or auxiliary supply
- Protection of motors against damage caused by unbalanced phase voltages and phase loss
- Automatic connection & disconnection of decentralised power stations to the grid

Grid feeding monitoring relays
The CM-UFx range monitors all voltage and frequency parameters in a grid and ensures the safe feeding of decentral produced eletrical energy into the grid.
- Monitoring of the voltage with up to 2 thresholds for over- and undervoltage
- Monitoring of the frequency with up to 2 thresholds for over- and underfrequency
- Optional ROCOF (rate of change of frequency) and vector shift
- Acc. to national grid feeding standards such as CEI 0-21, VDE AR-N 4105 etc.



Thermistor motor protection
CM-MSS provide full protection of motors with integrated PTC resistor sensors.


- Protection of motors against thermal overload, e. g. caused by insufficient cooling, heavy load starting conditions, undersized motors, etc.



Measuring and monitoring relays
Monitoring features and application ranges

Liquid level monitoring and control

CM-ENE, CM-ENS and CM-ENN for control and regulation of liquid levels and ratios of mixtures of conductive fluids.




- Protection of pumps against dry running
- Protection against container overflow
- Control of liquid levels
- Detection of leaks
- Control of mixing ratios

Temperature monitoring

Acquisition, messaging and regulation of temperatures of solid, liquid and gaseous media in processes and machines

- with CM-TCS via PT100 sensor
- with C512 and C513 with PT100, PT1000 KTY83, KTY84 or NTC sensors
- Motor and system protection
- Control panel temperature monitoring
- Frost monitoring
- Temperature limits for process variables, e.g. in the packing or electroplating industry
- Control of systems and machines like heating, air-conditioning and ventilation systems, solar collectors, heat pumps or hot water supply systems
- Monitoring of servomotors with KTY sensors
- Bearing and gear oil monitoring
- Coolant monitoring



Measuring and monitoring relays
Approvals and marks

■ existing □ pending		Current and voltage monitoring, single-phase									Three-phase monitoring												
Approvals		CM-SRS.1xS/P	CM-SRS.2xS	CM.SRS.MS/P	CM-SFS.2S/P	CM-ESS.1xS/P	CM-ESS.2xS	CM-ESS.MS/P	CM- EFS.2S/P		CM-PBE	CM-PVE	CM-PFE	CM-PFS.S/P	CM-PSS.x1S/P	CM-PVS.x1S/P	CM-PVS.81S/P	CM-PAS.x1S/P	CM-MPS.x1S/P	CM-MPS.x3S/P	CM-MPN.52S/P	CM-MPN.62S/P	CM-MPN.72S/P
	UL 508, CAN/CSA C22.2 No.14	■	■	■	■	■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	
	GL	■	■	■	■	■	■	■	■					■	■	■	■	■	■	■	■	■	■
	EAC	■	■	■	■	■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■
	CB scheme	■	■	■	■	■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■
	CCC	■	■	■	■	■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■
	RMRS	■	■	■	■	■	■	■	■		■	■	■		■	■	■	■	■	■	■	■	■
	Rail applications [1]	■	■	■		■	■							■		■			■	■			
Marks																							
	CE	■	■	■	■	■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	
	C-Tick	■	■	■	■	■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	

■ existing □ pending		Insulation monitoring relays for ungrounded supply mains						Motor load monitoring				Tempera-ture monitoring				Grid feeding monitoring relays		
Approvals		CM-IWS.2S/P	CM-IWS.1S/P	CM-IWN.1S/P	CM-IWN.4,5,6.S/P	CM-IVN.S/P		CM-LWN				CM-TCS.xS/P	C512	C513		CM-UFD.M22	CM-UFD.M31	CM-UFD.M33
	UL 508, CAN/CSA C22.2 No.14	■	■	■	■	■		■				■	■	■				■
	GL	■	■	■		■		■				□						
	EAC	■	■	■	■	■		■				■						
	CB scheme	■	■	■	■	■		■				■						
	CCC	■	■	■	■	■		■				■						
	RMRS	■	■	■	■			■										
	Rail applications [1]	■		■		■												
DEKRA	CEI 0-21															■		
	G59/3 LV + G83/2, G59/3 HV																	■
	VDE-AR-N 4105 „Erzeugungsanlagen am Niederspannungsnetz“																■	
	BDEW „Erzeugungsanlagen am Mittelspannungsnetz“																■	
Marks																		
	CE	■	■	■	■	■		■				■	■	■		■	■	■
	C-Tick	■	■	■	■	■		■				■						

[1] Applicable in rail application following the latest standards for rail applications: NF F 16-101/102 (I2/F2 classified), EN 45545 (Hazard Level 3), DIN 5510, EN 50155, IEC 60571. Further information is available in our rail segment brochure 2CDC110084B0201.

Measuring and monitoring relays
Approvals and marks

■ existing □ pending			Thermistor motor protection								Liquid level monitoring				
Approvals			CM-MSE	CM-MSS.x1	CM-MSS.12	CM-MSS.13	CM-MSS.22	CM-MSS.23	CM-MSS.32	CM-MSS.32	CM-ENE MIN	CM-ENE MAX	CM-ENS	CM-ENS UP/...	CM-ENN
	UL 508, CAN/CSA C22.2 No.14		■	■	■	■	■	■	■	■	■	■	■	■	■
	GL			■	■	■	■	■	■	■			■[1]		■
	EAC		■	■	■	■	■	■	■	■	■	■	■	■	■
	II (2) G D, PTB 02 ATEX 3080														
	CB scheme		■	■	■	■	■	■	■	■	■	■	■	■	■
	CCC		■	■	■	■	■	■	■	■	■	■	■	■	■
	RMRS		■								■	■	■	■	■
	ATEX			■					■	■					
Marks															
CE	CE		■	■	■	■	■	■	■	■	■	■	■	■	■
	C-Tick		■	■	■	■	■	■	■	■	■	■	■	■	■

[1] Version with protective separation without UL approval

Current and voltage monitoring relays, single-phase
Product group picture

2





Current and voltage monitoring relays, single-phase
Table of contents

Current and voltage monitoring relays, single-phase

Benefits and advantages	2/11
Operating controls	2/12
Selection table - Current monitoring relays	2/13
Selection table - Voltage monitoring relays	2/14
Ordering details - Current monitoring relays	2/15
Ordering details - Voltage monitoring relays	2/16
Function diagrams	2/17
Connection diagrams, DIP switches	2/20
Technical data - Current monitoring relays	2/22
Technical data - Voltage monitoring relays	2/24

Current and voltage monitoring relays, single-phase
Benefits and advantages

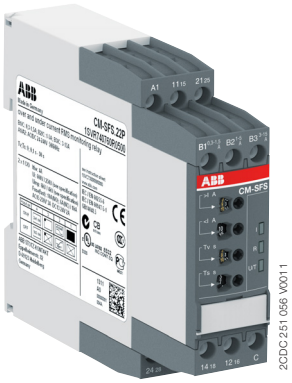

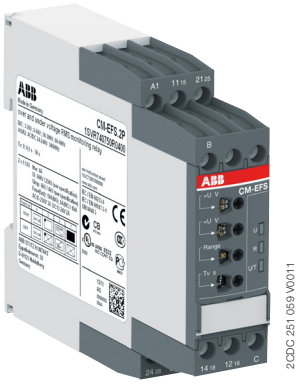

Characteristics current and voltage monitoring relays

- Monitoring of DC and AC currents: 3 mA to 15 A [1)]
- Monitoring of DC and AC voltages from 3-600 V
- TRMS measuring principle
- One device includes 3 measuring ranges
- One device includes 4 measuring ranges: 3-30 V; 6-60 V; 30-300 V; 60-600 V
- Over- and undercurrent monitoring[1)]
- Over- and undervoltage monitoring[1)]
- ON or OFF-delay configurable[1)]
- Open- or closed-circuit principle configurable[1)]
- Threshold values for >U and/or <U adjustable[1)]
- Latching function configurable[1)]
- Thresholds for >I and/or <I adjustable[1)]
- Fixed hysteresis of 5 %[1)]
- Start-up delay T_v adjustable 0; 0.1-30 s[1)]
- Tripping delay T_v adjustable 0; 0.1-30 s[1)]
- 1 x 2 c/o contacts (common signal) or 2 x 1 c/o contact (separate signals for >I and <I) configurable [1)]
- 1 x 2 c/o contacts (common signal) or 2 x 1 c/o contact (separate signals for >U and <U) configurable[1)]
- 22.5 mm width
- 3 LEDs for the indication of operational states
- Approvals / Marks

[2)] / CE

[1)] depending on device

[2)] Applicable in rail application following the latest standards for rail applications: NF F 16-101/102 (I2/F2 classified), EN 45545 (Hazard Level 3), DIN 5510, EN 50155, IEC 60571. Further information is available in our rail segment brochure 2CDC110084B0201.

Current monitoring, single-phase

The ABB current monitoring relays CM-SRS.xx reliably monitor the occurence of currents that exceed or fall below the selected threshold value. The functions overcurrent or undercurrent monitoring can be preselected. Single- and multifunction devices for the monitoring of direct or alternating currents from 3 mA to 15 A are available.

Current window monitoring (I_{min}, I_{max})

The window monitoring relay CM-SFS.2x is available if the application requires the simultaneous monitoring of over- and undercurrents.

Voltage monitoring, single-phase


The ABB voltage monitoring relays CM-SRS.xx are used to monitor direct and alternating voltages within a range of 3-600 V. Over- or undervoltage detection can be preselected.

Voltage window monitoring (U_{min}, U_{max})

For the simultaneous detection of over- and undervoltages, the window monitoring relay CM-EFS.2 can be used.

Current and voltage monitoring relays, single-phase
Operating controls

Current monitoring relays

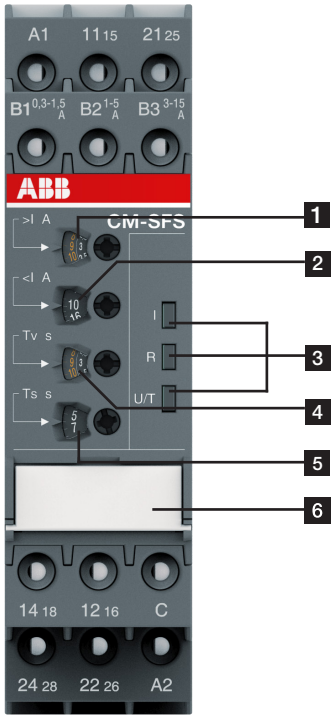

2CDC 253 018 F0013

1 **Adjustment of the threshold value >I for overcurrent**

2 **Adjustment of the threshold value <I for undercurrent**

3 **Indication of operational states**

U/T: green LED – control supply voltage/timing
R: yellow LED – relay status
I: red LED – over- / undercurrent


4 **Adjustment of the tripping delay T_v**

5 **Adjustment of the start-up delay T_s**

6 **DIP switches (see DIP switch functions on page 2/20)**

- ON-delay
- OFF-delay
- Closed-circuit principle
- Open-circuit principle
- Latching function activated
- Latching function not activated
- 2x1 c/o (SPDT) contact
- 1x2 c/o (SPDT) contacts

Voltage monitoring relays

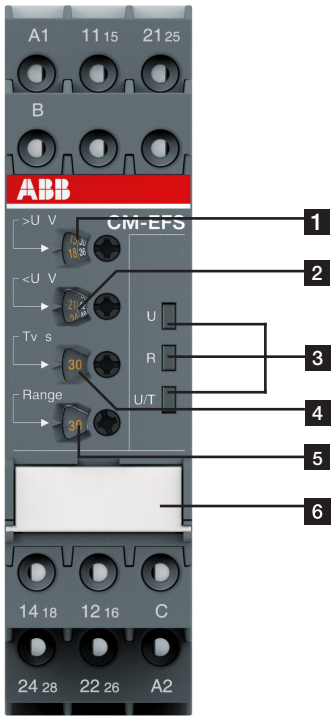

2CDC 253 014 F0013

1 **Adjustment of the threshold value >U for overvoltage**

2 **Adjustment of the threshold value <U for undervoltage**

3 **Indication of operational states**

U/T: green LED – control supply voltage/timing
R: yellow LED – relay status
U: red LED – over- / undervoltage

4 **Adjustment of the tripping delay T_v**

5 **Adjustment of the measuring range**

6 **DIP switches (see DIP switch functions on page 2/20)**

- ON-delay
- OFF-delay
- Closed-circuit principle
- Open-circuit principle
- Latching function activated
- Latching function not activated
- 2x1 c/o (SPDT) contact
- 1x2 c/o (SPDT) contacts

Current and voltage monitoring relays, single-phase
Selection table - Current monitoring relays





	Order number	1SVR730840R0200	1SVR740840R0200	1SVR730841R0200	1SVR740841R0200	1SVR730841R1200	1SVR740841R1200	1SVR730840R0300	1SVR730841R0300	1SVR730841R1300	1SVR730840R0400	1SVR740840R0400	1SVR730841R0400	1SVR740841R0400	1SVR730841R1400	1SVR740841R1400	1SVR730840R0500	1SVR730841R0500	1SVR730841R1500	1SVR730840R0600	1SVR740840R0600	1SVR730840R0700	1SVR730760R0400	1SVR740760R0400	1SVR730760R0500
	Type	CM-SRS.11S	CM-SRS.11P	CM-SRS.11S	CM-SRS.11P	CM-SRS.11S	CM-SRS.11P	CM-SRS.12S			CM-SRS.21S	CM-SRS.21P	CM-SRS.21S	CM-SRS.21P	CM-SRS.21S	CM-SRS.21P	CM-SRS.22S			CM-SRS.M1S	CM-SRS.M1P	CM-SRS.M2S	CM-SFS.21S	CM-SFS.21P	CM-SFS.22S
Rated control supply voltage U_s																									
24 - 240 V AC/DC		■	■					■			■	■					■			■	■	■	■	■	■
110 - 130 V AC				■	■				■				■	■				■							
220 - 240 V AC						■	■			■					■	■			■						
Measuring ranges AC/DC																									
3 - 30 mA		■	■	■	■	■	■				■	■	■	■	■	■				■	■		■	■	
10 - 100 mA		■	■	■	■	■	■				■	■	■	■	■	■				■	■		■	■	
0.1 - 1 A		■	■	■	■	■	■				■	■	■	■	■	■				■	■		■	■	
0.3 - 1.5 A								■	■	■							■	■	■			■			■
1 - 5 A								■	■	■							■	■	■			■			■
3 - 15 A								■	■	■							■	■	■			■			■
Monitoring function																									
Over- or undercurrent		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■			
Windows current monitoring																							■	■	■
Latching																				sel	sel	sel	sel	sel	sel
Open circuit or closed circuit principle																				sel	sel	sel	sel	sel	sel
Timing functions for tripping delay																									
ON delay, 0 or 0. 1 - 30 s											adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj			
ON or OFF delay																							sel	sel	sel
Output																									
c/o contact		1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
Connection type																									
Push-in terminals			■		■		■					■		■		■					■			■	
Double-chamber cage connection terminals		■		■		■		■	■	■	■		■		■		■	■	■	■		■	■		■

adj: adjustable
sel: selectable

Current and voltage monitoring relays, single-phase
Selection table - Voltage monitoring relays






	Order number	1SVR730830R0300	1SVR740830R0300	1SVR730831R0300	1SVR740831R0300	1SVR730831R1300	1SVR740831R1300	1SVR730830R0400	1SVR740830R0400	1SVR730831R0400	1SVR740831R0400	1SVR730831R1400	1SVR740831R1400	1SVR730830R0500	1SVR740830R0500	1SVR730750R0400	1SVR740750R0400
	Type	CM-ESS.1S	CM-ESS.1P	CM-ESS.1S	CM-ESS.1P	CM-ESS.1S	CM-ESS.1P	CM-ESS.2S	CM-ESS.2P	CM-ESS.2S	CM-ESS.2P	CM-ESS.2S	CM-ESS.2P	CM-ESS.MS	CM-ESS.MP	CM-EFS.2S	CM-EFS.2P
Rated control supply voltage U_s																	
24 - 240 V AC/DC		■	■					■	■					■	■	■	■
110 - 130 V AC				■	■					■	■						
220 - 240 V AC						■	■					■	■				
Measuring ranges AC/DC																	
3 - 30 V		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
6 - 60 V		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
30 - 300 V		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
60 - 600 V		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Monitoring function																	
Over- or undervoltage		■	■	■	■	■	■	■	■	■	■	■	■	■	■		
Windows voltage monitoring																■	■
Latching														sel	sel	sel	sel
Open circuit or closed circuit principle														sel	sel	sel	sel
Timing functions for tripping delay																	
ON delay, 0 or 0.1 - 30 s								adj	adj	adj	adj	adj	adj	adj	adj		
ON or OFF delay																sel	sel
Output																	
c/o contact		1	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2
Connection type																	
Push-in terminals			■		■		■		■		■		■		■		■
Double-chamber cage connection terminals		■		■		■		■		■		■		■		■	

adj: adjustable
sel: selectable

Current and voltage monitoring relays, single-phase
Ordering details - Current monitoring relays



CM-SRS.22S



CM-SFS.22P

Description

The CM range current monitoring relays protect single-phase mains (DC or AC) from over- and undercurrent from 3 mA to 15 A. Two different terminal versions are available. You can choose between the proven screw connection technology (double-chamber cage connecting terminals) and the completely tool-free Easy Connect Technology (push-in terminals).

Ordering details

Rated control supply voltage	Function	Tripping delay T_v	Measuring range	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24-240 V AC/DC					1SVR730840R0200		0.145 (0.320)
110-130 V AC				CM-SRS.11S	1SVR730841R0200		0.161 (0.355)
220-240 V AC					1SVR730841R1200		0.161 (0.355)
24-240 V AC/DC					1SVR740840R0200		0.137 (0.302)
110-130 V AC				CM-SRS.11P	1SVR740841R0200		0.153 (0.337)
220-240 V AC					1SVR740841R1200		0.153 (0.337)
24-240 V AC/DC					1SVR730840R0300		0.137 (0.302)
110-130 V AC		without	0.3-1.5 A, 1-5 A, 3-15 A	CM-SRS.12S	1SVR730841R0300		0.168 (0.370)
220-240 V AC					1SVR730841R1300		0.168 (0.370)
24-240 V AC/DC					1SVR730840R0400		0.152 (0.335)
110-130 V AC				CM-SRS.21S	1SVR730841R0400		0.179 (0.395)
220-240 V AC					1SVR730841R1400		0.179 (0.395)
24-240 V AC/DC					1SVR740840R0400		0.141 (0.311)
110-130 V AC		adjustable 0 or 0.1-30 s	3-30 mA, 10-100 mA, 0.1-1 A	CM-SRS.21P	1SVR740841R0400		0.168 (0.370)
220-240 V AC					1SVR740841R1400		0.168 (0.370)
24-240 V AC/DC					1SVR730840R0500		0.144 (0.399)
110-130 V AC				CM-SRS.22S	1SVR730841R0500		0.181 (0.399)
220-240 V AC					1SVR730841R1500		0.181 (0.399)
24-240 V AC/DC		adjustable 0 or 0.1-30 s	3-30 mA, 10-100 mA, 0.1-1 A	CM-SRS.M1S	1SVR730840R0600		0.153 (0.337)
				CM-SRS.M1P	1SVR740840R0600		0.142 (0.313)
24-240 V AC/DC		adjustable 0 or 0.1-30 s	0.3-1.5 A, 1-5 A, 3-15 A	CM-SRS.M2S	1SVR730840R0700		0.155 (0.342)
24-240 V AC/DC		adjustable 0 or 0.1-30 s	3-30 mA, 10-100 mA, 0.1-1 A	CM-SFS.21S	1SVR730760R0400		0.150 (0.331)
				CM-SFS.21P	1SVR740760R0400		0.139 (0.306)
24-240 V AC/DC		adjustable 0 or 0.1-30 s	0.3-1.5 A, 1-5 A, 3-15 A	CM-SFS.22S	1SVR730760R0500		0.158 (0.348)

S: screw connection
P: push-in / easy connect

Overcurrent monitoring
Undercurrent monitoring
Without latching
With latching
1x2 c/o (SPDT) contacts
2x1 c/o (SPDT) contact

Current and voltage monitoring relays, single-phase
Ordering details - Voltage monitoring relays



CM-ESS.MP



CM-EFS.2

Description

The CM range voltage monitoring relays provide reliable monitoring of voltages as well as detection of phase loss in single-phase mains.
All devices are available with two different terminal versions. You can choose between the proven screw connection technology (double-chamber cage connecting terminals) and the completely tool-free Easy Connect Technology (push-in terminals).

Ordering details

Rated control supply voltage	Function	Tripping delay T_v	Measuring range AC/DC	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24-240 V AC/DC				CM-ESS.1S	1SVR730830R0300		0.135 (0.298)
110-130 V AC					1SVR730831R0300		0.164 (0.362)
220-240 V AC					1SVR730831R1300		0.164 (0.362)
24-240 V AC/DC				CM-ESS.1P	1SVR740830R0300		0.126 (0.278)
110-130 V AC					1SVR740831R0300		0.155 (0.342)
220-240 V AC					1SVR740831R1300		0.155 (0.342)
24-240 V AC/DC				CM-ESS.2S	1SVR730830R0400		0.153 (0.337)
110-130 V AC					1SVR730831R0400		0.181 (0.399)
220-240 V AC					1SVR730831R1400		0.181 (0.399)
24-240 V AC/DC				CM-ESS.2P	1SVR740830R0400		0.142 (0.313)
110-130 V AC					1SVR740831R0400		0.170 (0.375)
220-240 V AC					1SVR740831R1400		0.170 (0.375)
24-240 V AC/DC				CM-ESS.MS	1SVR730830R0500		0.154 (0.340)
				CM-ESS.MP	1SVR740830R0500		0.143 (0.320)
24-240 V AC/DC				CM-EFS.2S	1SVR730750R0400		0.157 (0.346)
				CM-EFS.2P	1SVR740750R0400		0.146 (0.322)

Function: without — 3-30 V, 6-60 V, 30-300 V, 60-600 V

Function: adjustable 0 or 0.1-30 s — 3-30 V, 6-60 V, 30-300 V, 60-600 V

Function: adjustable 0 or 0.1-30 s — 3-30 V, 6-60 V, 30-300 V, 60-600 V


S: screw connection
P: push-in / easy connect

- Overcurrent monitoring
- Undercurrent monitoring
- Without latching
- With latching
- 1x2 c/o (SPDT) contacts
- 2x1 c/o (SPDT) contact


Current and voltage monitoring relays, single-phase
Function diagrams

Function diagrams - CM-SRS.1

Overcurrent monitoring

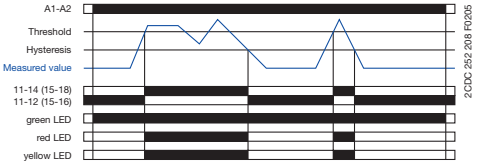


Undercurrent monitoring

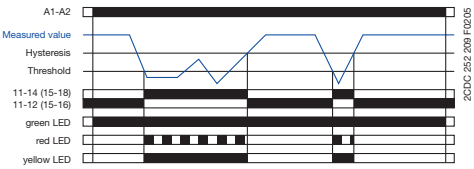


Function diagrams - CM-SRS.2

Overcurrent monitoring

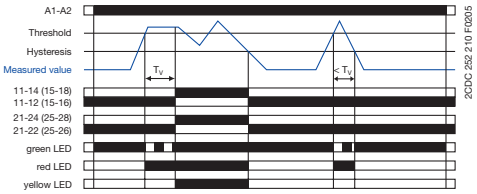


Undercurrent monitoring

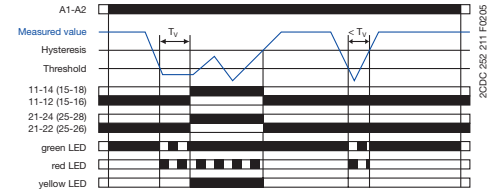


If the measured value exceeds resp. drops below the adjusted threshold value, the output relay(s) energize(s): on the CM-SRS.1 immediately, on the CM-SRS.2 after the set tripping delay T_V. If the measured value exceeds resp. drops below the threshold value plus resp. minus the adjusted hysteresis, the output relay(s) de-energize(s). The hysteresis is adjustable within a range of 3-30 % of the threshold value.

Function diagrams - CM-SRS.M


Overcurrent monitoring without latching

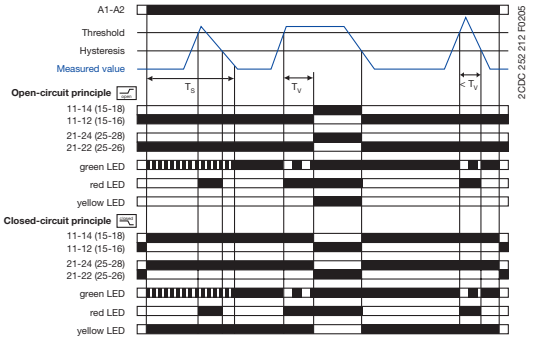


Undercurrent monitoring without latching

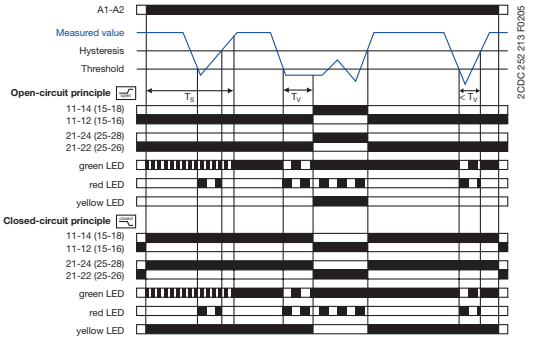

Overcurrent monitoring with latching

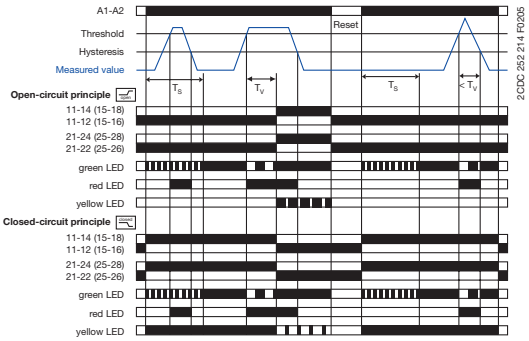

Undercurrent monitoring with latching

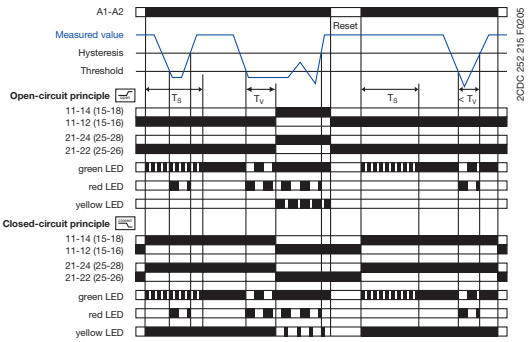


If the measured value exceeds resp. drops below the adjusted threshold value before the set start-up delay T_S is complete, the output relays do not change their actual state. If the measured value exceeds resp. drops below the adjusted threshold value when T_S is complete, the tripping delay T_V starts. If T_V is complete and the measured value is still exceeding resp. below the threshold value plus resp. minus the set hysteresis, the output relays energize / de-energize.
If the measured value exceeds resp. drops below the threshold value minus resp. plus the set hysteresis and the latching function is not activated, the output relays de-energize / energize. With activated latching function the output relays remain energized and de-energize only, when the supply voltage is interrupted / the output relays remain de-energized and energize only, when the supply voltage is switched off and then again switched on = Reset.
The hysteresis is adjustable within a range of 3-30 % of the threshold value.

Current and voltage monitoring relays, single-phase
Function diagrams

Function diagrams - CM-SFS.2

Current window monitoring 1x2 c/o contact 1x2 c/o
ON-delayed ⊠ without latching ▭

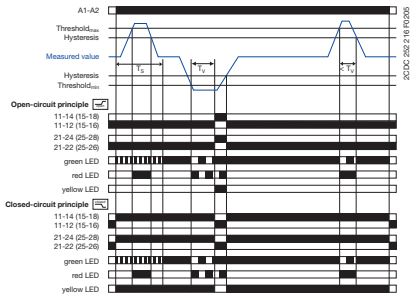


Further function diagrams see data sheet.

ON-delayed ⊠ current window monitoring with parallel switching c/o contacts 1x2 c/o**:**

If the measured value exceeds resp. drops below the adjusted threshold value before the set start-up delay T_S is complete, the output relays do not change their actual state.
If the measured value exceeds resp. drops below the adjusted threshold value when T_S is complete, the tripping delay T_V starts, when ⊠ is configured. If T_V is complete and the measured value is still exceeding resp. below the threshold value minus resp. plus the fixed hysteresis (5%), the output relays energize open / de-energize closed.
If the measured value exceeds resp. drops below the threshold value plus resp. minus the hysteresis and the latching function is not activated ▭, the output relays de-energize open / energize closed. With activated latching function ⊠ the output relays remain energized open and de-energize only, when the supply voltage is interrupted / the output relays remain de-energized closed and energize only, when the supply voltage is switched off and then again switched on = Reset.

Current window monitoring 1x2 c/o contact 1x2 c/o
OFF-delayed ■ without latching ⊠

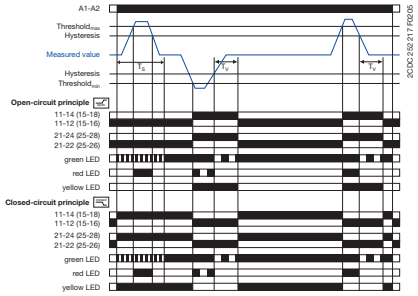


OFF-delayed ■ current window monitoring with parallel switching c/o contacts 1x2 c/o**:**


If the measured value exceeds resp. drops below the adjusted threshold value when the set start-up delay T_S is complete, the output relays energize open / de-energize closed, when ■ is configured, and remain in this position during the set tripping delay T_V. If the measured value exceeds resp. drops below the threshold value plus resp. minus the fixed hysteresis (5%) and the latching function is not activated ⊠, the tripping delay T_V starts. After completion of T_V, the output relays de-energize open / energize closed, provided that the latching function is not activated ⊠. With activated latching function ▭ the output relays remain energized open and de-energize only, when the supply voltage is interrupted / the output relays remain de-energized closed and energize only, when the supply voltage is switched off and then again switched on = Reset. When 2x1 c/o is adjusted on the device, the functionality is equivalent to the one described above. There is only to consider that in this case, instead of both output relays, only one output relay each will be switched.
“>I“ = 11_{15}-12_{16}/14_{18} ; “<I“ = 21_{25}-22_{26}/24_{28}

Function diagrams - CM-ESS.1

Overvoltage monitoring

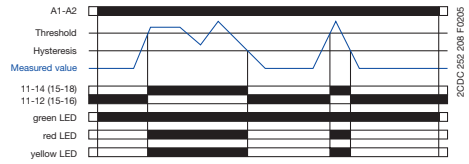


Undervoltage monitoring

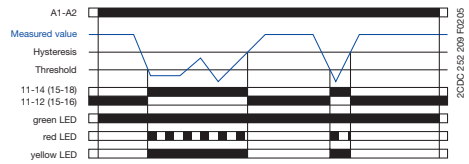


Function diagrams - CM-ESS.2

Overvoltage monitoring

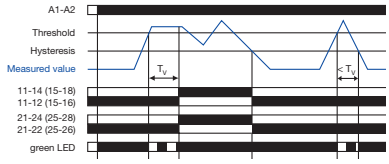

Undervoltage monitoring

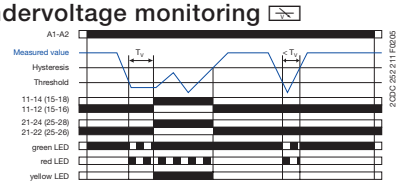


Depending on the configuration, the voltage monitoring relays CM-ESS.1 and CM-ESS.2 can be used for over- or undervoltage monitoring in single-phase AC and/or DC systems. The voltage to be monitored (measured value) is applied to terminals B-C. The devices work according the open-circuit principle. If the measured value exceeds resp. drops below the adjusted threshold value, the output relay(s) energize(s): on the CM-ESS.1 immediately, on the CM-ESS.2 after the set tripping delay T_V. If the measured value exceeds resp. drops below the threshold value plus resp. minus the adjusted hysteresis, the output relay(s) de-energize(s). The hysteresis is adjustable within a range of 3-30 % of the threshold value.


Current and voltage monitoring relays, single-phase
Function diagrams

Function diagrams - CM-ESS.M


Overvoltage monitoring without latching




Undervoltage monitoring without latching

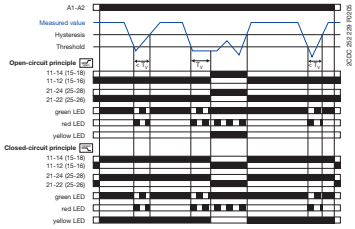

Overvoltage monitoring with latching

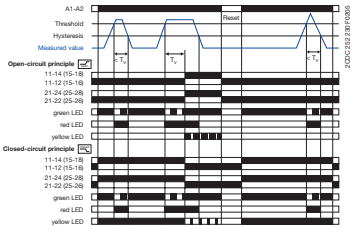

Undervoltage monitoring without latching

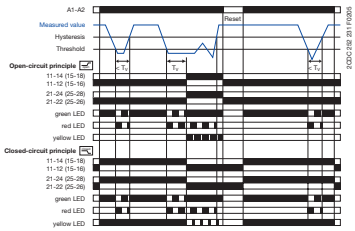


If the measured value exceeds resp. drops below the adjusted threshold value, the tripping delay T_V starts. If T_V is complete and the measured value is still exceeding resp. below the threshold value plus resp. minus the set hysteresis, the output relays energize / de-energize .

If the measured value exceeds resp. drops below the threshold value plus resp. minus the set hysteresis and the latching function is not activated , the output relays de-energize / energize . With activated latching function the output relays remain energized and de-energize only, when the supply voltage is interrupted / the output relays remain de-energized and energize only, when the supply voltage is switched off and then again switched on = Reset. The hysteresis is adjustable within a range of 3-30 % of the threshold value.

Further function diagrams see data sheet.

Voltage window monitoring 1x2 c/o contact

ON-delayed without latching




ON-delayed voltage window monitoring with parallel switching c/o contacts :

If the measured value exceeds resp. drops below the adjusted threshold value, the tripping delay T_V starts, when is configured. If T_V is complete and the measured value is still exceeding resp. below the threshold value minus resp. plus the fixed hysteresis (5%), the output relays energize /de-energize .

If the measured value exceeds resp. drops below the threshold value plus resp. minus the hysteresis and the latching function is not activated , the output relays de-energize / energize . With activated latching function the output relays remain energized and de-energize only, when the supply voltage is interrupted / the output relays remain de-energized and energize only, when the supply voltage is switched off and then again switched on = Reset.

Voltage window monitoring 1x2 c/o contact

OFF-delayed without latching



OFF-delayed voltage window monitoring with parallel switching c/o contacts :

If the measured value exceeds resp. drops below the adjusted threshold value, the output relays energize / de-energize , when is configured, and remain in this position during the set tripping delay T_V.


If the measured value exceeds resp. drops below the threshold value plus resp. minus the fixed hysteresis (5%) and the latching function is not activated , the tripping delay T_V starts. After completion of T_V, the output relays de-energize / energize , provided that the latching function is not activated . With activated latching function the output relays remain energized and de-energize only, when the supply voltage is interrupted / the output relays remain de-energized and energize only, when the supply voltage is switched off and then again switched on = Reset.

When is adjusted on the device, the functionality is equivalent to the one described above. There is only to consider that in this case, instead of both output relays, only one output relay each will be switched.


“>U“ = 11_{15}-12_{16}/14_{18} ; “<U“ = 21_{25}-22_{26}/24_{28}

Current and voltage monitoring relays, single-phase
Connection diagrams, DIP switches

Connection diagram CM-SRS.1, CM-SRS.2




2CDC 252 204 F0005



2CDC 252 205 F0005

A1-A2 Control supply voltage
B1-C Measuring range 1: 3-30 mA or 0.3-1.5 A
B2-C Measuring range 2: 10-100 mA or 1-5 A
B3-C Measuring range 3: 0.1-1 A or 3-15 A
11_{15}-12_{16}/14_{18}
21_{25}-22_{26}/24_{28} Output contacts - open-circuit principle

DIP switch functions CM-SRS.1, CM-SRS.2




2CDC 252 272 F0005

1 ON Undercurrent monitoring
OFF Overcurrent monitoring

OFF = Default


Connection diagram CM-SRS.M



2CDC 252 205 F0005

A1-A2 Control supply voltage
B1-C Measuring range 1: 3-30 mA or 0.3-1.5 A
B2-C Measuring range 2: 10-100 mA or 1-5 A
B3-C Measuring range 3: 0.1-1 A or 3-15 A
11_{15}-12_{16}/14_{18}
21_{25}-22_{26}/24_{28} Output contacts - open- or closed circuit principle

DIP switch functions CM-SRS.M




2CDC 252 273 F0005

1 ON Undercurrent monitoring
OFF Overcurrent monitoring
2 ON Closed-circuit principle
OFF Open-circuit principle
3 ON Latching function activated
OFF Latching function not activated

OFF = Default


Connection diagram CM-SFS.2



2CDC 252 205 F0005

A1-A2 Control supply voltage
B1-C Measuring range 1: 3-30 mA or 0.3-1.5 A
B2-C Measuring range 2: 10-100 mA or 1-5 A
B3-C Measuring range 3: 0.1-1 A or 3-15 A
11_{15}-12_{16}/14_{18}
21_{25}-22_{26}/24_{28} Output contacts - open- or closed circuit principle

DIP switch function CM-SFS.2




2CDC 252 274 F0005

1 ON OFF-delay
OFF ON-delay
2 ON Closed-circuit principle
OFF Open-circuit principle
3 ON Latching function activated
OFF Latching function not activated
4 ON 2x1 c/o contact
OFF 1x2 c/o contacts

OFF = Default


Connection diagram CM-ESS.M



2CDC 252 207 F0005

A1-A2 Control supply voltage
B-C Measuring ranges AC/DC:
3-30 V; 6-60 V
30-300 V; 60-600 V
11_{15}-12_{16}/14_{18}
21_{25}-22_{26}/24_{28} Output contacts - open- or closed circuit principle

DIP switch functions CM-ESS.M




2CDC 252 276 F0005

1 ON Undervoltage monitoring
OFF Overvoltage monitoring
2 ON Closed-circuit principle
OFF Open-circuit principle
3 ON Latching function activated
OFF Latching function not activated


OFF = Default

Current and voltage monitoring relays, single-phase
Connection diagrams, DIP switches

Connection diagram CM-ESS.1, CM-ESS.2




2CDC 252 206 F0005



2CDC 252 207 F0005

A1-A2 Control supply voltage
B-C Measuring ranges AC/DC:
3-30 V; 6-60 V; 30-300 V; 60-600 V
11_{15}-12_{16}/14_{18} Output contacts - open-circuit principle
21_{25}-22_{26}/24_{28}

DIP switch functions CM-ESS.1, CM-ESS.2




2CDC 252 275 F0005

1 ON Undervoltage monitoring
OFF Overvoltage monitoring

OFF = Default


Connection diagram CM-EFS.2



2CDC 252 207 F0005

A1-A2 Control supply voltage
B-C Measuring ranges AC/DC:
3-30 V; 6-60 V; 30-300 V;
60-600 V
11_{15}-12_{16}/14_{18} Output contacts - open-
21_{25}-22_{26}/24_{28} or closed circuit principle

DIP switch functions CM-EFS.2



2CDC 252 274 F0005

1 ON ON-delay
OFF OFF-delay
2 ON Closed-circuit principle
OFF Open-circuit principle
3 ON Latching function activated
OFF Latching function not activated
4 ON 2x1 c/o contact
OFF 1x2 c/o contacts

OFF = Default

Current monitoring relays, single-phase
Technical data - Current monitoring relays

Type		CM-SRS.1	CM-SRS.2	CM-SRS.M	CM-SFS.2
Input circuit - Supply circuit		A1-A2			
Rated control supply voltage U_s	A1-A2	110-130 V AC			
	A1-A2	220-240 V AC			
	A1-A2	24-240 V AC/DC			
Rated control supply voltage U_s tolerance		-15...+10 %			
Rated frequency	AC versions	50/60 Hz			
	AC/DC versions	50/60 Hz or DC			
Current / power consumption		see data sheets			
Power failure buffering time		20 ms			
Transient overvoltage protection		Varistors			
Input circuit - Measuring circuit		B1/B2/B3-C			
Monitoring function		over- or undercurrent monitoring configurable			over- and under-current monitoring
Measuring method		True RMS measuring principle			
Measuring inputs		CM-SxS.x1			CM-SxS.x2
	Terminal connection	B1-C	B2-C	B3-C	B1-C	B2-C	B3-C
	Measuring ranges AC/DC	3-30 mA	10-100 mA	0.1-1 A	0.3-1.5 A	1-5 A	3-15 A [2]
	Input resistance	3.3 Ω	1 Ω	0.1 Ω	0.05 Ω	0.01 Ω	0.0025 Ω
	Pulse overload capacity t < 1 s	500 mA	1 A	10 A	15 A	50 A	100 A
	Continous capacity	50 mA	150 mA	1.5 A	2 A	7 A	17 A
Threshold value(s)		adjustable within the indicated measuring range			
Setting accuracy of threshold value		10 %			
Hysteresis related to the threshold value		3-30 % adjustable			5 % fixed
Measuring signal frequency range		DC / 15 Hz - 2 kHz			
Rated measuring signal frequency range		DC / 50-60 Hz			
Maximum response time		AC: 80 ms / DC: 120 ms			
Accuracy within the control supply voltage tolerance		ΔU ≤ 0.5 %			
Accuracy within the temperature range		ΔU ≤ 0.06 % / °C			
Timing circuit					
Start-up delay T_S		none		0 or 0.1-30 s adjustable	
Tripping delay T_V		none	0 or 0.1-30 s adjustable		
Repeat accuracy (constant parameters)		±0.07 % of full scale			
Accuracy within the control supply voltage tolerance		-	Δt ≤ 0.5 %		
Accuracy within the temperature range		-	Δt ≤ 0.06 % / °C		
Indication of operational states					
Control supply voltage	U/T: green LED	⎍⎍⎍: control supply voltage applied, ⎍⎍⎍: start-up delay T_S active, ⎍⎍⎍: tripping delay T_V active			
Measured value	I: red LED	⎍⎍⎍: overcurrent, ⎍⎍⎍: undercurrent			
Relay status	R: yellow LED	⎍⎍⎍: relay energized, no latching function ⎍⎍⎍: relay energized, active latching function ⎍⎍⎍: relay de-energized, active latching function			
Output circuits		11(15)-12(16)/14(18), 21(25)-22(26)/24(28) - Relays			
Kind of output		1 c/o contact	2 c/o contacts		1x2 c/o contacts or 2x1 c/o contact configurable
Operating principle		open-circuit principle [1]		open- or closed-circuit principle configurable [1]	
Contact material		AgNi			
Rated operational voltage U_e	IEC/EN 60947-1	250 V			
Minimum switching voltage / minimum switching current		24 V / 10 mA			
Maximum switching voltage / maximum switching current		250 V AC / 4 A AC			
Rated operational current I_e (IEC/EN 60947-5-1)	AC-12 (resistive) at 230 V	4 A			
	AC-15 (inductive) at 230 V	3 A			
	DC-12 (resistive) at 24 V	4 A			
	DC-13 (inductive) at 24 V	2 A			
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)	B 300			
	max. rated operational voltage	300 V AC			
	max. continuous thermal current at B 300	5 A			
	max. making/breaking apparent power (Make/Break) at B 300	3600/360 VA			
Mechanical lifetime		$30x10^6$ switching cycles			
Electrical lifetime (AC-12, 230 V, 4 A)		$0.1x10^6$ switching cycles			
Max. fuse rating to achieve short-circuit protection	n/c contact	6 A fast-acting	10 A fast-acting		6 A fast-acting
	n/o contact	10 A fast-acting			

[1] Open-circuit principle: output relay energizes if the measured value exceeds ⎍ / falls below ⎍ the adjusted threshold value
Closed-circuit principle: output relay de-energizes if measured value exeeds ⎍ / falls below ⎍ the adjusted threshold value

[2] In case of measured currents > 10 A, lateral spacing has to be min. 10 mm

Current monitoring relays, single-phase
Technical data - Current monitoring relays

Type		CM-SRS.1	CM-SRS.2	CM-SRS.M	CM-SFS.2
General data					
MTBF		on request			
Duty time		100%			
Dimensions (W x H x D)	product dimensions	22.5 x 85.6 x 103.7 mm (0.89 x 3.37 x 4.08 in)			
	packaging dimensions	97 x 109 x 30 mm (3.82 x 4.29 x 1.18 in)			
Weight	net weight	depending on device, see ordering details			
	gross weight	depending on device, see ordering details			
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool			
Mounting position		any			
Minimum distance to other units		10 mm (0.39 in) at measured current > 10 A [2]			
Material of housing		UL 94 V-0			
Degree of protection	housing / terminals	IP50 / IP20			
Electrical connection					
Wire size		Screw connection technology		Easy Connect Technology (Push-in)	
	fine-strand with(out) wire end ferrule	1 x 0.5-2.5 mm² (1 x 20-14 AWG) 2 x 0.5-1.5 mm² (2 x 20-16 AWG)		2 x 0.5-1.5 mm² (2 x 20-16 AWG)	
	rigid	1 x 0.5-4 mm² (1 x 20-12 AWG) 2 x 0.5-2.5 mm² (2 x 20-14 AWG)		2 x 0.5-1.5 mm² (2 x 20-16 AWG)	
Stripping length		8 mm (0.32 in)			
Tightening torque		0.6-0.8 Nm (5.31-7.08 lb.in)		-	
Environmental data					
Ambient temperature range	operation / storage	-20...+60 °C / -40...+85 °C			
Damp heat (IEC 60068-2-30)		55 °C, 6 cycles			
Vibration (sinusoidal) (IEC/EN 60255-21-1)		Class 2			
Shock (IEC/EN 60255-21-2)		Class 2			
Isolation data					
Rated insulation voltage (VDE 0110, IEC 60947-1, IEC/EN 60255-5)	supply / measuring circuit / output	600 V			
	supply / output 1/2	250 V			
Rated impulse withstand voltage U_{imp} (IEC/EN 60947-1, IEC/EN 60255-5)	supply /measuring circuit / output	6 kV 1.2/50 µs			
	supply / output 1/2	4 kV 1.2/50 µs			
Pollution degree (VDE 0110, IEC 664, IEC/EN 60255-5)		3			
Overvoltage category (VDE 0110, IEC 664, IEC/EN 60255-5)		III			
Standards					
Product standard		IEC/EN 60255-1, IEC/EN 60255-27, EN 50178			
Low Voltage Directive		2006/95/EC			
EMC Directive		2004/108/EC			
Electromagnetic compatibility					
Interference immunity to		IEC/EN 61000-6-2			
electrostatic discharge	IEC/EN 61000-4-2	Level 3			
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3			
electrical fast transient / burst	IEC/EN 61000-4-4	Level 3			
surge	IEC/EN 61000-4-5	Level 3			
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3			
Interference emission		IEC/EN 61000-6-3			
high-frequency radiated	IEC/CISPR 22; EN 55022	Class B			
high-frequency conducted	IEC/CISPR 22; EN 55022	Class B			

Voltage monitoring relays, single-phase
Technical data - Voltage monitoring relays

Type			CM-ESS.1	CM-ESS.2	CM-ESS.M	CM-EFS.2
Input circuit - Supply circuit			A1-A2			
Rated control supply voltage U_s		A1-A2	110-130 V AC			
		A1-A2	220-240 V AC			
		A1-A2	24-240 V AC/DC			
Rated control supply voltage U_s tolerance			-15...+10 %			
Rated frequency		AC versions	50/60 Hz			
		AC/DC versions	50/60 Hz or DC			
Current / power consumption			see data sheet			
Power failure buffering time			20 ms			
Transient overvoltage protection			Varistors			
Input circuit - Measuring circuit			B-C			
Monitoring function			over- or undervoltage monitoring configurable			over- and undervoltage monitoring configurable
Measuring method			True RMS measuring principle			
Measuring inputs			CM-ExS			
		Terminal connection	B-C	B-C	B-C	B-C
		Measuring range AC/DC	3-30 V	6-60 V	30-300 V	60-600 V
		Input resistance	600 kΩ	600 kΩ	600 kΩ	600 kΩ
		Pulse overload capacity t < 1 s	800 V	800 V	800 V	800 V
		Continous capacity	660 V	660 V	660 V	660 V
Threshold value(s)			adjustable within the indicated measuring range			
Setting accuracy of threshold value			10 %			
Hysteresis related to the threshold value			3-30 % adjustable			5 % fixed
Measuring signal frequency range			DC / 15 Hz - 2 kHz			
Rated measuring signal frequency range			DC / 50-60 Hz			
Maximum response time			AC: 80 ms / DC: 120 ms			
Accuracy within the control supply voltage tolerance			$\Delta U \leq 0.5$ %			
Accuracy within the temperature range			$\Delta U \leq 0.06$ % / °C			
Transient overvoltage protection			Varistors			
Timing circuit						
Delay time T_V			none	0 or 0.1-30 s adjustable		
Repeat accuracy (constant parameters)			±0.07 % of full scale			
Accuracy within the control supply voltage tolerance			-	$\Delta t \leq 0.5$ %		
Accuracy within the temperature range			-	$\Delta t \leq 0.06$ % / °C		
Indication of operational states						
Control supply voltage		U/T: green LED	⎍‾‾‾‾⎍: control supply voltage applied ⎍⎍⎍⎍⎍: tripping delay T_V active			
Measured value		U: red LED	⎍‾‾‾‾⎍: overvoltage, ⎍⎍⎍⎍⎍: undervoltage			
Relay status		R: yellow LED	⎍‾‾‾‾⎍: relay energized, no latching function ⎍⎍⎍⎍⎍: relay energized, active latching function ⎍⎍⎍⎍⎍: relay de-energized, active latching function			
Output circuits						
Kind of output			1 c/o contact	2 c/o contacts		1x2 c/o contacts or 2x1 c/o contact configurable
Operating principle			open-circuit principle [1]		open- or closed-circuit principle configurable [1]	
Contact material			AgNi			
Rated operational voltage U_e		IEC/EN 60947-1	250 V			
Minimum switching voltage / minimum switching current			24 V / 10 mA			
Maximum switching voltage / maximum switching current			250 V AC / 4 A AC			
Rated operational current I_e (IEC/EN 60947-5-1)		AC-12 (resistive) at 230 V	4 A			
		AC-15 (inductive) at 230 V	3 A			
		DC-12 (resistive) at 24 V	4 A			
		DC-13 (inductive) at 24 V	2 A			
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)		B 300			
	max. rated operational voltage		300 V AC			
	max. continuous thermal current at B 300		5 A			
	max. making/breaking apparent power (Make/Break) at B 300		3600/360 VA			
Mechanical lifetime			$30x10^6$ switching cycles			
Electrical lifetime		AC-12, 230 V, 4 A	$0.1x10^6$ switching cycles			
Max. fuse rating to achieve short-circuit protection		n/c contact	6 A fast-acting	10 A fast-acting		6 A fast-acting
		n/o contact	10 A fast-acting			

Voltage monitoring relays, single-phase
Technical data - Voltage monitoring relays

Type		CM-ESS.1	CM-ESS.2	CM-ESS.M	CM-EFS.2
General data					
MTBF		on request			
Duty time		100%			
Dimensions (W x H x D)	product dimensions	22.5 x 85.6 x 103.7 mm (0.89 x 3.37 x 4.08 in)			
	packaging dimensions	97 x 109 x 30 mm (3.82 x 4.29 x 1.18 in)			
Weight	net weight	depending on device, see ordering details			
	gross weight	depending on device, see ordering details			
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool			
Mounting position		any			
Minimum distance to other units	vertical / horizontal	not necessary / not necessary			
Material of housing		UL 94 V-0			
Degree of protection	housing / terminals	IP50 / IP20			
Environmental data					
Ambient temperature ranges	operation	-20...+60 °C			
	storage	-40...+85 °C			
Damp heat, cyclic (IEC/EN 60068-2-30)		55 °C, 6 cycle			
Vibration, sinusoidal (IEC/EN 60255-21-1)		Class 2			
Shock (IEC/EN 60255-21-2)		Class 2			
Electrical connection					
Wire size		Screw connection technology		Easy Connect Technology (Push-in)	
	fine-strand with(out) wire end ferrule	1 x 0.5-2.5 mm² (1 x 20-14 AWG) 2 x 0.5-1.5 mm² (2 x 20-16 AWG)		2 x 0.5-1.5 mm² (2 x 20-16 AWG)	
	rigid	1 x 0.5-4 mm² (1 x 20-12 AWG) 2 x 0.5-2.5 mm² (2 x 20-14 AWG)		2 x 0.5-1.5 mm² (2 x 20-16 AWG)	
Stripping length		8 mm (0.32 in)			
Tightening torque		0.6-0.8 Nm (5.31-7.08 lb.in)		-	
Isolation data					
Rated insulation voltage (VDE 0110, IEC 60947-1, IEC/EN 60255-5)	supply / measuring circuit / output	600 V			
	supply / output 1/2	250 V			
Rated impulse withstand voltage U_{imp} (IEC/EN 60947-1, IEC/EN 60255-5)	supply / measuring circuit / output	6 kV 1.2/50 µs			
	supply / output 1/2	4 kV 1.2/50 µs			
Pollution degree (VDE 0110, IEC 664, IEC/EN 60255-5)		3			
Overvoltage category (VDE 0110, IEC 664, IEC/EN 60255-5)		III			
Standards					
Product standard		IEC/EN 60255-1, IEC/EN 60255-27, EN 50178			
Low Voltage Directive		2006/95/EC			
EMC Directive		2004/108/EC			
Electromagnetic compatibility					
Interference immunity to		IEC/EN 61000-6-2			
electrostatic discharge	IEC/EN 61000-4-2	Level 3			
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3			
electrical fast transient / burst	IEC/EN 61000-4-4	Level 3			
surge	IEC/EN 61000-4-5	Level 3			
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3			
Interference emission		IEC/EN 61000-6-3			
high-frequency radiated	IEC/CISPR 22; EN 55022	Class B			
high-frequency conducted	IEC/CISPR 22; EN 55022	Class B			

1) Open-circuit principle: output relay energizes if the measured value exceeds ⊼ / falls below ⊻ the adjusted threshold value
Closed-circuit principle: output relay de-energizes if measured value exeeds ⊼ / falls below ⊻ the adjusted threshold value

Current and voltage monitoring relays, single-phase
Notes

Three-phase monitoring relays
Product group picture



Three-phase monitoring relays
Table of contents

Three-phase monitoring relays

Benefits and advantages, Applications	2/29
Operating controls	2/30
Selection table singlefunctional	2/31
Selection table multifunctional	2/32
Ordering details - Singlefunctional	2/33
Ordering details - Multifunctional	2/34
Function diagrams	2/35
Connection diagrams	2/39
DIP switches, Rotary switches	2/40
Technical data	2/41

Three-phase monitoring relays
Benefits and advantages, Applications

Characteristics of the CM range three-phase monitors
- Adjustable phase unbalance threshold value [1)]
- Adjustable ON-delay/OFF-delay time [1)]
- Dual frequency measuring 50/60 Hz
- Powered by the measuring circuit
- 1 n/o contact, 1 or 2 c/o contacts
- LEDs for the indication of operational states
- Multifunctional and single-functional devices
- Phase failure detection
- Phase sequence monitoring [1)]
- Over- and undervoltage monitoring (fixed or adjustable)[1)]
- Wide-range operating voltage guarantees world-wide operation
- Approvals / Marks

[1)] depending on device type
[2)] Applicable in rail application following the latest standards for rail applications: NF F 16-101/102 (I2/F2 classified), EN 45545 (Hazard Level 3), DIN 5510, EN 50155, IEC 60571. Further information is available in our rail segment brochure 2CDC110084B0201.

Extended functionality
ABB's new generation of three-phase monitoring relays feature additional functions making the application field for the devices considerably larger.

Selectable phase sequence monitoring
The phase sequence monitoring can be switched off by means of a rotary switch or a DIP switch. This enables monitoring of three-phase mains where phase sequence is not relevant for the application, for example in case of motors with forward and reverse rotation, heating applications, etc.

Automatic phase sequence correction
The automatic phase sequence correction is activated by means of a DIP switch. With activated phase sequence correction, it is ensured that for any non-fixed or portable equipment, e.g. construction machinery, the correct phase sequence is always applied to the input terminals of the load. For details regarding the wiring, please see function description / diagrams.

Phase unbalance monitoring
If the supply by the three-phase system is unbalanced due to uneven distribution of the load, the motor will convert a part of the energy into reactive power. This energy gets lost unexploited; also the motor is exposed to higher thermal stress. Other thermal protection devices fail to dete ct continuing unbalances which can lead to damage or destruction of the motor. The CM range three-phase monitors with phase unbalance monitoring can reliably detect this critical situation.

Phase sequence
Changing the phase sequence during operation or a wrong phase sequence prior to startup causes a change of the rotational direction of the connected device. Generators, pumps or fans rotate in the wrong direction and the installation is no longer working properly. Especially for moveable equipment, such as construction machinery, phase sequence detection prior to the startup process is highly reasonable.

Phase loss
In case of phase loss, undefined stats of the installation are likely to occur. E.g. the startup process of motors is disturbed. All three-phase monitors of the ABB CM range detect a phase loss as soon as the voltage of one phase drops below 60% of its nominal value.

Voltage monitoring
All electric devices can be damaged when operated continuously in a network with out-of-range voltages. For example, safe starting is not ensured in case of undervoltage. Also, the switching state of a contactor is not clearly defined when operated in a „forbidden" voltage range. This can lead to undefined states of the installtion and cause damage or destruction of valuable parts.

Structure of the type designation
CM-_ _ x.yz
x: width of enclosure
y: Control supply voltage / measuring range


1	110, 115, 120, 127 V supply systems (phase-neutral)
2	220, 230, 240 V supply systems (phase-neutral)
3	200, 208, 220, 230, 240, 257, 260 V supply systems (phase-phase)
4	440, 460 V supply systems (phase-phase)
5	480, 500 V supply systems (phase-phase)
6	575, 600 V supply systems (phase-phase)
7	660, 690 V supply systems (phase-phase)
8	200, 400 V supply systems (phase-phase)

z: Rated frequency / output circuit

1	50/60 Hz – 1x2 c/o
2	50/60 Hz – 1x2 or 2x1 c/o
3	50/60/400 Hz – 1x2 oder 2x1 c/o

Three-phase monitoring relays
Operating controls

S-Range Housing

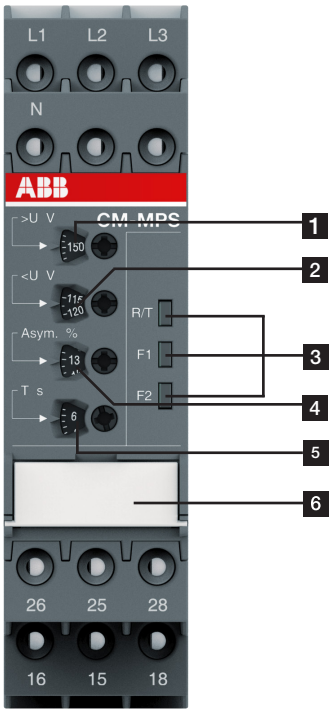


2CDC 253 017 F0013

1 Adjustment of the hysteresis >U for overvoltage
2 Adjustment of the threshold value <U for undervoltage
3 Indication of operational states
- R/T: red LED – Relay status / timing
- F1: yellow LED – Fault message
- F2: yellow LED – Fault message

4 Adjustment of the threshold value Asym. for phase unbalance
5 Adjustment of the tripping delay T_v
6 DIP switches (see DIP switch functions on page 2/40)
- ON-delay
- OFF-delay
- Phase sequence monitoring deactivated
- Phase sequence monitoring activated
- Phase sequence correction activated
- Phase sequence correction deactivated
- 2x1 c/o (SPDT) contact
- 1x2 c/o (SPDT) contacts

N-Range Housing

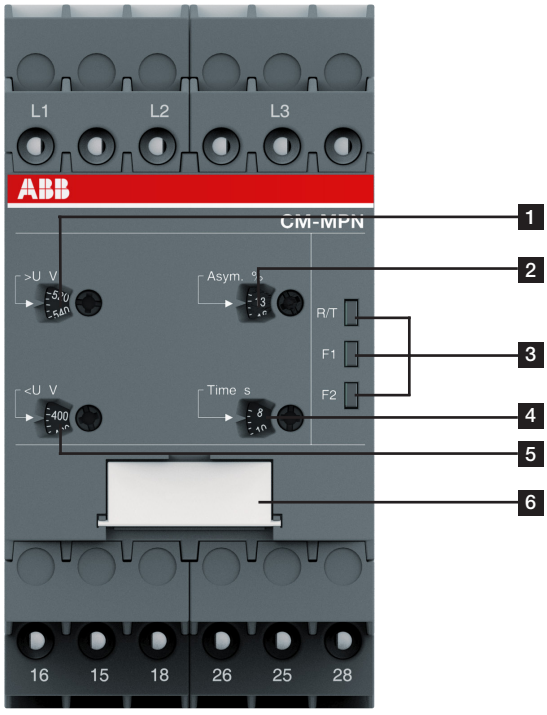

2CDC 253 016 F0013

1 Adjustment of the hysteresis >U for overvoltage
2 Adjustment of the threshold value Asym. for phase unbalance
3 Indication of operational states
- R/T: red LED – Relay status / timing
- F1: yellow LED – Fault message
- F2: yellow LED – Fault message

4 Adjustment of the tripping delay T_v
5 Adjustment of the hysteresis <U for undervoltage
6 DIP switches (see DIP switch functions on page 2/40)
- ON-delay
- OFF-delay
- Phase sequence monitoring deactivated
- Phase sequence monitoring activated
- Phase sequence correction activated
- Phase sequence correction deactivated
- 2x1 c/o (SPDT) contact
- 1x2 c/o (SPDT) contacts

Three-phase monitoring relays
Selection table singlefunctional





Rated control supply voltage U_s	Order number	1SVR550881R9400	1SVR550882R9500	1SVR550870R9400	1SVR550871R9500	1SVR550824R9100	1SVR730824R9300	1SVR740824R9300	1SVR730784R2300	1SVR740784R2300	1SVR730784R3300	1SVR740784R3300	1SVR730794R1300	1SVR730794R3300	1SVR740794R3300	1SVR730794R2300	1SVR740794R2300	1SVR730774R1300	1SVR740774R1300	1SVR730774R3300	1SVR740774R3300
	Type	CM-PBE	CM-PBE	CM-PVE	CM-PVE	CM-PFE	CM-PFS.S	CM-PFS.P	CM-PSS.31S	CM-PSS.31P	CM-PSS.41S	CM-PSS.41P	CM-PVS.31S	CM-PVS.41S	CM-PVS.41P	CM-PVS.81S	CM-PVS.81P	CM-PAS.31S	CM-PAS.31P	CM-PAS.41S	CM-PAS.41P
Phase to Phase																					
160-300 V AC													■					■	■		
200-400 V AC																■	■				
200-500 V AC							■	■													
208-440 V AC						■															
300-500 V AC														■	■					■	■
320-460 V AC				■	■																
350-580 V AC																					
380 V AC									■	■											
380-440 V AC	■	■																			
400 V AC											■	■									
Phase to Neutral																					
185-265 V AC			■																		
220-240 V AC	■																				
Rated frequency																					
50/60 Hz	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Suitable for monitoring																					
Single-phase mains	■		■																		
Three-phase mains	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Monitoring function																					
Phase failure	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Phase sequence					■	■	■	sel	sel	sel	sel	sel	sel	sel	sel	sel	sel	■	■	■	■
Automatic phase sequence correction																					
Overvoltage			■	■				■	■	■	■	■	■	■	■	■	■				
Undervoltage			■	■				■	■	■	■	■	■	■	■	■	■				
Unbalance																		■	■	■	■
Neutral [1]	■		■																		
Thresholds	fix	fix	fix	fix	fix	fix	fix	fix	fix	fix	fix	fix	adj	adj	adj	adj	adj	adj	adj	adj	adj
Timing functions for tripping delay																					
ON delay						fix	fix											sel	sel	sel	sel
On and OFF delay	fix	fix	fix	fix	fix			adj	adj	adj	adj	adj	adj	adj	adj	adj	adj				
Connection type																					
Push-in terminals									■		■			■		■			■		■
Double-chamber cage connection terminals								■		■		■	■		■		■	■		■	

[1] The external conductor voltage towards the neutral conductor is measured.

adj: adjustable
sel: selectable

Three-phase monitoring relays
Selection table multifunctional





Rated control supply voltage U_s	Order number	1SVR730885R1300	1SVR740885R1300	1SVR730885R3300	1SVR740885R3300	1SVR730884R1300	1SVR740884R1300	1SVR730884R3300	1SVR740884R3300	1SVR730885R4300	1SVR740885R4300	1SVR730884R4300	1SVR740884R4300	1SVR750487R8300	1SVR760487R8300	1SVR750488R8300	1SVR760488R8300	1SVR750489R8300	1SVR760489R8300
	Type	CM-MPS.11S	CM-MPS.11P	CM-MPS.21S	CM-MPS.21P	CM-MPS.31S	CM-MPS.31P	CM-MPS.41S	CM-MPS.41P	CM-MPS.23S	CM-MPS.23P	CM-MPS.43S	CM-MPS.43P	CM-MPN.52S	CM-MPN.52P	CM-MPN.62S	CM-MPN.62P	CM-MPN.72S	CM-MPN.72P
Phase to Phase																			
160-300 V AC						■	■												
300-500 V AC								■	■			■	■						
350-580 V AC														■	■				
450-720 V AC																■	■		
530-820 V AC																		■	■
Phase to Neutral																			
90-170 V AC		■	■																
180-280 V AC				■	■					■	■								
Rated frequency																			
50/60 Hz		■	■	■	■	■	■	■	■					■	■	■	■	■	■
50/60/400 Hz										■	■	■	■						
Suitable for monitoring																			
Single-phase mains		■	■	■	■					■	■								
Three-phase mains		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Monitoring function																			
Phase failure		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Phase sequence		sel	sel	sel	sel	sel	sel	sel	sel	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj
Automatic phase sequence correction										adj	adj	adj	adj	adj	adj	adj	adj	adj	adj
Overvoltage		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Undervoltage		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Unbalance		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Neutral [1]		■[2]	■[2]	■[2]	■[2]					■[2]	■[2]								
Thresholds		adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj
Timing functions for tripping delay																			
On and OFF delay		adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj	adj
Connection type																			
Push-in terminals			■		■		■		■		■		■		■		■		■
Double-chamber cage connection terminals		■		■		■		■		■		■		■		■		■	

[1] The external conductor voltage towards the neutral conductor is measured.
[2] Interrupted neutral monitoring

adj: adjustable
sel: selectable

Three-phase monitoring relays
Ordering details - Singlefunctional

Description


Only reliable and continuous monitoring of a three-phase network guarantees the trouble-free and economic operation of machines and installations.



CM-PBE

Ordering details


Rated control supply voltage = measuring voltage	Monitoring function	Neutral monitoring	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
3x380-440 V AC, 220-240 V C	Phase failure detection (Single- and three-phase)	■	CM-PBE [1]	1SVR550881R9400		0.08 (0.17)
3x380-440 V AC			CM-PBE	1SVR550882R9500		0.08 (0.17)
3x320-460 V AC, 185-265 V AC	Over- / under-voltage and phase failure detection (Single- and three-phase)	■	CM-PVE [1]	1SVR550870R9400		0.08 (0.17)
3x320-460 V AC			CM-PVE	1SVR550871R9500		0.08 (0.17)
3x208-440 V AC	Phase sequence monitoring and phase failure detection (Three-phase)		CM-PFE [2]	1SVR550824R9100		0.08 (0.17)



CM-PSS.41P

Ordering details

Rated control supply voltage = measuring voltage	Monitoring function	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
3x200-500 V AC	Phase sequence monitoring and phase failure detection (Three-phase)	CM-PFS.S	1SVR730824R9300		0.127 (0.280)
		CM-PFS.P	1SVR740824R9300		0.119 (0.262)
3x380 V AC	Over- / undervoltage with fixed threshold values ± 10 %	CM-PSS.31S	1SVR730784R2300		0.132 (0.291)
		CM-PSS.31P	1SVR740784R2300		0.123 (0.271)
3x400 V AC		CM-PSS.41S	1SVR730784R3300		0.132 (0.291)
		CM-PSS.41P	1SVR740784R3300		0.123 (0.271)
3x160-300 V AC	Over- and undervoltage with adjustable threshold values (Three-phase)	CM-PVS.31S	1SVR730794R1300		0.141 (0.311)
		CM-PVS.31P	1SVR740794R1300		0.132 (0.291)
3x300-500 V AC		CM-PVS.41S	1SVR730794R3300		0.139 (0.306)
		CM-PVS.41P	1SVR740794R3300		0.131 (0.289)
3x200-400 V AC		CM-PVS.81S	1SVR730794R2300		0.136 (0.300)
		CM-PVS.81P	1SVR740794R2300		0.128 (0.282)
3x160-300 V AC	Phase unbalance (Three-phase)	CM-PAS.31S	1SVR730774R1300		0.133 (0.293)
		CM-PAS.31P	1SVR740774R1300		0.124 (0.273)
3x300-500 V AC		CM-PAS.41S	1SVR730774R3300		0.132 (0.291)
		CM-PAS.41P	1SVR740774R3300		0.123 (0.271)



CM-PAS.31P

[1] The version with neutral monitoring is also suitable for monitoring single-phase mains. For this, all three external conductors (L1,L2,L3) have to be jumpered and connected as one single conductor.


[2] For applications where a reverse fed voltage >60% is expected, we recommend to use our three-phase monitoring relays for unbalance CM-PAS.xx

S: screw connection
P: push-in / easy connect

Three-phase monitoring relays
Ordering details - Multifunctional



CM-MPS.23P



CM-MPN.52P

Ordering details


Rated control supply voltage = measuring voltage	DIP switch	Monitoring function	Neutral monitoring	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
90-170 V AC		Multifunctional (Three-phase phase failure detection, Phase sequence monitoring, overvoltage, undervoltage, Phase unbalance)	■	CM-MPS.11S	1SVR730885R1300		0.148 (0.326)
				CM-MPS.11P	1SVR740885R1300		0.137 (0.302)
180-280 V AC	⊠ ■ ◯ ∅			CM-MPS.21S	1SVR730885R3300		0.146 (0.322)
				CM-MPS.21P	1SVR740885R3300		0.135 (0.298)
3x160-300 V AC				CM-MPS.31S	1SVR730884R1300		0.142 (0.313)
				CM-MPS.31P	1SVR740884R1300		0.133 (0.293)
3x300-500 V AC				CM-MPS.41S	1SVR730884R3300		0.140 (0.309)
				CM-MPS.41P	1SVR740884R3300		0.132 (0.291)
180-280 V AC	⊠ ■ ◯ ∅ Ⓐ Ⓐ 2x1 c/o 1x2 c/o	Multifunctional (Three-phase phase failure detection, Phase sequence monitoring, overvoltage, undervoltage, Phase unbalance)	■	CM-MPS.23S	1SVR730885R4300		0.149 (0.328)
				CM-MPS.23P	1SVR740885R4300		0.138 (0.304)
3x300-500 V AC				CM-MPS.43S	1SVR730884R4300		0.148 (0.327)
				CM-MPS.43P	1SVR740884R4300		0.137 (0.302)
3x350-580 V AC	⊠ ■ ◯ ∅ Ⓐ Ⓐ 2x1 c/o 1x2 c/o			CM-MPN.52S	1SVR750487R8300		0.230 (0.507)
				CM-MPN.52P	1SVR760487R8300		0.226 (0.498)
3x450-720 V AC				CM-MPN.62S	1SVR750488R8300		0.229 (0.505)
				CM-MPN.62P	1SVR760488R8300		0.225 (0.496)
3x530-820 V AC				CM-MPN.72S	1SVR750489R8300		0.224 (0.494)
				CM-MPN.72P	1SVR760489R8300		0.220 (0.485)

S: screw connection
P: push-in / easy connect

⊠ ON-delayed
■ OFF-delayed
◯ Phase sequence monitoring activated
∅ Phase sequence monitoring deactivated
Ⓐ Phase sequence correction activated
Ⓐ Phase sequence correction deactivated
2x1 c/o (SPDT) contacts
1x2 c/o (SPDT) contacts


Three-phase monitoring relays
Function diagrams

Function diagrams - Phase failure detection CM-PBE

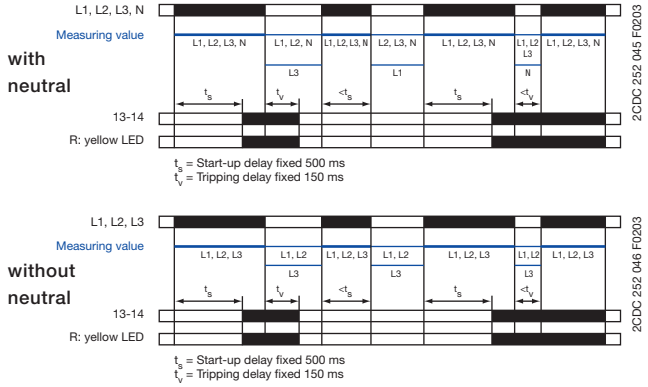


If all phases (and the neutral) are present, the output relay energizes after the start-up delay t_s is complete. If a phase failure occurs, the tripping delay t_v starts. When timing is complete, the output relay de-energizes. As soon as the voltage returns to the tolerance range, timing of ts starts. When timing is complete, the output relay re-energizes automatically. The yellow LED glows when the output relay is energized.

Function diagrams - Phase failure, under- / overvoltage detection CM-PVE

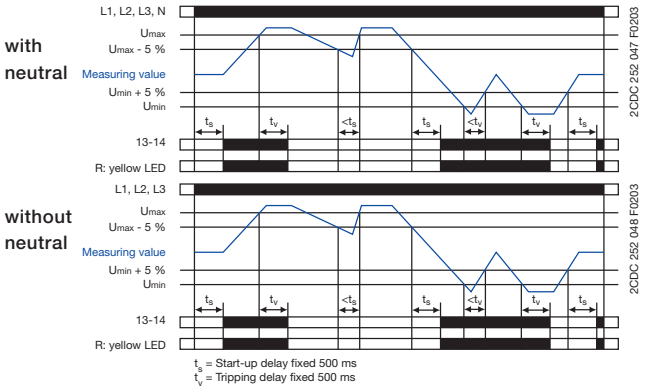


If all phases (and the neutral) are present with correct voltage, the output relay energizes after the start-up delay t_s is complete. If the voltage exceeds or falls below the fixed threshold value or if a phase failure occurs, the tripping delay t_v starts. When timing is complete, the output relay de-energizes. As soon as the voltage returns to the tolerance range, timing of ts starts. When timing is complete, the output relay re-energizes automatically. The yellow LED glows when the output relay is energized.

Function diagram - Phase failure detection, phase sequence monitoring CM-PFE

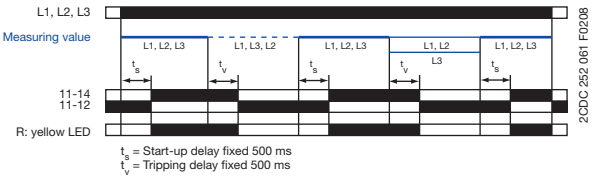

If all phases are present with the correct phase sequence, the output relay energizes after the start-up delay t_s is complete. If a phase failure or a phase sequence error occurs, the tripping delay t_v starts. When timing is complete, the output relay de-energizes. The yellow LED glows when the output relay is energized.
In case of motors which continue running with only two phases, the CM-PFE detects phase failure if the reverse fed voltage is less than 60 % of the originally applied voltage.

Function diagram - Phase failure detection, phase sequence monitoring CM-PFS

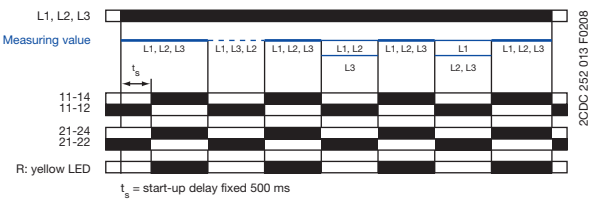

If all phases are present with the correct phase sequence, the output relay energizes after the start-up delay t_s is complete. If a phase failure or a phase sequence error occurs, the output relay de-energizes instantaneous. The yellow LED glows when the output relay is energized.
In case of motors which continue running with only two phases, the CM-PFS detects phase failure if the reverse fed voltage is less than 60 % of the originally applied voltage.

ATTENTION
If several CM-PFS units are placed side by side and the control supply voltage is higher than 415 V, spacing of at least 10 mm has to be kept between the individual units.

Three-phase monitoring relays
Function diagrams

CM-PSS.xx, CM-PVS.xx, CM.PAS.xx, CM-MPS.xx, CM-MPN.xx

Phase sequence monitoring and phase failure detection


Applying control supply voltage begins the fixed start-up delay t_S. When t_S is complete and all phases are present with correct voltage, the output relays energize and the yellow LED R/T glows.

Phase sequence monitoring

If phase sequence monitoring is activated, the output relays de-energize as soon as a phase sequence error occurs. The fault is displayed by alternated flashing of the LEDs F1 and F2. The output relays re-energize automatically as soon as the phase sequence is correct again.

Phase failure detection

The output relays de-energize instantaneous if a phase failure occurs. The fault is indicated by lightning of LED F1 and flashing of LED F2. The output relays re-energize automatically as soon as the voltage returns to the tolerance range.

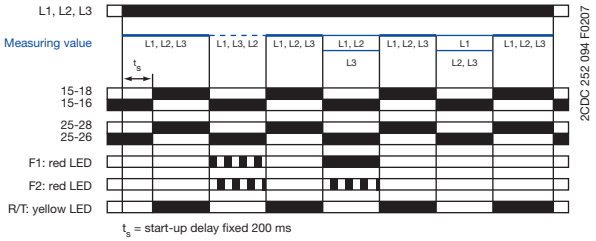


t_s = start-up delay fixed 200 ms

CM-MPS.11, CM-MPS.21, CM-MPS.23

Interrupted neutral monitoring

The interruption of the neutral in the main to be monitored is detected by means of phase unbalance evaluation. Determined by the system, in case of unloaded neutral, i.e. symmetrical load between all three phases, it may happen that an interruption of the neutral will not be detected.
If the star point is displaced by asymmetrical load in the three-phase main, an interrupted neutral will be detected.


Displacement of the star point




CM-MPS.x3, CM-MPN.x2

Automatic phase sequence correction


This function can be selected only if phase sequence monitoring is activated ⏀ and operating mode 2x1 c/o (SPDT) contact 1x2 c/o is selected.
Applying control supply voltage begins the fixed start-up delay t_{S1}. When t_{S1} is complete and all phases are present with correct voltage, output relay R1 energizes. Output relay R2 energizes when the fixed start-up delay t_{S2} is complete and all phases are present with correct phase sequence. Output relay R2 remains de-energized if the phase sequence is incorrect.
If the voltage to be monitored exceeds or falls below the set threshold values for phase unbalance, over- or undervoltage or if a phase failure occurs, output relay R1 de-energizes and the LEDs F1 and F2 indicate the fault.
Output relay R2 is responsive only to a false phase sequence. In conjunction with a reversing contactor combination, this enables an automatic correction of the rotation direction. See circuit diagrams on the right.

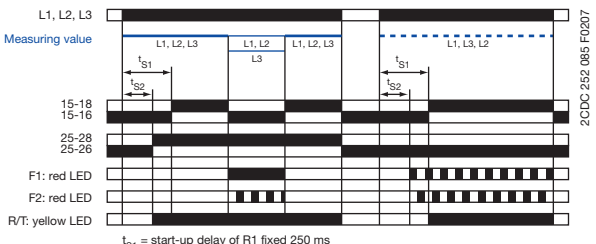


t_{S1} = start-up delay of R1 fixed 250 ms
t_{S2} = start-up delay of R2 fixed 200 ms



Control circuit diagram (K1 = CM-MPS.23)



Control circuit diagram (K1 = CM-MPS.43 or CM-MPN.xx)

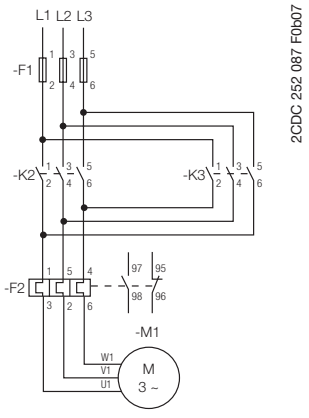

Power circuit diagram

Three-phase monitoring relays
Function diagrams

CM-PSS.xx[1], CM-PVS.xx[2], CM-MPS.xx[2], CM-MPN.xx[2]

Over- and undervoltage monitoring 1x2 c/o

Applying control supply voltage begins the fixed start-up delay t_S. When t_S is complete and all phases are present with correct voltage and with correct phase sequence, the output relays energize and the yellow LED R/T glows.

Type of tripping delay = ON-delay

If the voltage to be monitored exceeds or falls below the fixed[1] or set[2] threshold value, the output relays de-energize after the set tripping delay t_V is complete. The LED R/T flashes during timing and turns off as soon as the output relays de-energize.


The output relays re-energize automatically as soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 5 % and the LED R/T glows.

Type of tripping delay = OFF-delay


If the voltage to be monitored exceeds or falls below the fixed[1] or set[2] threshold value, the output relays de-energize instantaneously and the LED R/T turns off.

As soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 5 %, the output relays re-energize automatically after the set tripping delay t_V is complete. The LED R/T flashes during timing and turns steady when timing is complete.

ON-delay ⊠, 1x2 c/o contacts 1x2 c/o

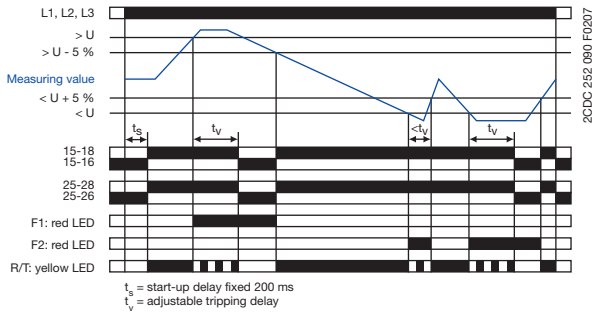

OFF-delay ■, 1x2 c/o contacts 1x2 c/o

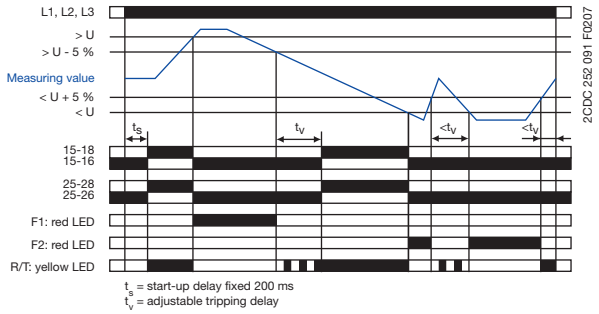

CM-MPS.x3, CM-MPN.x2

Over- and undervoltage monitoring 2x1 c/o

Applying control supply voltage begins the fixed start-up delay t_S. When t_S is complete and all phases are present with correct voltage and with correct phase sequence, the output relays energize. The yellow LED R/T glows as long as at least one output relay is energized.

Type of tripping delay = ON-delay

If the voltage to be monitored exceeds or falls below the set threshold value, output relay R1 (overvoltage) or output relay R2 (undervoltage) de-energizes after the set tripping delay t_V is complete. The LED R/T flashes during timing.


The corresponding output relay re-energizes automatically as soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 5 %.

Type of tripping delay = OFF-delay


If the voltage to be monitored exceeds or falls below the set threshold value, output relay R1 (overvoltage) or output relay R2 (undervoltage) de-energizes instantaneously.

As soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 5 %, the corresponding output relay re-energizes automatically after the set tripping delay t_V is complete. The LED R/T flashes during timing.

ON-delay ⊠, 2x1 c/o contact 2x1 c/o

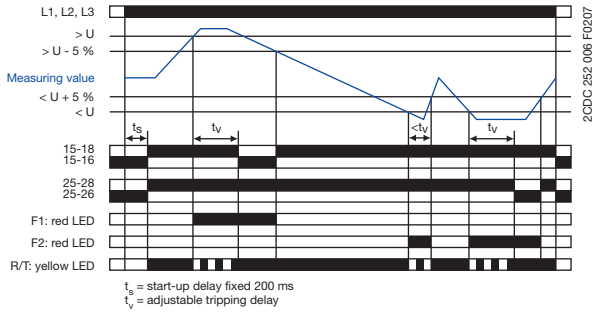

OFF-delay ■, 2x1 c/o contact 2x1 c/o

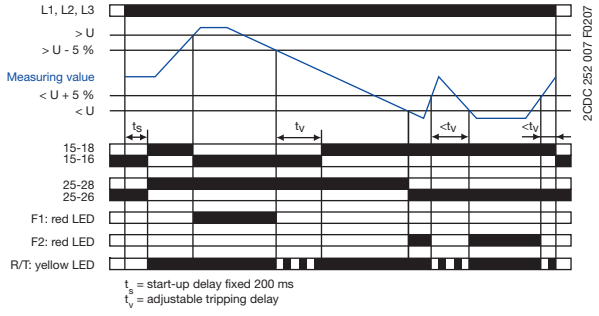

Three-phase monitoring relays
Function diagrams

CM-PAS.xx, CM-MPS.xx, CM-MPN.xx
Phase unbalance monitoring

Applying control supply voltage begins the fixed start-up delay t_S. When t_S is complete and all phases are present with correct voltage and with correct phase sequence, the output relays energize and the yellow LED R/T glows.

Type of tripping delay = ON-delay

If the voltage to be monitored exceeds or falls below the set phase unbalance threshold value, the output relays de-energize after the set tripping delay t_V is complete. The LED R/T flashes during timing and turns off as soon as the output relays de-energize.


The output relays re-energize automatically as soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 20 % and the LED R/T glows.

Type of tripping delay = OFF-delay

If the voltage to be monitored exceeds or falls below the set phase unbalance threshold value, the output relays de-energize instantaneously and the LED R/T turns off.


As soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 20 %, the output relays re-energize automatically after the set tripping delay t_V is complete. The LED R/T flashes during timing and turns steady when timing is complete.

ON-delay ⊠

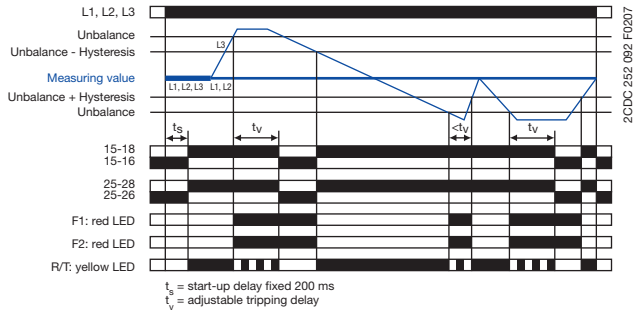

t_s = start-up delay fixed 200 ms
t_v = adjustable tripping delay

OFF-delay ■

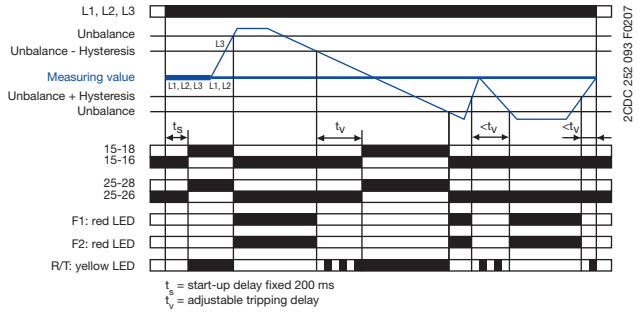

t_s = start-up delay fixed 200 ms
t_v = adjustable tripping delay

CM-PSS.xx, CM-PSV.xx, CM-PAS.xx, CM-MPS.xx, CM-MPN.xx
LED functions

Function	R/T: yellow LED	F1: red LED	F2: red LED
Control supply voltage applied, output relay energized	⎍	-	-
Tripping delay t_v active	⎍⎍	-	-
Phase failure	-	⎍	⎍⎍
Phase sequence	-	⎍⎍ alternating	
Overvoltage	-	⎍	-
Undervoltage	-	-	⎍
Phase unbalance	-	⎍	⎍
Interruption of the neutral	-	⎍	⎍⎍
Adjustment error [1]	⎍⎍	⎍⎍	⎍⎍

1) Possible misadjustments of the front-face operating controls:
Overlapping of the threshold values: An overlapping of the threshold values is given, if the threshold value for overvoltage is set to a smaller value than the threshold value for undervoltage.
DIP switch 3 = OFF and DIP switch 4 = ON: Automatic phase sequence correction is activated and selected operating mode is 1x2 c/o contacts
DIP switch 2 and 4 = ON: Phase sequence detection is deactivated and the automatic phase sequence correction is actived

CM-PSS.xx, CM-PSV.xx, CM-PAS.xx, CM-MPS.xx, CM-MPN.xx
Type of tripping delay


The type of tripping delay ⊠ / ■ can be adjusted via a rotary (CM-PxS.xx) or a DIP switch (CM-MPx.xx).

Switch position ON-delay ⊠:
In case of a fault, the de-energizing of the output relays and the respective fault message are suppressed for the adjusted tripping delay t_V.

Switch position OFF-delay ■:
In case of a fault, the output relays de-energize instantaneously and a fault message is displayed and stored for the length of the adjusted tripping delay t_V. Thereby, also momentary undervoltage conditions are recognized.

Three-phase monitoring relays
Connection diagrams


Connection diagrams CM-PBE, CM-PVE

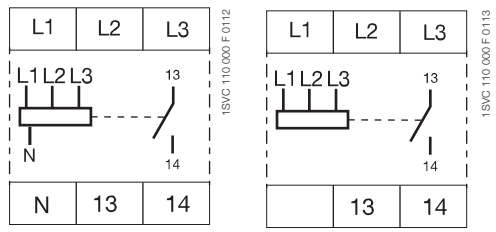

L1, L2, L3, (N) Control supply voltage = Measuring voltage

13-14 Output contact - closed-circuit principle


Connection diagram CM-PVS.x1, CM-PSS.x1, CM-PAS.x1



L1, L2, L3, (N) Control supply voltage = Measuring voltage

15-16/18 Output contact - closed-circuit principle
25-26/28


Connection diagram CM-PFE



L1, L2, L3 Control supply voltage = Measuring voltage

11-12/14 Output contact - closed-circuit principle


Connection diagram CM-MPN.x2



L1, L2, L3 Control supply voltage = Measuring voltage

15-16/18 Output contact - closed-circuit principle
25-26/28


Connection diagram CM-PFS



L1, L2, L3 Control supply voltage = Measuring voltage

11_{15}-12_{16} /14_{18}
21_{25}-22_{26}/24_{28} Output contact - closed-circuit principle


Connection diagram CM-MPS.x3

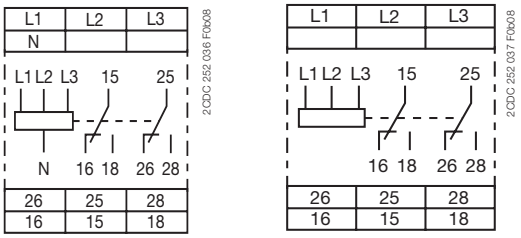

L1, L2, L3, (N) Control supply voltage = Measuring voltage

15-16/18 Output contact - closed-circuit principle
25-26/28

Connection diagram CM-MPS.x1

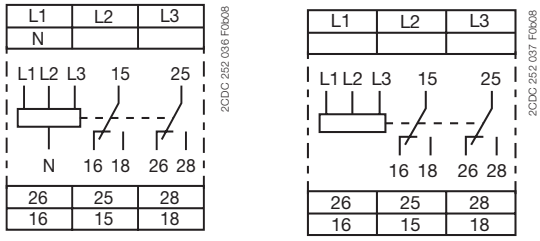


L1, L2, L3, (N) Control supply voltage = Measuring voltage

15-16/18 Output contact - closed-circuit principle
25-26/28

Three-phase monitoring relays
DIP switches, Rotary switches

Rotary switch "Function" CM-PVS




ON-delay
with phase sequence monitoring

OFF-delay
with phase sequence monitoring

ON-delay
without phase sequence monitoring

OFF-delay
without phase sequence monitoring

Rotary switch "Function" CM-PSS




ON-delay
with phase sequence monitoring

OFF-delay
with phase sequence monitoring

ON-delay
without phase sequence monitoring

OFF-delay
without phase sequence monitoring

DIP switch functions
CM-MPS.x3 and CM-MPN.x2



1 Timing function
ON ON-delayed
OFF OFF-delayed


2 Phase sequence monitoring
ON deactivated
OFF activated

3 Operating principle of output
ON 2x1 c/o contact
OFF 1x2 c/o contact

4 Phase sequence correction
ON activated
OFF deactivated

Output relay R1 is responsive to overvoltage, output relay R2 is responsive to undervoltage. In case of other faults, both output relays react synchronously.

DIP switch functions
CM-MPS.x1



1 Timing function
ON ON-delayed
OFF OFF-delayed

2 Phase sequence monitoring
ON deactivated
OFF activated

Three-phase monitoring relays
Technical data

Type			CM-PBE [1]	CM-PBE	CM-PVE [1]	CM-PVE	CM-PFE	CM-PFS
Supply circuit = measuring circuit			**L1-L2-L3-N**	**L1-L2-L3**	**L1-L2-L3-N**	**L1-L2-L3**	**L1-L2-L3**	
Rated control supply voltage U_S = measuring voltage			3x380-440 V AC, 220-240 V AC	3x380-440 V AC	3x320-460 V AC, 185-265 V AC	3x320-460 V AC	3x208-440 V AC	3x200-500 V AC
Power consumption							approx. 15 VA	
Rated control supply voltage U_S tolerance			-15...+15 %		-15...+10 %		-10...+10 %	-15...+10 %
Rated frequency			50/60 Hz		50/60 Hz (-10...+10 %)			50/60 Hz
Duty time			100 %					
Measuring circuit			L1-L2-L3-N	L1-L2-L3	L1-L2-L3-N	L1-L2-L3	L1-L2-L3	
Monitoring functions		phase failure	■	■	■	■	■	■
		phase sequence	-	-	-	-	■	■
		over- / undervoltage	-	-	■	■	-	-
		neutral	■	-	■	-	-	-
Measuring ranges			3x380-440 V AC, 220-240 V AC	3x380-440 V AC	3x320-460 V AC, 185-265 V AC	3x320-460 V AC	3x208-440 V AC	3x200-500 V AC
Thresholds		U_{min}	0.6 x UN		fixed 185 V / 320 V	fixed 320 V	0.6 x U_N	
		U_{max}			fixed 265 V / 460 V	fixed 460 V		
Hysteresis related to the threshold value			fixed 5 % (release value = 0.65 x U_N)		fixed 5 %		-	
Measuring voltage frequency			50/60 Hz (-10 %...+10 %)				50/60 Hz	
Response time			40 ms		80 ms		500 ms	
Accuracy within the rated control supply voltage tolerance			-				ΔU ≤ 0.5 %	
Accuracy within the temperature range			-		ΔU ≤ 0.06 % / °C			
Timing circuit								
Start-up delay t_S			fixed 500 ms (±20 %)				fixed 500 ms	
Tripping t_V			fixed 150 ms (±20 %)		at over-/ undervoltage fixed 500 ms (±20 %)		fixed 500 ms	-
Indication of operational states								
Relay status		R: yellow LED	⎍ Output relay energized					
Fault message		F: red LED	Only CM-PFS: ⎍ Phase failure / ⎍ Phase sequence error					
Output circuits			**13-14**				**11-12/14**	**11_{15}-12_{16} / 14_{18}, 21_{25}-22_{26} / 24_{28}**
Kind of output			1 n/o contact				1 c/o contact	2 c/o contacts
Operating principle			closed-circuit principle [2]					
Contact material			AgCdO					AgNi allow, Cd free
Rated operational voltage U_e		IEC/EN 60947-1	250 V					250 V AC
Minimum switching voltage / Minimum switching current			- / -					
Maximum switching voltage			250 V AC, 250 V DC					
Rated operational current I_e (IEC/EN 60947-5-1)		AC-12 (resistive) 230 V	4 A					
		AC-15 (inductive) 230 V	3 A					
		DC-12 (resistive) 24 V	4 A					
		DC-13 (inductive) 24 V	2 A					
Mechanical lifetime			30 x 10^6 switching cycles					
Electrical lifetime (AC-12, 230 V, 4 A)			0.1 x 10^6 switching cycles					
Max. fuse rating to achieve short-circuit protection		n/c contact	10 A fast-acting					6 A fast-acting
		n/o contact	10 A fast-acting					
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)		B 300, CM-PFS: B300, pilot duty general purpose (250 V, 4 A, cos phi 0.75)					
	max. rated operational voltage		300 V AC					
	max. continuous thermal current at B 300		5 A					
	max. making/breaking apparent power at B 300		3600/360 VA					

[1] Device with neutral monitoring: The external conductor voltage towards the neutral conductor is measured.
[2] Closed-circuit principle: Output relay is de-energized if the measured value exceeds/drops below the adjusted threshold.

Three-phase monitoring relays
Technical data

Type		CM-PBE [1]	CM-PBE	CM-PVE [1]	CM-PVE	CM-PFE	CM-PFS
General data							
Dimensions (W x H x D)		22.5 x 78 x 78.5 mm (0.89 x 3.07 x 3.09 in) CM-PFS: 22.5 x 78 x 100 mm (0.89 x 3.07 x 3.94 in)					
Weight		see data sheet					
Mounting		DIN rail (IEC/EN 60715)					
Mounting position		any					
Degree of protection	housing / terminals	IP50 / IP20					
Electrical connection							
Wire size	fine-strand with wire end ferrule	2 x 0.75-1.5 mm² (2 x 18-16 AWG)					Same as CM-PSS.31, see page 2/44.
	fine-strand without wire end ferrule	2 x 1-1.5 mm² (2 x 18-16 AWG)					
	rigid	2 x 0.75-1.5 mm² (2 x 18-16 AWG)					
Stripping length		10 mm (0.39 in)					Same as CM-PSS.31, see page 2/44.
Tightening torque		0.6-0.8 Nm					
Environmental data							
Ambient temperature range	operation / storage	-20..+60 °C / -40...+85 °C					
Environmental testing (IEC 68-2-30)		24 h cycle time, 55 °C, 93 % rel., 96 h					-
Operational reliability (IEC 68-2-6)		6 g					-
Mechanical resistance (IEC 68-2-6)		10 g					-
Climatic category	IEC/EN 60721-3-3	-					3K3
Damp heat, cyclic	IEC/EN 60068-2-30	CM-PFS: 6 x 24 h cycle, 55 °C, 95 % RH					
Vibration, sinusoidal	IEC/EN 60255-21-1	-					Class 2
Shock	IEC/EN 60255-21-2	-					Class 2
Isolation data							
Rated insulation voltage U_i (IEC/EN 60947-1, IEC/EN 60664-1)	between supply, measuring and output circuits	400 V				-	
	supply circuit / output circuit	-				600 V	
	output circuit 1 / output circuit 2	-				300 V	
Rated impulse withstand voltage U_{imp} between all isolated circuits (VDE 0110, IEC 664)		4 kV / 1.2 - 50 µs					-
	supply circuit / output circuit	-					6 kV
	output circuit 1 / output circuit 2	-					4 kV
Basic insulation for rated control supply voltage (IEC/EN 60664-1)	supply circuit / output circuit	-					600 V AC
Protective seperation (IEC/EN 61140, EN 50178)	supply circuit / output circuit	-					n/a
Test voltage (routine test)		2.5 kV, 50 Hz, 1 min.					-
	supply circuit / output circuit	-					2.5 kV, 50 Hz, 1 min.
	output circuit 1 / output circuit 2	-					2.5 kV, 50 Hz, 1 min.
Pollution degree (IEC/EN 60664-1)		3					
Overvoltage category (IEC/EN 60664-1)		III					
Standards							
Product standard		IEC 255-6, EN 60255-6, CM-PFS: IEC/EN 60255-1, IEC/EN 60255-27, EN 50178					
Low Voltage Directive		2006/95/EC					
EMC Directive		2004/108/EC					
RoHS Directive		CM-PFS: 2011/65/EC					
Electromagnetic compatibility							
Interference immunity to		EN 61000-6-2, CM-PFS: EN 61000-6-1, EN 61000-6-2					
electrostatic discharge	IEC/EN 61000-4-2	Level 3 - 6 kV/ 8 kV					
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 - 10 V/m (1 GHz) / 3 V/m (2 GHz) / 1 V/m (2.7 GHz)					
electrical fast transient / burst	IEC/EN 61000-4-4	Level 3 - 2 kV / 5 kHz					
surge	IEC/EN 61000-4-5	Level 4 - 2 kVL-L					
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 - 10 V					
voltage dips, short interruptions and voltage variations	IEC/EN 61000-4-11	-					Class 3
harmonics and interharmonics	IEC/EN 61000-4-13	-					Class 3
Interference emission		EN 61000-6-4, CM-PFS: EN 61000-6-3, EN 61000-6-4					
high-frequency radiated	IEC/CISPR 22, EN 55022						Class B
high-frequency conducted	IEC/CISPR 22, EN 55022						Class B

[1] Device with neutral monitoring: The external conductor voltage towards the neutral conductor is measured.

Three-phase monitoring relays
Technical data

Type		CM-PSS.31	CM-PSS.41	CM-PVS.31	CM-PVS.41	CM-PVS.81	CM-PAS.31	CM-PAS.41
Input circuit = Measuring circuit					L1, L2, L3			
Rated control supply voltage U_S = measuring voltage		3x380 V AC	3x400 V AC	3x160-300 V AC	3x300-500 V AC	3x200-400 V AC	3x160-300 V AC	3x300-500 V AC
Rated control supply voltage U_S tolerance		-15...+10 %						
Rated frequency		50/60 Hz						
Frequency range		45-65 Hz						
Typical current / power consumption		25 mA / 18 VA (380 V AC)	25 mA / 18 VA (400 V AC)	25 mA / 10 VA (230 V AC)	25 mA / 18 VA (400 V AC)	19 mA / 10 VA (300 V AC)	25 mA / 10 VA (230 V AC)	25 mA /18 VA (400 V AC)
Measuring circuit					L1, L2, L3			
Monitoring functions	Phase failure	■	■	■	■	■	■	■
	Phase sequence	can be switched off					■	■
	Automatic phase sequence correction	-	-	-	-	-	-	-
	Over- / undervoltage	■	■	■	■	■	-	-
	Phase unbalance	-	-	-	-	-	■	■
	Neutral	-	-	-	-	-	-	-
Measuring range	Overvoltage	3x418 V AC	3x440 V AC	3x220-300 V AC	3x420-500 V AC	3x300-400 V AC	-	-
	Undervoltage	3x342 V AC	3x360 V AC	3x160-230 V AC	3x300-380 V AC	3x210-300 V AC	-	-
	Phase unbalance	-	-	-	-	-	2-25 % of average of phase voltages	
Thresholds	Overvoltage	fixed		adjustable within measuring range			-	-
	Undervoltage	fixed		adjustable within measuring range			-	-
	Phase unbalance (switch-off value)	-	-	-	-	-	adjust. within meas. range	
Hysteresis related to the threshold value	Over- / undervoltage	fixed 5 %					-	
	Phase unbalance	-	-	-	-	-	fixed 20 %	
Rated frequency of the measuring signal		50/60 Hz						
Frequency range of the measuring signal		45-65 Hz						
Maximum measuring cycle time		100 ms						
Accuracy within the rated control supply voltage tolerance		$\Delta U \leq 0.5$ %						
Accuracy within the temperature range		$\Delta U \leq 0.06$ % / °C						
Measuring method		True RMS						
Timing circuit								
Start-up delay t_S		fixed 200 ms						
Tripping delay t_V		ON- or OFF-delay 0; 0.1-30 s adjustable					ON- delay 0; 0.1-30 s adjustable	
Repeat accuracy (constant parameters)		-	-	-	-	< ± 0.2 %	-	-
Accuracy within the rated control supply voltage tolerance		$\Delta t \leq 0.5$ %						
Accuracy within the temperature range		$\Delta t \leq 0.06$ % / °C						
Indication of operational states				1 yellow LED, 2 red LED's				
		Details see function description / -diagrams		Details see operating mode and function description / -diagrams			Details see function description / -diagrams	
Output circuits					15-16/18, 25-26/28			
Kind of output		relay, 2 x 1 c/o contact						
Operating principle		closed-circuit principle [1]						
Contact material		AgNi alloy, Cd free						
Rated operational voltage U_e	IEC/EN 60947-1	250 V						
Minimum switching power		24 V / 10 mA						
Maximum switching voltage		see „Load limit curves“ on page 127						

[1] Closed-circuit principle: Output relay(s) de-energize(s) if measured value exceeds or falls below the adjusted threshold value

Three-phase monitoring relays
Technical data

Type		CM-PSS.31	CM-PSS.41	CM-PVS.31	CM-PVS.41	CM-PVS.81	CM-PAS.31	CM-PAS.41
Rated operational current I_e (IEC/EN 60947-5-1)	AC-12 (resistive) 230 V	4 A						
	AC-15 (inductive) 230 V	3 A						
	DC-12 (resistive) 24 V	4 A						
	DC-13 (inductive) 24 V	2 A						
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)	B 300						
	max. rated operational voltage	300 V AC						
	max. continuous thermal current at B 300	5 A						
	max. making/breaking apparent power at B 300	3600/360 VA						
Mechanical lifetime		30 x 10^6 switching cycles						
Electrical lifetime (AC-12, 230 V, 4 A)		0.1 x 10^6 switching cycles						
Max. fuse rating to achieve short-circuit protection	n/c contact	6 A fast-acting						
	n/o contact	10 A fast-acting						
General data								
MTBF		on request						
Duty time		100%						
Dimensions (W x H x D)	product dimensions	22.5 x 85.6 x 103.7 mm (0.89 x 3.37 x 4.08 in)						
	packaging dimensions	97 x 109 x 30 mm (3.82 x 4.29 x 1.18 in)						
Weight		depending on device, see ordering details						
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool						
Mounting position		any						
Minimum distance to other units	horizontal	10 mm (0.39 in) in case of continuous measuring voltages						
		> 400 V	> 400 V	> 220 V	> 400 V	-	> 220 V	> 400 V
Material of housing		UL 94 V-0						
Degree of protection	housing / terminals	IP50 / IP20						
Electrical connection								
Wire size		Screw connection technology				Easy Connect Technology (Push-in)		
	fine-strand with(out) wire end ferrule	1 x 0.5-2.5 mm² (1 x 20-14 AWG) 2 x 0.5-1.5 mm² (2 x 20-16 AWG)				2 x 0.5-1.5 mm² (2 x 20-16 AWG)		
	rigid	1 x 0.5-4 mm² (1 x 20-12 AWG) 2 x 0.5-2.5 mm² (2 x 20-14 AWG)				2 x 0.5-1.5 mm² (2 x 20-16 AWG)		
Stripping length		8 mm (0.32 in)						
Tightening torque		0.6-0.8 Nm (5.31-7.08 lb.in)				-		
Environmental data								
Ambient temperature ranges	operation / storage	-25...+60 °C / -40...+85 °C						
Damp heat (IEC 60068-2-30)		55 °C, 6 cycles						
Climatic category		3K3						
Vibration (sinusoidal) (IEC/EN 60255-21-1)		Class 2						
Shock (IEC/EN 60255-21-2)		Class 2						
Isolation data								
Rated insulation voltage U_i	input circuit / output circuit	600 V						
	output circuit 1 / output circuit 2	300 V						
Rated impulse withstand voltage U_{imp} (VDE 0110, IEC/EN 60664)	input circuit	6 kV; 1.2/50 µs						
	output circuit	4 kV; 1.2/50 µs						
Test voltage between all isolated circuits (routine test)		2.5 kV, 50 Hz, 1 s						
Basic insulation	input circuit / output circuit	600 V						
Protective separation (VDE 0106 part 101 and 101/A, IEC/EN 1140)	input circuit / output circuit	-						
Pollution degree (VDE 0110, IEC/EN 60664)		3						
Overvoltage category (VDE 0110, IEC 60664)		III						
Standards								
Product standard		IEC/EN 60255-6, EN 50178						
Low Voltage Directive		2006/95/EC						
EMC directive		2004/108/EC						
RoHS directive		2011/65/EC						
Electromagnetic compatibility								
Interference immunity to		EN 61000-6-1, EN 61000-6-2						
electrostatic discharge	IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)						
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)						
electrical fast transient / burst	IEC/EN 61000-4-4	Level 3 (2 kV / 2 kHz)						
surge	IEC/EN 61000-4-5	Level 4 (2 kV L-L)						
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)						
Interference emission		EN 61000-6-3, EN 61000-6-4						
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B						
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B						

Three-phase monitoring relays
Technical data

Type			CM-MPS.11	CM-MPS.21	CM-MPS.31	CM-MPS.41
Input circuit = Measuring circuit			L1, L2, L3, N		L1, L2, L3	
Rated control supply voltage U_S = measuring voltage			3x90-170 V AC	3x180-280 V AC	3x160-300 V AC	3x300-500 V AC
Rated control supply voltage U_S tolerance			-15...+10 %			
Rated frequency			50/60 Hz			
Frequency range			45-65 Hz			
Typical current / power consumption			25 mA / 10 VA (115 V AC)	25 mA / 18 VA (230 V AC)	25 mA / 10 VA (230 V AC)	25 mA / 18 VA (400 V AC)
Measuring circuit			L1, L2, L3, N		L1, L2, L3	
Monitoring functions		Phase failure	■	■	■	■
		Phase sequence	can be switched off			
		Automatic phase sequence correction	-	-	-	-
		Over- / undervoltage	■	■	■	■
		Phase unbalance	■	■	■	■
		Interrupted neutral	■	■	-	-
Measuring range		Overvoltage	3x120-170 V AC	3x240-280 V AC	3x220-300 V AC	3x420-500 V AC
		Undervoltage	3x90-130 V AC	3x180-220 V AC	3x160-230 V AC	3x300-380 V AC
		Phase unbalance	2-25 % of average of phase voltages			
Thresholds		Overvoltage	adjustable within measuring range			
		Undervoltage	adjustable within measuring range			
		Phase unbalance (switch-off value)	adjustable within measuring range			
Hysteresis related to the threshold value		Over- / undervoltage	fixed 5 %			
		Phase unbalance	fixed 20 %			
Rated frequency of the measuring signal			50/60 Hz			
Frequency range of the measuring signal			45-65 Hz			
Maximum measuring cycle time			100 ms			
Accuracy within the rated control supply voltage tolerance			$\Delta U \leq 0.5$ %			
Accuracy within the temperature range			$\Delta U \leq 0.06$ % / °C			
Measuring method			True RMS			
Timing circuit						
Start-up delay t_S			fixed 200 ms			
Tripping delay t_V			ON- or OFF-delay 0; 0.1-30 s adjustable			
Accuracy within the rated control supply voltage tolerance			$\Delta t \leq 0.5$ %			
Accuracy within the temperature range			$\Delta t \leq 0.06$ % / °C			
Indication of operational states			Details see function description / -diagrams			
Output circuits			15-16/18, 25-26/28			
Kind of output			relay, 1 x 2 c/o contacts			
Operating principle			closed-circuit principle [1]			
Contact material			AgNi alloy, Cd free			
Rated operational voltage U_e (IEC/EN 60947-1)			250 V			
Minimum switching power			24 V / 10 mA			
Maximum switching voltage			see „Load limit curves“ on page 127			
Rated operational current I_e (IEC/EN 60947-5-1)		AC-12 (resistive) 230 V	4 A			
		AC-15 (inductive) 230 V	3 A			
		DC-12 (resistive) 24 V	4 A			
		DC-13 (inductive) 24 V	2 A			
AC rating (UL 508)		Utilization category (Control Circuit Rating Code)	B 300			
		max. rated operational voltage	300 V AC			
		max. continuous thermal current at B 300	5 A			
		max. making/breaking apparent power at B 300	3600/360 VA			
Mechanical lifetime			30 x 10^6 switching cycles			
Electrical lifetime (AC-12, 230 V, 4 A)			0.1 x 10^6 switching cycles			
Max. fuse rating to achieve short-circuit protection		n/c contact	6 A fast-acting			
		n/o contact	10 A fast-acting			

[1] Closed-circuit principle: Output relay(s) de-energize(s) if measured value exceeds or falls below the adjusted threshold value

Three-phase monitoring relays
Technical data

Type			CM-MPS.11	CM-MPS.21	CM-MPS.31	CM-MPS.41
General data						
MTBF			on request			
Duty time			100%			
Dimensions (W x H x D)		product dimensions	22.5 x 85.6 x 103.7 mm (0.89 x 3.37 x 4.08 in)			
		packaging dimensions	97 x 109 x 30 mm (3.82 x 4.29 x 1.18 in)			
Weight			Screw connection technology		Easy Connect Technology (Push-in)	
		net weight	depending on device, see ordering details			
		gross weight	depending on device, see ordering details			
Mounting			DIN rail (IEC/EN 60715), snap-on mounting without any tool			
Mounting position			any			
Minimum distance to other units		horizontal	10 mm (0.39 in) in case of continuous measuring voltages > 120 V	> 240 V	> 220 V	> 400 V
Material of housing			UL 94 V-0			
Degree of protection		housing / terminals	IP50 / IP20			
Electrical connection						
Wire size			Screw connection technology		Easy Connect Technology (Push-in)	
		fine-strand with(out) wire end ferrule	1 x 0.5-2.5 mm² (1 x 20-14 AWG) 2 x 0.5-1.5 mm² (2 x 20-16 AWG)		2 x 0.5-1.5 mm² (2 x 20-16 AWG)	
		rigid	1 x 0.5-4 mm² (1 x 20-12 AWG) 2 x 0.5-2.5 mm² (2 x 20-14 AWG)		2 x 0.5-1.5 mm² (2 x 20-16 AWG)	
Stripping length			8 mm (0.32 in)			
Tightening torque			0.6-0.8 Nm (5.31-7.08 lb.in)		-	
Environmental data						
Ambient temperature ranges		operation / storage	-25...+60 °C / -40...+85 °C			
Damp heat (IEC 60068-2-30)			55 °C, 6 cycles			
Climatic category			3K3			
Vibration (sinusoidal) (IEC/EN 60255-21-1)			Class 2			
Shock (IEC/EN 60255-21-2)			Class 2			
Isolation data						
Rated insulation voltage U_i		input circuit / output circuit	600 V			
		output circuit 1 / output circuit 2	300 V			
Rated impulse withstand voltage U_{imp} (VDE 0110, IEC/EN 60664)		input circuit	6 kV; 1.2/50 µs			
		output circuit	4 kV; 1.2/50 µs			
Test voltage between all isolated circuits (routine test)			2.5 kV, 50 Hz, 1 s			
Basic insulation		input circuit / output circuit	600 V			
Protective separation (VDE 0106 part 101 and 101/A, IEC/EN 61140)		input circuit / output circuit	yes		-	
Pollution degree (VDE 0110, IEC/EN 60664)			3			
Overvoltage category (VDE 0110, IEC 60664)			III			
Standards						
Product standard			IEC/EN 60255-1, EN 50178			
Low Voltage Directive			2006/95/EC			
EMC directive			2004/108/EC			
RoHS directive			2011/65/EC			
Electromagnetic compatibility						
Interference immunity to			EN 61000-6-1, EN 61000-6-2			
electrostatic discharge		IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)			
radiated, radio-frequency, electromagnetic field		IEC/EN 61000-4-3	Level 3 (10 V/m)			
electrical fast transient / burst		IEC/EN 61000-4-4	Level 3 (2 kV / 2 kHz)			
surge		IEC/EN 61000-4-5	Level 4 (2 kV L-L)			
conducted disturbances, induced by radio-frequency fields		IEC/EN 61000-4-6	Level 3 (10 V)			
harmonics and interharmonics		IEC/EN 61000-4-13	Class 3			
Interference emission			EN 61000-6-3, EN 61000-6-4			
high-frequency radiated		IEC/CISPR 22, EN 55022	Class B			
high-frequency conducted		IEC/CISPR 22, EN 55022	Class B			

Three-phase monitoring relays
Technical data

Type			CM-MPS.23	CM-MPS.43	CM-MPN.52	CM-MPN.62	CM-MPN.72
Input circuit = Measuring circuit			**L1, L2, L3, N**	**L1, L2, L3**			
Rated control supply voltage U_s = measuring voltage			3x180-280 V AC	3x300-500 V AC	3x350-580 V AC	3x450-720 V AC	3x530-820 V AC
Rated control supply voltage U_s tolerance			-15...+10 %				
Rated frequency			50/60/400 Hz		50/60 Hz		
Frequency range			45-440 Hz		45-65 Hz		
Typical current / power consumption			5 mA / 4 VA (230 V AC)	5 mA / 4 VA (400 V AC)	29 mA / 41 VA (480 V AC)	29 mA / 52 VA (600 V AC)	29 mA / 59 VA (690 V AC)
Measuring circuit			**L1, L2, L3, N**	**L1, L2, L3**			
Monitoring functions		Phase failure	■	■	■	■	■
		Phase sequence	can be switched off				
		Automatic phase sequence correction	configurable				
		Over- / undervoltage	■	■	■	■	■
		Phase unbalance	■	■	■	■	■
		Interrupted neutral	■	-	-	-	-
Measuring range		Overvoltage	3x240-280 V AC	3x420-500 V AC	3x480-580 V AC	3x600-720 V AC	3x690-820 V AC
		Undervoltage	3x180-220 V AC	3x300-380 V AC	3x350-460 V AC	3x450-570 V AC	3x530-660 V AC
		Phase unbalance	2-25 % of average of phase voltages				
Thresholds		Overvoltage	adjustable within measuring range				
		Undervoltage	adjustable within measuring range				
		Phase unbalance (switch-off value)	adjustable within measuring range				
Hysteresis related to the threshold value		Over- / undervoltage	fixed 5 %				
		Phase unbalance	fixed 20 %				
Rated frequency of the measuring signal			50/60/400 Hz		50/60 Hz		
Frequency range of the measuring signal			45-440 Hz		45-65 Hz		
Maximum measuring cycle time			100 ms				
Accuracy within the rated control supply voltage tolerance			$\Delta U \leq 0.5$ %				
Accuracy within the temperature range			$\Delta U \leq 0.06$ % / °C				
Measuring method			True RMS				
Timing circuit							
Start-up delay t_s and t_{s2}			fixed 200 ms				
Start-up delay t_{s1}			fixed 250 ms				
Tripping delay t_v			ON- or OFF-delay 0; 0.1-30 s adjustable				
Accuracy within the rated control supply voltage tolerance			$\Delta t \leq 0.5$ %				
Accuracy within the temperature range			$\Delta t \leq 0.06$ % / °C				
Indication of operational states			Details see function description / -diagrams				
Output circuits			**15-16/18, 25-26/28**				
Kind of output			relay, 2 x 1 or 1 x 2 c/o contacts configurable				
Operating principle			closed-circuit principle [1]				
Contact material			AgNi alloy, Cd free				
Rated operational voltage U_e		IEC/EN 60947-1	250 V				
Minimum switching power			24 V / 10 mA				
Maximum switching voltage			see „Load limit curves" on page 127				
Rated operational current I_e (IEC/EN 60947-5-1)		AC-12 (resistive) 230 V	4 A				
		AC-15 (inductive) 230 V	3 A				
		DC-12 (resistive) 24 V	4 A				
		DC-13 (inductive) 24 V	2 A				
AC rating (UL 508)		Utilization category (Control Circuit Rating Code)	B 300				
		max. rated operational voltage	300 V AC				
		max. continuous thermal current at B 300	5 A				
		max. making/breaking apparent power at B 300	3600/360 VA				
Mechanical lifetime			30 x 10^6 switching cycles				
Electrical lifetime (AC-12, 230 V, 4 A)			0,1 x 10^6 switching cycles				
Max. fuse rating to achieve short-circuit protection		n/c contact	6 A fast-acting		10 A fast-acting		
		n/o contact	10 A fast-acting				


[1] Closed-circuit principle: Output relay(s) de-energize(s) if measured value exceeds or falls below the adjusted threshold value

Three-phase monitoring relays
Technical data

Type		CM-MPS.23	CM-MPS.43	CM-MPN.52	CM-MPN.62	CM-MPN.72
General data						
MTBF		on request				
Duty time		100%				
Dimensions (W x H x D)	product dimensions	22.5 x 85.6 x 103.7 mm (0.89 x 3.37 x 4.08 in)				
	packaging dimensions	97 x 109 x 30 mm (3.82 x 4.29 x 1.18 in)				
Weight		depending on device, see ordering details				
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool				
Mounting position		any				
Minimum distance to other units	vertical / horizontal	not necessary / not necessary				
Material of housing		UL 94 V-0				
Degree of protection	housing / terminals	IP50 / IP20				
Electrical connection						
Wire size		**Screw connection technology**			**Easy Connect Technology (Push-in)**	
	fine-strand with(out) wire end ferrule	1 x 0.5-2.5 mm² (1 x 20-14 AWG) 2 x 0.5-1.5 mm² (2 x 20-16 AWG)			2 x 0.5-1.5 mm² (2 x 20-16 AWG)	
	rigid	1 x 0.5-4 mm² (1 x 20-12 AWG) 2 x 0.5-2.5 mm² (2 x 20-14 AWG)			2 x 0.5-1.5 mm² (2 x 20-16 AWG)	
Stripping length		8 mm (0.32 in)				
Tightening torque		0.6-0.8 Nm (5.31-7.08 lb.in)			-	
Environmental data						
Ambient temperature ranges	operation / storage	-25...+60 °C / -40...+85 °C				
Damp heat (IEC 60068-2-30)		55 °C, 6 cycles				
Climatic category		3K3				
Vibration (sinusoidal) (IEC/EN 60255-21-1)		Class 2				
Shock (IEC/EN 60255-21-2)		Class 2				
Isolation data						
Rated insulation voltage U_i	input circuit / output circuit	600 V		1000 V		
	output circuit 1 / 2	300 V				
Rated impulse withstand voltage U_{imp} (VDE 0110, IEC/EN 60664)	input circuit	6 kV; 1.2/50 µs		8 kV; 1.2/50 µs		
	output circuit	4 kV; 1.2/50 µs				
Test voltage (routine test) between	isolated output circuits	2.5 kV, 50 Hz, 1 s				
	input circuit and isolated output circuits	2.5 kV, 50 Hz, 1 s		4 kV, 50 Hz, 1 s		
Basic insulation	input circuit / output circuit	600 V		1000 V		
Protective separation (VDE 0106 part 101 and 101/A, IEC/EN 61140)	input circuit / output circuit	-				
Pollution degree (VDE 0110, IEC/EN 60664)		3				
Overvoltage category (VDE 0110, IEC 60664)		III				
Standards						
Product standard		IEC/EN 60255-1, EN 50178				
Low Voltage Directive		2006/95/EC				
EMC directive		2004/108/EC				
RoHS directive		2011/65/EC				
Electromagnetic compatibility						
Interference immunity to		EN 61000-6-1, EN 61000-6-2				
electrostatic discharge	IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)				
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)				
electrical fast transient / burst	IEC/EN 61000-4-4	Level 3 (2 kV / 2 kHz)				
surge	IEC/EN 61000-4-5	Level 4 (2 kV L-N)	Level 4 (2 kV L-L)			
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)				
harmonics and interharmonics	IEC/EN 61000-4-13	Class 3				
Interference emission		EN 61000-6-3, EN 61000-6-4				
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B				
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B				

Grid feeding monitoring relays - Voltage and frequency monitoring functions

Product group picture

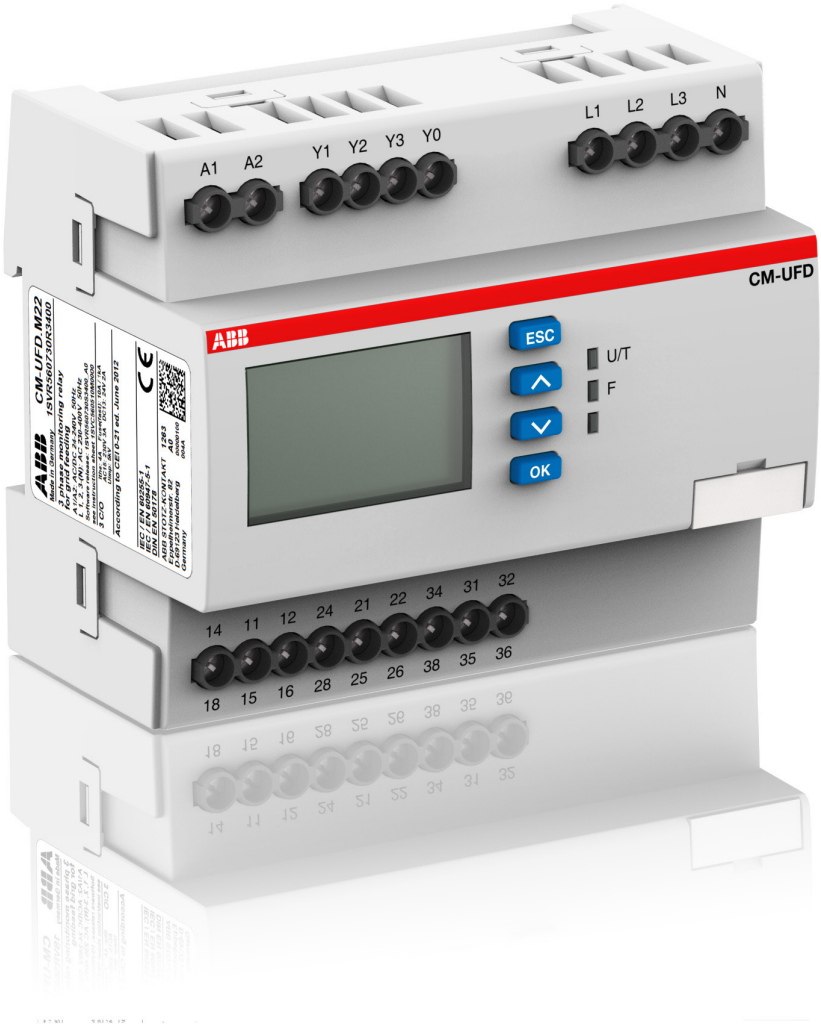

Grid feeding monitoring relays - Voltage and frequency monitoring functions
Table of contents

Grid feeding monitoring relays - Voltage and frequency monitoring functions

Benefits and advantages, operating controls 2/51
Applications 2/52
Applications, connection diagram 2/53
Ordering and selection 2/54
Technical data - CM-UFD.Mxx 2/55

Grid feeding monitoring relays - Voltage and frequency monitoring functions
Benefits and advantages, operating controls


Characteristics for all CM-UFD devices
- Monitoring of voltage and frequency in single- and three-phase mains 2-wire, 3-wire or 4-wire
- Over- and undervoltage, 10 minutes average value as well as over- and underfrequency monitoring
- Two-level threshold settings for over-/undervoltage and frequency
- Multiline, backlit LCD display
- All threshold values adjustable as absolute values
- True RMS measuring principle
- High measurement accuracy
- 3 control inputs for remote trip, feedback signal, and external signal
- Tripping delay for each threshold adjustable
- Interrupted neutral detection
- Error memory for up to 99 entries (incl. cause of error, measured value, relative timestamp)
- Test function
- Password setting protection
- 3 c/o (SPDT) contacts
- LEDs for the indication of operational states

Characteristics CM-UFD.M22
- ROCOF (rate of change of frequency) monitoring, configurable
- Third party certificate confirming accordance with CEI 0-21
- Pre-setting according to CEI 0-21

Characteristics CM-UFD.M31
- ROCOF (rate of change of frequency) monitoring and vector shift detection, configurable
- Third party certificate confirming accordance with VDE-AR-N 4105 and BDEW
- Pre-settings according to VDE-AR-N 4105 and BDEW

Characteristics CM-UFD.M33
- ROCOF (rate of change of frequency) monitoring and vector shift detection, configurable
- Factory certificate confirming accordance with Engineering Recommendation G59 Issue 3 - September 2013; Engineering Recommendation G83 Issue 2 - December 2012
- Pre-setting according to G59/3 LV + G83/2 HV
- UL 508, CAN/CSA C22.2 No.14

CM-UFD.Mxx

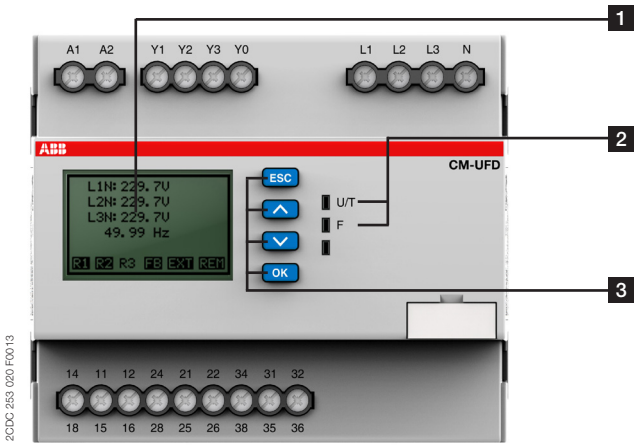

2CDC 253 020 F0013


1 Display
R1 R2 R3 - relay status; in this case R3 is de-energized
FB - status feedback loop Y0-Y1; in this case FB is closed
EXT – status input external signal; in this case input is closed
REM – status remote trip input; in this case input is closed

2 Indication of operational states
U/T: green LED – supply voltage applied / flashing = timing active
F: red LED - failure

3 Keypad
ESC: escape / return to previous menu
⋀: up / value increase
⋁: down / value decrease
OK: enter / confirm selection


Grid feeding monitoring relays - Voltage and frequency monitoring functions
Applications

Example of single-phase application CM-UFD.M22

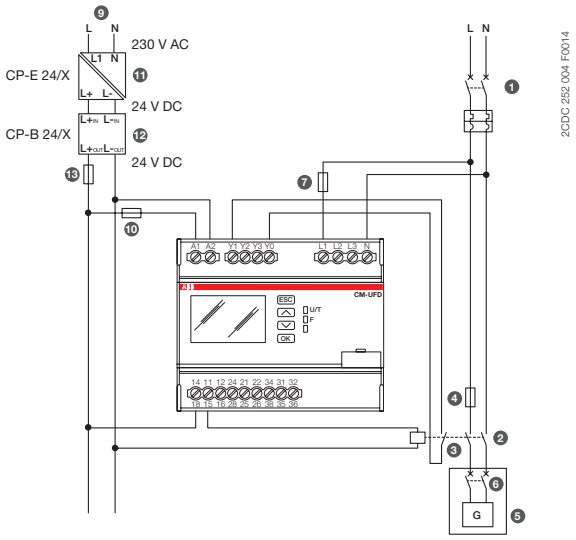

1. Main circuit breaker DG or DGL
2. DDI: Automatic circuit breaker or contactor equipped with low voltage coil and motor for automatic closure
3. Auxiliary contact of DDI, necessary for realizing the feedback function (compulsory for CM-UFD.M22)
4. DDI short-circuit protection
5. Generator and/or inverter
6. Generator (DDG)
7. Protection fuse for the measuring circuit of the CM-UFD.M22 (optional)
8. Shunt trip coil for feedback function (P>20 kW). This coil can control DG/DGL or DDG devices


Example of three-phase application CM-UFD.M22

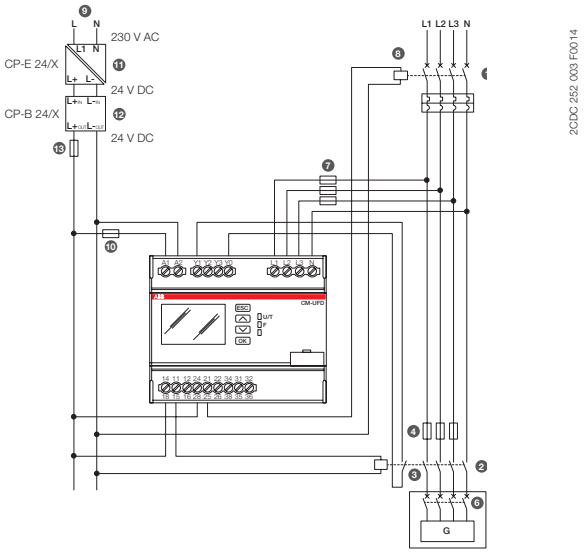

9. Control supply voltage for CM-UFD.M22 (SPI) and tripping device (DDI)*
10. Device protection fuse for the CM-UFD.M22
11. Primary switch mode power supply unit CP-E (230 V AC / 24 V DC) for the buffer module CP-B*
12. Ultra-capacitor based buffer module CP-B (24 V DC in/out)
13. Wire protection fuse for the output of the buffer module CP-B


* In accordance to CEI 0-21 regulation, in case of loss of control supply voltage it's asked to guarantee, at least for 5 seconds, the functionality of the CM-UFD.M22, the operability of the DDI and when present the command coil for operating the redundancy device. This function has to be realized by external buffer or UPS devices.

Example of single-phase application - CM-UFD.M31

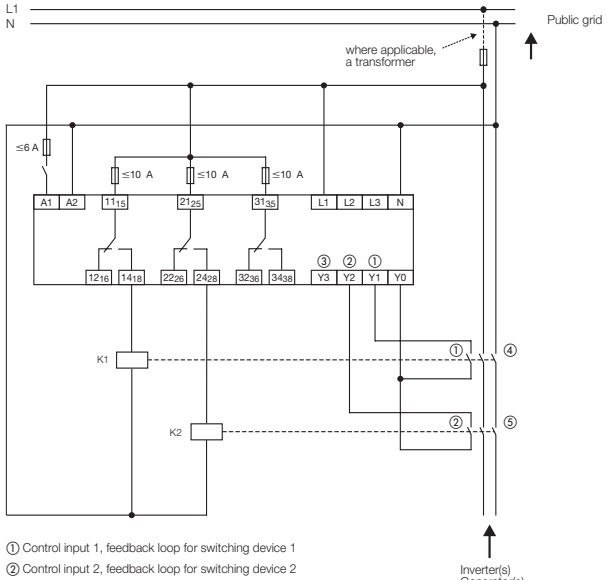

① Control input 1, feedback loop for switching device 1
② Control input 2, feedback loop for switching device 2
③ Control input 3 (e.g. for remote trip)
④ Switching device 1 of the section switch
⑤ Switching device 2 of the section switch


Example of three-phase application - CM-UFD.M31

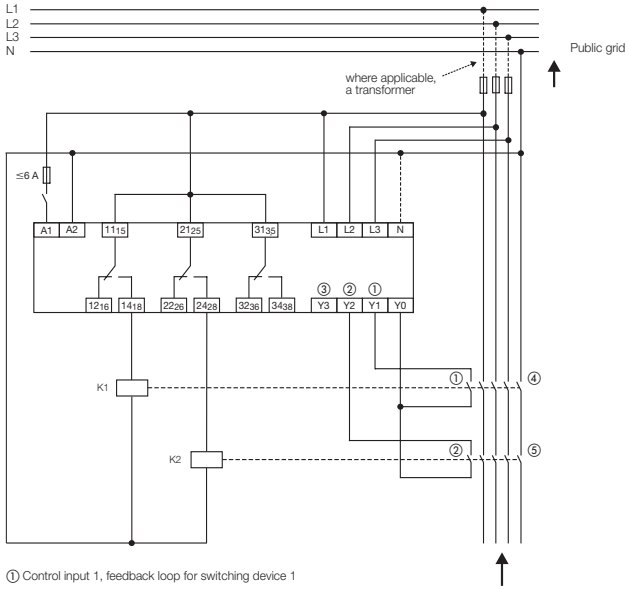

① Control input 1, feedback loop for switching device 1
② Control input 2, feedback loop for switching device 2
③ Control input 3 (e.g. for remote trip)
④ Switching device 1 of the section switch
⑤ Switching device 2 of the section switch


Grid feeding monitoring relays - Voltage and frequency monitoring functions
Applications, connection diagram

Example of single-phase application - CM-UFD.M33

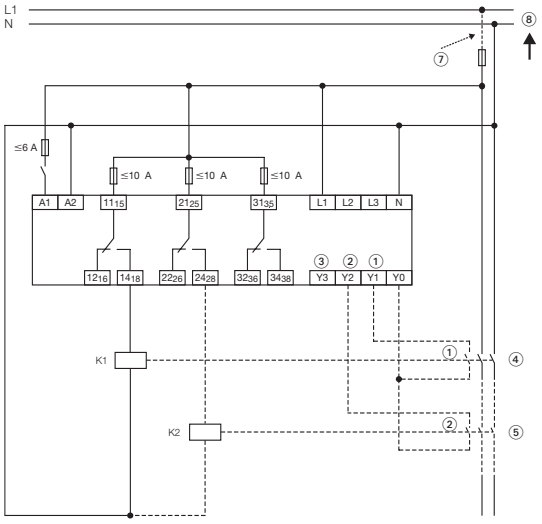


① Control input 1, feedback loop for switching device 1
② Control input 2, feedback loop for switching device 2
③ Control input 3 (e.g. for remote trip)
④ Switching device 1 of the section switch
⑤ Switching device 2 of the section switch
⑥ Inverter(s) / generator(s)
⑦ Transformer (if applicable)
⑧ Public grid

Example of three-phase application - CM-UFD.M33

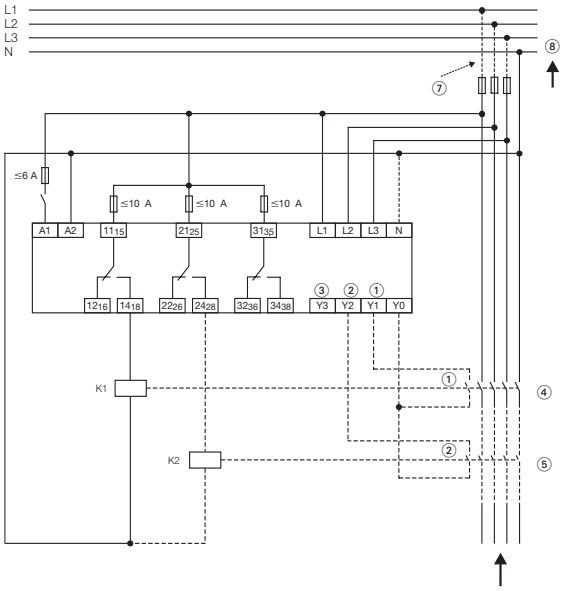


① Control input 1, feedback loop for switching device 1
② Control input 2, feedback loop for switching device 2
③ Control input 3 (e.g. for remote trip)
④ Switching device 1 of the section switch
⑤ Switching device 2 of the section switch
⑥ Inverter(s) / generator(s)
⑦ Transformer (if applicable)
⑧ Public grid

Electrical connection - CM-UFD.Mxx

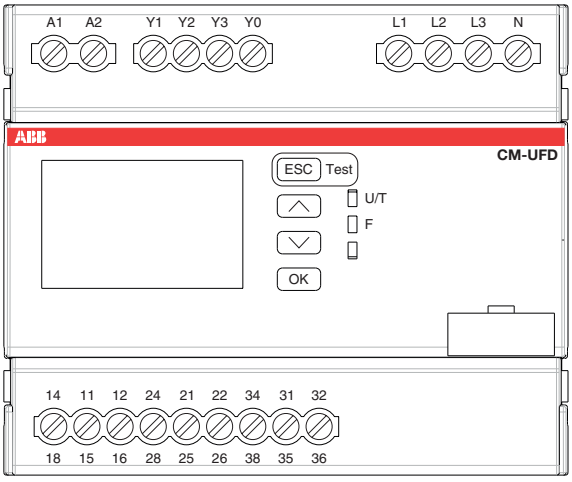

A1-A2	Control supply voltage U_s
L1, L2, L3, N	Measuring inputs
Y1-Y0	Control input 1: Feedback from switching device 1
Y2-Y0	Control input 2: Feedback from switching device 2
Y3-Y0	Control input 3: Remote trip, suppress Y1, suppress Y2, suppress Y1/Y2 or suppress vector shift detection
11_{15}-12_{16}/14_{18}	Output relay 1: Relay for tripping switching device 1 of the section switch, closed-circuit principle
21_{25}-22_{26}/24_{28}	Output relay 2: Relay for tripping switching device 2 of the section switch, closed-circuit principle
31_{35}-32_{36}/34_{38}	Output relay 3: Closing command for circuit breaker motor, configuration possibilities: closed-circuit principle, open-circuit principle, disabled or synchronous with R1/R2

Grid feeding monitoring relays - Voltage and frequency monitoring functions
Ordering and selection



CM-UFD.Mxx

Description

Only reliable and continuous monitoring of a three-phase network guarantees the trouble-free and economic operation of machines and installations.

Ordering details

Rated control supply voltage = measuring voltage	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24-240 V AC/DC	CM-UFD.M22	1SVR510730R0300		0.225 (0.496)
24-240 V AC/DC	CM-UFD.M31	1SVR510730R0300		0.225 (0.496)
24-240 V AC/DC	CM-UFD.M33	1SVR560730R3400		0.304 (0.670)

	Order number	1SVR560730R3400	1SVR560730R3401	1SVR560730R3402
	Type	CM-UFD.M22	CM-UFD.M31	CM-UFD.M33
Rated control supply voltage U_s				
24-240 V AC/DC		■	■	■
Standard				
VDE AR-N 4105, BDEW			■	
G59/3				■
CEI 0-21		■		
Rated frequency				
DC or 50 Hz		■	■	
DC or 50/60 Hz				■
Suitable for monitoring				
Single-phase mains		■	■	■
Three-phase mains		■	■	■
Monitoring function				
Over-/undervoltage		■	■	■
Over-/underfrequency		■	■	■
ROCOF (rate of change of frequency)		■	■	■
10 minutes average value		■	■	■
Vector shift			■	■
Thresholds		adj	adj	adj

Grid feeding monitoring relays - Voltage and frequency monitoring functions
Technical data - CM-UFD.Mxx

Technical data

Data at Ta = 25 °C and rated values, unless otherwise indicated

Type		CM-UFD.M22	CM-UFD.M31	CM-UFD.M33
Input circuit - Supply circuit				
Rated control supply voltage U_s		24-240 V AC/DC		
Rated control supply voltage U_s tolerance		-15...+10 %		
Rated frequency		DC or 50 Hz		
Frequency range AC		40-60 Hz		40-70 Hz
Typical current / power consumption	24 V DC	64 mA / 1.5 W		
	230 V AC	6.4 mA / 1.5 VA		
External fusing (necessary)		6 A gG (gL) or cirucit breaker 6 A with B characteristic or 6 A Class CC (acc. to UL-requirements)		
Power failure buffering time		200 ms, according to LVFRT (Low Voltage Fault Ride Through)		
Measuring circuit				
Monitoring functions	overvoltage 10-min average (>UAV)	adjustable, 1.00-1.30 * U_s in 0.01*U_s steps	threshold adjustable, 1.000-1.300 * U_n in 0.005 * U_n steps	
	overvoltage (>U1)	adjustable, 1.00-1.20 * U_s in 0.01*U_s steps	threshold adjustable, 1.000-1.300 * U_n in 0.005 * U_n steps	
	overvoltage (>U2)	-	threshold adjustable, 1.000-1.300 * U_n in 0.005 * U_n steps	
	undervoltage (<U1)	adjustable, 0.05-1.00 * U_s in 0.01*U_s steps	threshold adjustable, 0.100-1.000 * U_n in 0.005 * U_n steps	
	undervoltage (<U2)	adjustable, 0.05-1.00 * U_s in 0.01*U_s steps	threshold adjustable, 0.100-1.000 * U_n in 0.005 * U_n steps	
	overfrequency (>F1)	adjustable, 50.0-54.0 Hz in 0.1 Hz steps	threshold adjustable, 50.00-65.00 Hz in 0.01 Hz steps	
	underfrequency (<F2)	adjustable, 46.0-50.0 Hz in 0.1 Hz steps	threshold adjustable, 50.00-65.00 Hz in 0.01 Hz steps	
	overfrequency (>F1)	adjustable, 50.0-54.0 Hz in 0.1 Hz steps	threshold adjustable, 45.00-60.00 Hz in 0.01 Hz steps	
	underfrequency (<F2)	adjustable, 46.0-50.0 Hz in 0.1 Hz steps	threshold adjustable, 45.00-60.00 Hz in 0.01 Hz steps	
	ROCOF	adjustable, 0.1-1.0 Hz/s, in 0.1 Hz/s steps	threshold adjustable, 0.100-5.000 Hz in 0.005 Hz steps	
	vector shift		threshold adjustable, 2.0-40.0 ° in 0.1 ° steps	
	interrupted neutral conductor	enabled if a measuring principle with interrupted neutral conductor is selected		
Measuring ranges	voltage (4-wire system L1, L2, L3-N)	0-312 V AC		0-317 V AC
	(3-wire system L1,L2,L3)	0-540 V AC		0-550 V AC
	(2-wire system L-N)	0-312 V AC		0-317 V AC
	frequency	40-60 Hz		40-70 Hz
Rated frequency of the measuring signal		50 Hz		50/60 Hz
Accuracy of measurements	voltage	≤ 2 %	≤ 0.5 % ± 0.5 V	
	frequency	± 20 mHz	± 20 mHz	
	delay times	≤ 5 % ± 20 ms	≤ 0.1 % ± 20 ms	
Accuracy within the temperature range		ΔU ≤ 0.02 %/°C		
Hysteresis related to the threshold value	overvoltage 10-min average	-	adjustable, 0.1-10.0 % in 0.1 % steps	
	Overvoltage	0.95-0.97 * U_s	adjustable, 0.5-10.0 % in 0.1 % steps	
	Undervoltage	1.03-1.05 * U_s	adjustable, 0.5-10.0 % in 0.1 % steps	
	Overfrequency	0.997-0.999 * f_n	adjustable, 0.05-4.00 Hz in 0.01 Hz steps	
	underfrequency	1.001-1.003 * f_n	adjustable, 0.05-4.00 Hz in 0.01 Hz steps	
Measuring cycle of ROCOF		-	4-50 periods	
Reaction time acc. CEI 0-21 chapter A.4.3		CM-UFD.M22: adjustable, 0.05-600.00 s in 0.05 s steps, ±3 % ±20 ms for: Overvoltage 2, Undervoltage 1, Undervoltage 2, Overfrequency 1, Overfrequency 2, Underfrequency 1, Underfrequency 2		
Measuring cycle at 50 Hz	ROCOF	640 ms	adjustable, 4-50 periods	

Grid feeding monitoring relays - Voltage and frequency monitoring functions
Technical data - CM-UFD.Mxx

Type			CM-UFD.M22	CM-UFD.M31	CM-UFD.M33
Control circuits					
Number			3		
Type of triggering			volt-free triggering, signal source Y0		
Function of the control inputs		Y1-Y0 Control input 1	DDI feedback, trip and release monitoring times adjustable	feedback from switching device 1	
		Y2-Y0 Control input 2	External signal	feedback from switching device 2	
		Y3-Y0 Control input 3	Remote trip	remote trip; suppression of Y1, Y2, Y1/Y2 or vector shift detect.	
Electrical isolation		from supply voltage	yes		
		from the measuring circuit	no		
		from the relay outputs	yes		
Max. switching current in the control circuit			6 mA		
No-load voltage at the control inputs (V0-V1, V2, V3)			22-26 V DC		
Minimum control pulse length			20 ms		
Max. cable length at the control inputs (unshielded)			10 m		
Timing functions					
Start-up delay, R1 (prior to first grid connection or re-connection after interruption)			adjustable, 1.00-600.00 s in 0.05 s steps	-	
Restart delay, R1			adjustable, 0.05-600.00 s in 0.05 s steps	-	
Start-up delay, R2 (prior to first grid connection or re-connection after interruption)			1 s, fixed	-	
ON-delay, R3			adjustable, 0.00-10.00 s in 0.05 s steps	-	
ON-time, R3			adjustable, 0.05-10.00 s in 0.05 s steps	-	
Trip window, feedback loop Y1			adjustable, 0.05-0.50 s in 0.05 s steps	-	
Release window, feedback loop Y1			adjustable, 0.50-600.00 s in 0.05 s steps	-	
Tripping delays			adjustable, 0.05-600.00 s in 0.05 s steps	-	
ROCOF error time				-	
Switch-on delay (prior to first grid connection or reconnection after interruption)			-	adjustable, 0.05-600.00 s in 0.01 s steps	
Tripping delay		overvoltage 10-min average (>U_{AV})	-	< 3 s	
		overvoltage (>U1, >U2)	-	adjustable, 0.00-600.00 s in 0.01 s steps; +50 ms / -0 ms	
		undervoltage (<U1, <U2)			
		overfrequency (>F1, >F2)			
		underfrequency (<F1, <F2)			
		ROCOF			
		vector shift	-	< 50 ms	
		interrupted neutral conductor	< 150 ms		
Error time		ROCOF	-	adjustable, 0.5-600.00s in 0.01 s steps	
		vector shift	-	adjustable, 0.5-600.00s in 0.01 s steps	
Trip window (feedback loops Y1-Y0, Y2-Y0)			-	adjustable, 0.05-0.50 s in 0.01 s steps	
Release window (feedback loops Y1-Y0, Y2-Y0)			-	adjustable, 0.50-600.00 s in 0.01 s steps	
Time error within the temperature range			-	$\Delta t \leq 0.01$ %	
User interface - Indication of operational states					
Control supply voltage applied / timing		U/T	LED green on / flashing		
Fault message		F	LED red on		
For details see the message on the display					
User interface - Display					
Back light		on	press any button		
		off	switch-off delay adjustable, 10-600 s (default 10 s)		
Operating temperature range of the display		clearly visible	-20...+60 °C		
Resolution			112 x 64 pixel		
Display size			36 x 22 mm		
User interface - Operating elements					
4 push-buttons for menu navigation, setting and entering					

Grid feeding monitoring relays - Voltage and frequency monitoring functions
Technical data - CM-UFD.Mxx

Type			CM-UFD.M22	CM-UFD.M31	CM-UFD.M33
Output circuits					
Kind of outputs		11-12/14 (15-16/18)	1st c/o (SPDT) contact, tripping relay for switching device 1 (DDI)		
		21-22/24 (25-26/28)	2nd c/o (SPDT) contact, tripping relay for switching device 2 (DG)		
		31-32/34 (35-36/38)	3rd c/o (SPDT) contact, closing command for breaker motor		
Operating principle		11-12/14	closed-circuit principle		
		21-22/24	open- or closed-circuit principle configurable	closed-circuit principle	
		31-32/34		open-circuit, closed-circuit, disabled or synchronous with R1/R2 configurable	
Contact material			AgNi alloy, Cd-free		
Rated operational voltage U_e		IEC/EN 60947-1	250 V	300 V	
Minimum switching voltage / minimum switching current			24 V / 10 mA		
Maximum switching voltage / maximum switching current			see load limit curves		
Rated operational current I_e (IEC/EN 60947-5-1)		AC-12 (resisitive) at 230 V	4 A		
		AC-15 (inductive) at 230 V	3 A		
		DC-12 (resistive) at 24 V	4 A		
		DC-13 (inductive) at 24 V	2 A		
Mechanical lifetime			30 x 10^6 switching cycles		
Electrical lifetime		at AC12, 230 V AC, 4 A	50 x 10^3 switching cycles		
Maximum fuse rating to achieve short-circuit protection		n/c contact	10 A fast-acting	10 A fast-acting or circuit breaker 10 A with B characteristic	
		n/o contact	10 A fast-acting	10 A fast-acting or circuit breaker 10 A with B characteristic	
Maximum closing current (short time)		t < 20 ms	30 A		
		t < 80 ms	17 A		
Conventional thermal current I_{th}		IEC/EN 60947-1	5 A		
General data					
MTBF			on request		
Repeat accuracy (constant parameters)			< ±0.5 %		
Duty time			100 %		
Dimensions (W x H x D)		product dimensions	108 x 90 x 67 mm (4.25 x 3.54 x 2.64 in)		
		packaging dimensions	121 x 99 x 71 mm (4.76 x 3.90 x 2.80 in)		
Weight		net weight	0.306 kg (0.675 lb)		
		gross weight	0.360 kg (0.794 lb)		
Material of housing			PA666FR		
Mounting			DIN rail (IEC/EN 60715) TH 35-7.5 and TH 35-15, snap-on mounting without any tool		
Mounting position			any		
Minimum distance to other units		horizontal / vertical	not necessary		
Degree of protection		housing / terminals	IP20		
Electrical connection					
Wire size		fine-strand with wire end ferrulle	1 x 0.25-4 mm² (1 x 24-12 AWG), 2 x 0.25-0.75 mm² (2 x 24-18 AWG)		
		fine-strand without wire end ferrule	1 x 0.2-4 mm² (1 x 24-12 AWG), 2 x 0.2-1.5 mm² (2 x 24-16 AWG)		
		rigid	1 x 0.2-6 mm² (1 x 24-10 AWG), 2 x 0.2-1.5 mm² (2 x 24-16 AWG)		
Stripping length			8 mm (0.31 in)		
Tightening torque			0.5-0.6 Nm (4.4 -5.3 lb.in)		
Environmental data					
Ambient temperature ranges		operation	-20...+60 °C		
		storage	-20...+80 °C		
Climatic class (EN 50178)			3K5 (w/o condensation, w/o icing)		
Damp heat, cyclic (IEC/EN 60068-2-30)			6 x 24 h cycle, 55 °C, 95 % RH		
Vibration, sinusoidal (IEC/EN 60255-21-1)			Class 2		
Shock (IEC/EN 60255-21-2)			Class 2		

Grid feeding monitoring relays - Voltage and frequency monitoring functions
Technical data - CM-UFD.Mxx

Type			CM-UFD.M22	CM-UFD.M31	CM-UFD.M33
Isolation data					
Rated insulation voltage U_i (IEC/EN 60947-1, IEC/EN 60664-1)	supply/measuring/output circuits		600 V		
	output 1/output 2/output 3		300 V		
Rated impulse withstand voltage U_{imp} (IEC/EN 60947-1, IEC/EN 60664-1)	supply/measuring/output circuits		6 kV; 1.2/50 µs		
	output 1/output 2/output 3		4 kV; 1.2/50 µs		
Basic insulation acc. rated control supply voltage (IEC/EN 60664-1)	supply/measuring/output circuits		600 V		
	output 1/output 2/output 3		300 V		
Protective separation acc. rated voltage (IEC/EN 61140)	supply/measuring/output circuits		250 V		
	output 1/output 2/output 3		250 V		
Test voltage, routine test (IEC/EN 60255-5, IEC/EN 61010-1)	supply/measuring/output circuits		2.2 kV, 50 Hz, 1 s		
	output 1/output 2/output 3		2.2 kV, 50 Hz, 1 s		
Test voltage, type test (CEI 0-21)	supply/measuring /output circuits		5 kV, 50 Hz, 1 s		
	output 1/output 2/output 3		4 kV, 50 Hz, 1 s		
Pollution degree (IEC/EN 60664-1)			3		
Overvoltage category (IEC/EN 60664-1)			III		
Overvoltage category according to CEI 0-21			IV	-	
Standard					
Product standard			IEC/EN 60255-1		
Electrical safety			-	-	UL 508, CAN/CSA C22.2 No.14
Application standards			CEI 0-21: 2012-06 + CEI 0-21; V1: 2012-12 + A70 Terna	VDE-AR-N 4105: 2011-08; BDEW, June 2008 "Technische Richtlinie – Erzeugungsanlagen am Mittelspannungsnetz" including supplementary provisions of January 2013	Engineering Recommendation G59 Issue 3 - September 2013; Engineering Recommendation G83 Issue 2 - December 2012
Low Voltage Directive			2006/95/EC		
EMC Directive			2004/108/EC		
RoHS Directive			2011/65/EC		
Electromagnetic compatibility					
Interference immunity to			IEC/EN 61000-6-1, IEC/EN 61000-6-2		
electrostatic discharge		IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)		
radiated, radio-frequency, electromagnetic field		IEC/EN 61000-4-3	Level 3, 10 V/m		
electrical fast transient/burst		IEC/EN 61000-4-4	Level 3, 2 kV / 5 kHz		
surge		IEC/EN 61000-4-5	Level 3, installation class 3, supply and measuring input 1 kV L-L, 2 kV L-earth		
conducted disturbances, induced by radio-frequency fields		IEC/EN 61000-4-6	Level 3, 10 V		
voltage dips, short interruptions and voltage variations		IEC/EN 61000-4-11	Class 3		
harmonics and interharmonics		IEC/EN 61000-4-13	Class 3		
Interference emission			IEC/EN 61000-6-3, IEC/EN 61000-6-4		
high-frequency radiated		IEC/CISPR 22, EN 55022	Class B		
high-frequency conducted		IEC/CISPR 22, EN 55022	Class B		

Insulation monitoring relays for unearthed supply systems
Product group picture




Insulation monitoring relays for unearthed supply systems
Table of contents

Insulation monitoring relays for unearthed supply systems

Benefits and advantages	2/61
Benefits and advantages, Applications	2/62
Operating controls	2/63
Insulation monitoring in IT systems	2/64
Selection table	2/65
Ordering details	2/66
Operating state indication, Connection diagrams, DIP switches	2/67
Technical data	2/68
Technical data CM-IVN	2/71

Insulation monitoring relays for unearthed supply systems
Benefits and advantages




CM-IWS.2

Insulation monitoring relays for unearthed pure AC systems:

Characteristics
- For monitoring the insulation resistance of unearthed IT systems:
  up to U_n = 400 V AC
- According to IEC/EN 61557-8 "Electrical safety in low voltage distribution systems up to 1000 V AC and 1500 V DC: Equipment for testing, measuring or monitoring of protective measures – Part 8: Insulation monitoring devices for IT systems"
- Rated control supply voltage 24–240 V AC/DC
- Superimposed DC signal
- One measuring range 1–100 kΩ
- Precise adjustment of the threshold value in 1 kΩ steps
- Interrupted wire detection
- Fault storage/latching configurable by control input
- 1 c/o (SPDT) contact, closed-circuit principle
- 22.5 mm [0.89 in] width
- 3 LEDs for status indication



CM-IWS.1



CM-IWN.1

Insulation monitoring relays for unearthed AC, DC or mixed AC/DC systems:

Characteristics
- For monitoring the insulation resistance of unearthed IT systems up to U_n = 250 V AC and 300 V DC or U_n = 400 V AC and 600 V DC
- According to IEC/EN 61557-8 "Electrical safety in low voltage distribution systems up to 1000 V AC and 1500 V DC: Equipment for testing, measuring or monitoring of protective measures – Part 8: Insulation monitoring devices for IT systems"[1)]
- CM-IWN.4,5,6: Specifically for applications with high system leakage capacitances, for example in photovoltaic environments
- Rated control supply voltage 24-240 V AC/DC
- Prognostic measuring principle with superimposed square wave signal
- 1 or 2 measuring ranges (1-100 kΩ or 1-100 kΩ + 2-200 kΩ)
- 1 or 2 (configurable) c/o contacts[1)]
- Precise adjustmemt of the measuring value in 1 or 2 kΩ steps
- (non-volatile) fault storage, configurable latching, interrupted wire protection, open- or closed-circuit principle selectable[1)]
- 22.5 or 45 mm width
- 3 LEDs for status indication

[1)] depending on devices

Additional characteristics for CM-IWN.1,4,5,6:
- One (1 x 2 c/o) or two (2 x 1 c/o) threshold values R_{an}1/R1[1)] (final switch-off) and R_{an}2/R2[2)] (prewarning) configurable[3)]
- Precise adjustment of the threshold values in 1 kΩ steps (R1) and 2 kΩ steps (R2)
- Interrupted wire detection configurable
- Non-volatile fault storage configurable
- Open- or closed-circuit principle configurable

[1)] CM-IWN.6 does not meet the requirements of IEC/EN 61557-8 regarding the response time t_{an}.
[2)] term acc. to IEC/EN 61557-8
[3)] R2 only active with 2 x 1 c/o configuration

Insulation monitoring relays for unearthed supply systems
Benefits and advantages, Applications

Application / monitoring function CM-IWx
The CM-IWx serve to monitor insulation resistance in accordance with IEC 61557-8 in unearthed IT AC systems, IT AC sytems with galvanically connected DC circuits, or unearthed IT DC systems. The insulation resistance between system lines and system earth is measured. If this falls below the adjustable threshold values, the output relay(s) energize or de-energize. The CM-IWS.x can monitor control circuits (single-phase) and main circuits (3-phase). Supply systems with voltages U_n= 0-400 V AC (45-65 Hz), U_n=0-250 V AC (15-400 Hz) or 0-300 V DC can be directly connected. For systems with voltages above 400 V AC the insulation monitoring relay with or without the coupling unit CM-IVN can be used.

Application / monitoring function CM-IWN.x
The CM-IWN.x serves to monitor insulation resistance in accordance with IEC 61557-8 in unearthed IT AC systems, IT AC systems with galvanically connected DC circuits, or unearthed IT DC systems. The insulation resistance between system lines and system earth is measured. If this falls below the adjustable threshold values, the output relays switch into the fault state. The device can monitor control circuits (single-phase) and main circuits (3-phase). Supply systems with voltages U_n = 0-400 V AC (15-400 Hz) or 0-600 V DC can be directly connected to the measuring inputs and their insulation resistance being monitored. For systems with voltages above 400 V AC and 600 V DC the coupling unit CM-IVN can be used for the expansion of the CM-IWN.x voltage range.

Expansion of assortment for the requirements of decentral eletrical energy sources
ABB‘s insulation monitoring relays from the CM-IWN range provide higher system leakage capacitances which are necessary especially for solar applications. This expanded product range covers the requirements of decentral eletrical sources (e.g. photovoltaic systems).
The range of system leakage capacitances is 20 - 2000 µF.

Application / monitoring function CM-IVN
The coupling unit CM-IVN is designed to extend the nominal voltage range of the insulation monitoring relay CM-IWN.1 up to 690 V AC and 1000 V DC. The coupling unit can be connected to the system to be monitored by means of the terminals VL+ and VL-. The terminal Vw has to be connected to the earth potential. The terminals L+, V1+, L-, V1-, VS and VE have to be connected to the CM-IWN.1 as shown in the connection diagrams below. Supply systems with voltages U_n = 0-690 V AC (15-400 Hz) or 0-1000 V DC can be connected.


Measuring principle CM-IWS.2
A superimposed DC measuring signal is used for measurement. From the superimposed DC measuring voltage and its resultant current the value of the insulation resistance of the system to be monitored is calculated.

Measuring principle CM-IWN.x, CM-IWS.1
A pulsating measuring signal is fed into the system to be monitored and the insulation resistance is calculated. This pulsating measuring signal alters its form depending on the insulation resistance and system leakage capacitance. From this altered form the change in the insulation resistance is forecast. When the forecast insulation resistance corresponds to the insulation resistance calculated in the next measurement cycle and is smaller than the set threshold value, the output relay de-energizes. This measuring princiiple is also suitable for the detection of symmetrical insulation faults.






Insulation monitoring relays for unearthed supply systems
Operating controls

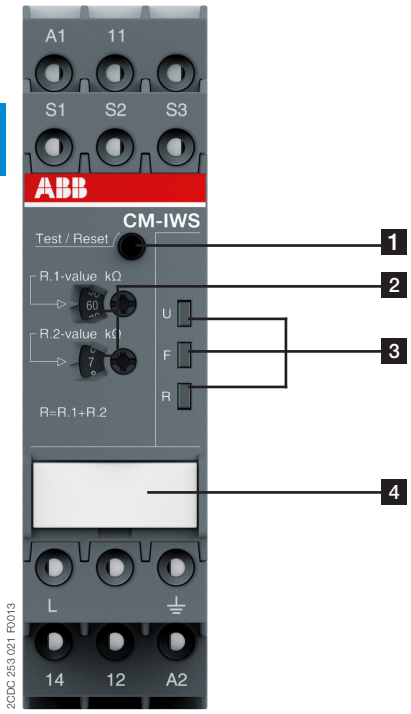

2CDC 253 021 F0013

1 **Test and reset button**


2 **Configuration and setting**

Front-face rotary switches for threshold value adjustment:
R.1 for R1 tens figures:
0, 10, 20, 30, 40, 50, 60, 70, 80, 90 kΩ in ten kΩ steps
R.2 for R1 units figures:
1, 2, 3, 4, 5, 6, 7, 8, 9, 10 kΩ in one kΩ steps

3 **Indication of operational states**

U: green LED - control supply voltage
F: red LED - fault message
R: yellow LED - relay status

4 **Marker label for devices without DIP switches**

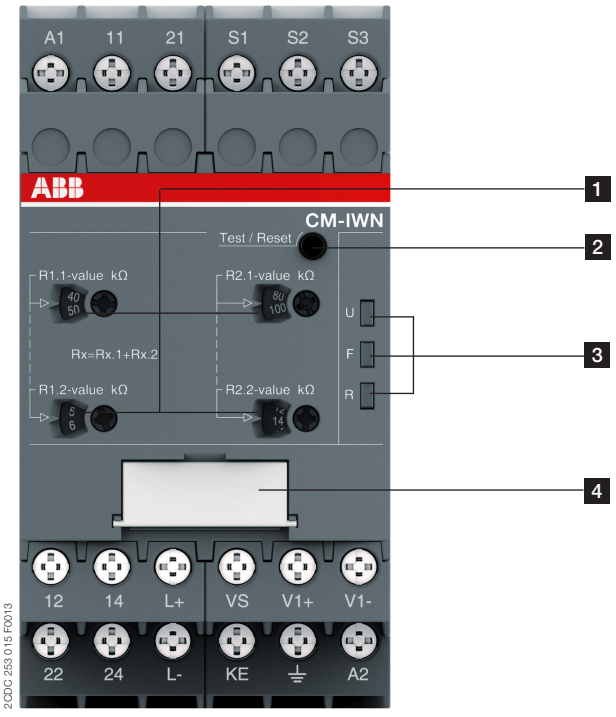

2CDC 253 015 F0013

1 **Front-face rotary switches to adjust the threshold value:**

R1.1 for R1 tens figure:
0, 10, 20, 30, 40, 50, 60, 70, 80, 90 kΩ in ten kΩ steps
R1.2 for R1 units figure:
1, 2, 3, 4, 5, 6, 7, 8, 9, 10 kΩ in one kΩ steps
R2.1 for R2 tens figure:
0, 20, 40, 60, 80, 100, 120, 140, 160, 180 kΩ in twenty kΩ steps
R2.2 for R2 units figure:
2, 4, 6, 8, 10, 12, 14, 16, 18, 20 kΩ in two kΩ steps

2 **Test and reset button**

3 **Indication of operational states**

U: green LED – control supply voltage
F1: red LED – fault message
F2: yellow LED – relay status

4 **DIP switches (see DIP switch functions)**

Insulation monitoring relays for unearthed supply systems
Insulation monitoring in IT systems


In electricity supply systems, an earthing system defines the electrial potential of the conductors relative to that of the earth's conductive surface. The choice of earthing system has implications for the safety and electromagnetic compatibility of the power supply. Note that regulations for earthing (grounding) systems vary considerably among different countries.

The international standard IEC 60364 distinguishes three families of earthing arrangements, using the two-letter codes TN, TT and IT.
The first letter indicates the connection between earth and the power-supply equipment (generator or transformer):
T: direct connection of a point with earth (Latin: terra)
I: no point is connected with earth (insulation), except perhaps via a high impendance
The second letter indicates the connection between earth and the electrical device being supplied:
T: direct connection of a point with earth
N: direct connection to neutral at the origin of installation,
which is connected to the earth

IT supply systems

The IT system is supplied either by an isolation transformer or a voltage source, such as battery or a generator.
In this system no active conductor is directly connected to earth potential. The advantage of this is that only a small fault current can flow in case of an insulation fault. This current is essentially caused by the leakage capacitance of the system.
The fuse of the system or MCB does not respond, thus maintaining the voltage supply and therefore operation even in case of a phase-to-earth fault.

The high reliability of an IT system is guaranteed thanks to continous insulation monitoring.
The insulation monitoring device recognizes insulation faults as they develop, and immediately reports that the value has fallen below the minimum. This prevents operational interruptions caused by a second more severe insulation fault.

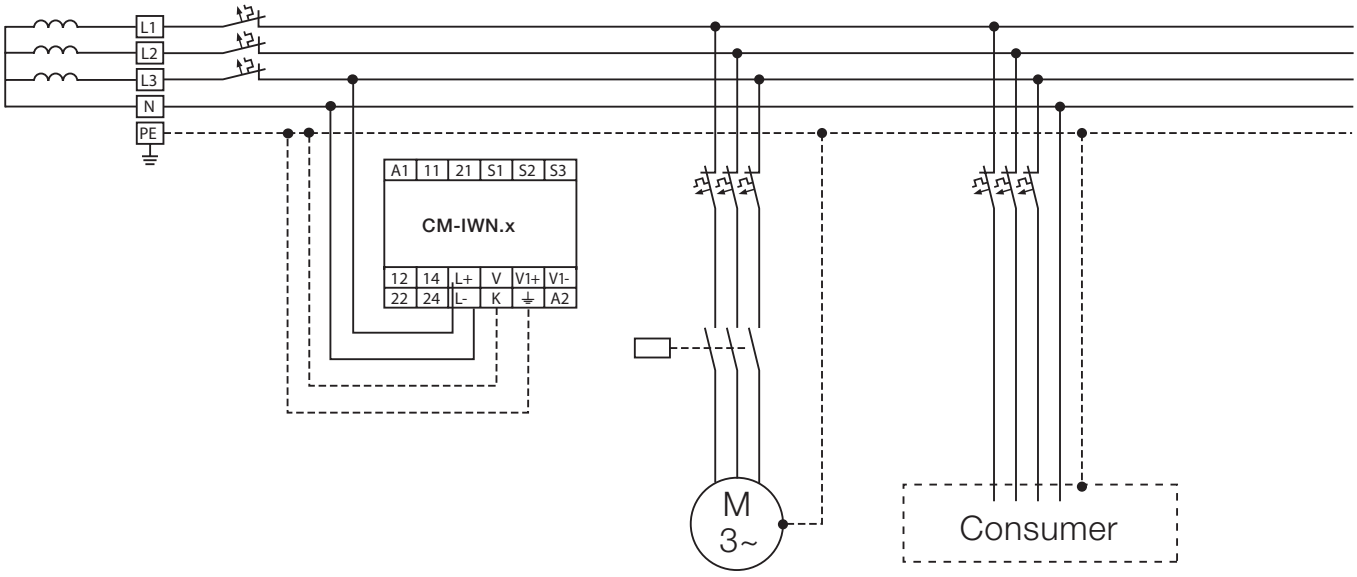

Insulation monitoring relays for unearthed supply systems
Selection table

	Order number	1SVR730670R0200	1SVR740670R0200	1SVR730660R0100	1SVR740660R0100	1SVR750660R0200	1SVR760660R0200	1SVR750660R0300	1SVR760660R0300	1SVR750660R0400	1SVR760660R0400	1SVR750660R0500	1SVR760660R0500
	Type	CM-IWS.2S	CM-IWS.2P	CM-IWS.1S	CM-IWS.1P	CM-IWN.1S	CM-IWN.1P	CM-IWN.4S	CM-IWN.4P	CM-IWN.5S	CM-IWN.5P	CM-IWN.6S	CM-IWN.6P
Rated control supply voltage U_s													
24 - 240 VAC/DC		■	■	■	■	■	■	■	■	■	■	■	■
Measuring voltages													
250 V AC (L-PE)				■	■								
400 V AC (L-PE)		■	■			■	■	■	■	■	■	■	■
690 V AC (L-PE)						■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]
300 V DC (L-PE)				■	■								
600 V DC (L-PE)						■	■	■	■	■	■	■	■
1000 V DC (L-PE)						■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]
Measuring range													
1 - 100 kΩ		■	■	■	■	■	■	■	■	■	■	■	■
2 - 200 kΩ						■	■	■	■	■	■	■	■
System leakage capacitance, max.													
10 µF		■	■	■	■								
20 µF						■	■						
500 µF								■	■				
1000 µF										■	■		
2000 µF												■	■
Output													
1 c/o		■	■	■	■								
1 x 2 c/o or 2 x 1 c/o						■	■	■	■	■	■	■	■
Operating principle													
Open-circuit principle		■	■	■	■								
Open- or closed-circuit principle adjustable						■	■	■	■	■	■	■	■
Test													
Front-face button or control input		■	■	■	■	■	■	■	■	■	■	■	■
Reset													
Front-face button or control input		■	■	■	■	■	■	■	■	■	■	■	■
Fault storage / latching configurable		■	■	■	■	■	■	■	■	■	■	■	■
Non volatile storage configurable		■	■	■	■	■	■	■	■	■	■	■	■
Interrupted wire detection						■	■	■	■	■	■	■	■
Threshold values configurable		1	1	1	1	2	2	2	2	2	2	2	2
Connection type													
Push-in terminals			■		■		■		■		■		■
Double-chamber cage connection terminals		■		■		■		■		■		■	

[1)] With coupling unit CM-IVN	screw version	CM-IVN.S: 1SVR750669R9400
	push-in version	CM-IVN.P: 1SVR760669R9400

Insulation monitoring relays for unearthed supply systems
Ordering details



CM-IWS.2

Description

The high reliability of an IT system is guaranteed thanks to continuous insulation monitoring. An insulation monitoring device recognizes insulation faults as they develop, and immediately reports that the value has fallen below the minimum. This prevents operational interruption caused by a second, more severe insulation fault.
ABB developed a totally new range of insulation monitors for AC, DC or mixed AC/DC IT Systems up to 690 V AC or 1000 V DC. With only 4 devices most standard applications can be served. Additionally a version for solar applications with increased earth leakage capacitance has been added.



CM-IWS.1



CM-IWN.1



CM-IVN

Ordering details

Rated control supply voltage = measuring voltage	Nominal voltage U_n of the distribution system to be monitored	System leakage capacitance, max.	Adjustment range of the specified response value R_{an} (threshold)	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24-240 V AC/DC	0-250 V AC / 0-300 V DC	10 µF	1-100 kΩ	CM-IWS.1S	1SVR730660R0100		0.148 (0.326)
				CM-IWS.1P	1SVR740660R0100		0.137 (0.302)
24-240 V AC/DC	0-400 V AC	10 µF	1-100 kΩ	CM-IWS.2S	1SVR730670R0200		0.141 (0.311)
				CM-IWS.2P	1SVR740670R0200		0.130 (0.287)
24-240 V AC/DC	0-400 V AC / 0-600 V DC	20 µF	1-100 kΩ 2-200 kΩ (activated / de-activated by DIP-switch)	CM-IWN.1S	1SVR750660R0200		0.241 (0.531)
				CM-IWN.1P	1SVR760660R0200		0.217 (0.478)
24-240 V AC/DC	0-400 V AC / 0-600 V DC	500 µF		CM-IWN.4S	1SVR750660R0300		0.241 (0.531)
				CM-IWN.4P	1SVR760660R0300		0.217 (0.478)
24-240 V AC/DC	0-400 V AC / 0-600 V DC	1000 µF		CM-IWN.5S	1SVR750660R0400		0.241 (0.531)
				CM-IWN.5P	1SVR760660R0400		0.217 (0.478)
24-240 V AC/DC	0-400 V AC / 0-600 V DC	2000 µF		CM-IWN.6S	1SVR750660R0500		0.241 (0.531)
				CM-IWN.6P	1SVR760660R0500		0.217 (0.478)

Ordering details - Coupling unit

Rated control supply voltage = measuring voltage	Nominal voltage U_n of the distribution system to be monitored	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
Passive device, no control supply voltage needed	0-690 V AC / 0-1000 V DC	CM-IVN.S	1SVR750669R9400		0.179 (0.395)
		CM-IVN.P	1SVR760669R9400		0.165 (0.364)

S: screw connection
P: push-in / easy connect

Insulation monitoring relays for unearthed supply systems
Operating state indication, Connection diagrams, DIP switches

LEDs, status information and fault messages CM-IWN.x


Operational state	LED U (green)	LED F (red)	LED R (yellow)
Start-up	⎍⎍⎍	OFF	OFF
No fault	⎍⎍⎍	OFF	1)
Prewarning	⎍⎍⎍	⎍⎍⎍	⎍⎍⎍
Insulation fault (below threshold value)	⎍⎍⎍	⎍⎍⎍	1)
KE/⏚ wire interruption	⎍⎍⎍	⎍⎍⎍	1)
L+/L- wire interruption during system start-up / test function	⎍⎍⎍ / ⎍⎍⎍	⎍⎍⎍	1)
System leakage capacitance too high / invalid measurement result	⎍⎍⎍	⎍⎍⎍	1)
Internal system fault	1)	⎍⎍⎍	1)
Setting fault [2]	⎍⎍⎍	⎍⎍⎍	⎍⎍⎍
Test function	⎍⎍⎍	OFF	1)
No fault after fault storage [3]	⎍⎍⎍	4)	⎍⎍⎍

LEDs, status information and fault messages CM-IWS.x

Operational state	LED U (green)	LED F (red)	LED R (yellow)
Start-up	⎍⎍⎍	OFF	OFF
No fault	⎍⎍⎍	OFF	⎍⎍⎍
Insulation fault (below threshold value)	⎍⎍⎍	⎍⎍⎍	OFF
Invalid measuring result	⎍⎍⎍	⎍⎍⎍	OFF
KE/⏚ wire interruption (only CM-IWS.[1])	⎍⎍⎍	⎍⎍⎍	OFF
CM-IWS.1: System leakage capacitance too high / invalid measurement result	⎍⎍⎍	⎍⎍⎍	OFF
CM-IWS.2: Invalid measurement result	⎍⎍⎍	⎍⎍⎍	OFF
Internal system fault	OFF	⎍⎍⎍	OFF
Test function	⎍⎍⎍	OFF	OFF
No fault after fault storage [3]	⎍⎍⎍	4)	⎍⎍⎍

[1] Depending on the configuration.
[2] Possible faulty setting: The threshold value for final switch-off is set at a higher value than the threshold value for prewarning
[3] The device has triggered after an insulation fault. The fault has been stored and the insulation resistance has returned to a higher value than the threshold value plus hysteresis.
[4] Depending on the fault


Connection diagram CM-IWS.2



2CDC 252 102 F0009

A1-A2	Control supply voltage
S1-S3	Remote test
S2-S3	Remote reset
L	Measuring circuit/input, system connection
⏚	Measuring circuit/input, earth connections
11-12/14	Output relay, closed-circuit principle


Connection diagram CM-IWS.1



2CDC 252 103 F0009

A1-A2	Control supply voltage
S1-S3	Remote test
S2-S3	Remote reset
L+, L–	Measuring circuit/input, system connection
⏚, KE	Measuring circuit/input, earth connections
1-12/14	Output relay, closed-circuit principle


Connection diagram CM-IWN.1, 4, 5, 6



2CDC 252 104 F0009

A1-A2	Control supply voltage
S1-S3	Remote test
S2-S3	Remote reset
L+, L–	Measuring circuit/input, system connection
⏚, KE	Measuring circuit/input, earth connections
VS, V1+, V1	Connections for the coupling unit (if used)
11-12/14	Output relay 1, open- or closed-circuit principle
21-22/24	Output relay 2, open- or closed-circuit principle


Connection diagram CM-IVN



2CDC 252 010 F0013

VE	Connection to CM-IWN.x - ⏚
VS	Connection to CM-IWN.x - VS
L+	Connection to CM-IWN.x - L+
V1+	Connection to CM-IWN.x - V1+
L-	Connection to CM-IWN.x - L-
V1-	Connection to CM-IWN.x - V1-
VL+	Measuring circuit / Measuring input
VL-	Connection to the system Measuring circuit / Measuring input
V⏚	Connection to earth

DIP switches of CM-IWN.1, 4, 5, 6

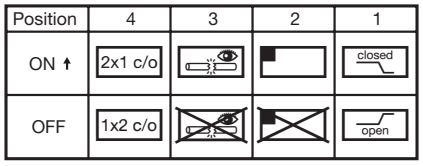

2CDC 252 050 F0009

	ON	OFF (default)
DIP switch 1 Operating principle of the output relays	Closed-circuit principle If closed-circuit principle is selected, the output relays de-energize in case a fault is occuring. In non-fault state the relays are energized.	Open-circuit principle If open-circuit principle is selected, the output relays energize in case a fault is occuring. In non-fault state the relays are de-energized.
DIP switch 2 Non-volatile fault storage	Fault storage activated (latching) If the fault storage function is activated, the output relays remain in tripped position until a reset is done either by the front-face button or by the remote reset connection S2-S3. This function is non-volatile.	Fault storage de-activated (non latching) If the fault storage function is de-activated, the output relays switch back to their original position as soon as the insulation fault no longer exists.
DIP switch 3 Interrupted wire detection	Interrupted wire detection activated With this configuration, the CM-IWN.1 monitoring relays the wires connected to ⏚ and KE for interruptions.	Interrupted wire detection de-activated With this configuration the interrupted wire detection is de-activated.
DIP switch 4 2 x 1 c/o, 1 x 2 c/o	2 x 1 c/o (SPDT) contact If operating principle 2 x 1 c/o contact is selected, the output relay R1 (11-12/14) reacts to threshold value R1 (final switch-off) and the output relay R2 (21-22/24) reacts to threshold value R2 (prewarning)	1 x 2 c/o (SPDT) contacts If operating principle 1 x 2 c/o contacts is selected, both output relays R1 (11-12/14) and R2 (21-22/24) react synchronously to threshold value R1. Settings of the threshold value R2 have no effect on the operation.

Insulation monitoring relays for unearthed supply systems
Technical data

Data at T_a = 25 °C and rated values, unless otherwise indicated

		CM-IWS.2	CM-IWS.1	CM-IWN.1, 4, 5, 6
Input circuit - Supply circuit		A1 - A2		
Rated control supply voltage U_s		24-240 V AC/DC		
Rated control supply voltage tolerance		-15...+10 %		
Typical current / power consumption	24 V DC	30 mA / 0.7 VA	35 mA / 0.9 VA	55 mA / 1.3 VA
	115 V AC	12 mA / 1.4 VA	17 mA / 2.0 VA	20 mA / 2.3 VA
	230 V AC	12 mA / 2.8 VA	14 mA / 3.2 VA	15 mA / 3.5 VA
Rated frequency f_s		DC or 15-400 Hz		
Frequency range AC		13.5-440 Hz		
Power failure buffering time	min.	20 ms		
Input circuit - Measuring circuit		L, ⏚	L+, L-, ⏚, KE	L+, L-, ⏚, KE
Monitoring function		insulation resistance monitoring of IT systems (IEC/EN 61557-8)		
Measuring principle		superimposed DC voltage	prognostic measuring principle with superimposed square wave signal	
Nominal voltage U_n of the distribution system to be monitored		0-400 V AC	0-250 V AC / 0-300 V DC	0-400 V AC / 0-600 V DC
Voltage range of the distribution system to be monitored		0-460 V AC (tolerance +15 %)	0-287.5 V AC / 0-345 V DC (tolerance +15 %)	0-460 V AC / 0-690 V DC (tolerance +15 %)
Rated frequency f_N of the distribution system to be monitored		50-60 Hz	DC or 15-400 Hz	DC or 15-400 Hz
System leakage capacitance C_e	max.	10 µF		CM-IWN.1: 20 µF CM-IWN.4: 500 µF CM-IWN.5 1000 µF CM-IWN.6: 2000 µF
Tolerance of the rated frequency f_N		45-65 Hz	13.5-440 Hz	13.5-440 Hz
Extraneous DC voltage U_{fg} (when connected to an AC system)	max.	none	290 V DC	460 V DC
Number of possible response / threshold values		1		2
Adjustment range of the specified response value R_{an} (threshold)	min.-max.	1-100 Ω		–
	min.-max. R1	–		1-100 kΩ
	min.-max. R2	–		2-200 kΩ (activated / de-activated by DIP-switch)
Adjustment resolution		1 kΩ		
	R1	1 kΩ		1 kΩ
	R2	–		2 kΩ
Tolerance of the adjusted threshold value / Relative percentage uncertainty A at -5...+45 °C, U_n = 0-115 %, U_s = 85-110 %, f_N, f_s, C_e = 1µF	at 1-10 kΩ R_F	±0.5 kΩ		–
	at 10-100 kΩ R_F	±6 %		–
	at 1-15 kΩ R_F	–		±1 kΩ*
	at 15-200 kΩ R_F	–		±8 %
Hysteresis related to the threshold value		25 %; min. 2 kΩ		
Internal impedance Z_i	at 50 Hz	135 kΩ	100 kΩ	155 kΩ
Internal DC resistance R_i		185 kΩ	115 kΩ	185 kΩ
Measuring voltage U_m		15 V	22 V	24 V
Tolerance of measuring voltage U_m		+10 %		
Measuring current I_m	max.	0.1 mA	0.3 mA	0.15 mA
Response time t_{an}				
pure AC system	0.5 x R_{an} and C_e = 1 µF	max. 10 s		
DC system or AC system with connected rectifiers		–	max. 15 s	
Repeat accuracy (constant parameters)		< 0.1 % of full scale		
Accuracy of R_a (measured value) within the rated control supply voltage tolerance		< 0.05 % of full scale		
Accuracy of R_a (measured value) within the operation temperature range	at 1-10 kΩ R_F	5 Ω / K		
	at 10-100 kΩ R_F	0.05 % / K		–
	at 10-200 kΩ R_F	–		0.05 % / K
Transient overvoltage protection (⏚ - terminal)		Z-diode	avalanche diode	
Input circuit - Control circuits		S1 - S2 - S3		
Control inputs - volt free	S1-S3	remote test		
	S2-S3	remote reset		
Maximum switching current in the control circuit		1 mA		
Maximum cable length to the control inputs		50 m - 100 pF/m [164 ft - 30.5 pF/ft]		
Minimum control pulse length		150 ms		
No-load voltage at the control input		≤ 24 V ± 5 %	≤ 24 V DC	
Indication of operational states				
Control supply voltage		LED U (green)		
Fault message		LED F (red)		
Relay status		LED R (yellow)		

*in combination with CM-IVN ±1.5 kΩ

Insulation monitoring relays for unearthed supply systems
Technical data

		CM-IWS.2	CM-IWS.1	CM-IWN.1, 4, 5, 6
Output circuits				
Kind of output		relay, 1 c/o (SPDT) contact		2 x 1 or 1 x 2 c/o (SPDT) contacts configurable
Operating principle		closed-circuit principle [1]		open- or closed circuit principle [1] configurable
Contact material		AgNi alloy, Cd free		
Rated voltage (VDE 0110, IEC 60947-1)		250 V AC / 300 V DC		
Min. switching voltage / Min. switching current		24 V / 10 mA		
Max. switching voltage / Max. switching current		see data sheet		
Rated operational current I_e (IEC/EN 60947-5-1)	AC-12 (resistive) at 230 V	4 A		
	AC-15 (inductive) at 230 V	3 A		
	DC-12 (resistive) at 24 V	4 A		
	DC-13 (inductive) at 24 V	2 A		
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)	B 300, pilot duty general purpose (250 V, 4 A, cos ϕ 0.75)		
	max. rated operational voltage	250 V AC		
	max. continuous thermal current at B 300	4 A		
	max. making/breaking apparent power at B 300	3600/360 VA		
Mechanical lifetime		30 x 10^6 switching cycles		
Electrical lifetime (AC-12, 230 V, 4 A)		0.1 x 10^6 switching cycles		
Max. fuse rating to achieve short-circuit protection	n/c contact	6 A fast-acting		
	n/o contact	10 A fast-acting		
Conventional thermal current I_{th} (IEC/EN 60947-1)		4 A		
General data				
Duty time		100 %		
Dimensions (W x H x D)				
	product dimension	22.5 x 85.6 x 103.7 mm (0.89 x 3.37 x 4.08 in)		45 x 85.6 x 103.7 mm (0.89 x 3.37 x 4.08 in)
	packaging dimenesion	97 x 109 x 30 mm (3.82 x 4.29 x 1.18 in)		97 x 109 x 30 mm (3.82 x 4.29 x 1.18 in)
Weight	net weight	CM-IWS.2P: 0.130 kg (0.287 lb) CM-IWS.2S: 0.141 kg (0.311 lb)	CM-IWS.1P: 0.137 kg (0.302 lb) CM-IWS.1S: 0.148 kg (0.326 lb)	CM-IWN.xP: 0.217 kg (0.478 lb) CM-IWN.xS: 0.241 kg (0.531 lb)
	gross weight	CM-IWS.2P: 0.155 kg (0.342 lb) CM-IWS.2S: 0.166 kg (0.366 lb)	CM-IWS.1P: 0.162 kg (0.357 lb) CM-IWS.1S: 0.173 kg (0.381 lb)	CM-IWN.xP: 0.246 kg (0.542 lb) CM-IWN.xS: 0.270 kg (0.595 lb)
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool		
Mounting position		any		
Minimum distance to other units	vertical	not necessary		
	horizontal	10 mm (0.39 in) at U_n > 240 V	not necessary	10 mm (0.39 in) at U_n > 400 V
Material of housing		UL 94 V-0		
Degree of protection	housing / terminal	IP50 / IP20		

Electrical connection		**Screw connection technology**	**Easy Connect Technology (Push-in)**
Wire size	fine-strand with(out) wire end ferrule	1 x 0.5-2.5 mm² (1 x 20-14 AWG) 2 x 0.5-1.5 mm² (2 x 20-16 AWG)	2 x 0.5-1.5 mm² (2 x 20-16 AWG)
	rigid	1 x 0.5-4 mm² (1 x 20-12 AWG) 2 x 0.5-2.5 mm² (2 x 20-14 AWG)	2 x 0.5-1.5 mm² (2 x 20-16 AWG)
Stripping length		8 mm (0.32 in)	
Tightening torque		0.6-0.8 Nm (5.31-7.08 lb.in)	

Environmental data		
Ambient temperature ranges	operation / storage / transport	-25...+60 °C/-40...+85 °C/-40...+85 °C
Climatic category	IEC/EN 60721-3-3	3K5 (no condensation, no ice formation)
Damp heat, cyclic	IEC/EN 60068-2-30	6 x 24 h cycle, 55 °C, 95 % RH
Vibration, sinusoidal	IEC/EN 60255-21-1	Class 2
Shock, half-sine	IEC/EN 60255-21-2	Class 2

[1] Closed-circuit principle: Output relay(s) de-energize(s) if a fault is occuring
Open-circuit principle: Output relay(s) energize(s) if a fault is occuring

Insulation monitoring relays for unearthed supply systems
Technical data

		CM-IWS.2	CM-IWS.1	CM-IWN.1, 4, 5, 6
Isolation data				
Rated impulse withstand voltage U_{imp} between all isolated circuits (IEC/EN 60947-1, IEC/EN 60664-1, VDE 0110-1)	supply / measuring circuit	6 kV		
	supply / output circuit	6 kV		
	measuring / output circuit	6 kV		
	output 1 / output circuit 2			4 kV
Pollution degree (IEC/EN 60664-1, VDE 0110-1)		3		
Overvoltage category (IEC/EN 60664-1, VDE 0110-1)		III		
Rated insulation voltage U_i (IEC/EN 60947-1, IEC/EN 60664-1, VDE 0110-1)	supply / measuring circuit	400 V	300 V	600 V
	supply / output circuit	300 V		
	supply / measuring circuit	400 V	300 V	600 V
	output 1 / output circuit 2	-	-	300 V
Basis isolation for rated control supply voltage (IEC/EN 60664-1, VDE 0110-1)	supply / measuring circuit	400 V AC / 300 V DC	250 V AC / 300 V DC	400 V AC / 600 V DC
	supply / output circuit	250 V AC / 300 V DC		
	measuring / output circuit	400 V AC / 300 V DC	250 V AC / 300 V DC	400 V AC / 600 V DC
	output 1 / output 2	250 V AC / 300 V DC		
Protective separation (IEC/EN 61140)	supply / output circuit	250 V AC / 250 V DC		
	supply / measuring circuit	250 V AC / 250 V DC		
	measuring / output circuit	250 V AC / 250 V DC		
Test voltage between all isolated circuits, routine test (IEC/EN 60255-5, IEC/EN 61010-1)	supply / output circuit	2.32 kV, 50 Hz, 2 s		
	supply / measuring circuit	2.32 kV, 50 Hz, 2 s		
	measuring / output circuit	2.2 kV, 50 Hz, 1 s		2.53 kV, 50 Hz, 1 s
Standards				
Product standard		IEC/EN 61557-1, IEC/EN 61557-8, IEC/EN 60255-1, EN 50178		
Other standards		EN 50178		
Low Voltage Directive		2006/95/EC		
EMC Directive		2004/108/EC		
RoHS Directive		2011/65/EC		
Electromagnetic compability				
Interference immunity to		IEC/EN 61000-6-1, IEC/EN 61000-6-2, IEC/EN 61326-2-4		
electrostatic discharge	IEC/EN 61000-4-2	Level 3, 6 kV / 8 kV		
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3, 10 V/m (1 GHz) / 3 V/m (2 GHz) / 1 V/m (2.7 GHz)		
electrical fast transient/burst	IEC/EN 61000-4-4	Level 3, 2 kV / 5 kHz		
surge	IEC/EN 61000-4-5	Level 3, installation class 3, supply circuit and measuring circuit 1 kV L-L, 2 kV L-earth		
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3, 10 V		
voltage dips, short interruptions and voltage variations	IEC/EN 61000-4-11	Class 3		
harmonics and interharmonics	IEC/EN 61000-4-13	Class 3		
Interference emissions		IEC/EN 61000-6-3, IEC/EN 61000-6-4		
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B		
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B		

Insulation monitoring relays for unearthed supply systems
Technical data CM-IVN

Input circuit - Measuring circuit		VL+, VL-, V⏚
Function		expansion of the nominal voltage range of the insulation monitoring relay CM-IWN to 690 V AC or 1000 V DC, max. length of connection cable 40 cm
Measuring principle		see CM-IWN
Nominal voltage U_n of the distribution system to be monitored		0-690 V AC / 0-1000 V DC
Voltage range of the distribution system to be monitored		0-793.5 V AC / 0-1150 V DC (tolerance +15 %)
Rated frequency f_N of the distribution system to be monitored		DC or 15-400 Hz
Tolerance of the rated frequency f_N		13.5-440 Hz
System leakage capacitance C_e	max.	identical to that of the insulation monitoring relay used
Extraneous DC voltage U_{fg} (when connected to an AC system)	max.	793.5 V DC
Tolerance of the adjusted threshold value / Relative percentage uncertainty A at -5...+ 45 °C, U_n = 0-115 %, U_s = 85-110 %, f_N, f_s, C_e = 1 µF	at 1-15 kΩ R_F	±1.5 kΩ
	at 15-200 kΩ R_F	±8 %
Internal impedance Z_i	at 50 Hz	195 kΩ
Internal DC resistance R_i		200 kΩ
Measuring voltage U_m		24 V
Tolerance of measuring voltage U_m		+10 %
Measuring current I_m		0.15 mA
General data		
MTBF		on request
Duty time		100 %
Dimensions (W x H x D)		45 x 78 x 100 mm (1.78 x 3.07 x 3.94 in)
Weight	gross weight	0.200 kg (0.441 lb)
	net weight	0.169 kg (0.373 lb)
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool
Mounting position		any
Minimum distance to other units	vertical	not necessary
	horizontal	10 mm (0.39 in) at U_n > 600 V
Degree of protection		IP50 / IP20
Electrical connection		
Wire size	fine-strand with(out) wire end ferrule	2 x 0.75-2.5 mm² (2 x 18-14 AWG)
	rigid	2 x 0.5-4 mm² (2 x 20-12 AWG)
Stripping length		7 mm (0.28 in)
Tightening torque		0.6-0.8 Nm (5.31-7.08 lb.in)
Max. length of connection cable to CM-IWN		40 cm
Environmental data		
Ambient temperature ranges	operation / storage / transport	-25...+60 °C / -40...+85 °C / -40...+85 °C
Climatic category	IEC/EN 60721-3-3	3K5 (no condensation, no ice formation)
Damp heat, cyclic	IEC/EN 60068-2-30	6 x 24 h cycle, 55 °C, 95 % RH
Vibration, sinusoidal	IEC/EN 60255-21-1	Class 2
Shock, half-sine	IEC/EN 60255-21-2	Class 2
Isolation data		
Rated impulse withstand voltage U_{imp} between all isolated circuits (IEC/EN 60947-1, IEC/EN 60664-1,VDE 0110-1)	input circuit / PE	8 kV
Pollution degree (IEC/EN 60664-1, VDE 0110-1)		3
Overvoltage category (IEC/EN 60664-1, VDE 0110-1)		III
Rated insulation voltage U_i (IEC/EN 60947-1, IEC/EN 60664-1,VDE 0110-1)	input circuit / PE	1000 V
Test voltage between all isolated circuits, routine test (IEC/EN 60255-5, IEC/EN 61010-1)	input circuit / PE	3.3 kV, 50 Hz, 1 s
Standards		
Product standard		IEC/EN 61557-1, IEC/EN 61557-8, IEC/EN 60255-1, EN 50178
Other standards		EN 50178
Low Voltage Directive		2006/95/EC
EMC Directive		2004/108/EC
RoHS Directive		2011/65/EC
Electromagnetic compability		
Interference immunity to		IEC/EN 61000-6-1, IEC/EN 61000-6-2, IEC/EN 61326-2-4
electrostatic discharge	IEC/EN 61000-4-2	Level 3, 6 kV / 8 kV
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3, 10 V/m (1 GHz) / 3 V/m (2 GHz) / 1 V/m (2.7 GHz)
electrical fast transient/burst	IEC/EN 61000-4-4	Level 3, 2 kV / 5 kHz
surge	IEC/EN 61000-4-5	Level 3, installation class 3, supply circuit and measuring circuit 1 kV L-L, 2 kV L-earth
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3, 10 V
voltage dips, short interruptions and voltage variations	IEC/EN 61000-4-11	Level 3
harmonics and interharmonics	IEC/EN 61000-4-13	Level 3
Interference emission		IEC/EN 61000-6-3, IEC/EN 61000-6-4
high-frequency radiated	IEC/CISPR 22, EN 50022	Class B
high-frequency conducted	IEC/CISPR 22, EN 50022	Class B

Insulation monitoring relays for unearthed supply systems
Notes

Motor load monitoring relays
Product picture



Motor load monitoring relays
Table of contents

Motor load monitoring relays

Fields of application 2/75
Ordering details 2/76
Technical information 2/77
Technical data 2/78

Motor load monitoring relays
Fields of application


The motor load monitor relay monitors the load states of single-phase and three-phase asynchronous motors. The evaluation of the phase angle between current and voltage allows a very precise monitoring of the load states. Compared with other conventional measuring principles (e.g. pressure transducers, current measurement), cos φ monitoring is a more precise and economical alternative. The motor is used as a sensor for its own load status.

Main applications


- Pump monitoring
  - Dry-running protection (underload)
  - Closed valves (overload)
  - Pipe break (overload)
- Heating, air-conditioning, ventilation
  - Monitoring of filter pollution
  - V-belt breakage (underload)
  - Closed shutters/valves (overload)
  - Air ventilating volume
- Agitating machines
  - High consistency within the tank (overload)
  - Pollution of the tank (overload)
- Transport/Conveyance
  - Congested conveyor belts (overload)
  - Jamming of belts (overload)
  - Material accumulation in spiral conveyors (overload)
  - Lifting platforms
- Machine installation
  - Wear of tools, e.g. worn saw blades in circular saws, etc. (overload)
  - Tool breakage (underload)
  - V-belt drives (breakage underload)

Pump control

Dry-running protection




Filter pollution




Ventilator monitoring


V-belt monitoring





Filter pollution




Wiring examples (for motor currents ≤ 20 A)

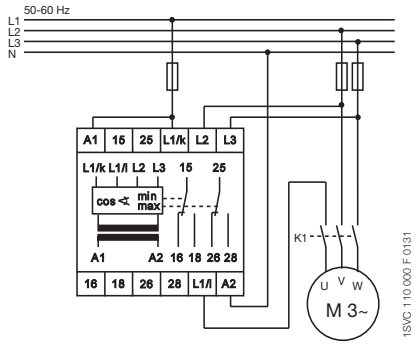


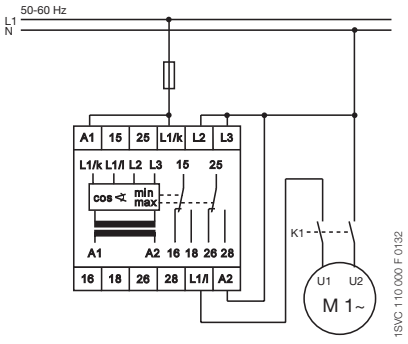


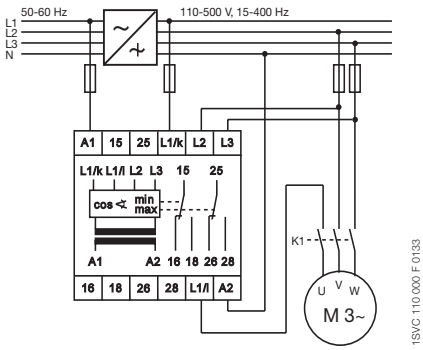

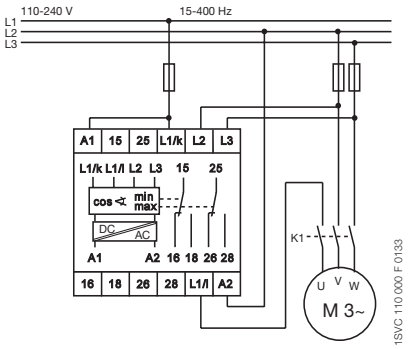

Wiring examples (for motor currents ≥ 20 A)

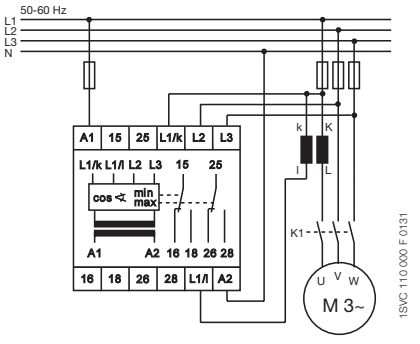

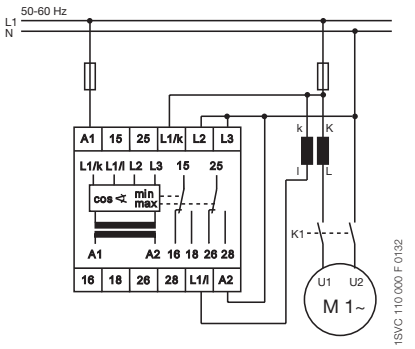

Motor load monitoring relays
Ordering details



CM-LWN

Description

The motor load monitor CM-LWN monitors the load of single-phase and three-phase asynchronous motors. The evaluation of the phase angle between current and voltage (cos φ monitoring) allows a very precise monitoring of the load status.


Ordering details

Rated control supply voltage = measuring voltage	Current range	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24-240 V AC/DC	0.5-5 A	CM-LWN	1SVR450335R0000		0.30 (0.66)
110-130 V AC			1SVR450330R0000		0.30 (0.66)
220-240 V AC			1SVR450331R0000		0.30 (0.66)
380-440 V AC			1SVR450332R0000		0.30 (0.66)
480-500 V AC			1SVR450334R0000		0.30 (0.66)
24-240 V AC/DC	2-20 A		1SVR450335R0100		0.30 (0.66)
110-130 V AC			1SVR450330R0100		0.30 (0.66)
220-240 V AC			1SVR450331R0100		0.30 (0.66)
380-440 V AC			1SVR450332R0100		0.30 (0.66)
480-500 V AC			1SVR450334R0100		0.30 (0.66)

Current transformers see „General technical data, Accessories, Current transformers“ on page 128.

Characteristics

- Pump monitoring
- Under- and overload monitoring cos φ in one unit
- Adjustable starting delay 0.3-30 s
- Direct measurement of currents up to 20 A
- Adjustable response time delay 0.2-2 s
- Single-phase or three-phase monitoring
- 2 x 1 c/o contact, closed-circuit principle
- 3 LEDs for status indication

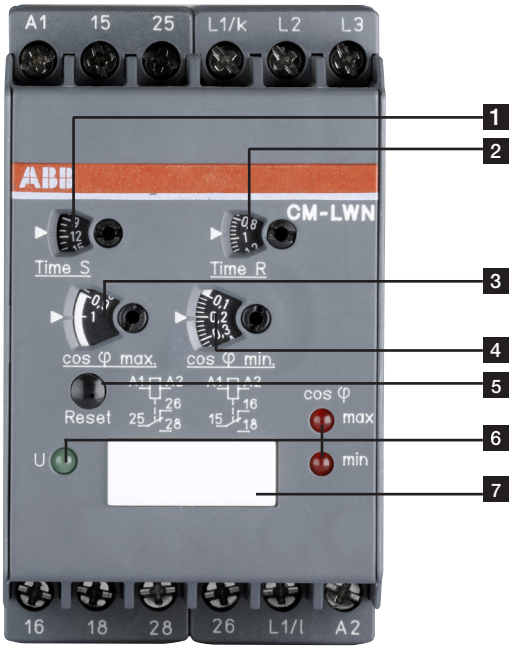


2CDC 253 010 F0013

1 **Starting delay „Time S“**
2 **Response delay „Time R“**
3 **Threshold for load limit cos φ_{max}**
4 **Threshold for load limit cos φ_{min}**
5 **Reset button**
6 **Indication of operational states**
U: green LED – control supply voltage
cos φ_{max}: red LED – cos φ_{max} exceeded
cos φ_{min}: red LED – below cos φ_{min}
7 **Marker label**


Motor load monitoring relays
Technical information

The CM-LWN module monitors the load status of inductive loads.
The primary application is the monitoring of single- or three-phase asynchronous motors (squirrel cage) under varying load conditions. The measuring principle is based on the evaluation of the phase shift (φ) between the voltage and the current in one phase.
The phase difference is nearly inversely proportional to the load. Therefore, cos φ, measured relatively from 0 to 1, measures the relationship of effective power to apparent power. A value towards 0 indicates low load and a value towards 1 indicates high load.
Threshold values can be set individually for cos φ_{max} and cos φ_{min} If the set threshold value is reached, a LED lights up and the relay is de-energized.
If cos φ returns to the acceptable limits (taking into account the hysteresis), the relay is reset to its original state and the LED flashes permanently to indicate the occurrence of the trip event. This message can be deleted using the reset button or by switching off the supply.
A time delay (Time S) of 0.3 to 30 s can be set for the starting phase of the motor. It is also possible to set a response delay time (Time R) of 0.2 to 2 s to suppress unwanted tripping due to unavoidable short load changes during normal operation.
To guarantee correct operation of the response delay (Time R), the adjusted value for cos φ_{max} has to be higher than the value for cos φ_{min} plus the hysteresis. Consequently, the overload and underload indication must not be active at the same time.
Due to the internal electrical isolation of the supply circuit and the measuring circuit, it is also possible to use the device in systems with different supply voltages.

Function diagram - CM-LWN

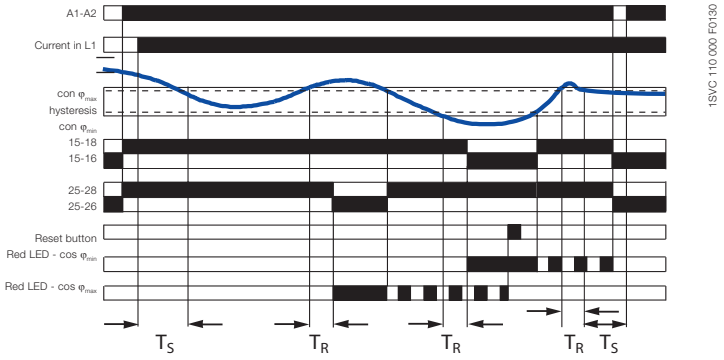

Connection diagram CM-LWN



A1-A2	Rated control supply voltage
L1/K-L1/L	Measuring current
L1/K-L2-L3	Measuring voltage
15-16/18	Output contacts - underload (cos φ_{min})
25-26/28	Output contacts - overload (cos φ_{max})
	closed-circuit principle

Motor load monitoring relays
Technical data

Type			CM-LWN
Input circuit - Supply circuit			**A1-A2**
Rated control supply voltage U_s - power consumption		A1-A2	24-240 V AC/DC approx. 8.4 VA/W
		A1-A2	110-130 V AC approx. 3.6 VA
		A1-A2	220-240 V AC approx. 3.6 VA
		A1-A2	380-440 V AC approx. 3.6 VA
		A1-A2	480-500 V AC approx. 3.6 VA
Rated control supply voltage U_s tolerance			-15 %...+10 %
Rated frequency		AC versions	50-60 Hz
		AC/DC versions	15-400 Hz or DC
Duty time			100 %
Measuring circuit			**L1/L-L1/K-L2-L3**
Monitoring function			Motor load monitoring by cos φ
Voltage range		L1/K-L2-L3	110-500 V AC single-phase or three-phase
Current range		L1/L-L1/K	0.5-5 A version 2-20 A version
Permissible overload of current input			25 A for 3 s 100 A for 3 s
Thresholds			$\cos \varphi_{min}$ and $\cos \varphi_{max}$ adjustable from 0 to 1
Hysteresis (related to phase angle φ in °)			4°
Frequency of measuring voltage			15-400 Hz
Response time			300 ms
Timing circuits			**indication of over- and undervoltage fault**
Start-up time (Time S)			0.3-30 s, adjustable
Response delay (Time R)			0.2-2 s, adjustable
Accuracy within the rated control supply voltage tolerance			$\Delta t \leq 0.5$ %
Accuracy within the temperature range			$\Delta t \leq 0.06$ % / °C
Indication of operational states			
Control supply voltage			U: green LED
below $\cos \varphi_{min}$			$\cos \varphi_{min}$: red LED
$\cos \varphi_{max}$ exceeded			$\cos \varphi_{max}$: red LED
Output circuits			**15-16/18, 25-26/28**
Kind of output			2 x 1 c/o contact
Operational principle			closed-circuit principle [1]
Contact material			AgCdO
Rated voltage (VDE 0110, IEC 664-1, IEC 947-1)			250 V
Max. switching voltage			400 V AC, 300 V DC
Rated operational current I_e (IEC/EN 60947-1)		AC-12 (resistive) 230 V	4 A
		AC-15 (inductive) 230 V	3 A
		DC-12 (resistive) 24 V	4 A
		DC-13 (inductive) 24 V	2 A
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)		B 300
	max. rated operational voltage		300 V AC
	max. continuous thermal current at B 300		5 A
	max. making/breaking apparent power at B 300		3600/360 VA
Mechanical lifetime			30 x 10^6 switching cycles
Electrical lifetime		at AC-12, 230 V, 4 A	0.1 x 10^6 switching cycles
Max. fuse rating to achieve short-circuit protection		n/c / n/o contact	10 A fast-acting / 10 A fast-acting
General data			
Dimensions (W x H x D)			45 mm x 78 mm x 100 mm (1.77 inch x 3.07 inch x 3.94 inch)
Mounting position			any
Degree of protection		housing / terminals	IP50 / IP20
Ambient temperature range		operation / storage	-25...+65 °C / -40...+85 °C
Mounting			DIN rail (IEC/EN 60715)
Electrical connection			
Wire size	fine-strand with wire end ferrule		2 x 2.5 mm² (2 x 14 AWG)
Standards			
Product standard			IEC 255-6, EN 60255-6
Low Voltage Directive			2006/95/EC
EMC Directive			2004/108/EC, 91/263/EEC, 92/31/EEC, 93/68/EEC, 93/67/EEC
Electromagnetic compatibility			**EN 61000-6-2, EN 61000-6-4**
electrostatic discharge		IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)
radiated, radio-frequency, electromagnetic field		IEC/EN 61000-4-3	Level 3 (10 V/m)
electrical fast transient / burst		IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)
surge		IEC/EN 61000-4-5	Level 4 (2 kV L-L)
conducted disturbances, induced by radio-frequency fields		IEC/EN 61000-4-6	Level 3 (10 V)
Operational reliability (IEC 68-2-6)			5 g
Mechanical resistance (IEC 68-2-6)			10 g
Environmental testing (IEC 68-2-30)			24 h cycle time, 55 °C, 93 % rel., 96 h
Isolation data			
Rating (HD 625.1 S1, VDE 0110, IEC 664-1, IEC 60255-5)			
Rated insulation voltage between supply- , measuring- and output circuit			250 V, 400 V, 500 V depending on the version
Rated impulse withstand voltage between all isolated circuits			4 kV / 1.2 - 50 µs
Test voltage between all isolated circuits			2,5 kV, 50 Hz, 1 min.
Pollution category			3
Overvoltage category			III

[1] Open-circuit principle: Output relay is energized if the measured value exceeds/drops below the adjusted threshold.
Closed-circuit principle: Output relay is de-energized if the measured value exceeds/drops below the adjusted threshold.

Motor control and protection
Product group picture



Motor control and protection
Table of contents

Motor control and protection

Benefits and advantages 2/81
Technical data 2/82

Motor control and protection
Benefits and advantages

UMC100.3 is a flexible, modular and expandable motor management system for constant-speed low-voltage range motors. It's most important tasks include motor protection, prevention of plant standstills and the reduction of down time. This is made possible by early information relating to possible motor problems which avoids unplanned plant standstills. Even if a motor trips, quick diagnosis of the cause of the fault serves to reduce downtime.

UMC100.3 combines in a very compact unit:

Motor protection
- Overload, underload
- Overvoltage, undervoltage
- Blocked rotor, low / high current
- Phase failure, imbalance, phase sequence
- Earth leakage
- Thermistor protection
- Limitation of starts per time
- One single version with integrated measuring system covers the rated motor current from 0.24 to 63 A

Motor control
- Integrated and easy to parametrize motor starter functions like direct, reverse, star-delta,...
- Additionally free programmable logic for application specific control functions
- Expansion modules DX111, DX122 for more I/Os
- Expansion modules VI150, VI155 for 3-phase voltage measuring
- Analog and temperature module AI111

Motor diagnostics
- Quick and comprehensive access to all relevant data via fieldbus and/or operator panel
- Current, thermal load
- Phase voltages
- Power factor
- Energy


Communication
- Communication-independent basic device
- Freely selectable fieldbus protocol with FieldBusPlug
- Profibus DP
- DeviceNet
- Modbus RTU
- Ethernet Modbus TCP
- Profinet

Typical application segments
- Oil & gas
- Cement
- Paper
- Mining
- Steel
- Chemical industry

Further information

UMC Catalog	2CDC 190 022 C0206
UMC Brochure	2CDC 135 011 B0203

Motor control and protection
Technical data



Basic device UMC100.3

Main power	
Voltage	max 1000 V AC
Frequency	45…65 Hz
Rated motor current	0.24…63 A, without accessories Higher currents with external transformer
Tripping classes	5E, 10E, 20E, 30E, 40E in accordance with EN/IEC 60947-4-1
Short-circuit protection	Separate fuse on network side
Control unit	
Supply voltage	24 V DC, 110-240 V AC/DC
Inputs	6 digital inputs 24 V DC 1 PTC input
Outputs	3 digital relay outputs 1 digital transistor output

Expansion modules

The UMC100.3 can be expanded with maximum 4 expanstion modules: One digital expansion module DX111 or DX122, one module VI150 or VI155 and 2 analog modules AI111.
Communication takes place via a simple two-wire line. The maximum distance allowed between the UMC100.3 and the expansion module is 3 m.



Digital expansion modules DX111 / DX122
Expands the UMC100.3 to include additional digital inputs and outputs and an analog output

Supply voltage	24 V DC
Inputs	DX111: 8 digital inputs 24 V DC DX122 8 digital inputs 110/230 V AC
Outputs	4 digital relay outputs 1 analog output, 0/4…20 mA, / 0…10 V configurable



Voltage modules VI150/VI155
Voltage modules for determining phase voltages, power factor (cos j), active power, apparent power, energy, harmonic content (THD)


VI150 for use in grounded networks
VI155 for use in grounded and ungrounded networks

Supply voltage	24 V DC
Voltage inputs	L1, L2, L3
Rated voltage range	150 … 690 V AC
Outputs	1 digital relay output

Analog module AI111
Expand the UMC100.3 with analog and temperature inputs

Supply voltage	24 V DC
Inputs	0-10 V, 0/4-20 mA PT100, PT1000, 2- or 3-wire connection KTY83, KTY84, NTC

Motor control and protection
Technical data



Ethernet communication interfaces
Mounted in the MCC cable chamber; connection of 1 to 4 motor controllers UMC100.3 via simple cables
MTQ22 for Modbus TCP
PNQ22 for Profinet IO




Fieldbus communication interfaces
Can be mounted direct on the UMC100.3 or separate in the cable chamber of the MCC.
Connection for standard fieldbus cables with 9-pole Sub-D (Profibus DP) or terminal blocks
PDP32 for Profibus DP
DNP31 for DeviceNet
MRP31 for Modbus RTU



CEM11 earth leakage sensors
Summation current transformer for connecting to a digital input
Mounting with bracket on DIN busbar or wall
Models

CEM11-FBP.20 80 – 1,700 mA	20 mm Ø
CEM11-FBP.35100 – 3,400 mA	35 mm Ø
CEM11-FBP.60120 – 6,800 mA	60 mm Ø
CEM11-FBP.120300 – 13,600 mA	120 mm Ø



Current transformer CT4L / CT5L
Only required for rated motor currents >63 A
Linear transformer, 3-phase with terminal block, designed for connecting leads Cu 2.5 mm²




UMC100-PAN control panel
Installation on the device or on the switching cabinet door
Graphics-enabled and backlit display, 3 LEDs for status indication
Freely configurable error messages
USB port for PC connection
Multilingual: German, English, French, Italian, Polish, Portuguese, Spanish, Russian

Motor control and protection
Notes

Thermistor motor protection relays
Product group picture

2

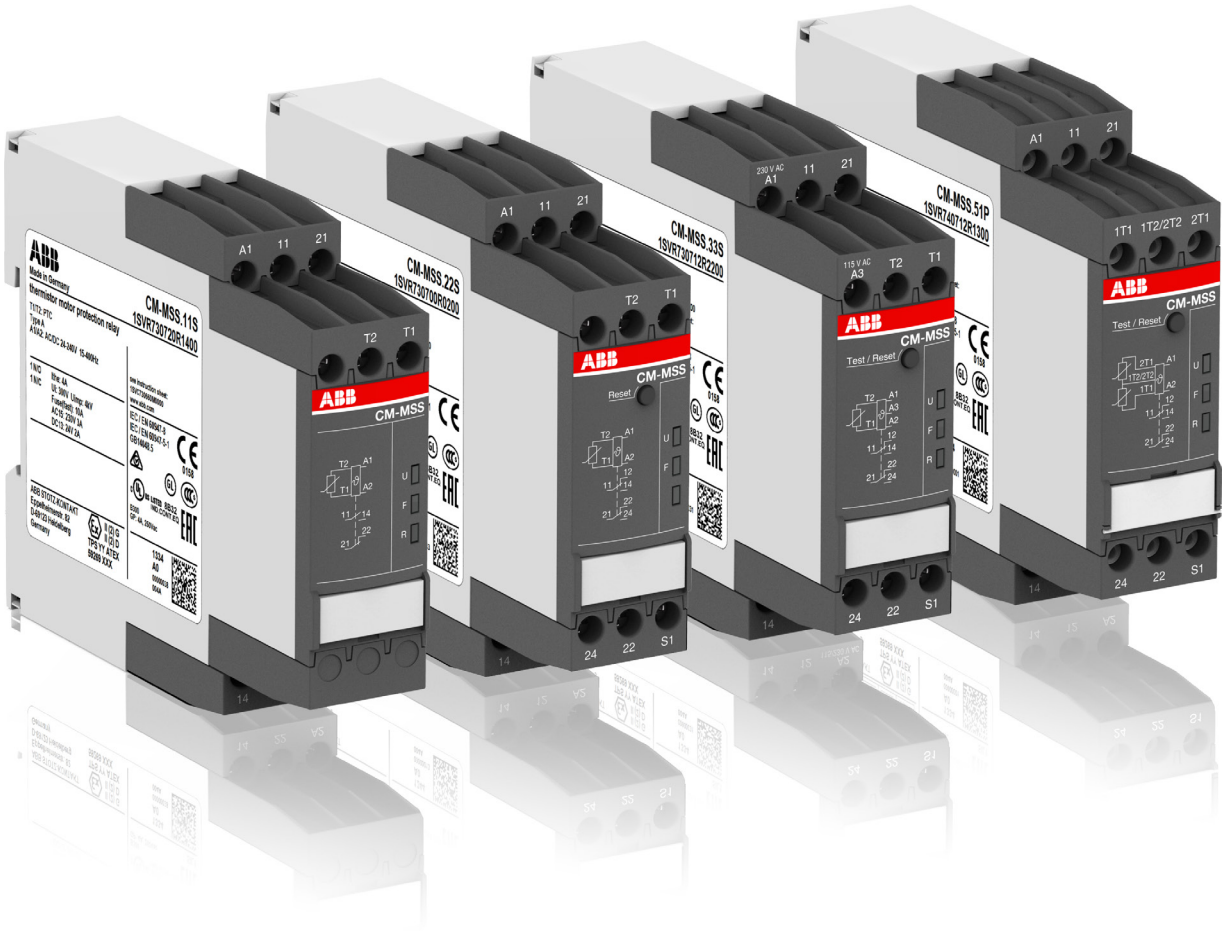

Thermistor motor protection relays
Table of contents

Thermistor motor protection relays

Benefits and advantages, Applications	2/87
Operating controls	2/88
Selection table CM-MSS range	2/89
Ordering details	2/90
Ordering details - PTC temperature sensors C011	2/91
Technical data	2/92
Connection diagrams	2/95
Circuit diagram	2/96

Thermistor motor protection relays
Benefits and advantages, Applications

The thermistor motor protection relays of the CM-MSx range protect motors with PTC sensors against high temperature. These sensors are incorporated in the motor windings thus measuring the motor heat directly.

Direct temperature measuring

Generally, motor damages caused by overload or overheating situations can be prevented in different ways. Compared to the indirect temperature measuring which monitors the motor current, the temperature inside the motor can be measured by direct temperature measuring.
This enables direct control and evaluation of the following operating conditions like:

- Heavy duty starting
- Increased switching frequency
- Single phase operation
- Phase unbalance
- High ambient temperature
- Insufficient cooling
- Breaking operation

Therefore the consequences from overheating like abrasion as well as electrical failures can be prevented.
The direct measuring principle is carried out by a combination of the thermistor motor protection relay and 3 PTC sensors which are installed directly in the motor by the manufacturer. Those 3 PTC sensors are placed directly at the thermal hotspots, the motor windings.

Monitoring the motor

The thermistor motor protection relay measures the resistance of the PTC sensors which reflects the internal motor temperature permanently.
If the temperature in the motor windings rises excessively and reaches the nominal response temperature (NRT), the thermistor motor protection relay detects this situation and the output relay switches off.
By doing so the motor contactor gets triggered and switches off the motor.

CM-MSS functionality video

Characteristics CM-MSS[1)]

- Different types of contacts available
  - 1 x 2 c/o (SPDT) contacts
  - 2 x 1 c/o (SPDT) contact
  - 1 n/o and 1 n/c contact
- 1 or 2 measuring circuits
- Different types of reset functions
  - Automatic
  - Manual
  - Remote
- Rated control supply voltages
  - 24 V AC/DC
  - 24-240 V AC/DC
  - 110-130 V AC, 220-240 V AC
- Approvals / Marks

Features [1)]


- Additional functions:
  - Dynamic interrupted wire detection
  - Short-circuit monitoring of the sensor circuit
  - Non-volatile fault storage
  - Single or sum evaluation
- Easy configuration via DIP switches
- LEDs to distinguish between different failure causes
- Screw connection technology or Easy Connect Technology available
- Test/Reset button available

[1)] Depending on device the characteristics vary, for detailled overview see „Selection table CM-MSx range“ on page 89.

Characteristics CM-MSE

- Auto reset
- Connection of several sensors (max. 6 sensors connected in series)
- Monitoring of bimetals
- 1 n/o contact
- Excellenct cost / performance ratio

Thermistor motor protection relays
Operating controls

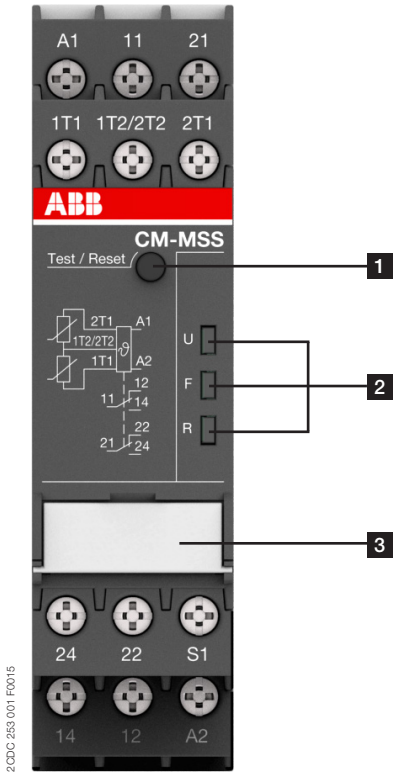

1 **Test / Reset button**

Reset - only possible if measured value < switch-on resistance

2 **Indication of operational states with LEDs**

U: green LED - Status indication of control supply voltage

Control supply voltage applied

F: red LED - Fault message

R: yellow LED - Status indication of the output relay

3 **DIP switches**

- Single evaluation 2 x 1 c/o (SPDT) contact
- Accumulative evaluation 1 x 2 c/o (SPDT) contacts
- Short-circuit detection de-activated
- Short-circuit detection activated
- Non-volatile fault storage activated
- Non-volatile fault storage de-activated

Thermistor motor protection relays
Selection table CM-MSx range

Order code	1SVR550805R9300	1SVR550800R9300	1SVR550801R9300	1SVR740720R1400	1SVR730720R1400	1SVR740700R0100	1SVR730700R0100	1SVR740700R2100	1SVR730700R2100	1SVR740722R1400	1SVR730722R1400	1SVR740700R0200	1SVR730700R0200	1SVR740700R2200	1SVR730700R2200	1SVR740712R1400	1SVR730712R1400	1SVR740712R0200	1SVR730712R0200	1SVR740712R2200	1SVR730712R2200	1SVR740712R1200	1SVR730712R1200	1SVR740712R1300	1SVR730712R1300
Type	CM-MSE	CM-MSE	CM-MSE	CM-MSS.11P	CM-MSS.11S	CM-MSS.12P	CM-MSS.12S	CM-MSS.13P	CM-MSS.13S	CM-MSS.21P	CM-MSS.21S	CM-MSS.22P	CM-MSS.22S	CM-MSS.23P	CM-MSS.23S	CM-MSS.31P	CM-MSS.31S	CM-MSS.32P	CM-MSS.32S	CM-MSS.33P	CM-MSS.33S	CM-MSS.41P	CM-MSS.41S	CM-MSS.51P	CM-MSS.51S
Characteristics																									
ATEX approval				■	■					■	■					■	■	■	■	■	■	■	■	■	■
Number of sensor circuits	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2
Single or sum evaluation																								■	■
Number of LEDs				3	3	2	2	2	2	3	3	2	2	2	2	3	3	3	3	3	3	3	3	3	3
Contacts																									
1 c/o (SPDT) contact						■	■	■	■																
2 c/o (SPDT) contacts												■	■	■	■			■	■	■	■	■	■		
1 n/o	■	■	■																						
1 n/c and 1 n/o				■	■					■	■					■	■								
2 x 1 c/o or 1 x 2 c/o contacts, configurable																								■	■
Reset																									
Manual												■	■	■	■	■	■	■	■	■	■	■	■	■	■
Remote												■	■	■	■	■	■	■	■	■	■	■	■	■	■
Auto	■	■	■	■	■	■	■	■	■	■	■	■ [1]	■ [1]	■ [1]	■ [1]	■ [1]	■ [1]	■ [1]	■ [1]	■ [1]	■ [1]	■ [1]	■ [1]	■ [2]	■ [2]
Test button																■	■	■	■	■	■	■	■	■	■
Functions																									
Short-circuit detection										■	■					■	■	■	■	■	■				
Short-circuit detection, configurable																						■	■	■	■
Dynamic interrupted wire detection				■	■					■	■					■	■	■	■	■	■	■	■	■	■
Non-volatile fault storage				■	■					■	■					■	■								
Non-volatile fault storage, configurable																						■	■	■	■
Rated control supply voltage U_S																									
24 V AC	■																								
110-130 V AC		■																							
220-240 V AC			■																						
24-240 V AC/DC				■	■					■	■					■	■					■	■	■	■
24 V AC/DC						■	■					■	■					■	■						
110-130 V AC, 220-240 V AC								■	■					■	■					■	■				
Connection type																									
Push-in terminals				■		■		■		■		■		■		■		■		■		■		■	
Double-chamber cage connection terminals					■		■		■		■		■		■		■		■		■		■		■

[1] For automatic reset, connect terminals S1 to T2.
[2] For automatic reset, connect terminals S1 to 1T2/2T2.

Thermistor motor protection relays
Ordering details

Description

The thermistor motor protection relays CM-MSx are used to control motors equipped with PTC temperature sensors. The PTC temperature sensors are incorporated in the motor windings to measure the motor heating. This enables direct control and evaluation of various operating conditions. Depending on the products also ATEX approvals for use in hazardous areas are availabe.
ABB also offers PTC temperature sensors C011 (according to DIN 44081) which are suitable for embedding in motor windings.



CM-MSS.51S


Ordering details CM-MSx

Rated control supply voltage	Output	Function	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24 V AC	1 n/o	Autoreset	CM-MSE	1SVR550805R9300		0.11 (0.24)
110-130 V AC			CM-MSE	1SVR550800R9300		0.11 (0.24)
220-240 V AC			CM-MSE	1SVR550801R9300		0.11 (0.24)
24-240 V AC/DC	1 n/c, 1 n/o	Autoreset, dynamic interrupted wire detection, non-volatile fault storage, ATEX approval	CM-MSS.11P	1SVR740720R1400		0.119 (0.263)
			CM-MSS.11S	1SVR730720R1400		0.127 (0.280)
24 V AC/DC	1 c/o (SPDT)	Autoreset	CM-MSS.12P	1SVR740700R0100		0.105 (0.231)
			CM-MSS.12S	1SVR730700R0100		0.113 (0.249)
110-130 V AC, 220-240 V AC	1 c/o (SPDT)	Autoreset	CM-MSS.13P	1SVR740700R2100		0.147 (0.324)
			CM-MSS.13S	1SVR730700R2100		0.155 (0.342)
24-240 V AC/DC	1 n/c, 1 n/o	Autoreset, dynamic interrupted wire detection, non-volatile fault storage, short-circuit detection, ATEX approval	CM-MSS.21P	1SVR740722R1400		0.118 (0.260)
			CM-MSS.21S	1SVR730722R1400		0.126 (0.278)
24 V AC/DC	2 c/o (SPDT)	Auto, manual or remote reset	CM-MSS.22P	1SVR740700R0200		0.121 (0.267)
			CM-MSS.22S	1SVR730700R0200		0.132 (0.291)
110-130 V AC, 220-240 V AC	2 c/o (SPDT)	Auto, manual or remote reset	CM-MSS.23P	1SVR740700R2200		0.163 (0.359)
			CM-MSS.23S	1SVR730700R2200		0.174 (0.384)
24-240 V AC/DC	1 n/c, 1 n/o	Auto, manual or remote reset, dynamic interrupted wire detection, non-volatile fault storage, short-circuit detection, ATEX approval	CM-MSS.31P	1SVR740712R1400		0.120 (0.265)
			CM-MSS.31S	1SVR730712R1400		0.128 (0.282)
24 V AC/DC	2 c/o (SPDT)	Auto, manual or remote reset, dynamic interrupted wire detection, short-circuit detection, ATEX approval	CM-MSS.32P	1SVR740712R0200		0.120 (0.265)
			CM-MSS.32S	1SVR730712R0200		0.130 (0.287)
110-130 V AC, 220-240 V AC	2 c/o (SPDT)		CM-MSS.33P	1SVR740712R2200		0.162 (0.357)
			CM-MSS.33S	1SVR730712R2200		0.172 (0.379)
24-240 V AC/DC	2 c/o (SPDT)	Auto, manual or remote reset, dynamic interrupted wire detection, non-volatile fault storage, short-circuit detection, ATEX approval	CM-MSS.41P	1SVR740712R1200		0.130 (0.287)
			CM-MSS.41S	1SVR730712R1200		0.141 (0.311)
	2x1 c/o or, 1x2 c/o	Auto, manual or remote reset, dynamic interrupted wire detection, non-volatile fault storage, short-circuit detection, accumulative evaluation, ATEX approval	CM-MSS.51P	1SVR740712R1300		0.135 (0.298)
			CM-MSS.51S	1SVR730712R1300		0.145 (0.320)

Thermistor motor protection relays
Ordering details - PTC temperature sensors C011



Temperature sensor characteristics

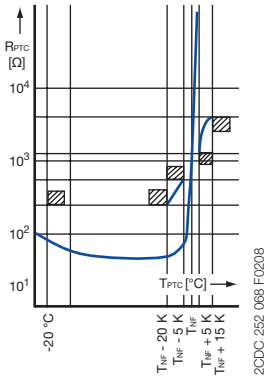

[1] Temperature sensor C011, standard version acc. to DIN 44081
[2] Triple temperature sensor C011-3

Description

The PTC temperature sensors (temperature-dependent with positive temperature coefficient) are selected by the manufacturer of the motor depending on:
- the motor insulation class according to IEC/EN 60034-11,
- the special characteristics of the motor, such as the conductor cross-section of the windings, the permissible overload factor etc.
- special conditions prescribed by the user, such as the permissible ambient temperature, risks resulting from locked rotor, extent of permitted overload etc.

One temperature sensor must be embedded in each phase winding. For instance, in case of three-phase squirrel cage motors, three sensors are embedded in the stator windings. For pole-changing motors with one winding (Dahlander connection), 3 sensors are also sufficient. Pole-changing motors with two windings, however, require The sensors are suitable for embedding in motor windings with rated operating voltages of up to 600 V AC. Conductor length: 500 mm per sensor. A 14 V varistor can be connected in parallel to protect the sensors from overvoltage. Due to their characteristics, the thermistor motor protection relays can also be used with PTC temperature sensors of other manufacturers which comply with DIN 44 081 and DIN 44 082 6 sensors.

If an additional warning is required before the motor is switched off, separate sensors for a correspondingly lower temperature must be embedded in the winding. They have to be connected to a second control unit.

Ordering details

Rated response temperature T_{NF}	Color coding	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
70 °C	white-brown	C011-70[1]	GHC0110003R0001		0.02 (0.044)
80 °C	white-white	C011-80[1]	GHC0110003R0002		0.02 (0.044)
90 °C	green-green	C011-90[1]	GHC0110003R0003		0.02 (0.044)
100 °C	red-red	C011-100[1]	GHC0110003R0004		0.02 (0.044)
110 °C	brown-brown	C011-110[1]	GHC0110003R0005		0.02 (0.044)
120 °C	gray-gray	C011-120[1]	GHC0110003R0006		0.02 (0.044)
130 °C	blue-blue	C011-130[1]	GHC0110003R0007		0.02 (0.044)
140 °C	white-blue	C011-140[1]	GHC0110003R0011		0.02 (0.044)
150 °C	black-black	C011-150[1]	GHC0110003R0008		0.02 (0.044)
160 °C	blue-red	C011-160[1]	GHC0110003R0009		0.02 (0.044)
170 °C	white-green	C011-170[1]	GHC0110003R0010		0.02 (0.044)
150 °C	black-black	C011-3-150[2]	GHC0110033R0008		0.05 (0.11)

Technical data

Characteristic data	Sensor type C011
Cold-state resistance	50 -100 Ω at 25 °C
Warm-state resistance ± 5 up to 6 K of rated response temperature T_{NF}	10 000 Ω
Thermal time constant, sensor open [1]	< 5 s
Permitted ambient temperature	+180 °C

Rated response temperature ± tolerance $T_{NF} \pm \Delta T_{NF}$	PTC resistance R from -20 °C to T_{NF} - 20 K	PTC resistance R2) at PTC temperatures of: $T_{NF} - \Delta T_{NF}$ (UPTC ≤ 2.5 V)	$T_{NF} + \Delta T_{NF}$ (UPTC ≤ 2.5 V)	T_{NF} + 15 K (UPTC ≤ 7.5 V)
70 ±5 °C	≤ 100 Ω	≤ 570 Ω	≥ 570 Ω	-
80 ±5 °C				
90 ±5 °C		≤ 550 Ω	≥ 1330 Ω	≥ 4000 Ω
100 ±5 °C				
110 ±5 °C				
120 ±5 °C				
130 ±5 °C				
140 ±5 °C				
150 ±5 °C				
160 ±5 °C				
170 ±7 °C		≤ 570 Ω	≥ 570 Ω	-

[1] Not embedded in windings.
[2] For triple temperature sensor take values x 3.

Thermistor motor protection relays
Technical data

Technical data

Data at T_a = 25 °C and rated values, unless otherwise indicated

Supply circuit - Input circuit		CM-MSS.x1	CM-MSS.x2	CM-MSS.x3
Rated control supply voltage U_s	A1-A2	24-240 V AC/DC	24 V AC/DC	220-240 V AC
	A2-A3	-	-	110-130 V AC
Rated control supply voltage U_s tolerance		-15...+10 %		
Rated frequency		15-400 Hz	50-60 Hz	
Electrical insulation between supply circuit and measuring circuit		yes	no	yes
Power failure buffering time		20 ms		
Supply circuit - Measuring circuit / Sensor circuit				
Number of circuits		1 (CM-MSS.51: 2)		
Sensor type		PTC type A (DIN/EN 44081, DIN/EN 44082)		
Max. total resistance of sensors connected in series, cold state		< 750 Ω		
Overtemperature monitoring	switch-off resistance (relay de-energizes)	2.83 kΩ ± 1% (CM-MSS.12 /.13 /.22 /.23: 2.7 kΩ ± 5%)		
	switch-on resistance (relay energizes)	1.1 kΩ ± 1% (CM-MSS.12 /.13 /.22 /.23: 1.2 kΩ ± 5%)		
Maximum voltage in sensor circuit	1.33 kΩ	2.5 V		
	4 kΩ	3.7 V		
	∞ kΩ	5.5 V		
Maximum current in sensor circuit		3.7 mA		
Maximum sensor cable length		2 x 100 m at 0.75 mm², 2 x 400 m at 2.5 mm²		
Accuracy within the rated control supply voltage tolerance		0.50 % (CM-MSS.12 /.13 /.22 /.23: 5 %)		
Accuracy within the temperature range		0.01 %/K (CM-MSS.12 /.13 /.22 /.23: 0.5 %/K)		
Repeat accuracy (constant parameters)		on request		
Reaction time of the safety function		< 100 ms		
Hardware fault tolerance (HFT)		0		
Control circuit				
Control function		see „Selection table CM-MSx range“ on page 89		
Maximum no-load voltage		5.5 V		
Max. current		0.6 mA (CM-MSS.12 /.13 /.22 /.23: 1.2 mA)		
Maximum cable length		2 x 100 m at 0.75 mm², 2 x 400 m at 2.5 mm²		
Indication of operational states				
Control supply voltage	U	LED green		
Relay status	R	LED yellow		
Fault message	F	LED red		
Output circuit				
Kind of output		see „Selection table CM-MSx range“ on page 89		
Operating principle		closed-circuit principle		
Contact material		AgNi alloy, Cd free		
Rated operational voltage U_e (IEC/EN 60947-1)		250 V AC		
Minimum switching voltage / Minimum switching current		24 V / 10 mA		
Maximum switching voltage / Maximum switching current		see data sheet		
Rated operating current I_e (IEC/EN 60947-5-1)	AC-12 (resistive) at 230 V	4 A		
	AC-15 (inductive) at 230 V	3 A		
	DC-12 (resistive) at 24 V	4 A		
	DC-13 (inductive) at 24 V	2 A		
AC Rating (UL 508)	utilization category (Control Circuit Rating Code)	B 300		
	maximum rated operational voltage	250 V AC		
	maximum continuous thermal current at B 300	4 A		
	maximum making/breaking apparent power at B 300	3600/360 VA		
Mechanical lifetime		30 x 10^6 switching cycles		
Electrical lifetime	at AC12, 230 V AC, 4 A	0.1 x 10^6 switching cycles		
Maximum fuse rating to achieve short-circuit protection	n/c contact	10 A fast-acting (CM-MSS.12, CM-MSS.13, CM-MSS.51: 6 A)		
	n/o contact	10 A fast-acting		

Thermistor motor protection relays
Technical data - CM-MSS

General data			
MTBF		on request	
Duty time		100 %	
Dimensions (W x H x D)	product dimensions	22.5 x 85.6 x 103.7 mm (0.89 x 3.37 x 4.08 in)	
	packaging dimensions	97 x 109 x 30 mm (3.82 x 4.29 x 1.18 in)	
Weight		see „Ordering details“ on page 90	
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool	
Mounting position		any	
Minimum distance to other units	vertical	10 mm (0.394 in) if switching current > 2 A	
	horizontal	10 mm (0.394 in) if switching current > 2 A	
Material of housing		UL 94 V-0	
Degree of protection	housing	IP50	
	terminals	IP20	
Electrical connection		**Screw connection technology**	**Easy Connect Technology (push-in)**
Wire size	fine-strand with(out) wire end ferrule	1 x 0.5-2.5 mm² (1 x 20-14 AWG) 2 x 0.5-1.5 mm² (2 x 20-16 AWG)	2 x 0.5-1.5 mm² (2 x 20-16 AWG)
	rigid	1 x 0.5-4 mm² (1 x 20-12 AWG) 2 x 0.5-2.5 mm2 (2 x 20-14 AWG)	2 x 0.5-1.5 mm² (2 x 20-16 AWG)
Stripping length		8 mm (0.32 in)	
Tightening torque		0.6-0.8 Nm (5.31-7.08 lb.in)	-
Wire end ferrule		according to DIN 46228-1-A, DIN 46228-4-E	-
Environmental data			
Ambient temperature ranges	operation	-25 °C...+60 °C	
	storage	-40 °C...+85 °C	
Damp heat, cyclic (IEC/EN 60068-2-30)		6 x 24 h cycle, 55 °C, 95 % RH	
Climatic category (IEC/EN 60721-3-3)		3K5 (no condensation, no ice formation)	
Vibration, sinusoidal (IEC/EN 60255-21-1)		Class 2	
Shock (IEC/EN 60255-21-2)		Class 2	
Isolation data			
Rated insulation voltage U_i (IEC/EN 60947-1, IEC/EN 60664-1)	Supply circuit / Measuring circuit[1)]	300 V AC (CM-MSS.x2: n/a)	
	Supply circuit / Output circuits	300 V AC	
	Measuring circuit[1)] / Output circuits	300 V AC	
	Output circuit 1 / Output circuit 2	300 V AC	
Rated impulse withstand voltage U_{imp} (IEC/EN 60947-1, IEC/EN 60664-1)	Supply circuit / Measuring circuit[1)]	4 kV / 6 kV (CM-MSS.x2: n/a)	
	Supply circuit / Output circuits	4 kV / 6 kV	
	Measuring circuit[1)] / Output circuits	4 kV / 6 kV	
	Output circuit 1 / Output circuit 2	4 kV	
Basic insulation (IEC/EN 60664-1)	Supply circuit / Measuring circuit[1)]	600 V AC (CM-MSS.x2: n/a)	
	Supply circuit / Output circuits	600 V AC	
	Measuring circuit[1)] / Output circuits	600 V AC	
	Output circuit 1 / Output circuit 2	300 V AC	
Test voltage, routine test (IEC/EN 60255-27, IEC/EN 61010-1)	Supply circuit / Measuring circuit[1)]	2.5 kV, 50 Hz, 1 min. (CM-MSS.x2: n/a)	
	Supply circuit / Output circuits	2.5 kV, 50 Hz, 1 min.	
	Measuring circuit[1)] / Output circuits	2.5 kV, 50 Hz, 1 min.	
Test voltage, type test (IEC/EN 60255-27)	Supply circuit / Measuring circuit[1)]	6 kV / 1.2 - 50 µs (CM-MSS.x2: n/a)	
	Supply circuit / Output circuits	6 kV / 1.2 - 50 µs	
	Measuring circuit[1)] / Output circuits	6 kV / 1.2 - 50 µs	
	Output circuit 1 / Output circuit 2	6 kV / 1.2 - 50 µs	
Protective separation (IEC/EN 61140, IEC/EN 50178)	Supply circuit / Measuring circuit[1)]	yes, up to 300 V	
	Supply circuit / Output circuits	yes (CM-MSS.x2: n/a)	
	Measuring circuit[1)] / Output circuits	yes	
	Output circuit 1 / Output circuit 2	no	
Pollution degree (IEC/EN 60664-1)		3	
Overvoltage category (IEC/EN 60664-1)		III	

[1)] Potential of measuring circuit = Potential of control circuit

Thermistor motor protection relays
Technical data - CM-MSS

Standards		
Product standard		IEC/EN 60255-1; IEC/EN 60947-8
Low Voltage Directive		2006/95/EC
EMC directive		2004/108/EC
ATEX directive		94/9/EC (only ATEX variants „Selection table CM-MSx range“ on page 89)
RoHS directive		2011/65/EC
Electromagnetic compatibility		
Interference immunity to		IEC/EN 61000-6-1, IEC/EN 61000-6-2
electrostatic discharge	IEC/EN 61000-4-2	Level 3, 6 kV contact discharge, 8 kV air discharge
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3, 10 V/m (1 GHz), 3 V/m (2 GHz), 1 V/m (2.7 GHz)
electrical fast transient / burst	IEC/EN 61000-4-4	Level 3, 2 kV / 5 kHz
surge	IEC/EN 61000-4-5	Level 3, Installation class 3, supply circuit and measuring circuit 1 kV L-L, 2 kV L-N
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3, 0.15-80 MHz, 10 V, 80 % AM (1kHz)
voltage dips, short interruptions and voltage variations	IEC/EN 61000-4-11	Class 3
harmonics and interharmonics	IEC/EN 61000-4-13	Class 3
Additional interference immunity according to product standard EN 60255-1 (reference on EN 60255-26_2011)		
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	10 V/m (80 MHz - 3 GHz)
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	10 V at stated frequencies
damped oscillatory waves	IEC/EN 61000-4-18	Signal lines, symmetric coupling: 1 kV peak voltage Power supply, asymmetric coupling: 2.5 kV peak voltage
Interference emissions		IEC/EN 61000-6-3, IEC/EN 61000-6-4
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B
high-frequency radiated	Germanischer Lloyd	increased requirements in the emergency call frequency band

Thermistor motor protection relays
Technical data - CM-MSE

Technical data


Data at T_a = 25 °C and rated values, unless otherwise indicated

Supply circuit - Input circuit			CM-MSE
Rated control supply voltage U_s power consumption		1SVR550805R9300	24 V AC approx. 1.5 A
		1SVR550800R9300	110-130 V AC approx. 1.5 A
		1SVR550801R9300	220-240 V AC approx. 1.5 A
Rated control supply voltage U_s tolerance			-15...+10 %
Rated frequency			50-60 Hz
Measuring circuit			
Monitoring function		T1-T2	temperature monitoring by means of PTC sensors
Number of sensor circuits			1
Sensor circuit			
Temperature threshold (relay de-energizes)			2.7-3.7 kΩ
Temperature hysteresis (relay energizes)			1.7-2.3 kΩ
Short-circuit threshold (relay de-energizes)			<18 Ω
Short-circuit hysteresis (relay energizes)			>45 Ω
Maximum total resistance of sensors connected in series (cold state)			≤1.5 kΩ
Maximum sensor cable length for short-circuit detection			2 x 100 m at 0.75 mm², 2 x 400 m at 2.5 mm²
Response time			<100 ms
Output circuit			
Kind of output		13-14	1 n/o contact
Operational principle			closed-circuit principle (output relay de-energizes if the measured value exceeds/drops below the adjusted threshold)
Contact material			AgCdO
Rated voltage		VDE 0110, IEC 664-1, IEC 60947-1	250 V
Maximum switching voltage			250 V
Rated operating current I_e (IEC/EN 60947-5-1)		AC-12 (resistive) at 230 V	4 A
		AC-15 (inductive) at 230 V	3 A
		DC-12 (resistive) at 24 V	4 A
		DC-13 (inductive) at 24 V	2 A
AC Rating (UL 508)		utilization category (Control Circuit Rating Code)	B 300
		maximum rated operational voltage	300 V AC
		maximum continuous thermal current at B 300	5 A
		maximum making/breaking apparent power at B 300	3600/360 VA
Mechanical lifetime			30 x 10^6 switching cycles
Electrical lifetime		at AC12, 230 V AC, 4 A	0.1 x 10^6 switching cycles
Maximum fuse rating to achieve short-circuit protection		n/c contact	10 A fast-acting
		n/o contact	10 A fast-acting
General data			
Dimensions (W x H x D)			22.5 x 78 x 78.5 mm (0.89 x 3.07 x 3.09 in)
Duty time			100 %
Weight			approx. 0.11 kg (0.24 lb)
Mounting position			any
Degree of protection		housing / terminals	IP50 / IP20
Ambient temperature range		operation	-20...+60 °C
		storage	-40...+85 °C
Mounting			DIN rail (IEC/EN 60715)
Electrical connection			
Wire size		fine strand with wire end ferrule	2 x 1.5 mm² (2 x 16 AWG)
		fine strand without wire end ferrule	2 x 0.75-1.5 mm² (2 x 18-16 AWG)
		rigid	2 x 1-1.5 mm² (2 x 18-16 AWG)
Stripping length			2 x 0.75-1.5 mm² (2 x 18-16 AWG)
Tightening torque			0.6-0.8 Nm (5.31-7.08 lb.in)
Standards			
Product standard			IEC 255-6, EN 60255-6
Low Voltage Directive			2006/95/EC
EMC Directive			2004/108/EC, 91/263/EEC, 92/31/EEC, 93/68/EEC, 93/67/EEC
Electromagnetic compatibility			
electrostatic discharge		IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)
radiated, radio-frequency, electromagnetic field		IEC/EN 61000-4-3	Level 3 (10 V/m)
electrical fast transient /burst		IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)
surge		IEC/EN 61000-4-5	Level 3/4 (1/2 kV)
conducted disturbances, induced by radio-frequency fields		IEC/EN 61000-4-6	Level 3 (10 V)
Operational reliability (IEC 68-2-6)			6 g
Resistance to vibration (IEC 68-2-6)			10 g
Environmental testing (IEC 68-2-30)			24 h cycle time, 55 °C, 93 % rel., 96 h
Electromagnetic compatibility			
Rated voltage between supply, measuring and output circuit			250 V
Rated impulse withstand voltage between all isolated circuits			4 kV / 1.2 - 50 µs
Test voltage between all isolated circuits			2.5 kV, 50 Hz, 1 min.
Pollution degree			3
Overvoltage category			III

Thermistor motor protection relays
Notes


Thermistor motor protection relays
Connection diagrams

CM-MSS.11, CM-MSS.21




A1 – A2	Control supply voltage
13 – 14	n/o contact
21 – 22	n/c contact
T1 – T2	Measuring circuit

CM-MSS.12




A1 – A2	Control supply voltage
11 – 12/14	c/o contact
T1 – T2	Measuring circuit

CM-MSS.13




A1 – A2	Control supply voltage 220-240 V AC
A2 – A3	Control supply voltage 110-130 V AC
11 – 12/14	c/o contact
T1 – T2	Measuring circuit

CM-MSS.31




A1 – A2	Control supply voltage
13 – 14	n/o contact
21 – 22	n/c contact
S1 – T2 (jumpered)	Automatic reset
T1 – T2	Measuring circuit

CM-MSS.22, CM-MSS.32, CM-MSS.41




A1 – A2	Control supply voltage 24 V AC/DC
11 – 12/14	1st c/o (SPDT) contact
21 – 22/24	2nd c/o (SPDT) contact
S1 – T2 (jumpered)	Automatic reset
T1 – T2	Measuring circuit

CM-MSS.23, CM-MSS.33




A1 – A2	Control supply voltage 220-240 V AC
A2 – A3	Control supply voltage 110-130 V AC
11 – 12/14	1st c/o (SPDT) contact
21 – 22/24	2nd c/o (SPDT) contact
S1 – T2 (jumpered)	Automatic reset
T1 – T2	Measuring circuit

CM-MSS.51



A1 – A2	Control supply voltage 220-240 V AC
11 – 12/14	1st c/o (SPDT) contact
21 – 22/24	2nd c/o (SPDT) contact
S1 – 1T2/2T2 (jumpered)	Automatic reset
1T1 – 1T2/2T2	Measuring circuit 1
2T1 – 1T2/2T2	Measuring circuit 2


CM-MSE




A1 – A2	Control supply voltage 24 V AC
T1-T2	Sensor circuit
13-14	Output contact - Closed circuit principle

Thermistor motor protection relays
Circuit diagram


CM-MSS.11, CM-MSS.21

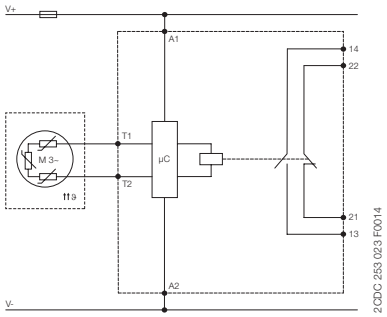


CM-MSS.12

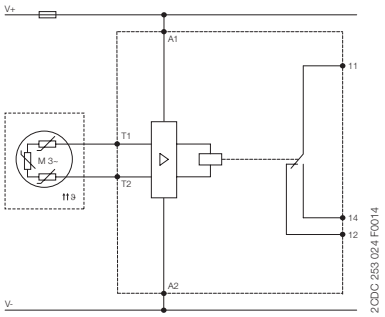


CM-MSS.13

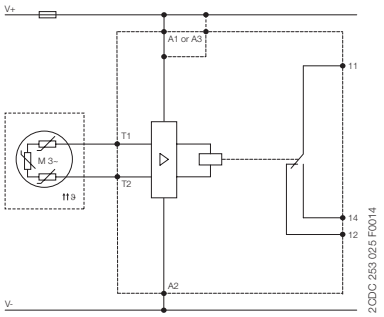


CM-MSS.22

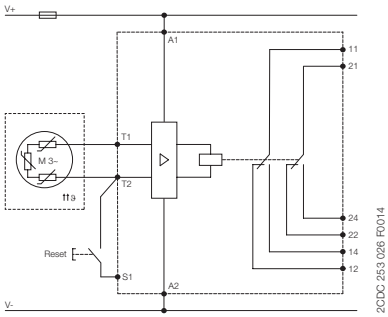


CM-MSS.23

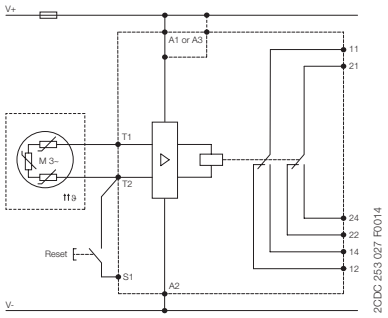


CM-MSS.31

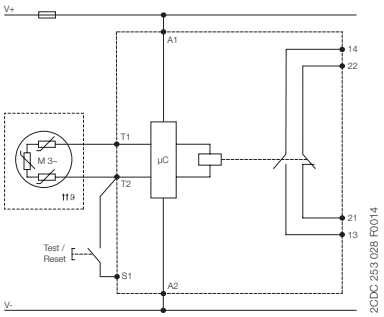


CM-MSS.32, CM-MSS.41

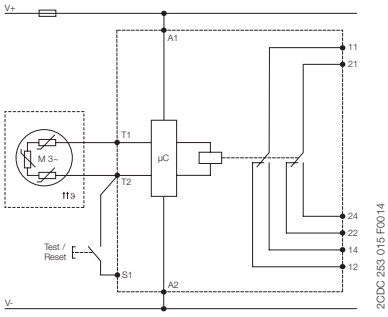


CM-MSS.33

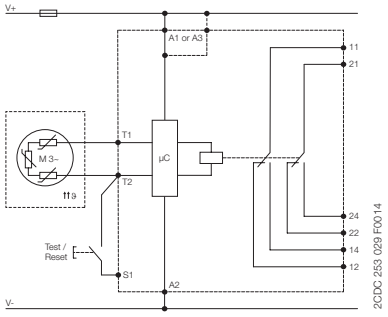

CM-MSS.51

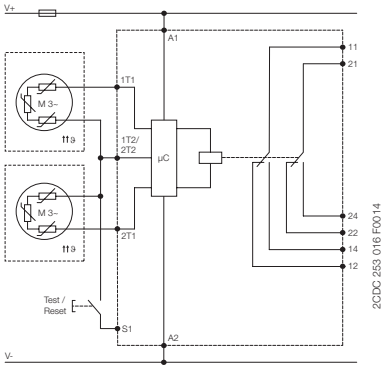


CM-MSE



Temperature monitoring relays
Product group picture

2

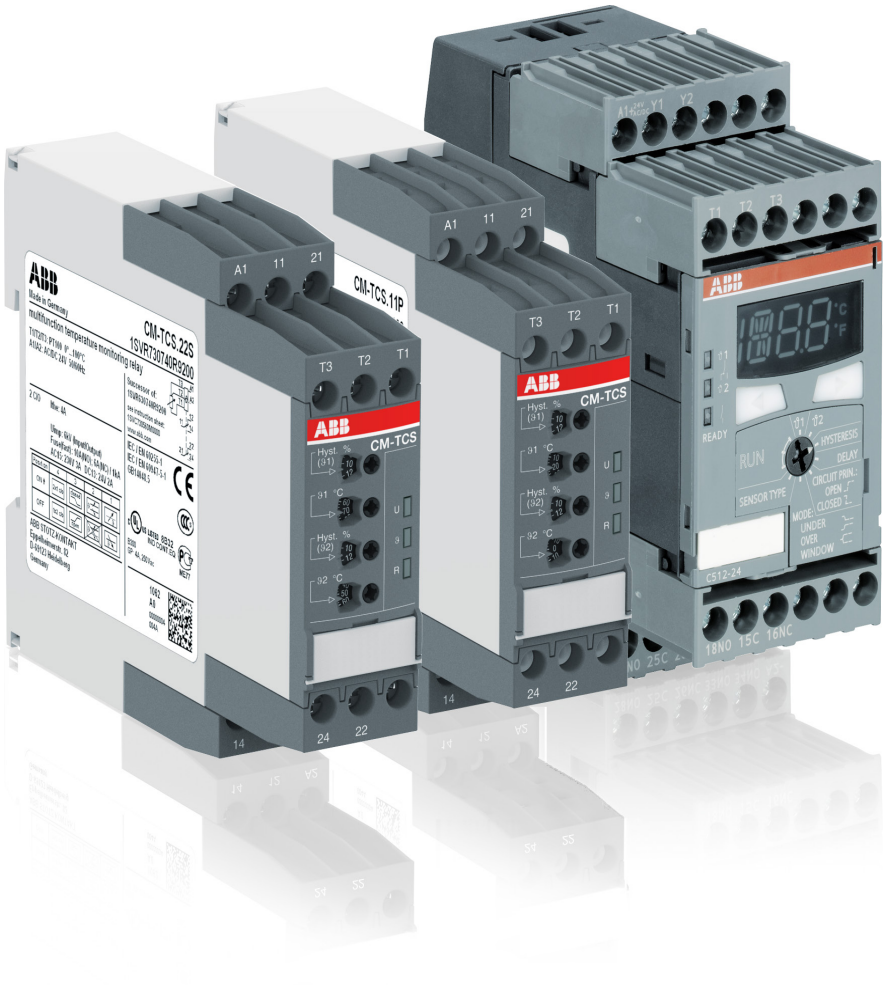

Temperature monitoring relays
Table of contents

Temperature monitoring relays

Benefits and advantages, Applications	2/99
Operating controls	2/100
Selection	2/101
Ordering details	2/102
Function diagrams	2/103
Overview, Functional description and diagrams	2/104
Connection diagrams, Resistance thermometer sensors	2/105
Technical data - CM-TCS.xx	2/106
Technical data - C51x	2/108

Temperature monitoring relays
Benefits and advantages, Applications

Overview
The temperature monitoring relays can be used for temperature measurement in solid, liquid and gaseous media. The temperature is acquired by the sensor in the medium, evaluated by the device and monitored to determine whether it is within an operating range (range monitoring function) or has exceeded or fallen below a threshold.

Functional description
The temperature monitoring relays CM-TCS monitor overtemperature, undertemperature, or temperatures between two threshold values (window monitoring) with PT100 sensor. As soon as the temperature falls below or exceeds the threshold value the output relays change their positions according to the configured functionality and the front-face LEDs display the current status. Regardless of the selected configuration, the device is monitoring its measuring circuit for interrupted wires or short-circuits.


Characteristics CM-TCS
- Adjustable sensor type: PT100
- Functionality like overtemperature monitoring, undertemperature monitoring, temperature window monitoring configurable
- All configurations and adjustments by front-face operating elements
- Precise adjustment with direct reading scales
- One or two threshold values
- Hysteresis 2...20 % adjustable
- Operating temperature range -40...+60 °C
- 1 x 2 c/o or 2 x 1 c/o configurable
- Open- or closed-circuit principle configurable
- Short-circuit monitoring and interrupted wire detection
- 22.5 mm (0.89 in) width
- LEDs for status indication

Characteristics C512 + C513
- Adjustable sensor types: PT100, PT1000, KTY83, KTY84, NTC-B57227-K333-A1
- Measuring principle for 2-wire and 3-wire sensors
- Temperature monitor for 1-3 sensor circuits
- Adjustable over-, undertemperature monitoring or range monitoring function
- 2 thresholds
- Hysteresis for both thresholds (1-99 Kelvin)
- Adjustable time delay from 0-999 s affects to both thresholds
- Storage function selectable via external signal (Y1-Y2)
- Non volatile storage of parameter settings
- 1 n/o (for wire-break and short-circuit detection) and 2 c/o
- Multifunctional digital display
- 3 LEDs for status indication
- Open- or closed-circuit principle selectable
- 45 mm wide housing with 24 terminals

C512
- Temperature monitor for 1 sensor circuit

C513
- Temperature monitor for 1-3 sensor circuits
- In the 3-sensor version the status of the single sensors is displayed if the temperature exceeds or falls below the threshold. This way it can be easily determined which one of the connected sensors has exceeded or dropped below either one or both threshold values.

Temperature monitoring relays
Operating controls

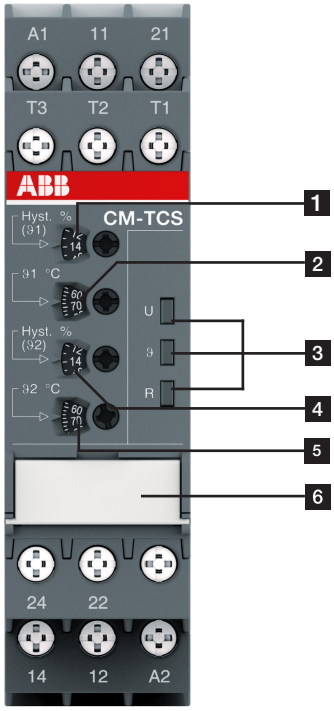

2CDC 253 019 F0013

1 **Adjustment of the hysteresis for threshold value ϑ1**

2 **Adjustment of the threshold value ϑ1**

3 **Indication of operational states**

U: green LED – status indication of control supply voltage
ϑ: red LED – fault message, state of measuring input
R: yellow LED – status indication of the output relays

4 **Adjustment of the hysteresis for threshold value ϑ2**

5 **Adjustment of the threshold value ϑ2**

6 **DIP switch functions / marker label (on page 2/104)**

- Overtemperature monitoring
- Undertemperature monitoring
- Temperature window monitoring activated
- Temperature window monitoring de-activated
- Closed-circuit principle
- Open-circuit principle
- 2 x 1 c/o (SPDT) contact
- 1 x 2 c/o (SPDT) contacts

Temperature monitoring relays
Selection

Order number	1SVR 730 740 R9100	1SVR 740 740 R9100	1SVR 730 740 R0100	1SVR 740 740 R0100	1SVR 730 740 R9200	1SVR 740 740 R9200	1SVR 730 740 R0200	1SVR 740 740 R0200	1SVR 730 740 R9300	1SVR 740 740 R9300	1SVR 730 740 R0300	1SVR 740 740 R0300		1SAR 700 100 R0005	1SAR 700 110 R0010	1SAR 700 110 R0010
Type	CM-TCS.21S	CM-TCS.21P	CM-TCS.11S	CM-TCS.11P	CM-TCS.22S	CM-TCS.22P	CM-TCS.12S	CM-TCS.12P	CM-TCS.23S	CM-TCS.23P	CM-TCS.13S	CM-TCS.13P		C512-24	C512-W	C513-W
Rated control supply voltage U_s																
24 V AC/DC	■	■			■	■			■	■				■		
24-240 V AC/DC			■	■			■	■			■	■			■	■
Technology																
analogue	■	■	■	■	■	■	■	■	■	■	■	■				
digital														■	■	■
Sensor circuits (2 or 3 wire)																
number of temperature sensors	1	1	1	1	1	1	1	1	1	1	1	1		1	1	3
number of thresholds	2	2	2	2	2	2	2	2	2	2	2	2		2	2	3
Sensor type																
PT100	■	■	■	■	■	■	■	■	■	■	■	■		■	■	■
PT100, KTY83, KTY84, NTC, PT1000														■	■	■
Measuring temperature range																
-50...+50 °C	■	■	■	■												
0...+100 °C					■	■	■	■								
0...+200 °C									■	■	■	■				
-50...+500 °C														■	■	■
Monitoring function																
overtemperature	■	■	■	■	■	■	■	■	■	■	■	■		■	■	■
undertemperature	■	■	■	■	■	■	■	■	■	■	■	■		■	■	■
window temperature	■	■	■	■	■	■	■	■	■	■	■	■		■	■	■
Operating principle																
open or closed principle	■	■	■	■	■	■	■	■	■	■	■	■		■	■	■
Output contacts																
n/o														1	1	1
c/o	2	2	2	2	2	2	2	2	2	2	2	2		2	2	2

Temperature monitoring relays
Ordering details

Description

Acquisition, messaging and regulation of temperatures of solid, liquid and gaseous media in processes and machines via PT100, PT1000, KTY83, KTY84 or NTC sensors.
ABB offers different temperature monitoring relays to meet the needs of your application:



CM-TCS

Ordering details - Temperature monitoring relays PT100 sensors, 2 or 3 wire connection, 2 thresholds adjustable

Rated control supply voltage	Measuring range	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24-240 V AC/DC	-50...+50 °C	CM-TCS.11S	1SVR730740R0100		0.151 (0.333)
		CM-TCS.11P	1SVR740740R0100		0.140 (0.309)
	0...+100 °C	CM-TCS.12S	1SVR730740R0200		0.151 (0.333)
		CM-TCS.12P	1SVR740740R0200		0.140 (0.309)
	0...+200 °C	CM-TCS.13S	1SVR730740R0300		0.151 (0.333)
		CM-TCS.13P	1SVR740740R0300		0.140 (0.309)
24 V AC/DC	-50...+50 °C	CM-TCS.21S	1SVR730740R9100		0.138 (0.304)
		CM-TCS.21P	1SVR740740R9100		0.127 (0.280)
	0...+100 °C	CM-TCS.22S	1SVR730740R9200		0.138 (0.304)
		CM-TCS.22P	1SVR740740R9200		0.127 (0.280)
	0...+200 °C	CM-TCS.23S	1SVR730740R9300		0.138 (0.304)
		CM-TCS.23P	1SVR740740R9300		0.127 (0.280)



C512, C513

Ordering details - Temperature monitoring relays C51x range with display and digital setup

Rated control supply voltage	Measuring range	Type [2]	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24 V AC/DC	-50...+500 °C [1]	C512-24	1SAR700100R0005		0.32 (0.71)
24-240 V AC/DC		C512-W	1SAR700100R0010		0.33 (0.73)
24-240 V AC/DC		C513-W	1SAR700110R0010		0.34 (0.75)

[1] The measuring range depends on the used sensor type:
PT100: -50...+500 °C
PT1000: -50...+500 °C
NTC: +80...+160 °C
(Typ Siemens Matsushita B57272-A333-A1 - 100 °C: 1.8 kΩ, 25 °C: 32.762 kΩ)
KTY84: -40...+300 °C
KTY83: -50...+175 °C


Ordering details - Replaceable cover marking for digital devices

Use for	Language	Type	Order code	Price 5 pces	Weight (1 pce) kg (lb)
C512	German	C512-D	1SVR700101R0100		
C512	English	C512-E	1SVR700102R0100		
C513	German	C513-D	1SVR700111R0100		
C513	English	C513-E	1SVR700112R0100		

Temperature monitoring relays
Function diagrams


CM-TCS - Overtemperature monitoring, 1 x 2 c/o contacts 1x2 c/o

With this configuration, settings via $\vartheta 2$ have no influence on the operating function ($\vartheta 2$ disabled).
Open-circuit principle:
If the measured value is correct, the output relays remain de-energized when control supply voltage is applied. If the measured value exceeds the adjusted threshold value $\vartheta 1$, the output relays energize. If the measured value drops again below the adjusted threshold value $\vartheta 1$ minus the adjusted hysteresis, the output relays de-energize.
Closed-circuit principle:
The behavior is inverse to the one with open-circuit principle.

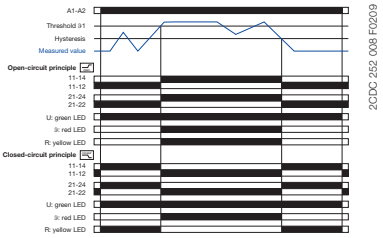


Overtemperature monitoring, 2 x 1 c/o contact 2x1 c/o

Open-circuit principle:
If the measured value is correct, the output relays remain de-energized when control supply voltage is applied. If the measured value exceeds the adjusted threshold value $\vartheta 2$, output relay R2 (prewarning) energizes. If the measured value exceeds the adjusted threshold value $\vartheta 1$, output relay R1 (final switch-off) energizes.
If the measured value drops again below the adjusted threshold value $\vartheta 1$ minus the adjusted hysteresis, output relay R1 (final switch-off) de-energizes. If the measured value drops below the adjusted threshold value $\vartheta 2$ minus the adjusted hysteresis, output relay R2 (prewarning) de-energizes.
Closed-circuit principle:
The behavior is inverse to the one with open-circuit principle.




Undertemperature monitoring, 1 x 2 c/o contacts 1x2 c/o

With this configuration, settings via $\vartheta 1$ have no influence on the operating function ($\vartheta 1$ disabled).
Open-circuit principle:
If the measured value is correct, the output relays remain de-energized when control supply voltage is applied. If the measured value drops below the adjusted threshold value $\vartheta 2$, the output relays energize. If the measured value exceeds again the adjusted threshold value $\vartheta 2$ plus the adjusted hysteresis, the output relays de-energize.
Closed-circuit principle:
The behavior is inverse to the one with open-circuit principle.

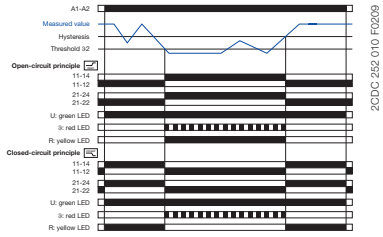


Undertemperature monitoring, 2 x 1 c/o contact 2x1 c/o

Open-circuit principle:
If the measured value is correct, the output relays remain de-energized when control supply voltage is applied. If the measured value drops below the adjusted threshold value $\vartheta 1$, output relay R1 (prewarning) energizes. If the measured value drops below the adjusted threshold value $\vartheta 2$, output relay R2 (final switch-off) energizes.
If the measured value exceeds again the adjusted threshold value $\vartheta 2$ plus the adjusted hysteresis, output relay R2 (final switch-off) de-energizes. If the measured value exceeds the adjusted threshold value $\vartheta 1$ plus the adjusted hysteresis, output relay R1 (prewarning) de-energizes.
Closed-circuit principle:
The behavior is inverse to the one with open-circuit principle.




Temperature window monitoring, 1 x 2 c/o contacts 1x2 c/o

Open-circuit principle:
If the measured value is correct, the output relays remain de-energized when control supply voltage is applied. If the measured value exceeds the adjusted threshold value $\vartheta 1$ or drops below the adjusted threshold value $\vartheta 2$, the output relays energize. If the measured value drops again below the adjusted threshold value $\vartheta 1$ minus the adjusted hysteresis or exceeds again the adjusted threshold value $\vartheta 2$ plus the adjusted hysteresis, the output relays de-energize.
Closed-circuit principle:
The behavior is inverse to the one with open-circuit principle.



Temperature window monitoring, 2 x 1 c/o contact 2x1 c/o

Open-circuit principle:
If the measured value is correct, the output relays remain de-energized when control supply voltage is applied.
If the measured value exceeds the adjusted threshold value $\vartheta 1$ or drops below the adjusted threshold value $\vartheta 2$, output relay R1 (> $\vartheta 1$) or R2 (< $\vartheta 2$) respectively energizes.
If the measured value drops again below the adjusted threshold value $\vartheta 1$ minus the adjusted hysteresis or exceeds again the adjusted threshold value $\vartheta 2$ plus the adjusted hysteresis, output relay R1 (>$\vartheta 1$) or R2 (<$\vartheta 2$) respectively de-energizes.
Closed-circuit principle:
The behavior is inverse to the one with open-circuit principle.




Temperature monitoring relays
Overview, Functional description and diagrams

Functional description

Digital tripping devices

Once the temperature has reached the set threshold of υ1, output relay K1 changes its switching state after the set time delay t has elapsed (K2 reacts in the same way for υ2).


Characteristic curves of resistance sensors

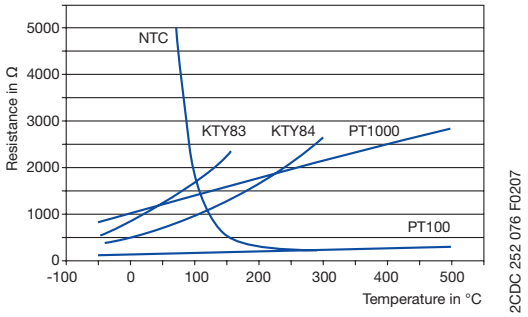


Function diagrams

Overtemperature - C512/C513

Open-circuit principle




Closed-circuit principle




Undertemperature - C512/C513

Open-circuit principle




Closed-circuit principle




Range monitoring - C512/C513

Open-circuit principle




Closed-circuit principle



Function principle with storage function - C512/C513

using overtemperature with closed-circuit principle as an example

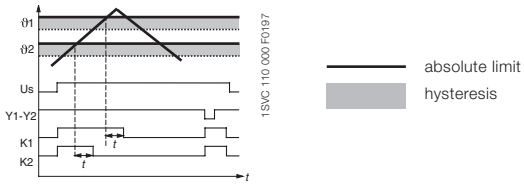


DIP switches CM-TCS

Position	4	3	2	1
ON ↑	2x1 c/o	closed	ϑ	ϑ
OFF	1x2 c/o	open	ϑ	ϑ

	ON	OFF (default)
DIP switch 1 Monitoring principle	Overtemperature monitoring If overtemperature monitoring is selected, the CM-TCS recognizes temperatures above the selected threshold and trips the output relay according to the selected operating principle.	Undertemperature monitoring If undertemperature monitoring is selected, the CM-TCS recognizes temperatures below the selected threshold and trips the output relay according to the selected operating principle.
DIP switch 2 Temperature window monitoring	Temperature window monitoring activated If temperature window monitoring is selected, the CM-TCS monitors over- and undertemperature. If temperature window monitoring is activated, DIP switch 1 is disabled.	Temperature window monitoring de-activated Temperature window monitoring is de-selected.
DIP switch 3 Operating principle of the output relays	Closed-circuit principle If closed-circuit principle is selected, the output relays are energized. They de-energize if a fault is occuring.	Open-circuit principle If open-circuit principle is selected, the output relays are deenergized. They energize if a fault is occuring.
DIP switch 4 2 x 1 c/o contact, 1 x 2 c/o contacts	2 x 1 c/o (SPDT) contact If operating principle 2 x 1 c/o contact is selected, the output relay R1 (11-12/14) reacts to threshold value ϑ1 and the output relay R2 (21-22/24) reacts to threshold value ϑ2.	1 x 2 c/o (SPDT) contacts If operating principle 1 x 2 c/o contacts is selected, both output relays R1 (11-12/14) and R2 (21-22/24) react synchronously to one threshold value. Overtemperature monitoring: Settings of the threshold value ϑ2 have no effect on the operation. Undertemperature monitoring: Settings of the threshold values ϑ2 have no effect on the operation.


Temperature monitoring relays
Connection diagrams, Resistance thermometer sensors

Connection diagrams

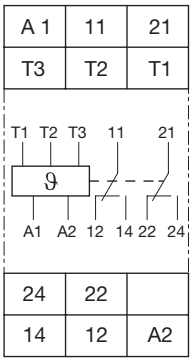


CM-TCS

A1-A2 Control supply voltage
11-12/14 Output relay R1
21-22/24 Output relay R2
T1, T2, T3 Measuring input, connection PT100



C512

A1-A2 Rated control suppy voltage
15-16/18 Output contacts
25-26/28
33-34
T1-T3 Sensor connection
Y1-Y2 Connection for storage bridge




C513

A1-A2 Rated control suppy voltage
15-16/18 Output contacts
25-26/28
33-34
1T1-1T3 Sensor connection 1
2T1-2T3 Sensor connection 2
3T1-3T3 Sensor connection 3
Y1-Y2 Connection for storage bridge

Connection of resistance thermometer sensors


2-wire measurement

When using 2-wire temperature sensors the sensor resistance and the wire resistance are added together.
The resulting systematic errors must be taken into account when adjusting the tripping device.
A jumper must be connected between the terminals T2 and T3.
The following table can be used for PT100 sensors to determine the temperature errors caused by the line length.
When using resistance sensors with two-wire connection a bridge must be inserted between terminals T2 and T3.



3-wire measurement

To minimize the influence of the wire resistance, a three-wire connection is usually used. By means of the additional wire two measuring circuits are created. One of these two circuits is used for reference. This way, the tripping device can calculate and take into account the wire resistance automatically.



Error caused by the line


The error resulting from the line resistance amounts to approx. 2.5 Kelvin/Ohm. If the resistance of the line is not known and it is not possible to measure it, the error caused by the line can be estimated using the following table.

Temperature error

(depending on the line length and conductor cross section for PT100 sensors at an ambient temperature of 20 °C, in K)

Line length in m	Wire size mm²			
	0.50	0.75	1	1.5
0	0.0	0.0	0.0	0.0
10	1.8	1.2	0.9	0.6
25	4.5	3.0	2.3	1.5
50	9.0	6.0	4.5	3.0
75	13.6	9.0	6.8	4.5
100	18.1	12.1	9.0	6.0
200	36.3	24.2	18.1	12.1
500	91.6	60.8	45.5	30.2

Electrical isolation

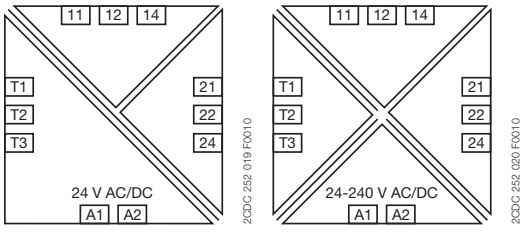

Electrical isolation

Protective searation acc. to IEC/EN 61140; EN 50178

Temperature monitoring relays
Technical data - CM-TCS.xx

Type			CM-TCS.11/12/13	CM-TCS.21/22/23
Input circuit				
Rated control supply voltage U_s		A1-A2	24-240 V AC/DC	24 V AC/DC
Rated control supply voltage U_s tolerance			-15...+10 %	
Typical current / power / consumption		24 V DC	33 mA / 0.8 VA	18 mA / 0.45 VA
		115 V AC	12.5 mA / 1.5 VA	n/a
		230 V AC	13 mA / 2.9 VA	n/a
Rated frequency		AC	15-400 Hz	50/60 Hz
Frequency range		AC	13.5-440 Hz	45-65 Hz
Power failure buffering time		min.	20 ms	
Measuring circuit			**T1, T2, T3**	
Sensor type			PT100	
Connection of the sensor		2-wire	yes, jumper between T2-T3	
		3-wire	yes, use terminal T1, T2, T3	
Monitoring function			overtemperature, undertemperature or window monitoring	
Threshold values adjustable within the measuring range		CM-TCS.x1	-50...+50 °C	
		CM-TCS.x2	0...+100 °C	
		CM-TCS.x3	0...+200 °C	
Number of possible thresholds			2	
Tolerance of the adjusted threshold value			typ. ±5 % of the range end value	
Hysteresis related to the threshold value			2-20 % of threshold value, min. 1 °C	
Measuring principle			continuous current	
Typical current in the sensor circuit			0.8 mA	
Maximum current in sensor circuit			0.9 mA	
Interrupted wire detection			yes, indicated via LED status	
Short-circuit detection			yes, indicated via LED status	
Accuracy within the rated control supply voltage tolerance			< 0.2 °C / or < 0.01 %/K	
Accuracy within the temperature range			< 0.2 °C / or < 0.01 %/K	
Repeat accuracy (constant parameters)			< 0.2 % of full scale	
Maximum measuring cycle			320 ms	
Output circuit				
Kind of output			2 x 1 or 1 x 2 c/o (SPDT) contacts configurable	
Operating principle			open- or closed-circuit principle configurable [1]	
Contact material			AgNi alloy, Cd free	
Rated operational voltage (IEC/EN 60947-1)			250 V AC / 300 V DC	
Minimum switching voltage / Minimum switching current			24 V / 10 mA	
Maximum switching voltage / Maximum switching current			see 'Load limit curves'	
Rated operating current I_e (IEC/EN 60947-1-5)		AC-12 (resistive) 230 V	4 A	
		AC-15 (inductive 230 V	3 A	
		DC-12 (resistive) 24 V	4 A	
		DC-13 (inductive) 24 V	2 A	
AC Rating (UL508)		utilization category	B 300, pilot duty general purpose (250 V, 4 A, cos φ 0.75)	
		maximum rated operational voltage	250 V AC	
		maximum continuous thermal current at B 300	4 A	
		maximum making/breaking apparent power at B 300	3600/360 VA	
Mechanical lifetime			30 x 10^6 switching cycles	
Electrical lifetime (AC-12, 230 V, 4 A)			0.1 x 10^6 switching cycles	
Maximum fuse rating to achieve short-circuit protection		n/c contact	6 A fast-acting	
		n/o contact	10 A fast-acting	
Conventional thermal current I_{th} acc. IEC/EN 60947-1			4 A	
General data				
Dimensions (W x H x D)			22.5 x 85.6 x 103.7 mm (0.89 x 3.37 x 4.08 in)	
Mounting position			any	
			Screw connection technology	**Easy Connect Technology (push-in)**
Weight	net weight	CM-TCS.1x	0.151 kg (0.333 lb)	0.140 kg (0.309 lb)
		CM-TCS.2x	0.138 kg (0.304 lb)	0.127 kg (0.280 lb)
	gross weight	CM-TCS.1x	0.176 kg (0.388 lb)	0.165 kg (0.364 lb)
		CM-TCS.2x	0.163 kg (0.360 lb)	0.152 kg (0.335 lb)
Degree of protection		enclosure / terminals	IP50 / IP20	
Ambient temperature range		operation	-40...+60 °C	
		storage/transport	-40...+85 °C	
Mounting			DIN rail (IEC/EN 60715), snap-on mounting without any tool	

[1] Closed-circuit principle: Output relay(s) de-energize(s) if measured value exceeds or falls below the adjusted threshold value

Temperature monitoring relays
Technical data - CM-TCS.xx

Type			CM-TCS.11/12/13	CM-TCS.21/22/23
Electrical connection				
Wire size			Screw connection technology	Easy Connect Technology (Push-in)
	fine-strand without wire end ferrule	A1, A2, 11, 12, 14, 21, 22, 24	1 x 0.5-2.5 mm² (1 x 20-14 AWG) 2 x 0.5-1.5 mm² (2 x 20-16 AWG)	2 x 0.5-1.5 mm² (2 x 20-16 AWG) connection with lever
		T1, T2, T3	1 x 0.2-2.5 mm² (1 x 24-14 AWG) 2 x 0.2-1.5 mm² (2 x 24-16 AWG)	2 x 0.2-1.5 mm² (2 x 24-16 AWG) connection with lever
	fine-strand with wire end ferrule	A1, A2, 11, 12, 14, 21, 22, 24	1 x 0.5-2.5 mm² (1 x 20-14 AWG) 2 x 0.5-1.5 mm² (2 x 20-16 AWG)	2 x 0.5-1.5 mm² (2 x 20-16 AWG) connection: push-in
		T1, T2, T3	1 x 0.2-2.5 mm² (1 x 24-14 AWG) 2 x 0.2-1.5 mm² (2 x 24-16 AWG)	2 x 0.2-1.5 mm² (2 x 24-16 AWG) insulated ferrule (DIN 46228-4-E): connection: push-in ferrule (DIN 46228-1-A): < 0.5 mm², connection with lever ≥ 0.5 mm², connection: push-in
	rigid	A1, A2, 11, 12, 14, 21, 22, 24	1 x 0.5-4 mm² (1 x 20-12 AWG) 2 x 0.5-2.5 mm² (2 x 20-14 AWG)	2 x 0.5-1.5 mm² (2 x 20-16 AWG) connection: push-in
		T1, T2, T3	1 x 0.2-4 mm² (1 x 24-12 AWG) 2 x 0.2-2.5 mm² (2 x 24-14 AWG)	2 x 0.2-1.5 mm² (2 x 24-16 AWG) < 0.5 mm², connection with lever ≥ 0.5 mm², connection: push-in
Stripping length			8 mm (0.32 in)	
Tightening torque		< 0.5 mm²	0.5 Nm (4.43 lb.in)	-
		≥ 0.5 mm²	0.6 - 0.8 Nm (5.31 - 7.08 lb.in)	-
Standards				
Product standard			IEC/EN 60255-1, IEC/EN 60255-27, EN 50178	
Low Voltage Directive			2006/95/EC	
EMC Directive			2004/108/EC	
RoHS Directive			2011/65/EC	
Environmental data				
Ambient temperature ranges		operation/storage/ transport	-40...+60°C/-40...+85°C/-40...+85°C	
Climatic category			3K5 (no condensation, no ice formation)	
Damp heat, cyclic			6 x 24 h cycle, 55 °C, 95 % RH	
Vibration, sinusoidal			Class 2	
Shock			Class 2	
Isolation data				
Rated impulse withstand voltage U_{imp} between all isolated circuits (IEC/EN 60947-1, IEC/EN 60664-1)		supply circuit / measuring circuit	4 kV	-
		supply circuit / output circuits	4 kV	
		measuring circuit / output circuits	4 kV	
		output circuit 1 / output circuit 2	4 kV	
Pollution degree (IEC/EN 60664-1)			3	
Overvoltage category (IEC/EN 60664-1)			III	
Rated insulation voltage U_i (IEC/EN 60947-1, IEC/EN 60664-1)		supply circuit / measuring circuit	300 V	-
		supply circuit / output circuits	300 V	
		measuring circuit / output circuits	300 V	
		output circuit 1 / output circuit 2	300 V	
Basis isolation for rated control supply voltage (IEC/EN 60664-1)		supply circuit / measuring circuit	250 V AC / 300 V DC	-
		supply circuit / output circuits	250 V AC / 300 V DC	
		measuring circuit / output circuits	250 V AC / 300 V DC	
		output circuit 1 / output circuit 2	250 V AC / 300 V DC	
Protective separation (IEC/EN 61140, EN 50178)		supply circuit / measuring circuit	250 V AC / 250 V DC	-
		supply circuit / output circuits	250 V AC / 300 V DC	250 V AC / 250 V DC
		measuring circuit / output circuits	250 V AC / 300 V DC	250 V AC / 250 V DC
Test voltage between all isolated circuits, routine test (IEC/EN 60255-5, IEC/EN 61010-1)		supply circuit / measuring circuit	2.0 kV, 50 Hz, 1 s	-
		supply circuit / output circuits	2.0 kV, 50 Hz, 1 s	
		measuring circuit / output circuits	2.0 kV, 50 Hz, 1 s	
Test voltage between all isolated circuits, type test (IEC/EN 60255-5)		supply circuit / measuring circuit	4.0 kV, 50 Hz, 1 s	-
		supply circuit / output circuits	4.0 kV, 50 Hz, 1 s	
		measuring circuit / output circuits	4.0 kV, 50 Hz, 1 s	
Electromagnetic compatibility				
Interference immunity to			IEC/EN 61000-6-1, IEC/EN 61000-6-2, IEC/EN 61326-2-4	
electrostatic discharge		IEC/EN 61000-4-2	Level 3, 6 kV / 8 kV	
radiated, radio-frequency, electromagnetic field		IEC/EN 61000-4-3	Level 3, 10 V/m (1 GHz) / 3 V/m (2 GHz) / 1 V/m (2.7 GHz)	
electrical fast transient/burst		IEC/EN 61000-4-4	Level 3, 2 KV / 5 kHz	
surge		IEC/EN 61000-4-5	Level 3, installation class 3, supply circuit and measuring circuit 1 kV L-L, 2 kV L-earth	
conducted disturbances, induced by radio-frequency fields		IEC/EN 61000-4-6	Level 3, 10 V	
voltage dips, short interruptions and voltage variations		IEC/EN 61000-4-11	Class 3	
harmonics and interharmonics		IEC/EN 61000-4-13	Class 3	
Interference emission			EN 61000-6-3, EN 61000-6-4	
high-frequency radiated		IEC/CISPR 22, EN 55022	Class B	
high-frequency conducted		IEC/CISPR 22, EN 55022	Class B	

Temperature monitoring relays
Technical data - C51x

Type			C512	C513
Input circuit				
Rated control supply voltage U_s		A1-A2	24 V AC/DC	-
		A1-A2	24-240 V AC/DC	
Power consumption		AC	< 7 VA	
		DC	< 4 W	
Rated control supply voltage U_s tolerance			-15...+10 %	
Rated frequency		AC		
Sensor circuit				
Sensor type			PT100, PT1000, KTY83, KTY84, NTC	
Sensor current		PT100	typ. 1 mA	
		PT1000, KTY83, KTY84, NTC	typ. 0.2 mA	
Wire-break detection			yes (not for NTC)	
Short-circuit detection			yes	
3-wire connection			yes (2-wire connection of sensors with terminals T2 and T3 bridged)	
Measuring circuit				
Setting accuracy at T_a = 20 °C (T_{20})			< ±2 K ± 1 digit	
Accuracy within the temperature range			0.05 °C / °C deviation from T_{20}	
Response time			500 ms	
Hysteresis settings		temperature 1	1-99 kelvin	
		temperature 2	1-99 kelvin	
Tripping delay			0-999 s	
Output circuit				
Kind of output			2 c/o + 1n/o	2 c/o + 1 n/o
Rated operating current I_e (IEC/EN 60947-1-5)	AC-12 (resistive) 230 V		n/a	
	AC-15 (inductive) 230 V		3 A	
	DC-12 (resistive) 24 V		1 A	
	DC-13 (inductive) 24 V		0.1 A	
Mechanical lifetime			30 x 10^6 switching cycles	
Electrical lifetime (AC-15 at 3 A)			0.1 x 10^5 switching cycles	
Max. fuse rating to achieve short-circuit protection			4 A, operating class gL/gG	
General data				
Dimensions (W x H x D)			45 x 105.9 x 86 mm (1.77 x 4.17 x 3.39 in)	
Tightening torque			0.8-1.2 Nm	
Mounting position			any	
Degree of protection		enclosure / terminals	IP 40 / IP 20	
Ambient temperature range		operation	-25...+60 °C	
		storage	-40...+80 °C	
Mounting			DIN rail (IEC/EN 60715)	
Electrical connection				
Wire size		rigid	1 x 4 mm² (1 x 12 AWG), 2 x 2.5 mm² (2 x 14 AWG)	
		fine-strand with wire end ferrule	1 x 2.5 mm² (1 x 14 AWG), 2 x 1.5 mm² (2 x 16 AWG)	
Standards				
Environmental conditions			IEC 60721-3-3	
Low Voltage Directive			IEC 60947-5-1, VDE 0660	
Electromagnetic compatibility		Interference immunity	EN 61000-6-2	
		Interferenece emission	EN 61000-6-4	
Vibration resistance (IEC 68-2-6)			5-26 Hz / 0.75 mm	
Shock resistance (IEC 68-2-27)			15 g / 11 ms	
Isolation data				
Rated insulation voltage			300 V AC	
Pollution degree			3	

Liquid level monitors and controls
Product group picture

2



Liquid level monitors and controls
Table of contents

Liquid level monitors and controls

Benefits and advantages 2/111
Operating controls 2/112
Ordering details 2/113
Ordering details - Accessories 2/114
Function diagrams 2/115
Connection diagrams 2/117
Application examples 2/118
Technical data 2/120

Liquid level monitors and controls
Benefits and advantages

CM-ENE MIN/MAX
- Monitoring of pump systems for dry running (ENE MIN) and overflow (ENE MAX)
- Connection of 2 electrodes possible at C and MIN/MAX
- 3 supply voltage versions
- Optimal price/performance ratio
- 1 n/o contact: Open-circuit principle for CM-ENE MIN, Closed-circuit principle for CM-ENE MAX
- LED for status indication

CM-ENS
- Monitoring and control of liquid levels (when draining or filling liquids in tanks)
- Monitoring and control of mixture ratios (conductivity of liquids)
- Adjustable response sensitivity 5-100 kΩ
- 4 supply voltage versions 24-240 V AC
- Version with protective separation acc. to VDE 0160
- Cascadable
- 1 c/o contact or 1 n/o and 1 n/c contact
- 2 LEDs for status indication

CM-ENS UP/DOWN
- Monitoring and control of liquid levels
- Selectable function "fill" or "drain"
- Adjustable response sensitivity 5-100 kΩ
- Cascadable
- 1 c/o contact
- 2 LEDs for status indication

CM-ENN
- Monitoring and control of liquid levels (when emptying or filling liquids in tanks)
- Monitoring and control of mixture ratios (conductivity of liquids)
- 3 response sensitivities from 250 Ω - 500 kΩ in one unit
- 5 supply voltage versions 24 V AC/DC - 415 V AC
- Selectable ON- or OFF-delay 0.1-10 s
- 2 c/o contacts
- 2 LEDs for status indication

Liquid level monitors and controls
Operating controls

CM-ENS



2CDC 253 026 F0013

1 **„Sens.“ - sensitivity potentiometer for adjusting the response sensitivity**

2 **Indication of operational states**
R: yellow LED - relay status
U: green LED -control supply voltage

3 **Marker label**

CM-ENN



2CDC 253 012 F0013

1 **„Function.“ - function selector switch:**
„UP“- fill
„DOWN“ - drain

2 **„Sens.“ - potentiometer for adjusting the response sensitivity**

3 **Indication of operational states**
R: MIN/MAX: yellow LED - relay status MIN/MAX
U: green LED - control supply voltage
R AL1: yellow LED - relay status AL1
R AL2: yellow LED - relay status AL2

4 **Marker label**

Liquid level monitors and controls
Ordering details



CM-ENE MIN



CM-ENE MAX



CM-ENS



CM-ENN

Description

ABB's liquid level monitoring relays for regulation and control of liquid levels and ratios of mixtures of conductive fluids.
The assortment includes single function and multifunction monitoring relays which can be used for overflow and dry-running protection, for filling and draining applications, for max and min alarm or any combination of such functions. Furthermore a wide range of accessories is available

Ordering details

Rated control supply voltage	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24 V AC	CM-ENE MIN	1SVR550855R9500		0.15 (0.33)
110-130 V AC		1SVR550850R9500		0.15 (0.33)
220-240 V AC		1SVR550851R9500		0.15 (0.33)
24 V AC	CM-ENE MAX	1SVR550855R9400		0.15 (0.33)
110-130 V AC		1SVR550850R9400		0.15 (0.33)
220-240 V AC		1SVR550851R9400		0.15 (0.33)
24 V AC	CM-ENS	1SVR430851R9100		0.15 (0.33)
110-130 V AC		1SVR430851R0100		0.15 (0.33)
220-240 V AC		1SVR430851R1100		0.15 (0.33)
220-240 V AC [1]		1SVR430851R1300		0.15 (0.33)
24 V AC	CM-ENS UP/DOWN	1SVR430851R9200		0.15 (0.33)
110-130 V AC		1SVR430851R0200		0.15 (0.33)
220-240 V AC		1SVR430851R1200		0.15 (0.33)
24-240 V AC/DC	CM-ENN	1SVR450055R0000		0.30 (0.66)
24 V AC		1SVR450059R0000		0.30 (0.66)
110-130 V AC		1SVR450050R0000		0.30 (0.66)
220-240 V AC		1SVR450051R0000		0.30 (0.66)

[1] Version with protective separation acc. to VDE 0160, 1 n/o, 1 n/c


Liquid level monitors are


Suitable for		Not suitable for	
spring water	acids, bases	chemically pure water	ethylene glycol
drinking water	liquid fertilizers	fuel	concentrated alcohol
sea water	milk, beer, coffee	oils	paraffin
sewage	non-concentrated alcohol	explosive areas (liquid gas)	lacquers


Liquid level monitors and controls
Ordering details - Accessories


Compact support CM-KH-3 for 3 bar electrodes

- Ideally suited for use with liquid level relays CM-ENS and CM-ENN
- Wire connection by screw terminals
- Pull relief by M16 screwed cable glands
- Temperature range up to 90 °C
- Food safe material (PPH)
- Screw-in electrodes (M4 thread)
- Distance plate (CM-AH-3) and locking nut (CM-GM-1) optionally available as an accessory

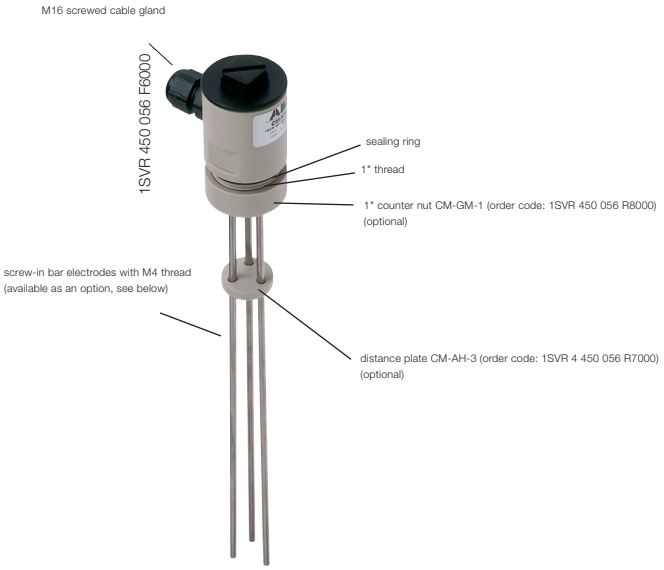

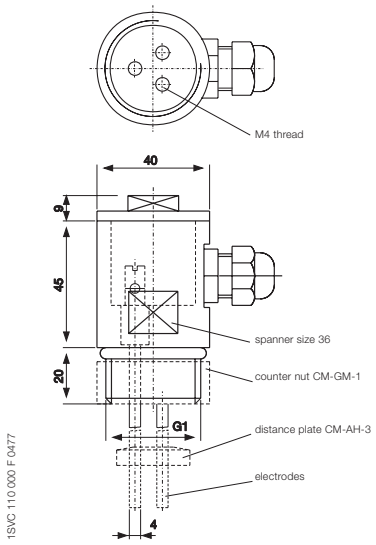






Technical data compact support

Type of mounting: G 1" thread
Mounting position: any
Enclosure material: PPH
Sealing: NBR 70
Temperature range: 90 °C max.
Pressure: 10 bar max. (60 °C)

Description	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Compact support for 3 bar electrodes	CM-KH-3	1SVR450056R6000		1	0.06 (0.132)
Distance plate for 3 bar electrodes	CM-AH-3	1SVR450056R7000			0.06 (0.132)
Counter nut for 1" thread	CM-GM-1	1SVR450056R8000			0.06 (0.132)

Screw-in bar electrodes for compact support CM-KH-3



Thread M4


Material: stainless steel 304, high-grade steel 14301

During project engineering the compatibility of the electrode material with the medium to be supervised is to be examined!

Suspension electrode CM-HE




Steel electrode (X14CrMoS17) with sleeve (Hostalen GC 7260) suitable up to 60°C max.



Lenght	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
300 mm	CM-SE-300	1SVR450056R0000		1	0.08 (0.176)
600 mm	CM-SE-600	1SVR450056R0100			0.08 (0.176)
1000 mm	CM-SE-1000	1SVR450056R0200			0.08 (0.176)
CM-HE	CM-HE	1SVR402902R0000			0.08 (0.176)


Liquid level monitors and controls
Function diagrams

Function diagram - CM-ENS

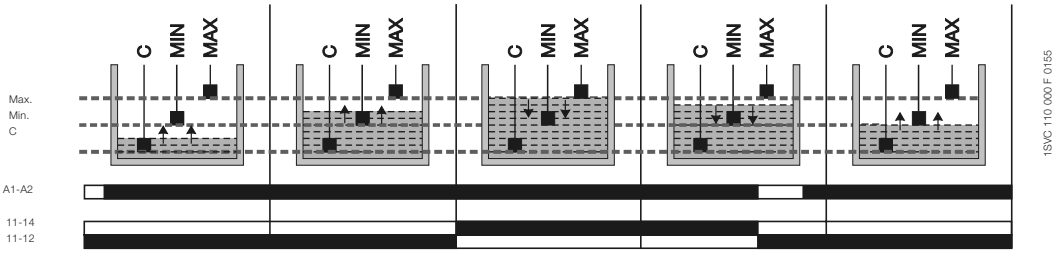

The CM-ENS monitors levels of conductive liquids and is used for example for liquid level control in pump systems. It can be used for filling or draining tanks for example. It is also suitable for monitoring the conductivity of liquids. The measuring principle is based on the resistance change sensed by single-pole electrodes. After the supply voltage is applied to the terminals A1 and A2, the output relay is de-energized. The probes must be connected to C, MAX, MIN. The output relay energizes if the liquid exceeds the maximum level (C and MAX wet) and de-energizes if the liquid level is below the minimum level (MAX and MIN dry). Basedau m on the measuring circuit there will be a response delay of approx. 250 ms at maximum sensitivity. Different levels in one tank can be controlled by up to 5 CM-ENS without interfering with each other.

Function diagram - CM-ENS UP/DOWN

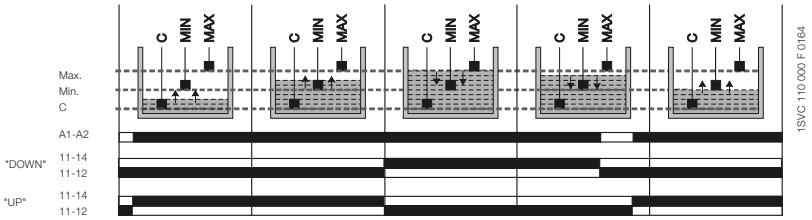


The CM-ENS UP/DOWN monitors levels of conductive liquids and other media, and is used e.g. for liquid level control in pump systems.
The measuring principle is based on the resistance change sensed by single-pole electrodes. The output relay functions fill (UP) or drain (DOWN) can be selected on a front-face selector switch. If the "UP" function is selected, the output relay is energized until the MAX electrode becomes wet. Then it is de-energized and not re-energized until the MIN electrode becomes dry. If the "DOWN" function is selected, the output relay is energized as soon as the MAX electrode becomes wet. It remains energized until the liquid level has dropped below the MIN electrode. The electrodes can be connected to more than one CM-ENS unit without interference.

Liquid level monitors and controls
Function diagrams


Function diagrams - CM-ENN

Circuit with 2 electrodes

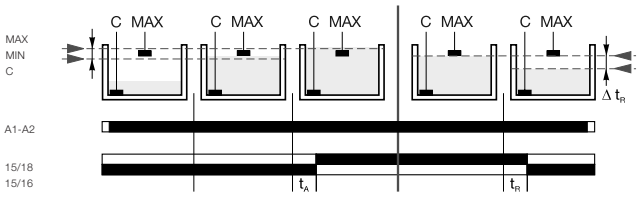

1SVC 110 000 F 0167

Circuit with 3 electrodes

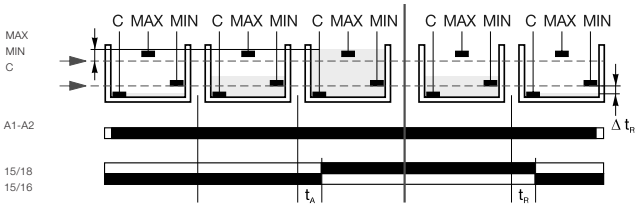


1SVC 110 000 F 0168

t_A = ON-delay, t_R = OFF-delay

The CM-ENN monitors levels of conductive liquids and is used for example for liquid level monitoring in pump control systems, for dry-running protection of submersible pumps or overflow monitoring of tanks. It is also suitable for conductivity monitoring of liquids. The measuring principle is based on the resistance change sensed by single-pole electrodes (wet or dry).
Instead of electrodes, other sensors or transducers can also be used if their output quantities are different resistance values. The measuring, output and supply circuits are electrically isolated for potential separation and to prevent electrical interference.
Due to the integrated ON- or OFF-delay, it is possible to set up time-dependent liquid controls using only two electrodes (C, MAX). Different liquid levels in one tank can be controlled by up to 5 CM-ENN (AC version) without mutual interference.


Function diagram - CM-ENE MIN

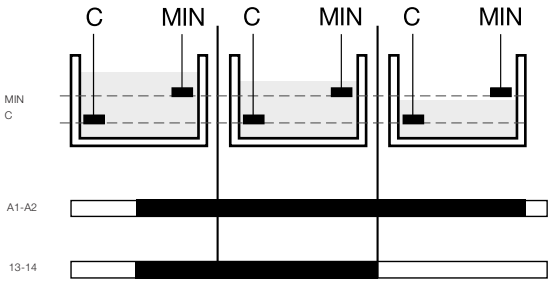

1SVC 110 000 F 0151

The liquid level relays CM-ENE MIN and CM-ENE MAX are used to monitor levels of conductive liquids, for example in pump control systems for dry-running or overflow monitoring.
The measuring principle is based on the occurring resistance change when moisting single-pole electrodes. The single-pole electrodes (see also section Accessories) are connected to the terminals C and MIN or MAX.
If the supply voltage is applied to A1-A2 and the electrodes are wet, the output relay of the CM-ENE MIN is energized and the output relay of the CM-ENE MAX is de-energized.
The output relay of the CM-ENE MIN de-energizes if the electrodes are no longer wet. The output relay of the CM-ENE MAX energizes if the electrodes are no longer wet.


Function diagram CM-ENE MAX

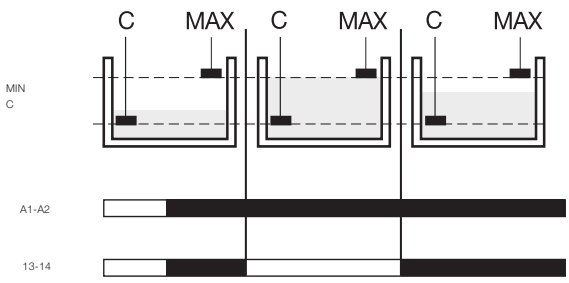

1SVC 110 000 F 0152


Liquid level monitors and controls
Connection diagrams

Connection diagram CM-ENE MIN




A1-A2	Rated control supply voltage
C	Ground reference electrode
MIN	Minimum level
13-14	Output contact -open-circuit principle

Connection diagram CM-ENE MAX




A1-A2	Rated control supply voltage
C	Ground reference electrode
MIN	Maximum level
13-14	Output contact -open-circuit principle

Connection diagram CM-ENS




A1-A2	Rated control supply voltage
C	Ground reference electrode
MAX	Maximum level
MIN	Minimum level
11_{15}-12_{16}/14_{18}	Output contact -open-circuit principle

Connection diagram CM-ENN



A1-A2	Rated control supply voltage
C	Ground reference electrode
MAX	Maximum level electrode
MIN	Minimum level electrode
11_{15}-12_{16}/14_{18}	Output contact -open-circuit principle

Connection diagram CM-ENS UP/DOWN




A1-A2	Rated control supply voltage
C	Ground reference electrode
MAX	Maximum level
MIN	Minimum level
11-12/14	Output contacts - open-circuit or closed-circuit principle selectable


Liquid level monitors and controls
Application examples

Application examples CM-ENE MIN/MAX

CM-ENE MIN **CM-ENE MAX** **CM-ENE MIN und CM-ENE MAX**

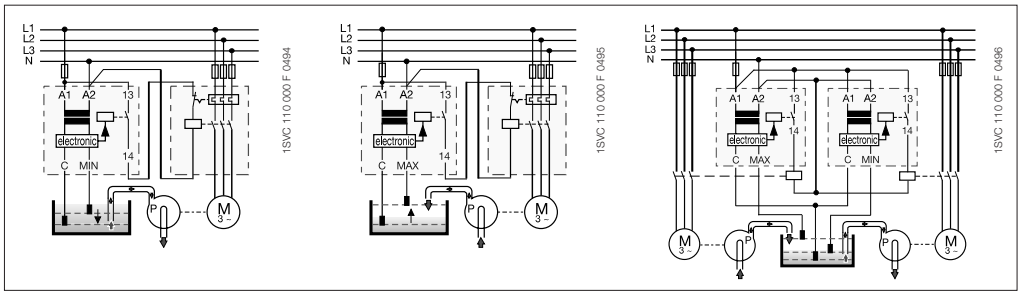


Application examples CM-ENS

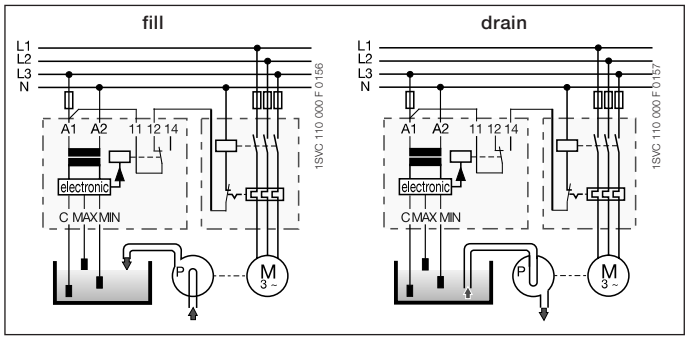


Cascading

The electrode inputs can be interconnected as required, which ensures simple monitoring of different liquid levels.



Redundancy


Redundant liquid level monitoring or control can be implemented by connecting the electrodes to two units.



Application examples CM-ENS UP/DOWN


Liquid level control - fill - switch position "UP"

Liquid level control - drain - switch position "DOWN"

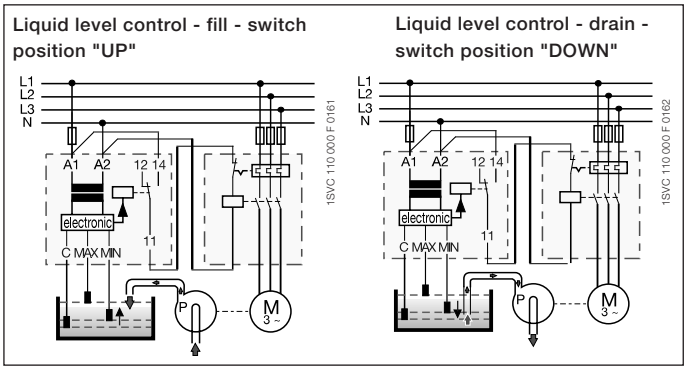


Cascading of electrodes

The electrode inputs can be interconnected as required, which ensures simple monitoring of different liquid levels.




Redundancy

Redundant liquid level monitoring or control can be implemented by connecting the electrodes to two units.



Liquid level monitors and controls
Application examples

Application examples CM-ENN

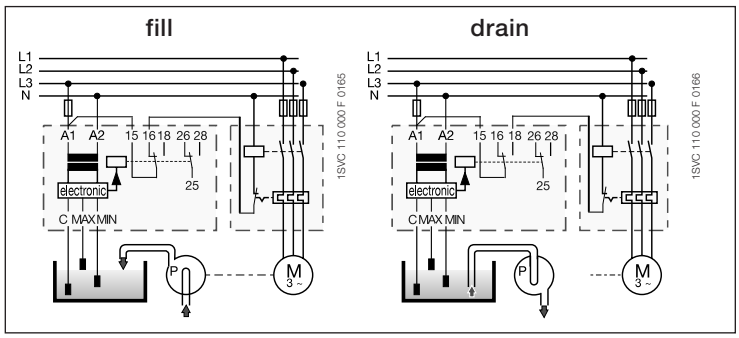

For commissioning, set both potentiometers (response sensitivity = R value and ON-delay = time value) to the minimum value (5) and select a suitable resistance range (sector). After all electrodes have been wetted by the liquid being monitored, turn the sensitivity potentiometer towards maximum value (100) until the relay energizes. If the relay does not energize, select a higher Ω value (sector) on the device and proceed as before. Then it has to be checked if the relay de-energizes properly as soon as the electrodes C and MIN are no longer wet. Liquid levels higher than the maximum level electrode can be obtained by setting an ON-delay (TA = 0.1...10 s).
Liquid levels lower than the minimum level electrode can be obtained by setting an OFF-delay time (TR = 0.1...10 s), e.g. for emptying tanks.

Liquid level monitors and controls
Technical data

Type			CM-ENE MIN	CM-ENE MAX
Supply circuit				
Rated control supply voltage U_S - power consumption		A1-A2	24 V AC	approx. 1.5 VA
		A1-A2	110-130 V AC	approx. 1.2 VA
		A1-A2	220-240 V AC	approx. 1.4 VA
Rated control supply voltage U_S tolerance			-15...+15 %	
Rated frequency			50-60 Hz	
Duty time			100 %	
Measuring circuit			MIN-C, MAX-C	
Monitoring function			dry-running protection	overflow protection
Response sensitivity			0-100 kΩ, not adjustable	
Maximum electrode voltage			30 V AC	
Maximum electrode current			1.5 mA	
Electrode supply line		max. cable capacity	3 nF	
		max. cable length	30 m	
Timing circuit				
Time delay			-	
Tripping delay			fixed approx. 200 ms	
Indication of operational states				
Output relay energized			R: yellow LED	
Output circuits			13-14	
Kind of output			1 n/o contact	
Operational principle [1]			open-circuit principle	closed-circuit principle
Contact material			AgCdO	
Rated operational voltage U_e		(IEC/EN 60947-1)	250 V	
Mininimum switching voltage / minimum switching current			- / -	
Maximum switching voltage			250 V	
Rated operational current I_e (IEC/EN 60947-5-1)		AC-12 (resistive) 230 V	4 A	
		AC-15 (inductive) 230 V	3 A	
		DC-12 (resistive) 24 V	4 A	
		DC-13 (inductive) 24 V	2 A	
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)		B 300	
	max. rated operational voltage		300 V AC	
	max. continuous thermal current at B 300		5 A	
	max. making/breaking apparent power at B 300		3600/360 VA	
Mechanical lifetime			30 x 10^6 switching cycles	
Electrical lifetime (AC-12, 230 V, 4 A)			0.3 x 10^6 switching cycles	
Max. fuse rating to achieve short-circuit protection		n/c contact	-	
		n/o contact	10 A fast-acting	
General data				
Dimensions (W x H x D)			22.5 x 78 x 78.5 mm (0.89 x 3.07 x 3.09 in)	
Mounting position			any	
Degree of protection		enclosure / terminals	IP50 / IP20	
Ambient temperature range		operation / storage	-20...+60 °C / -40...+85 °C	
Mounting			DIN rail (IEC/EN 60715)	
Electrical connection				
Wire size		fine-strand with wire-end ferrule	2 x 0.75-1.5 mm² (2 x 18-16 AWG)	
		fine-strand without wire-end ferrule	2 x 1-1.5 mm² (2 x 18-16 AWG)	
		rigid	2 x 0.75-1.5 mm² (2 x 18-16 AWG)	
Stripping length			10 mm (0.39 inch)	
Tightening torque			0.6-0.8 Nm	
Standards				
Product standard			IEC 255-6, EN 60255-6	
Low Voltage Directive			2006/95/EC	
EMC Directive			2004/108/EC	
Electromagnetic compatibility			EN 61000-6-2, EN 61000-6-4	
electrostatic discharge		IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)	
radiated, radio-frequency, electromagnetic field		IEC/EN 61000-4-3	Level 3 (10 V/m)	
electrical fast transient / burst		IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)	
surge		IEC/EN 61000-4-5	Level 4 (2 kV L-L)	
conducted disturbances, induced by radio-frequency fields		IEC/EN 61000-4-6	Level 3 (10 V)	
Resistance to vibration (IEC 68-2-6)			6 g	
Mechanical resistance (IEC 68-2-6)			10 g	
Isolation data				
Rat. insulation volt. betw. supply, meas. & output circuit (VDE 0110, IEC 60947)			250 V	
Rated impulse withstand voltage between all isolated circuits (VDE 0110, IEC 664)			4 kV / 1.2-50 µs	
Test voltage between all isolated circuits			2.5 kV, 50 Hz, 1 min.	
Pollution category (VDE 0110, IEC 664, IEC 255-5)			3 / C	
Overvoltage category (VDE 0110, IEC 664, IEC 255-5)			III / C	
Environmental testing (IEC 68-2-30)			24 h cycle time, 55 °C, 93 % rel., 96 h	

[1] Open-circuit principle: Output relay energizes if the measured value exceeds/drops below the adjusted threshold.
Closed-circuit principle: Output relay de-energizes if the measured value exceeds/drops below the adjusted threshold.

Liquid level monitors and controls
Technical data

Type			CM-ENS	CM ENS UP/DOWN
Supply circuit				
Rated control supply voltage U_S - power consumption		A1-A2	24 V AC	24 V AC
		A1-A2	110-130 V AC approx. 1.5 VA	110-130 V AC approx. 4 VA
		A1-A2	220-240 V AC approx. 1.5 VA	220-240 V AC approx. 4 VA
		A1-A2	380-415 V AC approx. 1.5 VA	
Rated control supply voltage U_S tolerance			-15...+10 %	
Rated frequency			50-60 Hz	
Duty time			100 %	
Measuring circuit			**MAX-MIN-C**	
Monitoring function			liquid level control	
Response sensitivity			5-100 kΩ, adjustable	
Maximum electrode voltage			30 V AC	
Maximum electrode current			1 mA	
Electrode supply line		max. cable capacity	10 nF	
		max. cable length	100 m	
Timing circuit				
Time delay			-	
Tripping delay			approx. 250 ms	
Indication of operational states				
Control supply voltage			U: green LED	
Output relay energized			R MAX/MIN: yellow LED	
Alarm relay AL1			-	R AL1: yellow LED
Alarm relay AL2			-	R AL2: yellow LED
Output circuits			**11-12/14, 21-22, 31-32**	
Kind of output			1 c/o contact, 1 n/o + 1 n/c contact [2]	
Operational principle [1]			open-circuit principle	open- and closed-circuit principle
Contact material			AgCdo	
Rated operational voltage U_e		(IEC/EN 60947-1)	250 V	
Minimum switching voltage / minimum switching current			- / -	
Maximum switching voltage			250 V	
Rated operational current I_e (IEC/EN 60947-5-1)		AC-12 (resistive) 230 V	4 A	
		AC-15 (inductive) 230 V	3 A	
		DC-12 (resistive) 24 V	4 A	
		DC-13 (inductive) 24 V	2 A	
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)		B 300	
	max. rated operational voltage		300 V AC	
	max. continuous thermal current at B 300		5 A	
	max. making/breaking apparent power at B 300		3600/360 VA	
Mechanical lifetime			30 x 106 switching cycles	
Electrical lifetime (AC-12, 230 V, 4 A)			0.3 x 106 switching cycles	
Max. fuse rating to achieve short-circuit protection		n/c / n/o contact		10 A fast-acting / 10 A fast-acting
General data				
Dimensions (W x H x D)			22.5 x 70 x 100 mm (0.89 x 3.07 x 3.94 in)	
Mounting position			any	
Degree of protection		enclosure / terminals	IP50 / IP20	
Ambient temperature range		operation / storage	-20...+60 °C / -40...+85 °C	
Mounting			DIN rail (IEC/EN 60715)	
Electrical connection				
Wire size	fine-strand with wire end ferrule		2 x 2.5 mm2 (2 x 14 AWG)	
Standards				
Product standard			IEC 255-6, EN 60255-6	
Low Voltage Directive			2006/95/EC	
EMC Directive			2004/108/EC	
Electromagnetic compatibility			-	
electrostatic discharge		IEC/EN 61000-4-2	Level 3 (6 kV / 8kV)	
radiated, radio-frequency, electromagnetic field		IEC/EN 61000-4-3	Level 3 (10 V/m)	
electrical fast transient / burst		IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)	
surge		IEC/EN 61000-4-5	Level 4 (2 kV L-L)	
conducted disturbances, induced by radio-frequency fields		IEC/EN 61000-4-6	Level 3 (10 V)	
Resistance to vibration (IEC 68-2-6)			4 g	
Mechanical resistance (IEC 68-2-6)			6 g	
Isolation data				
Rated insulation voltage between supply, measuring and output circuit (VDE 0110, IEC 60947)			250 V	
Rated impulse withstand voltage between all isolated circuits (VDE0 110, IEC 664)			4 kV / 1.2 - 50 µs	
Test voltage between all isolated circuits			2,5 kV, 50 Hz, 1 min.	
Pollution category (VDE 0110, IEC 664, IEC 255-5)			3 / C	
Overvoltage category (VDE 0110, IEC 664, IEC 255-5)			III / C	
Environmental testing (IEC 68-2-30)			24 h cycle time, 55 °C, 93 % rel., 96 h	

[1] Open-circuit principle: Output relay energizes if the measured value exceeds/drops below the adjusted threshold.
Closed-circuit principle: Output relay de-energizes if the measured value exceeds/drops below the adjusted threshold.
[2] 1SVR 430 851 R1300 (version with safe isolation)

Liquid level monitors and controls
Technical data

Type			CM-ENN		
Supply circuit					
Rated control supply voltage U_S - power consumption		A1-A2	24 V AC		
		A1-A2	110-130 V AC approx. 2.5 VA		
		A1-A2	220-240 V AC approx. 3 VA		
		A1-A2	24-240 V AC/DC approx. 2 VA/W		
Rated control supply voltage U_S tolerance			-15...+10 %		
Rated frequency			50-60 Hz oder DC		
Duty time			100 %		
Measuring circuit			MAX-MIN-C		
Monitoring function			liquid level control		
Response sensitivity			adjustable		
			250 Ω - 5 kΩ	2.5-50 kΩ	25-500 kΩ
Maximum electrode voltage			20 V AC		
Maximum electrode current			8 mA	2 mA	0.5 mA
Electrode supply line		max. cable capacity	200 nF	20 nF	4 nF
		max. cable length	1000 m	100 m	20 m
Timing circuit					
Time delay			0.1-10 s, adjustable, ON- or OFF-delay		
Indication of operational states					
Control supply voltage			U: green LED		
Output relay energized			R: yellow LED		
Output circuits			15-16/18, 25-26/28		
Kind of output			2 c/o contacts		
Operational principle [1]			closed-circuit principle		
Contact material			AgCdO		
Rated operational voltage U_e		IEC/EN 60947-1	400 V		
Minimum switching voltage / minimum switching current			- / -		
Maximum switching voltage			400 V		
Rated operational current I_e (IEC/EN 60947-5-1)		AC-12 (resistive) 230 V	5 A		
		AC-15 (inductive) 230 V	3 A		
		DC-12 (resistive) 24 V	5 A		
		DC-13 (inductive) 24 V	2.5 A		
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)		B 300		
	max. rated operational voltage		300 V AC		
	max. continuous thermal current at B 300		5 A		
	max. making/breaking apparent power at B 300		3600/360 VA		
Mechanical lifetime			30 x 10^6 switching cycles		
Electrical lifetime (AC-12, 230 V, 4 A)			0.1 x 10^6 switching cycles		
Max. fuse rating to achieve short-circuit protection		n/c / n/o contact	4 A fast-acting / 6 A fast-acting		
General data					
Diemensions (W X H X D)			45 x 78 x 100 mm (1.77 x 3.07 x 3.94 in)		
Mounting position			any		
Degree of protection		enclosure / terminals	IP50 / IP20		
Ambient temperature range		operation / storage	-25...+65 °C / -40...+85 °C		
Mounting			DIN rail (IEC/EN 60715)		
Electrical connection					
Wire size	fine-strand with wire end ferrule		2 x 2.5 mm² (2 x 14 AWG)		
Standards					
Product standard			IEC 255-6, EN 60255-6		
Low Voltage Directive			2006/95/EC		
EMC Directive			2004/108/EC		
Electromagnetic compatibility			-		
electrostatic discharge		IEC/EN 61000-4-2	Level 3 (6 kV / 8kV)		
radiated, radio-frequency, electromagnetic field		IEC/EN 61000-4-3	Level 3 (10 V/m)		
electrical fast transient / burst		IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)		
surge		IEC/EN 61000-4-5	Level 4 (2 kV L-L)		
conducted disturbances, induced by radio-frequency fields		IEC/EN 61000-4-6	Level 3 (10 V)		
Resistance to vibration (IEC 68-2-6)			5 g		
Mechanical resistance (IEC 68-2-6)			10 g		
Isolation data					
Rated insulation voltage between supply, measuring and output circuit (VDE 0110, IEC 60947)			500 V		
Rated impulse withstand voltage between all isolated circuits (VDE 0110, IEC 664)			4 kV / 1.2 - 50 µs		
Test voltage between all isolated circuits			2,5 kV, 50 Hz, 1 min.		
Pollution category (VDE 0110, IEC 664, IEC 255-5)			3 / C		
Overvoltage category (VDE 0110, IEC 664, IEC 255-5)			III / C		
Environmental testing (IEC 68-2-30)			24 h cycle time, 55 °C, 93 % rel., 96 h		

1) Open-circuit principle: Output relay energizes if the measured value exceeds/drops below the adjusted threshold.
Closed-circuit principle: Output relay de-energizes if the measured value exceeds/drops below the adjusted threshold.

Notes

General technical data, Accessories, Current transformers
Table of contents

General technical data, Accessories, Current transformers


Technical diagrams - CM-range 2/125
Dimensional drawings 2/127
Ordering details - CM-range accessories 2/128

General technical data, Accessories, Current transformers
Technical diagrams - CM-range


Load limit curves

CM-S (22.5 mm), CM-E (22.5 mm), CM-UFD.M22


AC load (resistive)

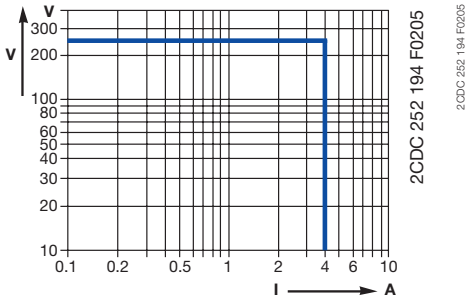


DC load (resistive)

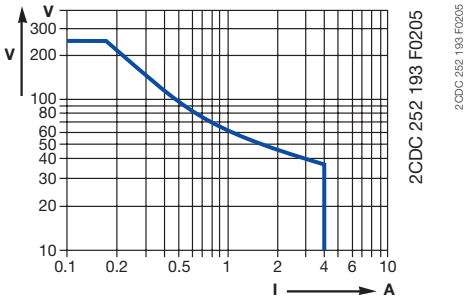

Derating factor F for inductive AC load

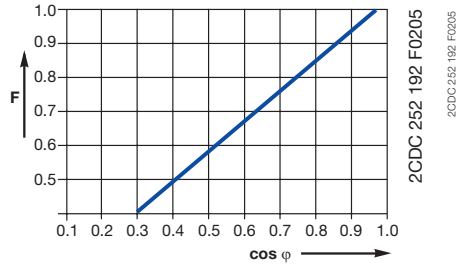


Contact lifetime

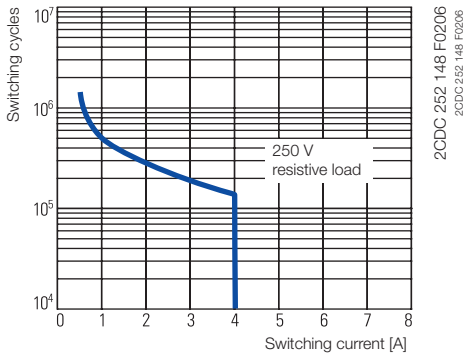


CM-N (45 mm)


AC load (resistive)

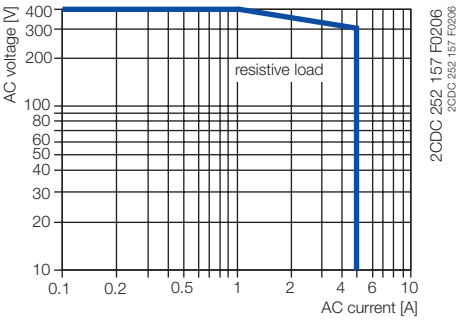


DC load (resistive)

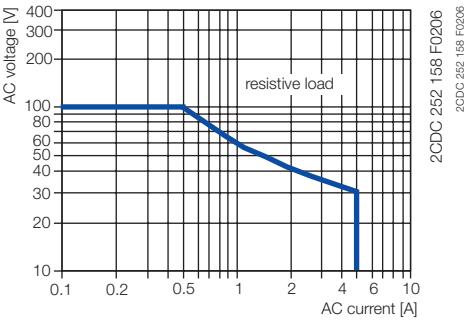

Derating factor F for inductive AC load

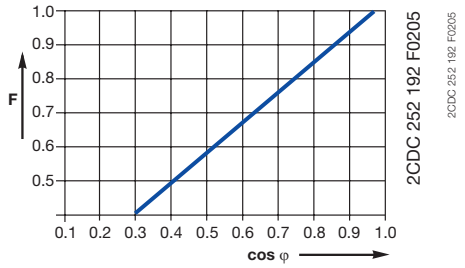


Contact lifetime

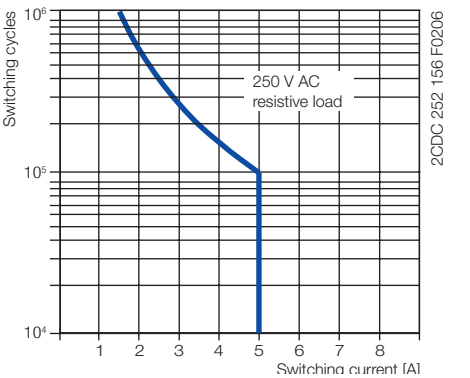


Technical diagrams - CM-range


Load limit curves CM-UFD.M21

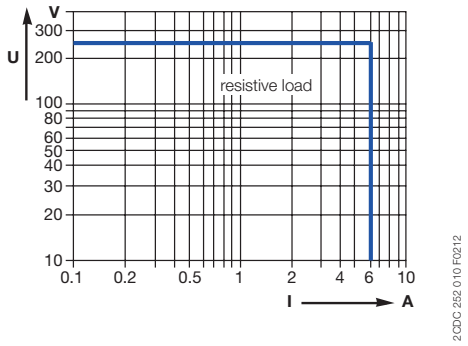

AC load (resistive)

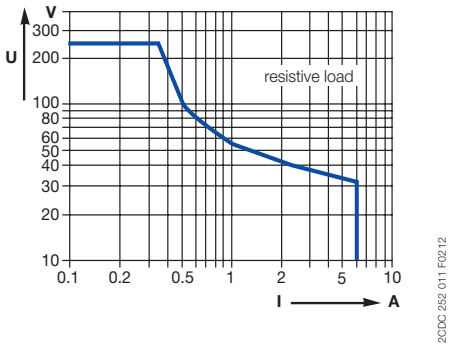

DC load (resistive)

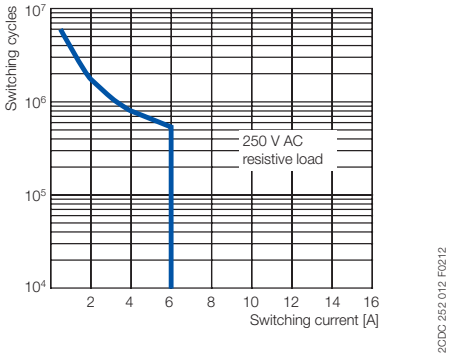

Contact lifetime

General technical data, Accessories, Current transformers
Dimensional drawings


Measuring and monitoring relays CM range old housing

Dimensions in mm


CM-S 22.5 mm

CM-N 45 mm

CM-E 22.5 mm

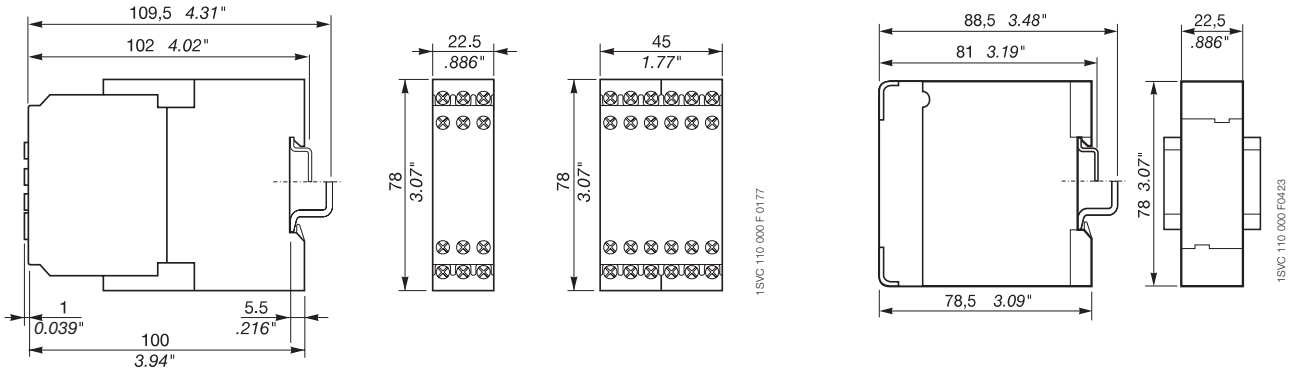


Measuring and monitoring relays CM range new housing

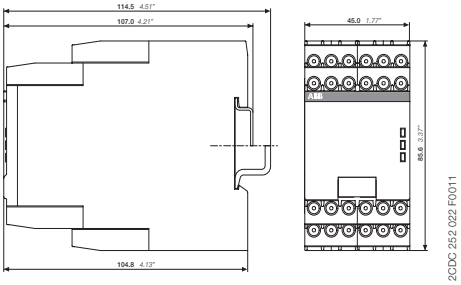

2CDC 252 022 F0011


CM-xxN 1SVR 750 xxx xxx, 1SVR 760 xxx xxx
45 mm

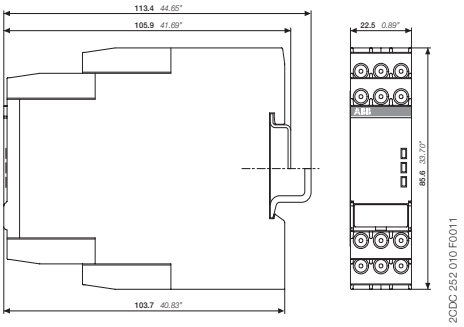


2CDC 252 010 F0011

CM-xxS 1SVR 730 xxx xxx, 1SVR 740 xxx xxx
22.5 mm

Temperature monitoring relays

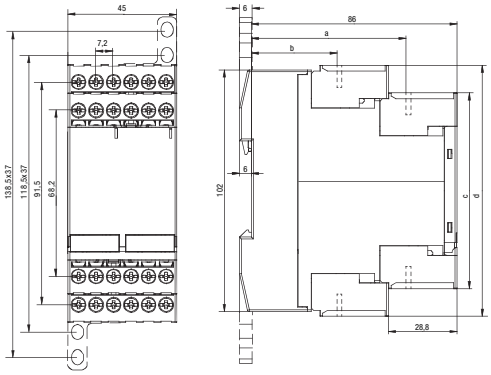




	a	b	c	d
C512, C513	65	36	82,6	105,9


C512/C513
45 mm

Dimensional drawing CM-UFD.Mxx

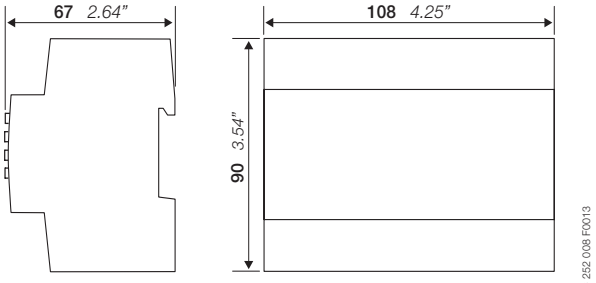


Ordering details - CM-range accessories


Accessories




ADP.01



MAR.01



Sealable cover COV.01




Sealable cover COV.02


Ordering details

Description	For type	Width in mm	for devices	Type	Order code	Price pce	Pkg qty	Weight (1 pce) g (oz)
Adapter for screw mounting	CM-S CM-S.S/P	22.5		ADP.01	1SVR430029R0100		1	18.4 (0.65)
	CM-N CM-N.S/P	45		ADP.02	1SVR440029R0100		1	36.7 (1.30)
Marker label	CM-S, CM-N CM-S.S/P CM-N.S/P		without DIP switches	MAR.01	1SVR366017R0100		10	0.19 (0.007)
	CM-S, CM-N		with DIP switches	MAR.02	1SVR430043R0000		10	0.13 (0.005)
	CM-S.S/P CM-N.S/P		with DIP switches	MAR.12	1SVR730006R0000		10	0.152 (0.335)
Sealable transparent cover	CM-S	22.5		COV.01	1SVR430005R0100		1	5.2 (0.18)
	CM-N	45		COV.02	1SVR440005R0100		1	7.7 (0.27)
	CM-S.S/P	22.5		COV.11	1SVR730005R0100		1	4.0 (0.129)
	CM-N.S/P	45		COV.12	1SVR750005R0100		1	7 (0.247)


General technical data, Accessories, Current transformers
Ordering details - CM-range accessories



CM-CT



CM-CT
with mounted accessories



CM-CT-A
mounted on DIN rail

Plug-in current transformers CM-CT

- Without primary conductor though with foot angle, insulating protective cap and bar fastening screws
- Primary / rated current from 50 A to 600 A
- Secondary current of 1 A or 5 A
- Class 1


Ordering details

Rated primary current	Secondary current	Burden class	Type	Order code	Price pce	Weight (1 pce) g (oz)
50 A	1 A	1 VA / 1	CM-CT 50/1	1SVR450116R1000		0.31 (0.683)
75 A		1.5 VA / 1	CM-CT 75/1	1SVR450116R1100		0.31 (0.683)
100 A		2.5 VA / 1	CM-CT 100/1	1SVR450116R1200		0.276 (0.608)
150 A		2.5 VA / 1	CM-CT 150/1	1SVR450116R1300		0.32 (0.705)
200 A		2.5 VA / 1	CM-CT 200/1	1SVR450116R1400		0.222 (0.489)
300 A		5 VA / 1	CM-CT 300/1	1SVR450117R1100		0.29 (0.639)
400 A		5 VA / 1	CM-CT 400/1	1SVR450117R1200		0.27 (0.595)
500 A		5 VA / 1	CM-CT 500/1	1SVR450117R1300		0.29 (0.639)
600 A		5 VA / 1	CM-CT 600/1	1SVR450117R1400		0.24 (0.529)
50 A	5 A	1 VA / 1	CM-CT 50/5	1SVR450116R5000		0.3 (0.661)
75 A		1.5 VA / 1	CM-CT 75/5	1SVR450116R5100		0.31 (0.683)
100 A		2.5 VA / 1	CM-CT 100/5	1SVR450116R5200		0.31 (0.683)
150 A		2.5 VA / 1	CM-CT 150/5	1SVR450116R5300		0.28 (0.617)
200 A		5 VA / 1	CM-CT 200/5	1SVR450116R5400		0.29 (0.639)
300 A		5 VA / 1	CM-CT 300/5	1SVR450117R5100		0.252 (0.556)
400 A		5 VA / 1	CM-CT 400/5	1SVR450117R5200		0.26 (0.573)
500 A		5 VA / 1	CM-CT 500/5	1SVR450117R5300		0.208 (0.459)
600 A		5 VA / 1	CM-CT 600/5	1SVR450117R5400		0.21 (0.463)


Ordering details - Accessories

Description	Type	Order code	Price 10 pces	Weight (1 pce) g (oz)
Snap-on fastener for DIN rail mounting of CM-CT	CM-CT A	1SVR450118R1000		0.009 (0.02)

Operating principle / circuit diagram

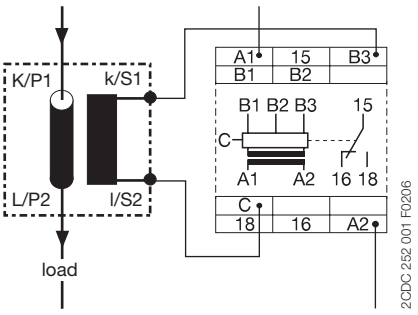

Dimensional drawing

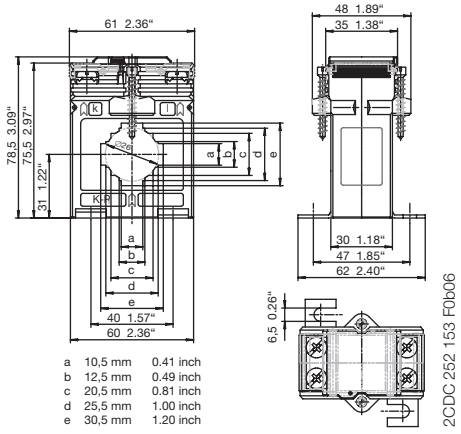

Notes

Primary switch mode power supplies
Product group picture

3



Primary switch mode power supplies
Table of contents

Primary switch mode power supplies

Overview 3/3
Approvals and marks 3/4
Selection table - Single-phase 3/5
Selection table - Three-phase, CP-ASI 3/6
CP-D range 3/7
Benefits and advantages 3/9
Ordering details 3/10
Technical data 3/11
Technical diagrams 3/15
Dimensional drawings 3/16
CP-E range 3/17
Benefits and advantages 3/19
Ordering details 3/20
Technical data 3/21
Technical diagrams, Wiring instructions 3/29
Technical diagrams, Dimensional drawings 3/30
CP-T range 3/31
Benefits and advantages 3/33
Ordering details 3/34
Technical data 3/35
Technical diagrams, Dimensional drawings 3/39
Technical diagrams 3/40
CP-S and CP-C 3/41
Benefits and advantages 3/43
Operating control 3/44
Ordering details 3/45
Technical data 3/46
Technical diagrams, Dimensional drawings 3/50
Redundancy units 3/51
Ordering details 3/51
Technical data 3/52
Dimensional drawings 3/56
CP-ASI range 3/57
Benefits and advantages 3/59
Ordering details 3/60
Technical data 3/61
Technical diagrams 3/63
Dimensional drawings 3/64
CP-B range 3/65
Benefits and advantages 3/67
Ordering details 3/68
Technical data 3/69
Technical data, Technical diagrams 3/70
Dimensional drawings 3/71
Technical data 3/72
Electronic protection devices EPD24 3/73
Ordering details 3/75
Technical data 3/76
Technical information 3/78
Approvals, Safety instructions 3/79
Installation guidelines 3/80

Primary switch mode power supplies
Overview

Modern power supply units are a vital component in most areas of energy management and automation technology. ABB as your global partner in these areas pays the utmost attention to the resulting requirements. Innovation is the key to a substantial enlargement of our power supply product program:

CP-D
The CP-D range of power supply units in MDRC design (modular DIN rail components) fits into all domestic installation and distribution panels.

CP-E
The CP-E range offers enhanced functionality while the number of different types has been considerably reduced. Now all power supply units can be operated at an ambient temperature of up to +70 °C.

CP-T
The CP-T range of three-phase power supply units is ABB's youngest member of the power supply family.

CP-S
The CP-S range is ABB's standard range, a high-end power supply unit optimised for serial applications.

CP-C
The CP-C range's pluggable function modules adapt these power supply units exactly to your application's needs. Of course, all ABB power supply units feature primary switch mode technology – environmentally sound and cost-efficiency. This represents the highest level of innovative industrial electronics.

Application manual
For today's applications, e.g. in control engineering, it is essential to make the right decision regarding the selection and planning of the power supply unit. Incorrect dimensioning or incorrect connection of a power supply unit can seriously affect the safety and/or availability of the entire installation. ABB's "Power Supply Units" application manual provides a general overview of switch mode power supply units, thus helping you to choose the ideal power supply unit and avoid problems during engineering and commissioning. The manual generally shows and explains the fundamental characteristics of and the differences between power supply units, and provides a detailed introduction to the ABB product range on the basis of the selection criteria. Finally, it describes and explains application examples for engineering.

The manual is available in English and German.
English Version: 2CDC 114 048 M0203
German Version: 2CDC 114 048 M0103

Primary switch mode power supplies
Approvals and marks

■ existing
□ pending

Approvals		CP-D						
		CP-D 12/0.83	CP-D 12/2.1	CP-D 24/0.42	CP-D 24/1.3	CP-D 24/2.5	CP-D 24/4.2	CP-D RU
cULus LISTED	UL 508, CAN/CSA C22.2 No.107.1	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	
cULus	UL 1310, CAN/CSA C22.2 No.223 (Class 2 Power Supply)	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]		
cULus	UL 60950, CAN/CSA C22.2 No.60950	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	
CB	CB Scheme	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	
EAC	EAC	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	
CCC	CCC	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	
Marks								
CE	CE	■	■	■	■	■	■	■
C-Tick	C-Tick	■	■	■	■	■	■	■

■ existing
□ pending

Approvals		CP-E														CP-T							
		CP-E 5/3.0	CP-E 12/2.5	CP-E 12/10.0	CP-E 24/0.75	CP-E 24/1.25	CP-E 24/2.5	CP-E 24/5.0	CP-E 24/10.0	CP-E 24/20.0	CP-E 48/0.62	CP-E 48/1.25	CP-E 48/5.0	CP-E 48/10.0		CP-RUD		CP-T 24/5.0	CP-T 24/10.0	CP-T 24/20.0	CP-T 24/40.0		CP-T 48/5.0	CP-T 48/10.0	CP-T 48/20.0
cULus LISTED	UL 508, CAN/CSA C22.2 No.107.1	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]				■[1)]	■[1)]	■[1)]	■[1)]		■[1)]	■[1)]	■[1)]
cULus	UL 1310, CAN/CSA C22.2 No.223 (Class 2 Power Supply)	■	■		■	■	■				■	■													
cULus	ANSI/ISA-12.12 (Class I, Div. 2, hazardous locations) CAN/CSA C22.2 No. 213	■	■	■	■	■	■	■	■	■	■	■	■	■				■	■	■	■		■	■	■
cULus	UL 60950, CAN/CSA C22.2 No.60950	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]				■[1)]	■[1)]	■[1)]	■[1)]		■[1)]	■[1)]	■[1)]
EAC	EAC	■	■	■	■	■	■	■	■	■	■	■	■	■				■	■	■	■		■	■	■
CCC	CCC	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]	■[1)]											
CQC	GB4943, GB9254, GB17625.1																	■	■	■	■		■	■	■
Marks																									
CE	CE	■	■	■	■	■	■	■	■	■	■	■	■	■		■		■	■	■	■		■	■	■
C-Tick	C-Tick	■	■	■	■	■	■	■	■	■	■	■	■	■		■		□	□	□	□		□	□	□

■ existing
□ pending

Approvals		CP-S				CP-C					CP-A			CP-B			
		CP-S 24/5.0	CP-S 24/10.0	CP-S 24/20.0		CP-C 24/5.0	CP-C 24/10.0	CP-C 24/20.0		CP-C MM		CP-A RU	CP-A CM		CP-B 24/3.0	CP-B 24/10.0	CP-B 24/20.0	CP-B EXT.2
cULus LISTED	UL 508, CAN/CSA C22.2 No.107.1	■[1)]	■[1)]	■[1)]		■[1)]	■[1)]	■[1)]							■	■	■	■
cULus LISTED	UL 1604 (Class I, Div. 2, hazardous locations), CAN/CSA C22.2 No.213	■[1)]	■[1)]	■[1)]		■[1)]	■[1)]	■[1)]										
cULus	UL 60950, CAN/CSA C22.2 No.60950	■[1)]	■[1)]	■[1)]		■[1)]	■[1)]	■[1)]				■[1)]	■[1)]					
EAC	EAC	■	■	■		■	■	■		■		■	■		■	■	■	■
CB	CB scheme	■	■	■		■	■	■				■	■					
Marks																		
CE	CE	■	■	■		■	■	■		■		■	■		■	■	■	■
C-Tick	C-Tick	■	■	■		■	■	■		■		■	□					

[1)] Approvals refer to the rated input voltage U_{in}.

Primary switch mode power supplies
Selection table - Single-phase

		Order number	1SVR427041R1000	1SVR427043R1200	1SVR427041R0000	1SVR427043R0100	1SVR427044R0200	1SVR427045R0400		1SVR427033R3000	1SVR427032R1000	1SVR427035R1000	1SVR427030R0000	1SVR427031R0000	1SVR427032R0000	1SVR427034R0000	1SVR427035R0000	1SVR427036R0000	1SVR427030R2000	1SVR427031R2000	1SVR427034R0000	1SVR427035R2000		1SVR427014R0000	1SVR427015R0100	1SVR427016R0100	1SVR427024R0000	1SVR427025R0000	1SVR427026R0000
			Single phase																										
			CP-D							CP-E														CP-S			CP-C		
Rated output voltage	5 V DC									■																			
	12 V DC		■	■							■	■																	
	24 V DC				■	■	■	■					■	■	■	■	■	■						■	■	■	■	■	■
	48 V DC																		■	■	■	■							
Rated output current	0.42 A				■																								
	0.625 A																		■										
	0.75 A												■																
	0.83 A		■																										
	1.25 A													■						■									
	1.3 A					■																							
	2.1 A			■																									
	2.5 A						■				■					■													
	3 A									■																			
	4.2 A							■																					
	5 A															■					■			■			■		
	10 A											■					■					■			■			■	
	20 A																	■								■			■
Rated output power	10 W		■		■																								
	15 W									■																			
	18 W												■																
	30 W			■		■					■			■					■										
	60 W						■								■					■									
	100 W							■																					
	120 W											■				■								■			■		
	240 W																■				■				■			■	
	480 W																	■				■				■			■
Rated input voltage	100 - 240 V AC		■	■	■	■	■	■		■	■		■	■	■				■	■									
	115/230 V AC auto select											■				■	■				■									
	115 - 230 V AC																	■				■								
	110 - 240 V AC																							■			■	■	■
	110 - 120 V AC																								■	■				
	220 - 240 V AC																								■	■				
DC input voltage range	120 - 370 V DC		■	■	■	■	■	■		■			■				■					■								
	90 - 375 V DC										■			■	■				■	■										
	210 - 370 V DC											■				■	■				■									
	100 - 350 V DC																							■			■	■	■
	220 - 350 V DC																								■	■				
Features	Power reserve design																							■	■	■	■	■	■
	Adjustable output voltage			■		■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■					■	■	■
	Integrated input fuse		■	■	■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■		■	■	■	■	■	■
	Short circuit stable		■	■	■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■		■	■	■	■	■	■
	Fold forward behavior (U/I)		■	■	■	■	■	■			■	■		■	■	■	■	■	■	■	■	■		■	■	■	■	■	■
	Fold back behavior (hiccup)									■			■																
	Power factor correction											pas				pas	pas	act			pas	act					act	act	act
	Ambient temp. rating -25°C (-40°C) to 70°C		■	■	■	■	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■		■	■	■	■	■	■
	Parallel connection									■	■	3	■	■	■	3	3	3	■	■	3	3		5	5	5	5	5	5
	Serial connection		■	■	■	■	■	■		■	■	2	■	■	■	2	2	2	■	■	2	2		■	■	■	■	■	■

Primary switch mode power supplies
Selection table - Three-phase, CP-ASI

		Order number	1SVR427054R0000	1SVR427055R0000	1SVR427056R0000	1SVR427057R0000	1SVR427054R2000	1SVR427055R2000	1SVR427056R2000		1SVR427090R0280	1SVR427090R0400	1SVR427095R0400	1SVR427090R0800
			Three phase								AS-Interface			
			CP-T								CP-ASI			
Rated output voltage	24 V DC		■	■	■	■								
	30.5 V DC										■	■	■	■
	48 V DC						■	■	■					
Rated output current	2.8 A										■			
	3 A											■	■	
	5 A		■				■							
	8 A													■
	10 A			■				■						
	20 A				■				■					
	40 A					■								
Rated output power	85 W										■			
	120 W		■											
	122 W											■	■	
	240 W			■			■							
	244 W													■
	480 W				■			■						
	960 W					■			■					
Rated input voltage	85-132 V AC, 184-264 V AC										■	■		■
	3 x 400 - 800 V AC		■	■	■	■	■	■	■					
DC input voltage range	18-32.4 V DC												■	
	480 - 820 V DC		■	■	■	■	■	■	■					
Features	Adjustable output voltage		■	■	■	■	■	■	■					
	Integrated input fuse		■	■	■	■	■	■	■					
	Short circuit stable		■	■	■	■	■	■	■					
	Fold forward behavior (U/I)		■	■	■		■	■						
	Fold back behavior (hiccup)		■	■	■	■	■	■	■					
	Power factor correction													
	Ambient temp. rating -25°C (-40°C) to 70°C		■	■	■	■	■	■	■					
	Serial connection			2	2	2	2	2	2					
	Suited for AS-Interfaces										■	■	■	■

CP-D range
Product group picture

3



CP-D range
Table of contents

CP-D range

Product group picture 3/7
Table of contents 3/8
Benefits and advantages 3/9
Ordering details 3/10
Technical data 3/11
Technical diagrams 3/15
Dimensional drawings 3/16

CP-D range
Benefits and advantages

Characteristics
- Output voltages 12 V, 24 V DC
- Adjustable output voltages (devices > 10 W)
- Output currents 0.42 A / 0.83 A / 1.3 A / 2.1 A / 2.5 A / 4.2 A
- Power range 10 W, 30 W, 60 W, 100 W
- Wide range input 100-240 V AC (90-264 V AC, 120-375 V DC)
- High efficiency of up to 89 %
- Low power dissipation and low heating
- Free convection cooling (no forced cooling with ventilators)
- Ambient temperature range during operation -40 °C...+70 °C
- Open-circuit, overload and short-circuit stable
- Integrated input fuse
- U/I characteristic (fold-forward behaviour at overload – no switch-off)
- LEDs for status indication
- Light-grey housing in RAL 7035
- Approvals / Marks (depending on device, partly pending):

Benefits

Width and structural form ①
With their width between 18 to 90 mm only, the CP-D range switch mode power supplies are ideally suited for installation in distribution panels.

Wide range input ②
Optimised for world-wide applications: The CP-D power supplies can be supplied with 90-264 V AC or 120-375 V DC.


Adjustable output voltage ③
The CP-D range types > 10 W feature a continuously adjustable output voltage. Thus, they can be optimally adapted to the application, e.g. compensating the voltage drop caused by a long line length.




2CDC 271 027 F0007



2CDC 276 033 F0007

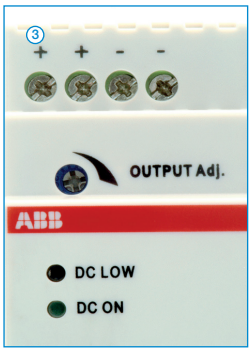

2CDC 276 032 F0007

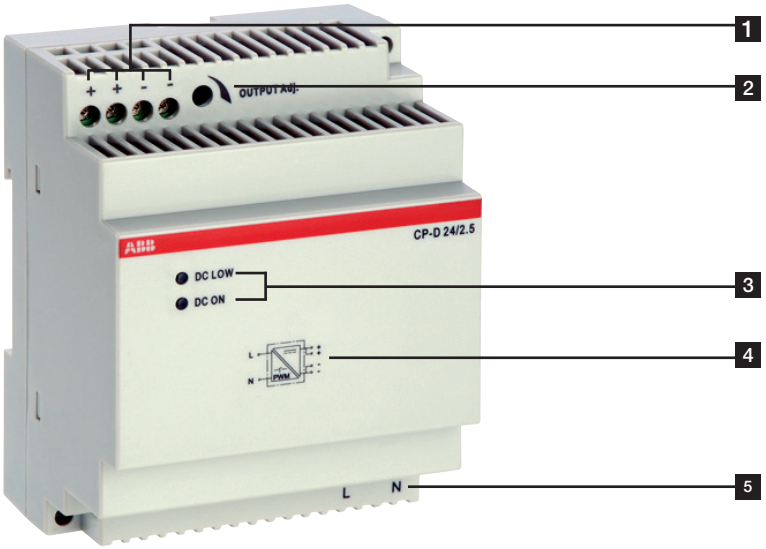

1 OUTPUT ++/--: terminals - output
2 INPUT L, N: terminals - input
3 Indication of operational states
DC ON: green LED - output voltage applied
DC LOW: red LED - output voltage too low
4 Circuit diagram
5 OUTPUT Adjust: potentiometer - adjustment of output voltage

CP-D range
Ordering details



CP-D 12/0.83, CP-D 24/0.42



CP-D 12/2.1, CP-D 24/1.3



CP-D 24/2.5

Description

The CP-D range of modular power supply units in MDRC design (modular DIN rail components) is ideally suited for installation in distribution panels. This range offers devices with output voltages of 12 V DC and 24 V DC at output currents of 0.42 A to 4.2 A. Thanks to a high thermal efficiency corresponding to low power and heat dissipation, the devices can be operated without forced cooling. All devices feature the U/I output characteristic (fold forward behaviour). All power supply units in the CP-D range are approved according to all relevant international standards.

Ordering details

Input voltage range	Rated output voltage / current	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
90-264 V AC/ 120-375 V DC	12 V DC / 0.83 A	CP-D 12/0.83	1SVR427041R1000		0.06 (0.13)
90-264 V AC/ 120-375 V DC	12 V DC / 2.1 A	CP-D 12/2.1	1SVR427043R1200		0.19 (0.41)
90-264 V AC/ 120-375 V DC	24 V DC / 0.42 A	CP-D 24/0.42	1SVR427041R0000		0.06 (0.13)
90-264 V AC/ 120-375 V DC	24 V DC / 1.3 A	CP-D 24/1.3	1SVR427043R0100		0.19 (0.41)
90-264 V AC/ 120-375 V DC	24 V DC / 2.5 A	CP-D 24/2.5	1SVR427044R0200		0.25 (0.56)
90-264 V AC/ 120-375 V DC	24 V DC / 4.2 A	CP-D 24/4.2	1SVR427045R0400		0.32 (0.71)

CP-D range
Technical data

Data at T_a = 25 °C, U_{in} = 230 V AC and rated values, unless otherwise indicated

Type		CP-D 12/0.83	CP-D 12/2.1
Input circuit - supply circuit		L, N	
Rated input voltage U_{in}		100-240 V AC	
Input voltage range		90-264 V AC / 120-375 V DC	
Frequency range AC		47-63 Hz	
Typical input current / typical power consumption	at 110 V AC	200 mA / 12.68 W	502 mA / 31.14 W
	at 230 V AC	128.3 mA / 13.01 W	277 mA / 31.2 W
Inrush current limiting	at 230 V AC	30 A (max. 3 ms)	50 A (max. 3 ms)
Power failure buffering time		min. 30 ms	
Internal input fuse		1 A slow-acting / 250 V AC	2 A slow-acting / 250 V AC
Power factor correction (PFC)		no	
Indication of operational states			
Output voltage	DC ON: green LED	⎍: output voltage applied	
	DC LOW: red LED	⎍: output voltage too low	
Output circuit		+, -	++, --
Rated output voltage		12 V DC	
Tolerance of the output voltage		±1 %	
Adjustment range of the output voltage		-	12-14 V DC
Rated output power		10 W	25 W
Rated output current I_r	$T_a \leq 60$ °C	0.83 A	2.1 A
Derating of the output current	60 °C < $T_a \leq$ 70 °C	2.5 %/°C	
Maximum deviation with	load change statical	max. 1 %	
	change of output voltage within the input voltage range	max. 1 %	
Control time		< 1 ms	
Starting time after applying the supply voltage	at I_r	1000 ms	
Rise time	at rated load	typ. 1 ms	
Residual ripple and switching peaks	BW = 20 MHz	50 mV	
Parallel connection		yes, using CP-D RU	
Series connection		yes, to increase voltage	
Resistance to reverse feed		18 V / 1 s	
Output circuit - No-load, overload and short-circuit behaviour			
Characteristic curve of output		U/I characteristic curve	
Short-circuit protection		continuous short-circuit stability	
Short-circuit behaviour		continuation with output power limiting	
Current limiting at short circuit		typ. 1.4 A	typ. 5.9 A
Overload protection		output power limiting	
Overvoltage protection		15-16.5 V DC	
No-load protection		continuous no-load stability	
Starting of capacitive loads		unlimited	
General data			
Efficiency		typ. 78 %	typ. 82 %
Duty time		100 %	
Dimensions (W x H x D)		18 x 91 x 57.5 mm (0.71 x 3.58 x 2.26 in)	53 x 91 x 57.5 mm (2.09 x 3.58 x 2.26 in)
Weight		0.066 kg (0.13 lb)	0.196 kg (0.41 lb)
Material of housing		plastic	
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool	
Mounting position		horizontal	
Minimum distance to other units	horizontal / vertical	25 mm / 25 mm (0.98 in / 0.98 in)	
Degree of protection	housing / terminals	IP20 / IP20	
Protection class		II	

CP-D range
Technical data

Data at T_a = 25 °C, U_{in} = 230 V AC and rated values, unless otherwise indicated

Type		CP-D 12/0.83	CP-D 12/2.1
Electrical connection - Input circuit / Output circuit			
Wire size	fine-strand with wire end ferrule	0.2-1.5 mm² (24-16 AWG)	0.2-2.5 mm² (24-14 AWG)
	rigid	0.2-2.5 mm² (26-12 AWG)	0.2-2.5 mm² (24-12 AWG)
Stripping length		4-5 mm (0.16-0.2 in)	7 mm (0.28 in)
Tightening torque		0.6 Nm (5 lb.in)	0.7 Nm (6 lb.in)
Environmental data			
Ambient temperature range	operation	-40…+70 °C	
	rated load	-40…+60 °C	
	storage	-40…+85 °C	
Damp heat (cyclic) (IEC/EN 60068-2-30)		4 x 24 cycles, 40 °C, 95 % RH	
Vibration (sinusoidal) (IEC/EN 60068-2-6)		50 m/s², 10 Hz - 2 kHz	
Shock (half-sine) (IEC/EN 60068-2-27)		40 m/s², 22 ms	
Isolation data			
Rated insulation voltage U_i	input circuit / output circuit	3 kV AC	
Pollution degree		2	
Overvoltage category (UL/IEC/EN 60950-1)		II	
Standards			
Product standard		EN 61204	
Low Voltage Directive		2006/95/EC	
EMC Direcitve		2004/108/EC	
Electrical safety		UL 508, UL 60950-1, EN 60950-1	
Protective low voltage		SELV (EN 60950-1)	
Electromagnetic compatibility			
Interference immunity to		EN 61000-6-2	
electrostatic discharge	IEC/EN 61000-4-2	Level 4 (4 kV / 8 kV)	Level 4 (4 kV / 15 kV)
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)	
electrical fast transient/burst	IEC/EN 61000-4-4	Level 4 (4 kV)	
surge	IEC/EN 61000-4-5	Level 3 (2 kV L-L)	
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)	
Interference emission		EN 61000-6-3	
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B	
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B	

„Approvals and marks“ on page 3/4.

CP-D range
Technical data

Data at T_a = 25 °C, U_{in} = 230 V AC and rated values, unless otherwise indicated

Type		CP-D 24/0.42	CP-D 24/1.3	CP-D 24/2.5	CP-D 24/4.2
Input circuit - supply circuit		L, N			
Rated input voltage U_{in}		100-240 V AC			
Input voltage range		90-264 V AC /120-375 V DC			
Frequency range AC		47-63 Hz			
Typical input current / typical power consumption	at 110 V AC	184 mA / 11.62 W	600 mA / 37.92 W	1120 mA / 69.3 W	1800 mA / 117.3 W
	at 230 V AC	120.6 mA / 12 W	344 mA / 38.16 W	660 mA / 70.1 W	900 mA / 114.4 W
Inrush current limiting	at 230 V AC	30 A (max. 3 ms)	50 A (max. 3 ms)	60 A (max. 3 ms)	
Power failure buffering time		min. 30 ms		min. 60 ms	
Internal input fuse		1 A slow-acting / 250 V AC	2 A slow-acting / 250 V AC		3.15 A slow-acting / 250 V AC
Power factor correction (PFC)		no			
Indication of operational states					
Output voltage	DC ON: green LED	⎍: output voltage applied			
	DC LOW: red LED	⎍: output voltage too low			
Output circuit		+, -		++, --	
Rated output voltage		24 V DC			
Tolerance of the output voltage		±1 %			
Adjustment range of the output voltage		-	24-28 V DC		
Rated output power		10 W	30 W	60 W	100 W
Rated output current I_r		$T_a \leq 60$ °C: 0.42 A	$T_a \leq 60$ °C: 1.3 A	$T_a \leq 55$ °C: 2.5 A	$T_a \leq 60$ °C: 4.2 A
Derating of the output current		60 °C < $T_a \leq 70$ °C: 2.5 %/°C	60 °C < $T_a \leq 70$ °C: 2.5 %/°C	55 °C < $T_a \leq 70$ °C: 2.5 %/°C	60 °C < $T_a \leq 70$ °C: 2.5 %/°C
Maximum deviation with	load change statical	max. 1 %			
	change of output voltage within the input voltage range	max. 1 %			
Control time		< 1 ms			
Starting time after applying the supply voltage	at I_r	1000 ms			
Rise time	at rated load	typ. 1 ms			
Residual ripple and switching peaks	BW = 20 MHz	50 mV			
Parallel connection		yes, using CP-D RU			
Series connection		yes, to increase voltage			
Resistance to reverse feed		35 V / 1 s			
Output circuit - No-load, overload and short-circuit behaviour					
Characteristic curve of output		U/I characteristic curve			
Short-circuit protection		continuous short-circuit stability			
Short-circuit behaviour		continuation with output power limiting			
Current limiting at short circuit		typ. 0.78 A	typ. 4.2 A	typ. 6.05 A	typ. 11.5 A
Overload protection		output power limiting			
Overvoltage protection		30-33 V DC			
No-load protection		continuous no-load stability			
Starting of capacitive loads		unlimited			
General data					
Efficiency		typ. 80 %	typ. 83 %	typ. 86 %	typ. 89 %
Duty time		100 %			
Dimensions (W x H x D)		18 x 91 x 57.5 mm (0.71 x 3.58 x 2.26 in)	53 x 91 x 57.5 mm (2.09 x 3.58 x 2.26 in)	71 x 91 x 57.5 mm (2.80 x 3.58 x 2.26 in)	89.9 x 91 x 57,5 mm (3.54 x 3.58 x 2.26 in)
Weight		0.066 kg (0.13 lb)	0.196 kg (0.41 lb)	0.252 kg (0.55 lb)	0.386 kg / (0.72 lb)
Material of housing		plastic			
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool			
Mounting position		horizontal			
Minimum distance to other units	horizontal / vertical	25 mm / 25 mm (0.98 in / 0.98 in)			
Degree of protection	housing / terminals	IP20 / IP20			
Protection class		II			

CP-D range
Technical data


Data at T_a = 25 °C, U_{in} = 230 V AC and rated values, unless otherwise indicated

Type		CP-D 24/0.42	CP-D 24/1.3	CP-D 24/2.5	CP-D 24/4.2
Electrical connection - Input circuit / Output circuit					
Wire size	fine-strand with wire end ferrule	0.2-1.5 mm² (24-16 AWG)	0.2-2.5 mm² (24-14 AWG)		
	rigid	0.2-2.5 mm² (26-12 AWG)	0.2-2.5 mm² (24-12 AWG)		
Stripping length		4-5 mm (0.16-0.2 in)		7 mm (0.28 in)	
Tightening torque		0.6 Nm (5 lb.in)		0.7 Nm (6 lb.in)	
Environmental data					
Ambient temperature range	operation	-40…+70 °C			
	rated load	-40…+60 °C		-40…+55 °C	-40…+60 °C
	storage	-40…+85 °C			
Damp heat (cyclic) (IEC/EN 60068-2-30)		4 x 24 cycles, 40 °C, 95 % RH			
Vibration (sinusoidal) (IEC/EN 60068-2-6)		50 m/s², 10 Hz - 2 kHz			
Shock (half-sine) (IEC/EN 60068-2-27)		40 m/s², 22 ms			
Isolation data					
Rated insulation voltage U_i	input circuit / output circuit	3 kV AC		4 kV AC	3 kV AC
Pollution degree		2			
Overvoltage category (UL/IEC/EN 60950-1)		II			
Standards					
Product standard		EN 61204			
Low Voltage Directive		2006/95/EC			
EMC Direcitve		2004/108/EC			
Electrical safety		UL 508, UL 60950-1, EN 60950-1			
Protective low voltage		SELV (EN 60950-1)			
Electromagnetic compatibility					
Interference immunity to		EN 61000-6-2			
electrostatic discharge	IEC/EN 61000-4-2	Level 4 (4 kV / 8 kV)	Level 4 (4 kV / 15 kV)		Level 4 (4 kV / 8 kV)
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)			
electrical fast transient/burst	IEC/EN 61000-4-4	Level 4 (4 kV)			
surge	IEC/EN 61000-4-5	Level 3 (2 kV L-L)			
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)			
Interference emission		EN 61000-6-3			
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B			
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B			


„Approvals and marks“ on page 3/4.

CP-D range
Technical diagrams


Characteristic curve of output at Ta = 25 °C

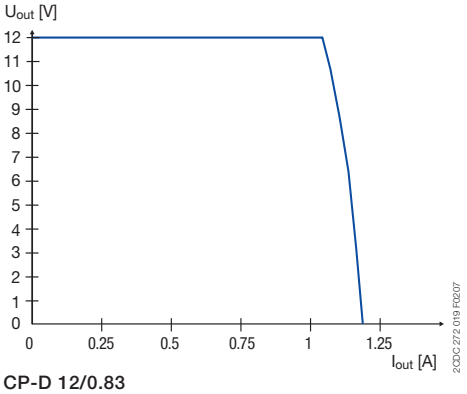


CP-D 12/0.83

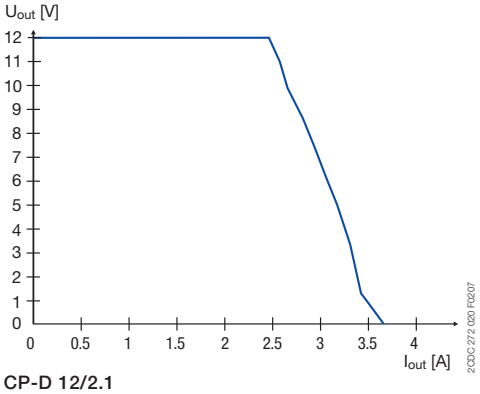


CP-D 12/2.1

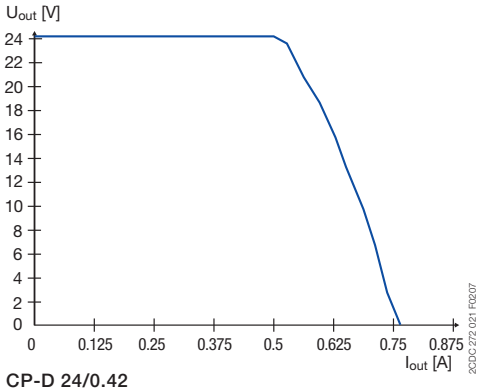


CP-D 24/0.42

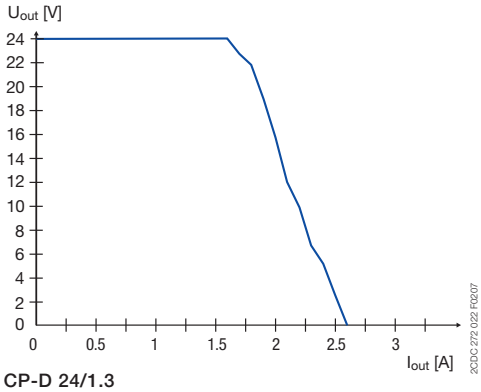

CP-D 24/1.3

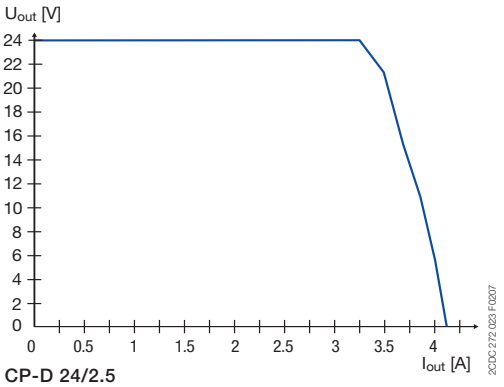


CP-D 24/2.5

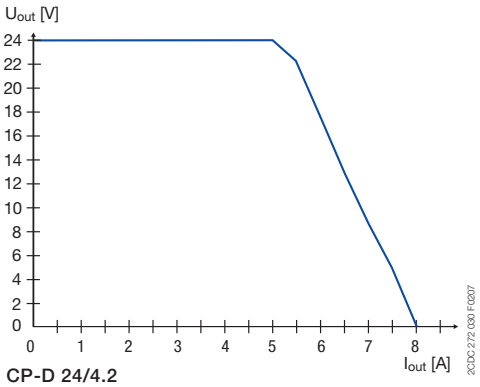


CP-D 24/4.2

Characteristic curve of temperature at rated output voltage

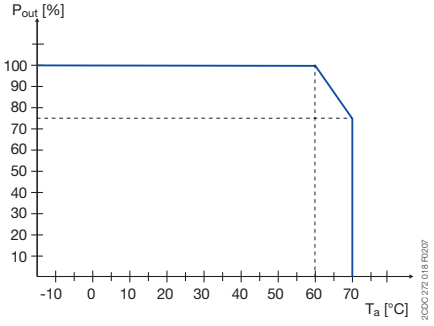


CP-D except CP-D 24/2.5

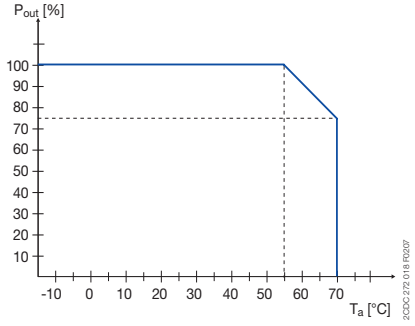


CP-D 24/2.5

CP-D range
Dimensional drawings


Dimensional drawings dimensions in mm

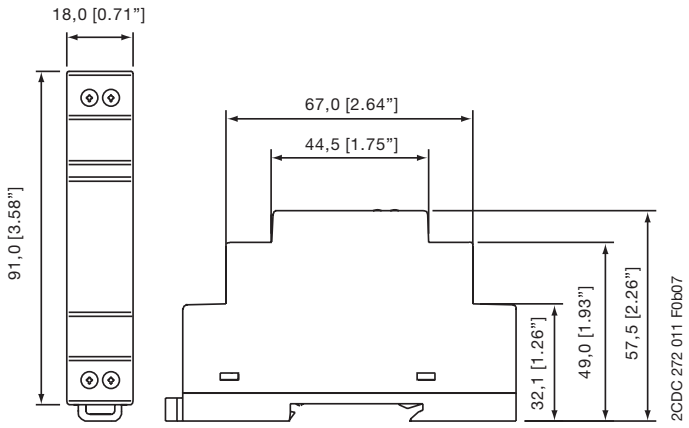


CP-D 12/0.83, CP-D 24/0.42

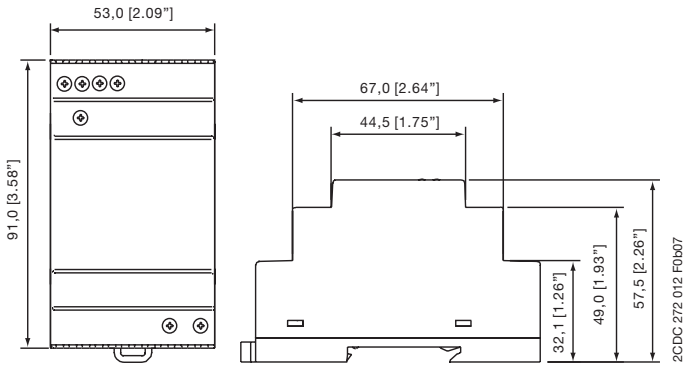

CP-D 12/2.1, CP-D 24/1.3

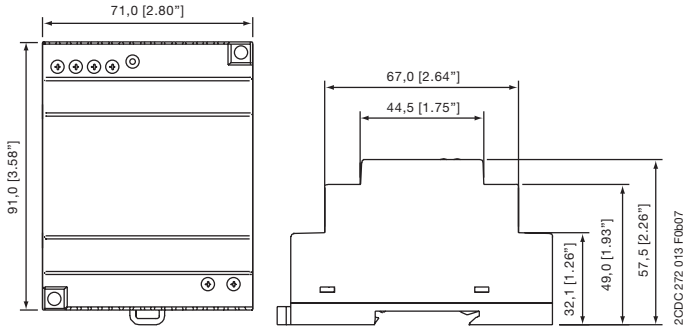

CP-D 24/2.5

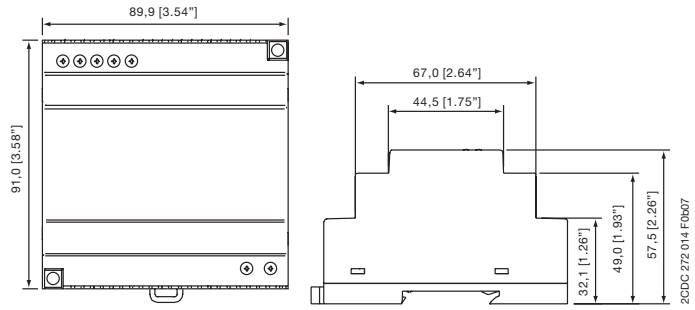

CP-D 24/4.2

CP-E range
Product group picture



CP-E range
Table of contents

CP-E range

Product group picture 3/17
Table of contents 3/18
Benefits and advantages 3/19
Ordering details 3/20
Technical data 3/21
Technical diagrams, Wiring instructions 3/29
Technical diagrams, Dimensional drawings 3/30

CP-E range
Benefits and advantages

Characteristics
- Output voltages 5 V, 12 V, 24 V, 48 V DC
- Adjustable output voltages
- Output currents 0.625 A / 0.75 A / 1.25 A / 2.5 A / 3 A / 5 A / 10 A / 20 A
- Power range 15 W, 18 W, 30 W, 60 W, 120 W, 240 W, 480 W
- High efficiency of up to 90 %
- Low power dissipation and low heating
- Free convection cooling (no forced cooling with ventilators)
- Ambient temperature range during operation -40...+70 °C
- Open-circuit, overload and short-circuit stable
- Integrated input fuse
- U/I characteristic curve on devices > 18 W (fold-forward behaviour at overload – no switch-off)
- Redundancy units offering true redundancy
- LED(s) for status indication
  - Signalling output/contact for output voltage OK
    Transistor on 24 V devices > 18 W and < 120 W
  - Solid-state on 24 V devices ≥ 120 W
- Approvals / Marks (depending on device, partly pending):
- cULus LISTED, cULus, EAC, KC / CE, DNV

Benefits

Signalling output/contact ①
The CP-E range 24 V devices > 18 W offer an output/contact for monitoring of the output voltage and remote diagnosis.

Wide range input ②
Optimised for world-wide applications: The CP-E power supplies can be supplied within a wide range of AC or DC voltage.


Adjustable output voltage ③
The CP-E range types feature a continuously adjustable output voltage. Thus, they can be optimally adapted to the application, e.g. compensating the voltage drop caused by a long line length.

Redundancy units ④
For decoupling of parallelized power supply units ≤ 40 V. Thus, true redundancy can be achieved.
Further information about redundancy unit on page 51.











1 **INPUT L, N, PE: terminals - input**
2 **Circuit diagram**
3 **single/parallel: sliding switch - adjustment of single or parallel operation**
4 **Indication of operational states**
DC ON: green LED - green LED - output voltage OK
DC LOW: red LED - output voltage too low
5 **OUTPUT L+, L+, L-, L-: terminals - output**
6 **OUTPUT Adjust: potentiometer - adjustment of output voltage**

CP-E range
Ordering details

Description

This range offers types with output voltages from 5 V DC to 48 V DC at output currents of 0.625 A to 20 A. The high thermal efficiency of up to 90 %, corresponding to very low power and heat dissipation, allows operation without forced cooling. The functionality has been enhanced while the number of different types has been considerably reduced.
Of course all power supplies of the CP-E range are approved in accordance with all relevant international standards.



CP-E 24/0.75



CP-E 12/2.5



CP-E 48/5.0

Ordering details - CP-E < 100 W

Input voltage range	Rated output voltage / current	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
90-264 V AC / 120-375 V DC	5 V DC / 3 A	CP-E 5/3.0	1SVR427033R3000		0.15 (0.33)
85-264 V AC / 90-375 V DC	12 V DC / 2.5 A	CP-E 12/2.5	1SVR427032R1000		0.29 (0.64)
90-132 V AC, 180-264 V AC / 210-375 V DC	12 V DC / 10 A	CP-E 12/10.0	1SVR427035R1000		1.00 (2.20)
90-264 V AC / 120-375 V DC	24 V DC / 0.75 A	CP-E 24/0.75	1SVR427030R0000		0.15 (0.33)
85-264 V AC / 90-375 V DC	24 V DC / 1.25 A	CP-E 24/1.25	1SVR427031R0000		0.29 (0.64)
85-264 V AC / 90-375 V DC	24 V DC / 2.5 A	CP-E 24/2.5	1SVR427032R0000		0.36 (0.79)

Ordering details - CP-E M 120 W

Input voltage range	Rated output voltage / current	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
90-132 V AC, 180-264 V AC / 210-375 V DC	24 V DC / 5 A	CP-E 24/5.0	1SVR427034R0000		1.00 (2.20)
90-132 V AC, 180-264 V AC / 210-375 V DC	24 V DC / 10 A	CP-E 24/10.0	1SVR427035R0000		1.36 (3.01)
90-264 V AC / 120-375 V DC	24 V DC / 20 A	CP-E 24/20.0	1SVR427036R0000		1.90 (4.18)
85-264 V AC / 90-375 V DC	48 V DC / 0.625 A	CP-E 48/0.62	1SVR427030R2000		0.29 (0.64)
85-264 V AC / 90-375 V DC	48 V DC / 1.25 A	CP-E 48/1.25	1SVR427031R2000		0.36 (0.79)
90-132 V AC, 180-264 V AC / 210-375 V DC	48 V DC / 5 A	CP-E 48/5.0	1SVR427034R2000		1.36 (3.01)
90-264 V AC / 120-375 V DC	48 V DC / 10 A	CP-E 48/10.0	1SVR427035R2000		1.90 (4.19)

CP-E range
Technical data

Data at T_a = 25 °C, U_{in} = 230 V AC and rated values, unless otherwise indicated

Type		CP-E 5/3.0	CP-E 12/2.5	CP-E 12/10.0
Input circuit		L, N		
Rated input voltage U_{in}		100-240 V AC		115 / 230 V AC auto select
Input voltage range		90-264 V AC / 120-375 V DC	85-264 V AC / 90-375 V DC	90-132 V AC, 180-264 V AC / 210-375 V DC
Frequency range AC		47-63 Hz		
Typical input current	at 115 V AC	335 mA	560 mA	2.2 A
	at 230 V AC	210 mA	330 mA	0.83 A
Typical power consumption		19.8 W	35.9 W	143 W
Inrush current limiting	at 115 V AC	10 A (max. 3 ms)	20 A (max. 3 ms)	24 A (max. 5 ms)
	at 230 V AC	18 A (max. 3 ms)	40 A (max. 3 ms)	48 A (max. 5 ms)
Discharge current	input / output	0.25 mA		
	input / PE	3.5 mA		
Power failure buffering time	at 115 V AC	min. 20 ms	min. 20 ms	min. 25 ms
	at 230 V AC	min. 75 ms	min. 30 ms	min. 30 ms
Internal input fuse		2 A slow-acting / 250 V AC		3.15 A slow-acting / 250 V AC
Power factor correction (PFC)		no		yes, passive, 0.7
Indication of operational states				
Output voltage	green LED	OK: ⎍: output voltage OK	OUTPUT OK: ⎍: output voltage OK	OUTPUT OK: ⎍: output voltage OK
	red LED	LOW: ⎍: output voltage too low	-	OUTPUT LOW: ⎍: output voltage too low
Output circuit		L+,L-	L+, L+, L-, L-	
Rated output voltage		5 V DC	12 V DC	
Tolerance of the output voltage		0...+1 %		
Adjustment range of the output voltage		4.5-5.75 V DC	12-14 V DC	11.4-14.5 V DC
Rated output power		15 W	30 W	120 W
Rated output current I_r	$T_a \leq 60$ °C	3.0 A	2.5 A	10 A
Derating of the output current	60 °C < $T_a \leq$ 70 °C	2.5 %/°C	2.5 %/°C	
Maximum deviation with	load change statical	±2 %	±0.5 %	±1 % (single mode) ±5 % (parallel mode)
	change of output voltage within the input voltage range	±1 %	±0.5 %	±0.5 %
Control time		< 2 ms		
Starting time after applying the supply voltage	at I_r	max. 1 s		
	with 3500 µF	-	max. 2 s	-
	with 7000 µF	max. 1.5 s	-	max. 1.5 s
Rise time	at rated load	max. 150 ms		
	with 3500 µF	-	max. 500 ms	-
	with 7000 µF	max. 500 ms	-	max. 500 ms
Fall time		max. 150 ms		
Residual ripple and switching peaks	BW = 20 MHz	50 mV		
Parallel connection		yes, to enable redundancy		configurable, to increase power,up to 3 devices, min. 0.1 I_r - max. 0.9 I_r
Series connection		yes, to increase voltage		yes, to increase voltage, max. 2 devices
Resistance to reverse feed		1 s - max. 7.5 V DC	1 s - max.18 V DC	max. 18 V DC
Output circuit - No-load, overload and short-circuit behaviour				
Characteristic curve of output		Hiccup-mode	U/I characteristic curve	
Short-circuit protection		continuous short-circuit proof		
Short-circuit behaviour		Hiccup-mode	continuation with output power limiting	
Overload protection		output power limiting		
No-load protection		continuous no-load stability		
Starting of capacitive loads		7000 µF	3500 µF	7000 µF

CP-E range
Technical data

Data at T_a = 25 °C, U_{in} = 230 V AC and rated values, unless otherwise indicated

Type		CP-E 5/3.0	CP-E 12/2.5	CP-E 12/10.0
General data				
Power dissipation		typ. 5 W	typ. 5.6 W	typ. 24 W
Efficiency		typ. 75 %	typ. 84 %	typ. 84 %
Duty time		100 %		
Dimensions (W x H x D)		22.5 x 90 x 114 mm (0.89 x 3.54 x 4.49 in)	40.5 x 90 x 114 mm (1.59 x 3.54 x 4.49 in)	63.2 x 123.6 x 123.6 mm (2.49 x 4.87 x 4.87 in)
Weight		0.144 kg (0.317 lb)	0.287 kg (0.633 lb)	0.888 kg (1.958 lb)
Material of housing		Plastic		Metal
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool		
Mounting position		horizontal		
Minimum distance to other units	horizontal / vertical	25 mm / 25 mm (0.98 in / 0.98 in)		
Degree of protection	housing / terminals	IP20 / IP20		
Protection class		I		
Electrical connection - input circuit / output circuit				
Wire size	fine-strand with wire end ferrule	0.2-2.5 mm² (24-14 AWG)		0.2-4 mm² (24-11 AWG)
	fine-strand without wire end ferrule			0.2-6 mm² (24-10 AWG)
	rigid			
Stripping length		6 mm (0.24 in)		8 mm (0.31 in)
Tightening torque	input / output	0.6 Nm (5 lb.in)		1.0 Nm (9 lb.in) / 0.62 Nm (5.5 lb.in)
Environmental data				
Ambient temperature range	operation	-20…+70 °C	-40…+70 °C	-35…+70 °C
	rated load	-20...+60 °C	-40...+60 °C	-35...+60 °C
	storage	-20…+85 °C	-40…+85 °C	-40…+85 °C
Damp heat (cyclic) (IEC/EN 60068-2-30)		95 RH, % without condensation		
Vibration (sinusoidal) (IEC/EN 60068-2-6)		10-500 Hz, 2 G, along X, Y, Z each axis, 60 min. for each axis		
Shock (half-sine) (IEC/EN 60068-2-27)		15 G, 11 ms, 3 axes, 6 faces, 3 times for each face		
Isolation data				
Rated insulation voltage U_i	input circuit / output circuit	3 kV AC		
	input / PE	1.5 kV AC		
	output / PE	0.5 kV AC; 0.71 kV DC		
Pollution degree		2		
Overvoltage category (UL/IEC/EN 60950-1)		II		
Standards				
Product standard		EN 61204-3		
Low Voltage Directive		2006/95/EC		
EMC directive		2004/108/EC		
RoHS directive		2011/65/EC		
Electrical safety		EN 60950-1, UL 60950-1, UL 508	EN 60950-1, UL 60950-1, UL 508, EN 61558-1, EN 61558-2-17; EN 60204-1	
Protective low voltage		SELV (EN 60950)		
Electromagnetic compatibility				
Interference immunity to		IEC/EN 61000-6-2		
electrostatic discharge	IEC/EN 61000-4-2	Level 4 (air discharge 15 kV / contact discharge 8 kV)		
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)		
electrical fast transient/burst	IEC/EN 61000-4-4	Level 4 (4 kV / 2,5 kHz)	Level 4 (4 kV / 5 kHz)	
surge	IEC/EN 61000-4-5	L-L Level 3 (2 kV) / L-PE Level 4 (4 kV)		
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)		
power frequency magnetic fields	IEC/EN 61000-4-8	Level 4 (30 A/m)		
voltage dips, short interruptions and voltage variations	IEC/EN 61000-4-11	dip: >95 % 10 ms / >30 % 500 ms interruptions: >95 % 5000 ms		
Interference emission		IEC/EN 61000-6-3		
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B		
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B		
limits for harmonic current emissions	IEC/EN 61000-3-2	Class D	Class A	Class D

„Approvals and marks“ on page 3/4.

CP-E range
Technical data

Data at Ta = 25 °C, Uin = 230 V AC and rated values, unless otherwise indicated

Type		CP-E 24/0.75	CP-E 24/1.25	CP-E 24/2.5
Input circuit		L, N		
Rated input voltage U_{in}		100-240 V AC		
Input voltage range		90-264 V AC / 120-375 V DC	85-264 V AC / 90-375 V DC	
Frequency range AC		47-63 Hz		
Typical input current	at 115 V AC	335 mA	560 mA	1060 mA
	at 230 V AC	210 mA	330 mA	590 mA
Typical power consumption		22.8 W	36.7 W	69.2 W
Inrush current limiting	at 115 V AC	10 A (max. 3 ms)	20 A (max. 3 ms)	20 A (max. 3 ms)
	at 230 V AC	18 A (max. 3 ms)	40 A (max. 3 ms)	40 A (max. 3 ms)
Discharge current	input / output	0.25 mA		
	input / PE	3.5 mA		
Power failure buffering time	at 115 V AC	min. 20 ms	min. 20 ms	
	at 230 V AC	min. 75 ms	min. 30 ms	
Internal input fuse		2 A slow-acting / 250 V AC		
Power factor correction (PFC)		no		
Indication of operational states				
Output voltage	green LED	OK: ⎍: output voltage OK	OUTPUT OK: ⎍: output voltage OK	
	red LED	LOW: ⎍: output voltage too low	-	-
Output circuit		L+,L-	L+, L+, L-, L-	
Rated output voltage		24 V DC		
Tolerance of the output voltage		0 ... +1 %		
Adjustment range of the output voltage		21.6-28.8 V DC	24-28 V DC	
Rated output power		18 W	30 W	60 W
Rated output current I_r	$T_a \leq 60$ °C	0.75 A	1.25 A	2.5 A
Derating of the output current	60 °C < $T_a \leq 70$ °C	2.5 %/°C		
Signalling output for output voltage OK	DC OK	-	transistor	
Maximum deviation with	load change statical	±2 %	±0.5 %	
	change of output voltage within the input voltage range	±1 %	±0.5 %	
Control time		< 2 ms		
Starting time after applying the supply voltage	at I_r	max. 1 s		
	with 3500 µF	-	max. 2 s	-
	with 7000 µF	max. 1.5 s	-	max. 1.5 s
Rise time	at rated load	max. 150 ms		
	with 3500 µF	-	max. 500 ms	-
	with 7000 µF	max. 500 ms	-	max. 500 ms
Fall time		max. 150 ms		
Residual ripple and switching peaks	BW = 20 MHz	50 mV		
Parallel connection		yes, to enable redundancy		
Series connection		yes, to increase voltage		
Resistance to reverse feed		1 s - max. 35 V DC		
Output circuit - No-load, overload and short-circuit behaviour				
Characteristic curve of output		Hiccup-mode	U/I characteristic curve	
Short-circuit protection		continuous short-circuit proof		
Short-circuit behaviour		Hiccup-mode	continuation with output power limiting	
Overload protection		output power limiting		
No-load protection		continuous no-load stability		
Starting of capacitive loads		7000 µF	3500 µF	7000 µF

CP-E range
Technical data

Data at Ta = 25 °C, Uin = 230 V AC and rated values, unless otherwise indicated

Type		CP-E 24/0.75	CP-E 24/1.25	CP-E 24/2.5
General data				
Power dissipation		typ. 4.45 W	typ. 5.5 W	typ. 8.8 W
Efficiency		typ. 77 %	typ. 86 %	typ. 89 %
Duty time		100 %		
Dimensions (W x H x D)		22.5 x 90 x 114 mm (0.89 x 3.54 x 4.49 in)	40.5 x 90 x 114 mm (1.59 x 3.54 x 4.49 in)	
Weight		0.143 kg (0.315 lb)	0.270 kg (0.60 lb)	0.331 kg (0.73 lb)
Material of housing		Plastic		
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool		
Mounting position		horizontal		
Minimum distance to other units	horizontal / vertical	25 mm / 25 mm (0.98 in / 0.98 in)		
Degree of protection	housing / terminals	IP20 / IP20		
Protection class		I		
Electrical connection - input circuit / output circuit				
Wire size	fine-strand with wire end ferrule	0.2-2.5 mm² (24-14 AWG)		
	fine-strand without wire end ferrule			
	rigid			
Stripping length		6 mm (0.24 in)		
Tightening torque	input / output	0.6 Nm (5 lb.in)		
Environmental data				
Ambient temperature range	operation	-20…+70 °C	-40…+70 °C	
	rated load	-20…+60 °C	-40…+60 °C	
	storage	-20…+85 °C	-40…+85 °C	
Damp heat (cyclic) (IEC/EN 60068-2-30)		95 % RH, without condensation		
Vibration (sinusoidal) (IEC/EN 60068-2-6)		10-500 Hz, 2 G, along X, Y, Z each axis, 60 min. for each axis		
Shock (half-sine) (IEC/EN 60068-2-27)		15 G, 11 ms, 3 axes, 6 faces, 3 times for each face		
Isolation data				
Rated insulation voltage U_i	input circuit / output circuit	3 kV AC		
	input / PE	1.5 kV AC		
	output / PE	0.5 kV AC; 0.71 kV DC		
Pollution degree		2		
Overvoltage category (UL/IEC/EN 60950-1)		II		
Standards				
Product standard		EN 61204-3		
Low Voltage Directive		2006/95/EC		
EMC directive		2004/108/EC		
RoHS directive		2011/65/EC		
Electrical safety		EN 50178, EN 60950-1, UL 60950-1, UL 508	EN 60950-1, UL 60950-1, UL 508, EN 61558-1, EN 61558-2-17; EN 60204-1	
Protective low voltage		SELV (EN 60950)		
Electromagnetic compatibility				
Interference immunity to		IEC/EN 61000-6-2		
electrostatic discharge	IEC/EN 61000-4-2	Level 4 (air discharge 15 kV / contact discharge 8 kV)		
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)		
electrical fast transient/burst	IEC/EN 61000-4-4	Level 4 (4 kV / 2.5 kHz)	Level 4 (4 kV / 5 kHz)	
surge	IEC/EN 61000-4-5	L-L Level 3 (2 kV) / L-PE Level 4 (4 kV)		
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)		
power frequency magnetic fields	IEC/EN 61000-4-8	Level 4 (30 A/m)		
voltage dips, short interruptions and voltage variations	IEC/EN 61000-4-11	dip: >95 % 10 ms / >30 % 500 ms, interruptions: >95 % 5000 ms		
Interference emission		IEC/EN 61000-6-3		
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B		
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B		
limits for harmonic current emissions	IEC/EN 61000-3-2	Class D	Class A	

„Approvals and marks“ on page 3/4.

CP-E range
Technical data

Data at Ta = 25 °C, Uin = 230 V AC and rated values, unless otherwise indicated

Type		CP-E 24/5.0	CP-E 24/10.0	CP-E 24/20.0
Input circuit		L, N		
Rated input voltage U_{in}		115 / 230 V AC auto select		115-230 V AC
Input voltage range		90-132 V AC, 180-264 V AC / 210-375 V DC	90-132 V AC, 180-264 V AC / 210-375 V DC	90-264 V AC, 120-375 V DC
Frequency range AC		47-63 Hz		
Typical input current	at 115 V AC	2.2 A	4.0 A	4.9 A
	at 230 V AC	0.83 A	1.55 A	2.5 A
Typical power consumption		140 W	270 W	539 W
Inrush current limiting	at 115 V AC	24 A (max. 5 ms)	30 A (max. 5 ms)	25 A (max. 5 ms)
	at 230 V AC	48 A (max. 5 ms)	60 A (max. 5 ms)	50 A (max. 5 ms)
Discharge current	input / output	0.25 mA		
	input / PE	3.5 mA		
Power failure buffering time	at 115 V AC	min. 25 ms		
	at 230 V AC	min. 30 ms		
Internal input fuse		3.15 A slow-acting / 250 V AC	6.3 A slow-acting / 250 V AC	10 A slow-acting / 250 V AC
Power factor correction (PFC)		yes, passive, 0.7		yes, active 115 V AC: 0.99 230 V AC: 0.97
Indication of operational states				
Output voltage	green LED	OUTPUT OK: ⎍: output voltage OK		
	red LED	OUTPUT LOW: ⎍: output voltage too low		
Output circuit		L+, L+, L-, L-		
Rated output voltage		24 V DC		
Tolerance of the output voltage		0...+1 %		
Adjustment range of the output voltage		22.5-28.5 V DC		
Rated output power		120 W	240 W	480 W
Rated output current I_r	$T_a \leq 60$ °C	5 A	10 A	-
	$T_a \leq 55$ °C	-	-	20 A
Derating of the output current	60 °C < $T_a \leq 70$ °C	2.5 %/°C		-
	55 °C < $T_a \leq 70$ °C	-	-	2.5 %/°C
Signalling contact for output voltage OK	13-14	solid-state (max. 60 V DC, 0.3 A)		
Minimum fuse rating to achieve short-circuit protection	13-14	≥ 60 V DC, ≤ 0.3 A fast-acting		
Maximum deviation with	load change statical	±1 % (single mode), ±5 % (parallel mode)		
	change of output voltage within the input voltage range	±0.5 %		
Control time		< 2 ms		
Starting time after applying the supply voltage	at I_r	max. 1 s		
	with 3500 µF	max. 1.5 s	-	-
	with 7000 µF	-	max. 1.5 s	
Rise time	at rated load	max. 150 ms		
	with 3500 µF	max. 500 ms	-	-
	with 7000 µF	-	max. 500 ms	
Fall time		max. 150 ms		
Residual ripple and switching peaks	BW = 20 MHz	50 mV	100 mV	
Parallel connection		configurable, to increase power, up to 3 devices, min. 0.1 Ir - max. 0.9 Ir		
Series connection		yes, to increase voltage, max. 2 devices		
Resistance to reverse feed		max. 35 V DC		
Output circuit - No-load, overload and short-circuit behaviour				
Characteristic curve of output		U/I characteristic curve		
Short-circuit protection		continuous short-circuit proof		
Short-circuit behaviour		continuation with output power limiting		
Overload protection		output power limiting		
No-load protection		continuous no-load stability		
Starting of capacitive loads		3500 µF	7000 µF	

CP-E range
Technical data

Data at Ta = 25 °C, Uin = 230 V AC and rated values, unless otherwise indicated

Type		CP-E 24/5.0	CP-E 24/10.0	CP-E 24/20.0
General data				
Power dissipation		typ. 20 W	typ. 35 W	typ. 63 W
Efficiency		typ. 86 %	typ. 89 %	typ. 89 %
Duty time		100 %		
Dimensions (W x H x D)		63.2 x 123.6 x 123.6 mm (2.49 x 4.87 x 4.87 in)	83 x 123.6 x 123.6 mm (3.27 x 4.87 x 4.87 in)	175 x 123.6 x 123.6 mm (6.89 x 4.87 x 4.87 in)
Weight		0.882 kg (1.945 lb)	1.334 kg (2.941 lb)	1.850 kg (4.079 lb)
Material of housing		Metal		
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool		
Mounting position		horizontal		
Minimum distance to other units	horizontal / vertical	25 mm / 25 mm (0.98 in / 0.98 in)		
Degree of protection	housing / terminals	IP20 / IP20		
Protection class		I		
Electrical connection - input circuit / output circuit				
Wire size	fine-strand with wire end ferrule	0.2-4 mm² (24-11 AWG)		
	fine-strand without wire end ferrule	0.2-6 mm² (24-10 AWG)		
	rigid			
Stripping length		8 mm (0.31 in)		
Tightening torque	input / output	1.0 Nm (9 lb.in) / 0.62 Nm (5.5 lb.in)		
Environmental data				
Ambient temperature range	operation	-35…+70 °C	-40…+70 °C	
	rated load	-35…+60 °C	-40…+60 °C	-40…+55 °C
	storage	-40…+85 °C	-40…+85 °C	
Damp heat (cyclic) (IEC/EN 60068-2-30)		95 %RH, without condensation		
Vibration (sinusoidal) (IEC/EN 60068-2-6)		10-500 Hz, 2 G, along X, Y, Z each axis, 60 min. for each axis		
Shock (half-sine) (IEC/EN 60068-2-27)		15 G, 11 ms, 3 axes, 6 faces, 3 times for each face		
Isolation data				
Rated insulation voltage U_i	input circuit / output circuit	3 kV AC		
	input / PE	1.5 kV AC		
	output / PE	0.5 kV AC; 0.71 kV DC		
	signalling contact / PE	0.5 kV DC		
Pollution degree		2		
Overvoltage category (UL/IEC/EN 60950-1)		II		
Standards				
Product standard		EN 61204-3		
Low Voltage Directive		2006/95/EC		
EMC directive		2004/108/EC		
RoHS directive		2011/65/EC		
Electrical safety		EN 60950-1, UL 60950-1, UL 508, EN 61558-1, EN 61558-2-17; EN 60204-1		
Protective low voltage		SELV (EN 60950)		
Electromagnetic compatibility				
Interference immunity to		IEC/EN 61000-6-2		
electrostatic discharge	IEC/EN 61000-4-2	Level 4 (air discharge 15 kV / contact discharge 8 kV)		
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)		
electrical fast transient/burst	IEC/EN 61000-4-4	Level 4 (4 kV / 5 kHz)	Level 4 (4 kV / 2.5 kHz)	
surge	IEC/EN 61000-4-5	L-L Level 3 (2 kV) / L-PE Level 4 (4 kV)		
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)		
power frequency magnetic fields	IEC/EN 61000-4-8	Level 4 (30 A/m)		
voltage dips, short interruptions and voltage variations	IEC/EN 61000-4-11	dip: >95 % 10 ms / >30 % 500 ms interruptions: >95 % 5000 ms		
Interference emission		IEC/EN 61000-6-3		
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B		
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B		
limits for harmonic current emissions		Class D		

„Approvals and marks“ on page 3/4.

CP-E range
Technical data

Data at Ta = 25 °C, Uin = 230 V AC and rated values, unless otherwise indicated

Type		CP-E 48/0.62	CP-E 48/1.25	CP-E 48/5.0	CP-E 48/10.0
Input circuit		L, N			
Rated input voltage U_{in}		100-240 V AC		115 / 230 V AC auto select	115-230 V AC
Input voltage range		85-264 V AC / 90-375 V DC		90-132 V AC, 180-264 V AC / 210-375 V DC	90-264 V AC, 120-375 V DC
Frequency range AC		47-63 Hz			
Typical input current	at 115 V AC	560 mA	1060 mA	4.0 A	4.9 A
	at 230 V AC	330 mA	590 mA	1.55 A	2.5 A
Typical power consumption		35.7 W	69.0 W	267 W	528 W
Inrush current limiting	at 115 V AC	20 A (max. 3 ms)	20 A (max. 3 ms)	30 A (max. 5 ms)	25 A (max. 5 ms)
	at 230 V AC	40 A (max. 3 ms)	40 A (max. 3 ms)	60 A (max. 5 ms)	50 A (max. 5 ms)
Discharge current	input / output	0.25 mA			
	input / PE	3.5 mA			
Power failure buffering time	at 115 V AC	min. 20 ms		min. 25 ms	min. 25 ms
	at 230 V AC	min. 30 ms			
Internal input fuse		2 A slow-acting / 250 V AC		6.3 A slow-acting / 250 V AC	10 A slow-acting / 250 V AC
Power factor correction (PFC)		no		yes, passive, 0.7	yes, active 115 V AC: 0.99 230 V AC: 0.97
Indication of operational states					
Output voltage	green LED	OUTPUT OK: ⎍: output voltage OK			
	red LED	-	-	OUTPUT LOW: ⎍: output voltage too low	
Output circuit		L+, L+, L-, L-			
Rated output voltage		48 V DC			
Tolerance of the output voltage		0...+1 %			
Adjustment range of the output voltage		48-55 V DC		47-56 V DC	
Rated output power		30 W	60 W	240 W	480 W
Rated output current I_r	$T_a \leq 60$ °C	0.625 A	1.25 A	5 A	-
	$T_a \leq 55$ °C	-	-	-	10 A
Derating of the output current	60 °C < $T_a \leq 70$ °C	2.5 %/°C			-
	55 °C < $T_a \leq 70$ °C	-	-	-	2.5 %/°C
Signalling output for output voltage OK	DC OK	-	-	-	-
Maximum deviation with	load change statical	±0.5 %		±1 % (single mode) ±5 % (parallel mode)	
	change of output voltage within the input voltage range	±0.5 %		±0.5 %	
Control time		< 2 ms			
Starting time after applying the supply voltage	at I_r	max. 1 s			
	with 3500 µF	max. 2 s	-	-	-
	with 7000 µF	-	max. 1.5 s	max. 1.5 s	
Rise time	at rated load	max. 150 ms			
	with 3500 µF	max. 500 ms	-	-	-
	with 7000 µF	-	max. 500 ms	max. 500 ms	
Fall time		max. 150 ms			
Residual ripple and switching peaks	BW = 20 MHz	50 mV		100 mV	
Parallel connection		yes, to enable redundancy		configurable, to increase power, up to 3 devices, min. 0.1 I_r - max. 0.9 I_r	
Series connection		yes, to increase voltage		yes, to increase voltage, max. 2 devices	
Resistance to reverse feed		1 s - max. 63 V DC			
Output circuit - No-load, overload and short-circuit behaviour					
Characteristic curve of output		U/I characteristic curve			
Short-circuit protection		continuous short-circuit proof			
Short-circuit behaviour		continuation with output power limiting			
Overload protection		output power limiting			
No-load protection		continuous no-load stability			
Starting of capacitive loads		3500 µF	7000 µF	unlimited	7000 µF

CP-E range
Technical data


Data at Ta = 25 °C, Uin = 230 V AC and rated values, unless otherwise indicated

Type		CP-E 48/0.62	CP-E 48/1.25	CP-E 48/5.0	CP-E 48/10.0
General data					
Power dissipation		typ. 4.9 W	typ. 7.8 W	typ. 32 W	typ. 60 W
Efficiency		typ. 86 %	typ. 89 %	typ. 90 %	
Duty time		100 %			
Dimensions (W x H x D)		40.5 x 90 x 114 mm (1.59 x 3.54 x 4.49 in)		83 x 123.6 x 123.6 mm (3.27 x 4.87 x 4.87 in)	175 x 123.6 x 123.6 mm (6.89 x 4.87 x 4.87 in)
Weight		0.264 kg (0.582 lb)	0.316 kg (0.697 lb)	1.322 kg (2.915 lb)	1.839 kg (4.054 lb)
Material of housing		Plastic		Metal	
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool			
Mounting position		horizontal			
Minimum distance to other units	horizontal / vertical	25 mm / 25 mm (0.98 in / 0.98 in)			
Degree of protection	housing / terminals	IP/20 / IP20			
Protection class		I			
Electrical connection - input circuit / output circuit					
Wire size	fine-strand with wire end ferrule	0.2-2.5 mm² (24-14 AWG)		0.2-4 mm² (24-11 AWG)	
	fine-strand without wire end ferrule			0.2-6 mm² (24-10 AWG)	
	rigid				
Stripping length		6 mm (0.24 in)		8 mm (0.31 in)	
Tightening torque	input / output	0.6 Nm (5 lb.in)		1.0 Nm (9 lb.in) / 0.62 Nm (5.5 lb.in)	
Environmental data					
Ambient temperature range	operation	-40...+70 °C			
	rated load	-40...+60 °C			-40...+55 °C
	storage	-40...+85 °C			
Damp heat (cyclic) (IEC/EN 60068-2-30)		95 % RH, without condensation			
Vibration (sinusoidal) (IEC/EN 60068-2-6)		10-500 Hz, 2 G, along X, Y, Z each axis, 60 min. for each axis			
Shock (half-sine) (IEC/EN 60068-2-27)		15 G, 11 ms, 3 axes, 6 faces, 3 times for each face			
Isolation data					
Rated insulation voltage U_i	input circuit / output circuit	3 kV AC			
	input / PE	1.5 kV AC			
	output / PE	0.5 kV AC; 0.71 kV DC			
Pollution degree		2			
Overvoltage category (UL/IEC/EN 60950-1)		II			
Standards					
Product standard		EN 61204-3			
Low Voltage Directive		2006/95/EC			
EMC directive		2004/108/EC			
RoHS directive		2011/65/EC			
Electrical safety		EN 60950-1, UL 60950-1, UL 508, EN 61558-1, EN 61558-2-17; EN 60204-1			
Protective low voltage		SELV (EN 60950)			
Electromagnetic compatibility					
Interference immunity to		IEC/EN 61000-6-2			
electrostatic discharge	IEC/EN 61000-4-2	Level 4 (air discharge 15 kV / contact discharge 8 kV)			
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)			
electrical fast transient/burst	IEC/EN 61000-4-4	Level 4 (4 kV / 5 kHz)		Level 4 (4 kV / 2.5 kHz)	
surge	IEC/EN 61000-4-5	L-L Level 3 (2 kV) / L-PE Level 4 (4 kV)			
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V/m)			
power frequency magnetic fields	IEC/EN 61000-4-8	Level 4 (30 A/m)			
voltage dips, short interruptions and voltage variations	IEC/EN 61000-4-11	dip: >95 % 10 ms / >30 % 500 ms, interruptions: >95 % 5000 ms			
Interference emission		IEC/EN 61000-6-3			
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B			
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B			
limits for harmonic current emissions		Class A		Class D	


„Approvals and marks“ on page 3/4.

CP-E range
Technical diagrams, Wiring instructions


Output curve at T_a = 25 °C




CP-E 12/2.5




CP-E 12/10.0




CP-E 24/1.25




CP-E 24/2.5




CP-E 24/5.0




CP-E 24/10.0




CP-E 24/20.0




CP-E 48/0.62



CP-E 48/1.25




CP-E 48/5.0



CP-E 48/10.0


Wiring instructions

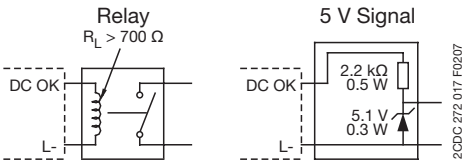


CP-E 24/1.25, CP-E 24/2.5

CP-E range
Technical diagrams, Dimensional drawings


Temperature behaviour at T_a = 25 °C

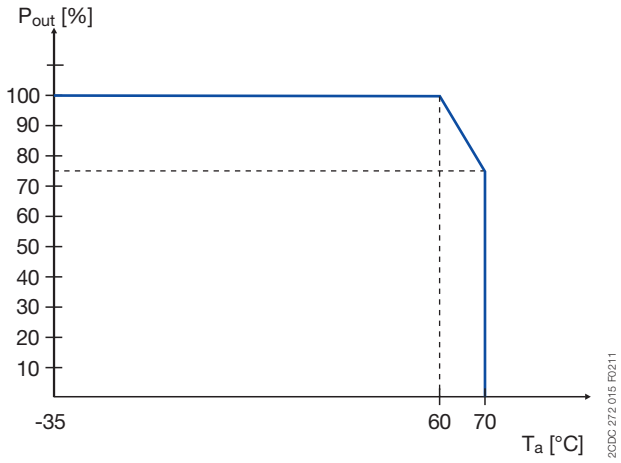


CP-E 12/10.0, CP-E 24/5.0

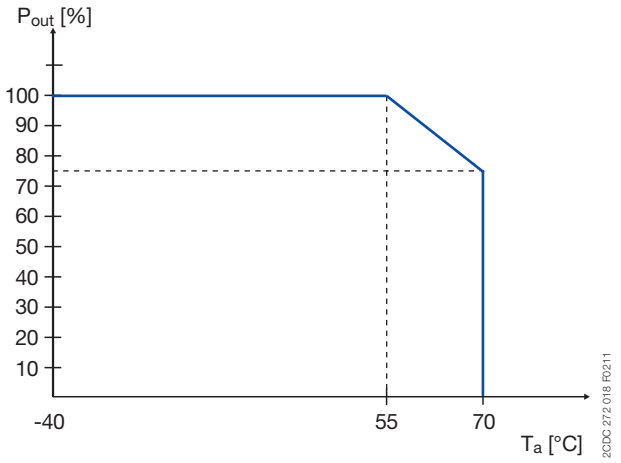

CP-E 24/20.0, CP-E 48/10.0

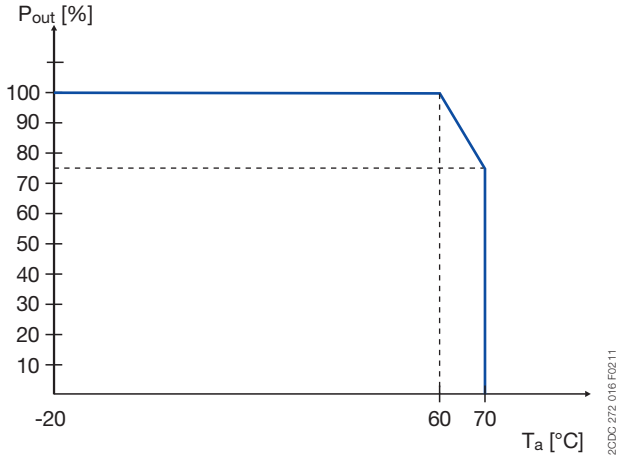


CP-E 5/3.0, CP-E 24/0.75

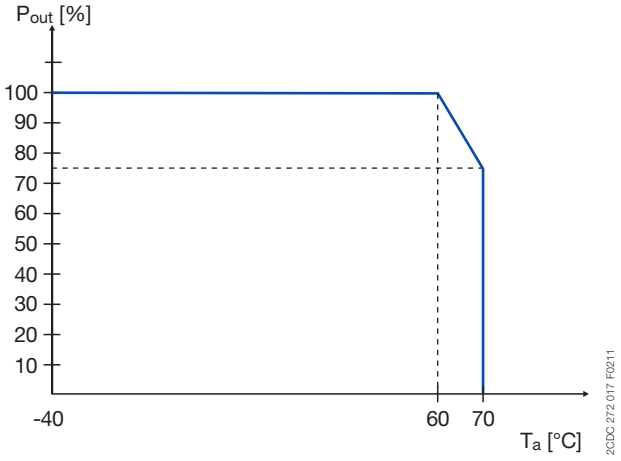


CP-E 12/2.5, CP-E 24/1.25, CP-E 48/0.62,
CP-E 24/2.5, CP-E 48/1.25, CP-E 24/10.0, CP-E 48/5.0

Dimensional drawings dimensions in mm

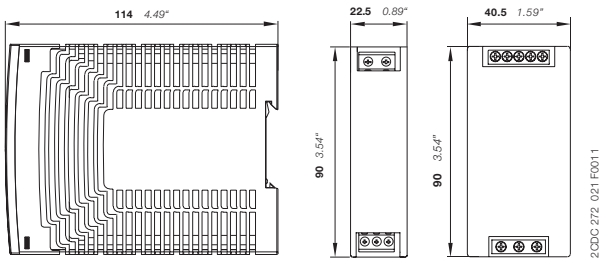

CP-E 5/3.0,
CP-E 24/0.75

CP-E 12/2.5,
CP-E 24/1.25,
CP-E 24/2.5,
CP-E 48/0.62,
CP-E 48/1.25

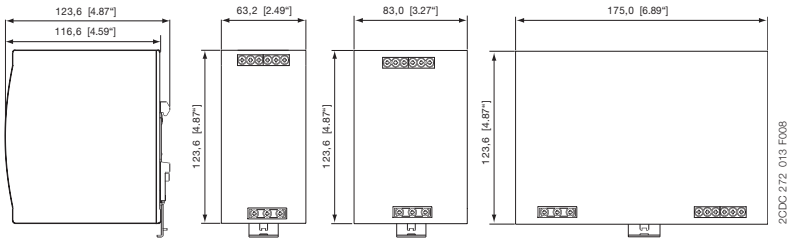

CP-E 12/10.0,
CP-E 24/5.0

CP-E 24/10.0,
CP-E 48/5.0

CP-E 24/20.0,
CP-E 48/10.0

CP-T range
Product group picture

3



CP-T range
Table of contents

CP-T range

Product group picture 3/31
Table of contents 3/32
Benefits and advantages 3/33
Ordering details 3/34
Technical data 3/35
Technical diagrams, Dimensional drawings 3/39
Technical diagrams 3/40

CP-T range
Benefits and advantages

Characteristics
- Rated output voltages 24 V, 48 V DC
- Output voltage adjustable via front-face rotary potentiometer “OUTPUT Adjust”
- Rated output currents 5 A, 10 A, 20 A, 40 A
- Rated output powers 120 W, 240 W, 480 W, 960 W
- Three-phase operation (see derating note)
- Two-phase operation (25 % derating possible, see derating note)
- Supply range 3 x 400–500 V AC (3 x 340–575 V AC, 480–820 V DC)
- Typical efficiency of 93 %
- Low power dissipation and low heating
- Free convection cooling (no forced cooling with ventilators)
- Ambient temperature range during operation -40...+70 °C [1)]
- Open-circuit, overload and short-circuit stable
- Integrated input fuse
- Redundancy unit CP-A RU offering true redundancy, available as accessory
- LEDs for status indication
- Signalling contact "13-14" (solid state) for output voltage OK
- Approvals / marks (depending on device, partly pending):
- cULus LISTED, cULus, EAC, RCM / CE, KC

[1)] 480 W variants: -30...+70°C

Benefits


Signalling output ①
The devices of the CP-T series offer a solid state output for function monitoring and remote diagnostics.

Wide input range
Wide range input optimized for world-wide applications:
The CP-T power supplies can be used in 340 - 575 V AC or 480 - 820 V DC supply systems.

Adjustable output voltage ②
The CP-T range feature a continuously adjustable output voltage. Thus, they can be optimally adapted to the application, e.g. compensating the voltage drop caused by a long line length.





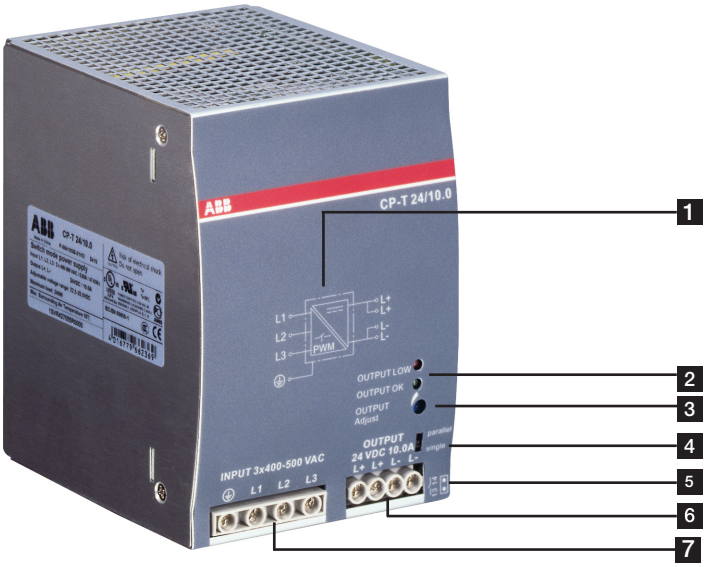

1 **Circuit diagram**

2 **Indication of operational states**
DC ON: green LED - green LED - output voltage OK
DC LOW: red LED - output voltage too low

3 **single/parallel: sliding switch - adjustment of single or parallel operation**

4 **Configuration of single or parallel operation**

5 **Signalling contact**
OUTPUT 13-14: terminals - signalling contact
A solid-state output indicates the error-free operation of the output voltage.

6 **OUTPUT L+, L+, L-, L-: terminals - output**

7 **INPUT L1, L2, L3, PE: terminals - input**

CP-T range
Ordering details



CP-T 24/5.0



CP-T 24/10.0, CP-T 48/5.0



CP-T 24/20.0, CP-T 48/10.0

Description

The CP-T range of three-phase power supply units is the youngest member of ABB's power supply family. In terms of design and functionality, the new range perfectly supplements the existing products and extends the range appropriately. The devices can be supplied with a three-phase voltage as well as with two-phase mains. Here, ABB offers power supply units with 24 V DC and 48 V DC outputs with 5 A, 10 A, 20 A and 40 A and efficiency of up to 92 %. As in the case of all products, they are designed for an ambient temperature of up to 70 °C. All products can be supplied within an AC supply voltage range between 340 to 575 V AC and a DC supply voltage range between 480 to 820 V DC.

Ordering details

Input voltage range	Rated output voltage / current	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
340-575 V AC / 480-820 V DC	24 V DC / 5 A	CP-T 24/5.0	1SVR427054R0000		0.80 (1.77)
340-575 V AC / 480-820 V DC	24 V DC / 10 A	CP-T 24/10.0	1SVR427055R0000		1.05 (2.31)
340-575 V AC / 480-820 V DC	24 V DC / 20 A	CP-T 24/20.0	1SVR427056R0000		1.75 (3.86)
340-575 V AC / 480-820 V DC	24 V DC / 40 A	CP-T 24/40.0	1SVR427057R0000		3.20 (7.05)
340-575 V AC / 480-820 V DC	48 V DC / 5 A	CP-T 48/5.0	1SVR427054R2000		1.05 (2.31)
340-575 V AC / 480-820 V DC	48 V DC / 10 A	CP-T 48/10.0	1SVR427055R2000		1.75 (3.86)
340-575 V AC / 480-820 V DC	48 V DC / 20 A	CP-T 48/20.0	1SVR427056R2000		3.40 (7.50)

CP-T range
Technical data

Data at Ta = 25 °C, U_{in} = 3 x 400 V AC and rated values, unless otherwise indicated

Type		CP-T 24/5.0	CP-T 24/10.0	CP-T 24/20.0	CP-T 24/40.0
Input circuit		L1, L2, L3			
Rated input voltage U_{in}		3 x 400-500 V AC			
Input voltage range		340-575 V AC			
		480-820 V DC			
Frequency range AC		47-63 Hz			
Typical input current		0.36 A	0.65 A	1.1 A	1.72 A
Typical power consumption		135 W	270 W	538 W	1058 W
Inrush current limiting		10 A	20 A		30 A
Power failure buffering time		min. 20 ms			min. 15 ms
Internal input fuse	per phase	2 A / 600 V AC		T 3.15 A / 500 V AC	T 5 A / 500 V AC
Recommended backup fuse		3 pole miniature circuit breaker ABB Type S203			
Power factor correction (PFC)		Yes, passive			
Discharge current	towards PE	< 3.5 mA			
	input / output	< 0.25 mA			
Indication of operational states					
Output voltage	OUTPUT OK: green LED	output voltage OK			
	OUTPUT LOW: red LED	output voltage too low			
Output circuit		L+, L+, L-, L-			
Rated output voltage		24 V DC			
Tolerance of the output voltage		0...+1 %			
Adjustment range of the output voltage		22.5-28.5 V DC			
Rated output power		120 W	240 W	480 W	960 W
Rated output current I_r	$T_a \leq 60$ °C	5 A	10 A	20 A	40 A
Derating of the output current	60 °C < $T_a \leq 70$ °C	2.5 %/°C			3.5 %/°C
Signalling contact for output voltage OK	13-14	solid state (max. 60 V DC, 0.3 A)			
	Threshold	17.6-19.4 V			
	Insulation voltage	500 V DC			
Mininum fuse rating to achieve short-circuit protection	13-14	≥ 60 V DC, ≤ 0.3 A fast-acting			
Maximum deviation with	load change statical	±1 %	±1 % (single mode)		
		-	±5 % (parallel mode)		
	change of output voltage within the input voltage range	± 0.5 %			
Control time	at nominal load	< 2 ms			
Starting time after applying the supply voltage	at I_r	max. 1 s			
	with 3500 µF	max. 1.5 s			
Rise time	at nominal load	max. 150 ms			
	with 3500 µF	max. 500 ms			
Fall time		max. 150 ms			
Residual ripple and switching peaks	BW = 20 MHz	100 mV			80 mV
Parallel connection		not supported	configurable, to increase power, up to 2 devices, min. 0.1 I_r - max 0.9 I_r)		to increase power, up to 2 devices, min. 0.1 I_r - max. 0.9 I_r use active current balancing
Series connection		not supported	yes, to increase voltage, max. 2 devices		
Resistance to reverse feed		approx. 35 V			
Output circuit - No-load, overload and short-circuit behaviour					
Characteristic curve of output		combined U/I characteristic curve and hiccup mode		U/I- or Hiccup-mode adjustable	hiccup / fold back behavior
Short-circuit protection		continuous short-circuit proof			
Short-circuit behaviour		current limiting			
Overload protection		hiccup mode			
No-load protection		continuous no-load stability			
Overtemperature protection		yes, automatic recovery after temperature went down			
Starting of capacitive loads		3500 µF	7000 µF	7000 µF	7000 µF

CP-T range
Technical data

Data at Ta = 25 °C, U_{in} = 3 x 400 V AC and rated values, unless otherwise indicated

Type			CP-T 24/5.0	CP-T 24/10.0	CP-T 24/20.0	CP-T 24/40.0
General data						
Efficiency			typ. 89 %	typ. 90 %		typ. 92 %
Duty time			100%			
Dimensions (W x H x D)			74.3 x 124 x 118.8 mm (2.92 x 4.88 x 4.68 in)	89 x 124 x 118.8 mm (3.5 x 4.88 x 4.68 in)	150 x 124 x 118.8 mm (5.91 x 4.88 x 4.68 in)	275.8 x 124 x 118.8 mm (10.86 x 4.88 x 4.68 in)
Weight			0.78 kg (1.72 lb)	1.045 kg (2.30 lb)	1.657 kg (3.653 lb)	3.275 kg (7.220 lb)
Material of housing			Metal			
Mounting			DIN rail (IEC EN 60715), snap-on mounting without any tool			
Mounting position			horizontal			
Minimum distance to other units		horizontal / vertical	25 mm / 25 mm (0.98 in / 0.98 in)			
Degree of protection		housing / terminals	IP20 / IP20			
Protection class			I			
Electrical connection - input circuit / output circuit / signalling circuit						
Wire size		fine-strand with wire end ferrule	0.2-4 mm² (24-11 AWG)			
		fine-strand without wire end ferrule	0.2-6 mm² (24-10 AWG)			
		rigid	0.2-6 mm² (24-10 AWG)			
Stripping length			8 mm (0.31 in)			
Tightening torque		input / output	1 Nm (9 lb.in) / 0.6 Nm (5.5 lb.in)			1 Nm (9 lb.in) / 1.8 Nm (15.6 lb.in)
Environmental data						
Ambient temperature range		operation	-40...+70 °C		-30...+70 °C	-40...+70 °C
		rated load	-40...+60 °C		-30...+60 °C	-40...+60 °C
		storage	-40...+85 °C			
Damp heat (cyclic) (IEC/EN 60068-2-30)			95 % without condensation			
Vibration (sinusoidal) (IEC/EN 60068-2-6)			2 g, 10-500 Hz, 2G, each along X, Y, Z axes 60 min / cycle			
Shock (half-sine) (IEC/EN 60068-2-27)			15 g, 11 ms, 3 axes, 6 faces, 3 times for each face			
Isolation data						
Rated insulation voltage U_i		input circuit / output circuit	3 kV AC			
		input / PE	1.5 kV AC			
		output / PE	0.5 kV AC; 0.71 kV DC			
		signalling output / PE	0.5 kV DC			
Pollution degree			2			
Standards						
Product standard			EN 61204-3			
Low Voltage Directive			2006/95/EC			
EMC directive			2004/108/EC			
RoHS directive			2011/65/EC			
Electrical safety			EN 60950-1, UL 60950-1, UL 508, EN 61558-1, EN 61558-2-17; EN 60204-1			
Protective low voltage			SELV			
Electromagnetic compatibility						
Interference immunity to			IEC/EN 61000-6-2			
electrostatic discharge	IEC/EN 61000-4-2		Level 4 (air discharge 15 kV / contact discharge 8 kV)			
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3		Level 3 (10 V/m)			
electrical fast transient/burst	IEC/EN 61000-4-4		Level 4 (4 kV / 2.5 kHz)	Level 4 (4 kV / 5 kHz)		
surge	IEC/EN 61000-4-5		L-L Level 3 (2 kV) / L-PE Level 4 (4 kV)			
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6		Level 3 (10 V)			
power frequency magnetic fields	IEC/EN 61000-4-8		Level 4 (30 A/m)			
voltage dips, short interruptions and voltage variations	IEC/EN 61000-4-11		dips: >95 % 0.5 ms / >30 % 0.5 ms, interruptions: >95 % 250 ms			
Interference emission			IEC/EN 61000-6-3			
high-frequency radiated	IEC/CISPR 22, EN 55022		Class B			
high-frequency conducted	IEC/CISPR 22, EN 55022		Class B			
limits for harmonic current emissions	IEC/EN 61000-3-2		Class A			

„Approvals and marks“ on page 3/4.

CP-T range
Technical data

Data at Ta = 25 °C, Uin = 3 x 400 V AC and rated values, unless otherwise indicated

Type			CP-T 48/5.0	CP-T 48/10.0	CP-T 48/20.0
Input circuit			L1, L2, L3		
Rated input voltage U_{in}			3 x 400-500 V AC		
Input voltage range			340-575 V AC		
			480-820 V DC		
Frequency range AC			47-63 Hz		
Typical input current			0.65 A	1.1 A	1.72 A
Typical power consumption			264 W	535 W	1050 W
Inrush current limiting			20 A		30 A
Power failure buffering time			min. 20 ms		min. 15 ms
Internal input fuse		per phase	2 A / 600 V AC	T3.15 A / 500 V AC	T 5 A / 500 V AC
Power factor correction (PFC)			yes, passive		
Discharge current		towards PE	< 3.5 mA		
		input / output	< 0.25 mA		
Indication of operational states					
Output voltage	OUTPUT OK: green LED		output voltage OK		
	OUTPUT LOW: red LED		output voltage too low		
Output circuit			L+, L+, L-, L-		
Rated output voltage			48 V DC		
Tolerance of the output voltage			0...+1 %		
Adjustment range of the output voltage			47-56 V DC		
Rated output power			240 W	480 W	960 W
Rated output current I_r		$T_a \leq 60$ °C	5 A	10 A	20 A
Derating of the output current		60 °C < $T_a \leq$ 70 °C	2.5 %/°C		3.5 %/°C
Maximum deviation with	load change statical		±1 % (single mode)		
			± 5 % (parallel mode)		
	change of output voltage within the input voltage range		±0.5 %		
Control time		at rated load	< 2 ms		
Starting time after applying the supply voltage		at I_r	max. 1 s		
		with 7000 µF	max. 1.5 s		
Rise time		at rated load	max. 150 ms		
		with 7000 µF	max. 500 ms		
Fall time			max. 150 ms		
Residual ripple and switching peaks		BW = 20 MHz	100 mV		80 mV
Parallel connection			configurable, to increase power, up to 2 devices, min. 0.1 I_r - max 0.9 I_r)		to increase power, up to 2 devices, min. 0.1 I_r - max. 0.9 I_r use active current balancing
Series connection			yes, to increase voltage, max. 2 devices		
Resistance to reverse feed			approx. 35 V	approx. 63 V	approx. 63 V
Output circuit - No-load, overload and short-circuit behaviour					
Characteristic curve of output			combined U/I and hiccup mode	U/I or hiccup mode, configurable	hiccup mode / fold back behavior
Short-circuit protection			continuous short-circuit proof		
Short-circuit behaviour			current limiting		
Overload protection			hiccup mode		
No-load protection			continuous no-load stability		
Over temperature protection			yes, automatic recovery after temperature went down		
Starting of capacitive loads			7000 µF		

CP-T range
Technical data


Data at Ta = 25 °C, Uin = 3 x 400 V AC and rated values, unless otherwise indicated

Type		CP-T 48/5.0	CP-T 48/10.0	CP-T 48/20.0
General data				
Efficiency		typ. 91 %		typ. 93 %
Duty time		100%		
Dimensions (W x H x D)		89 x 124 x 118.8 mm (3.5 x 4.88 x 4.68 in)	150 x 124 x 118.8 mm (5.91 x 4.88 x 4.68 in)	275.8 x 124 x 118.8 mm (10.86 x 4.88 x 4.68 in)
Weight		1.045 kg (2.30 lb)	1.657 kg (3.653 lb)	3.275 kg (7.22 lb)
Material of housing		Metal		
Mounting		DIN rail (IEC EN 60715), snap-on mounting without any tool		
Mounting position		horizontal		
Minimum distance to other units	horizontal / vertical	25 mm / 25 mm (0.98 in / 0.98 in)		
Degree of protection	housing / terminals	IP20 / IP20		
Protection class		I		
Electrical connection - input circuit / output circuit				
Wire size	fine-strand with wire end ferrule	0.2-4 mm² (24-11 AWG)		0.2-4 mm² (24-11 AWG) / 0.5-10 mm² (20-8 AWG)
	fine-strand without wire end ferrule	0.2-6 mm² (24-10 AWG)		
	rigid			
Stripping length		8 mm (0.31 in)		
Tightening torque	input / output	1 Nm (9 lb.in) / 0.6 Nm (5.5 lb.in)		1 Nm (9 lb.in) / 1.8 Nm (15.6 lb.in)
Environmental data				
Ambient temperature range	operation	-40…+70 °C	-30…+70 °C	-40…+70 °C
	rated load	-40…+60 °C	-30…+60 °C	-40…+60 °C
	storage	-40…+85 °C	-40…+85 °C	-40…+85 °C
Damp heat (cyclic) (IEC/EN 60068-2-30)		95 % without condensation		
Vibration (sinusoidal) (IEC/EN 60068-2-6)		10-500 Hz, 2G, each along X, Y, Z axes 6 min / cycle		
Shock (half-sine) (IEC/EN 60068-2-27)		15G, 11 ms, 3 axes, 6 Faces, 3 times for each face		
Isolation data				
Rated insulation voltage U_i	input circuit / output circuit	3 kV AC		
	input / PE	1.5 kV AC		
	output / PE	0.5 kV AC; 0.71 kV DC		
Pollution degree		2		
Standards				
Product standard		EN 61204-3		
Low Voltage Directive		2006/95/EC		
EMC directive		2004/108/EC		
RoHS directive		2011/65/EC		
Electrical safety		EN 60950-1, UL 60950-1, UL 508, EN 61558-1, EN 61558-2-16; EN 60204-1		
Protective low voltage		SELV		
Electromagnetic compatibility				
Interference immunity to		IEC/EN 61000-6-2		
electrostatic discharge	IEC/EN 61000-4-2	Level 4 (air discharge 15 kV / contact discharge 8 kV)		
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)		
electrical fast transient/burst	IEC/EN 61000-4-4	Level 4 (4 kV / 5 kHz)		
surge	IEC/EN 61000-4-5	L-L Level 3 (2 kV) / L-PE Level 4 (4 kV)		
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)		
power frequency magnetic fields	IEC/EN 61000-4-8	Level 4 (30 A/m)		
voltage dips, short interruptions and voltage variations	IEC/EN 61000-4-11	dips: >95 % 0.5 ms / >30 % 0.5 ms interruptions: >95 % 250 ms		
Interference emission		IEC/EN 61000-6-3		
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B		
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B		
limits for harmonic current emissions	IEC/EN 61000-3-2	Class A		


„Approvals and marks“ on page 3/4.

CP-T range
Technical diagrams, Dimensional drawings


Technical diagrams, dimensions in mm
Output curve at T_a = 25 °C

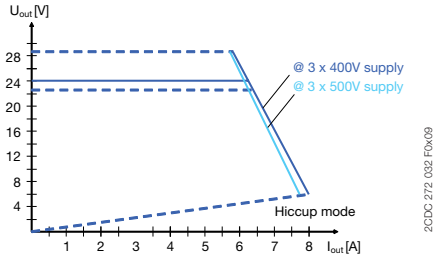


CP-T 24/5.0

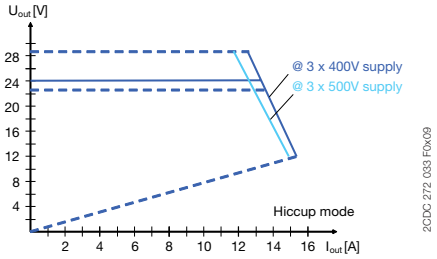


CP-T 24/10.0

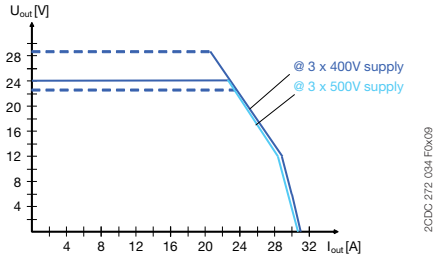


CP-T 24/20.0 U/I curve

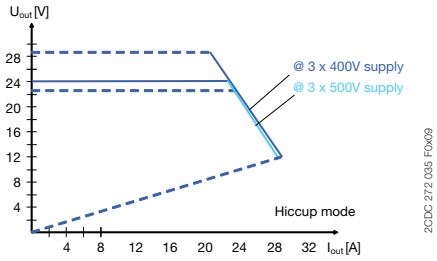


CP-T 24/20.0 Hiccup mode

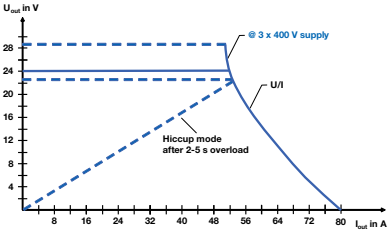


CP-T 24/40.0

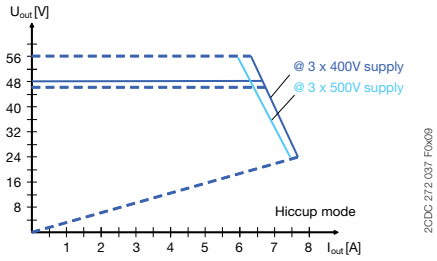


CP-T 48/5.0

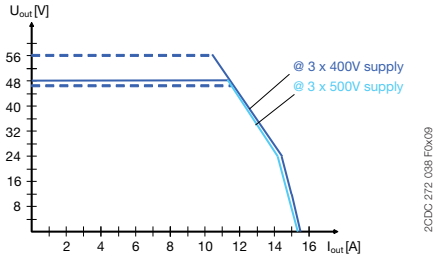

CP-T 48/10.0 U/I curve

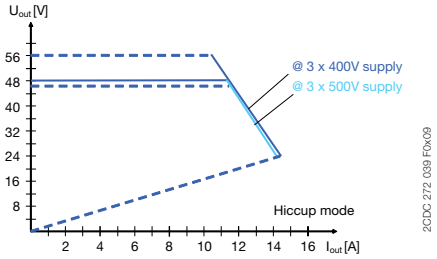


CP-T 48/10.0 Hiccup mode

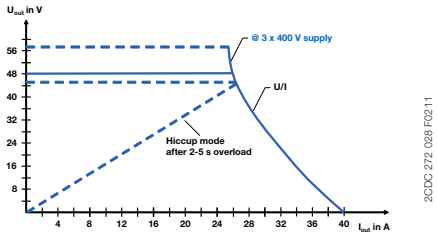


CP-T 48/20.0


Dimensional drawings dimensions in mm

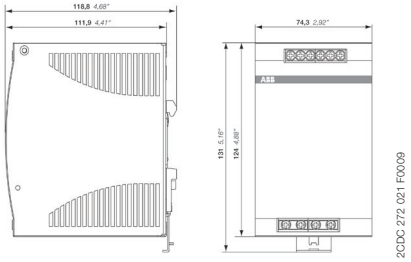


CP-T 24/5.0



CP-T 24/10.0, CP-T 48/5.0




CP-T 24/20.0, CP-T 48/10.0

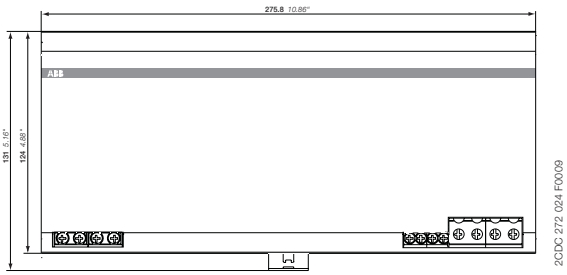


CP-T 24/40.0, CP-T 48/20.0

CP-T range
Technical diagrams


Temperature curve at rated load

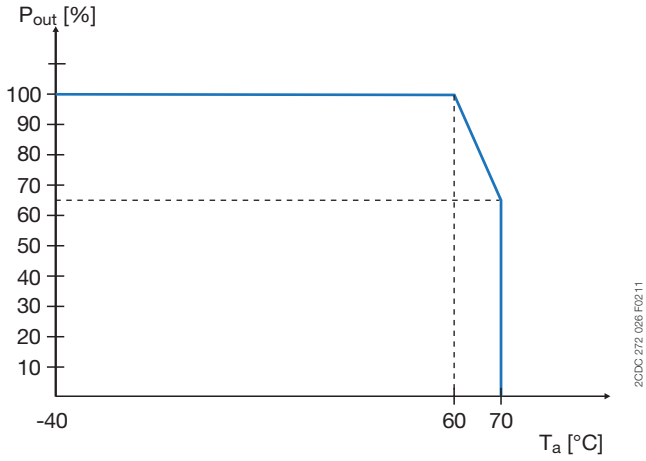

CP-T 24/40.0, CP-T 48/20.0

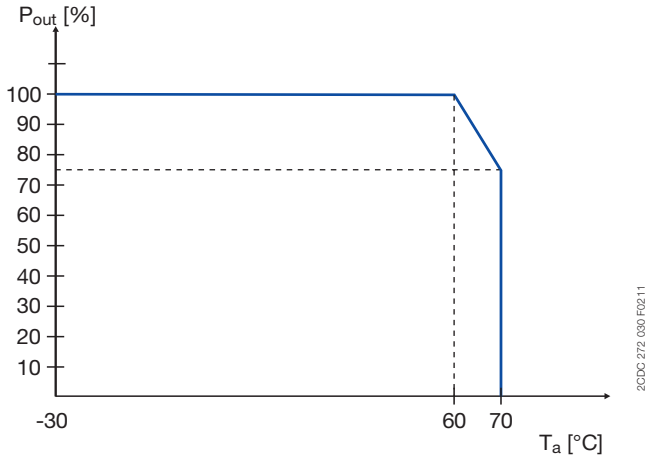

CP-T 24/20.0, CP-T 48/10.0

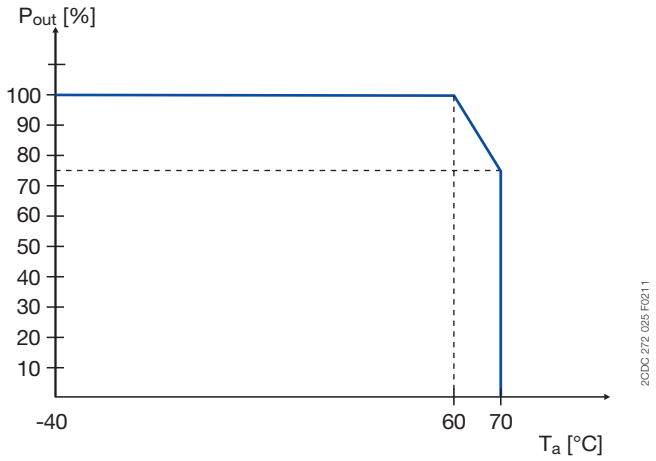

CP-T 24/5.0, CP-T 24/10.0, CP-T 48/5.0

CP-S and CP-C
Product group picture



CP-S and CP-C
Table of contents

CP-S and CP-C range

Product group picture 3/41
Table of contents 3/42
Benefits and advantages 3/43
Operating control 3/44
Ordering details 3/45
Technical data 3/46
Technical diagrams, Dimensional drawings 3/50

CP-S and CP-C
Benefits and advantages

Characteristics

CP-S and CP-C range
- Output current 5 A, 10 A and 20 A
- Integrated power reserve of up to 50 %
- 5 A and 10 A devices with pluggable connecting terminals
- Approvals / marks
  (depending on device, partly pending)
- cULus, cULus, EAC, CB, / CE,

CP-S range
- 10 A and 20 A device with front-face selector switch to adjust rated input voltage range:
  110-120 V AC or 220-240 V AC
- Output voltage fixed at 24 V DC
- Parallel operation for redundancy

CP-C range
- Wide range input 110-240 V AC (85-264 V AC, 100-350 V DC)
- Output voltage adjustable within a range of 22-28 V DC
- Parallel operation for increased capacity and redundancy
- Power factor correction (PFC) acc. to EN 61000-3-2
- Function module pluggable onto the front side

Messaging module CP-C MM:
- LED for status indication
- Relay outputs "Input OK" and "Output OK"
- REMOTE ON/OFF function to switch on and off the power supply externally
- Output voltage monitoring is only possible in decoupled parallel operation


Benefits

Integrated power reserve ①
The new CP-S and CP-C range power supplies feature an integrated power reserve of up to 50 %. No oversized electricity supply is needed, especially under heavy load conditions.


Pluggable connecting terminals ②
Extended flexibility in operation due to pluggable connecting terminals (this feature is not offered on all devices).

Adjustable output voltage ③
The CP-C range types feature a continuously adjustable output voltage from 22 to 28 V. Thus, they can be optimally adapted to the application, e.g. compensating the voltage drop caused by long line length.

Pluggable function modules ④
The CP-C range power supplies can be equipped with pluggable modules to add additional functions (e.g. messaging module). Thus, the power supplies can be ideally adapted to the relevant application.










CP-S and CP-C
Operating control



1 OUTPUT L+, L-: terminals - output
2 Indication of operational states
OUTPUT OK: green LED - output voltage OK
3 OUTPUT Adj.: rotary potentiometer - adjustment of output voltage
4 Circuit diagram
5 INPUT L, N, PE: terminals - input

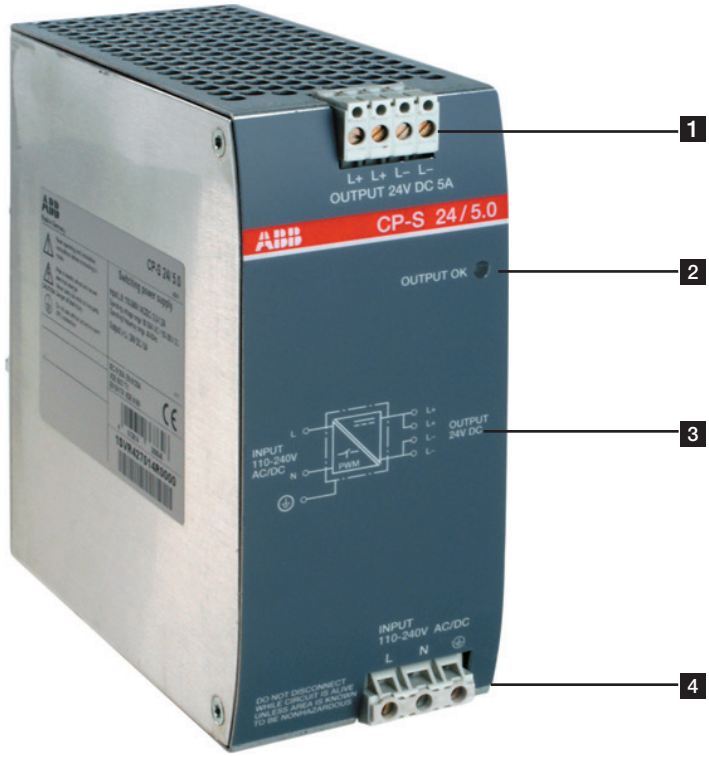

1 OUTPUT L+, L-: terminals - output
2 Indication of operational states
OUTPUT OK: green LED - output voltage OK
3 Circuit diagram
4 INPUT L, N, PE: terminals - input

CP-S and CP-C
Ordering details



CP-S 24/5.0



CP-S 24/20.0



CP-C 24/10.0

Description

The power supply units in the CP-S and CP-C range are ABB's high-end solutions. Designed with an integrated 50 % power reserve and an efficiency of approximately 89 % these are the perfect products for all complex, highly reliable applications. All the devices cover the U-I output characteristic and are built with thermal protection which switches off in case of overheating. In particular, the devices of the CP-C range feature a much broader functionality, including active power factor correction and pluggable function modules.
These products are designed to trip MCB's in the 24 V DC output circuit. Coordination tables are available.

Ordering details - CP-S

Input voltage range	Rated output voltage / current	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
85-264 V AC / 110-350 V DC	24 V DC / 5 A	CP-S 24/5.0	1SVR427014R0000		0.96 (2.11)
85-132 V AC, 184-264 V AC / 220-350 V DC	24 V DC / 10 A	CP-S 24/10.0	1SVR427015R0100		1.07 (2.35)
85-132 V AC, 184-264 V AC / 220-350 V DC	24 V DC / 20 A	CP-S 24/20.0	1SVR427016R0100		2.83 (6.23)

Ordering details - CP-C

Input voltage range	Rated output voltage / current	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
85-264 V AC / 110-350 V DC	24 V DC / 5 A	CP-C 24/5.0	1SVR427024R0000		0.96 (2.11)
85-264 V AC / 110-350 V DC	24 V DC / 10 A	CP-C 24/10.0	1SVR427025R0000		1.34 (2.95)
85-264 V AC / 110-350 V DC	24 V DC / 20 A	CP-C 24/20.0	1SVR427026R0000		3.15 (6.94)

Description	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
Messaging module for CP-C range power supplies	CP-C MM	1SVR427081R0000		0.065 (0.14)

CP-S and CP-C
Technical data

Data at T_a = 25 °C, U_{in} = 230 V AC and rated values, unless otherwise indicated

Type			CP-C 24/5.0 CP-S 24/5.0	CP-C 24/10.0 CP-S 24/10.0	CP-C 24/20.0 CP-S 24/20.0
Input circuit - supply circuit			**L, N**		
Rated input voltage U_{in}		CP-C	110-240 V AC		
	CP-S	switch position 115	110-240 V AC	110-120 V AC	
		switch position 230		220-240 V AC	
Input voltage range		CP-C	85-264 V AC / 100-350 V DC [1]		
	CP-S	switch position 115	85-264 V AC / 100-350 V DC [1]	85-132 V AC	
		switch position 230		184-264 V AC / 220-350 V DC [1]	
Frequency range AC			47-63 Hz		
Typical input current	CP-S and CP-C at 110-240 V AC		2.2-1.2 A	2.6-1.2 A	5.5-2.5 A
	CP-S at 110-120 V AC		-	4.2-4.0 A	9.0-8.0 A
	CP-S at 220-240 V AC		-	2.4-2.2 A	4.5-4.0 A
Typ. power consumption			135 W	269 W	538 W
Inrush current limiting / I^2t (cold start)		CP-C	< 23 A / approx. 0.9 A^2s	< 33 A / approx. 0.2 A^2s	< 40 A / approx. 1.9 A^2s
		CP-S		< 40 A / approx. 1.8 A^2s	< 70 A / approx. 8 A^2s
Power failure buffering time			min. 100 ms	min. 40 ms	min. 40 ms
Transient overvoltage protection			varistors		
Internal input fuse (apparatus protection, not accessible)			4 A (slow-acting)	6.3 A (slow-acting)	12 A (fast-acting)
Power factor correction (PFC)		CP-C	yes, active		
		CP-S	no		
Indication of operational states					
Output voltage	OUTPUT OK: green LED		⎍: output voltage OK		
Output circuit			**L+, L+, L-, L- : short-circuit, no-load and overload proof**		
Rated output voltage			24 V DC		
Tolerance of the output voltage		CP-C	±1 %		
		CP-S	-1...+5 %		
Adjustment range of the output voltage		CP-C	22-28 V DC, default setting 24 V ±0.5 %		
		CP-S	fixed		
Rated output power			120 W	240 W	480 W
Rated output current		$T_a \leq 60$ °C	5 A	10 A	20 A
Peak output current (power reserve)		$T_a \leq 40$ °C	typ. ≤ 7.25 A	typ. ≤ 12.25 A	typ. ≤ 22.5 A
Derating		60 °C < $T_a \leq 70$ °C	2.5 % per Kelvin temperature increase		
Deviation with	CP-C	load change statical 10-90 %	typ. < ±0.05 %		
	CP-S	load change statical 10-90 %	typ. < ±0.1 %		
		load change dynamical 10-90 %	typ. < ±3 %		
		change of the input voltage of ±10 %	typ. < ±0.05 %		
Control time			typ. < 1 ms		
Starting time after applying supply voltage		CP-C	< 200 ms	< 200 ms	typ. < 200 ms
		CP-S		< 250 ms	typ. < 300 ms
Rise time 10-90 %		CP-C	typ. < 30 ms	typ. < 4 ms	typ. < 12 ms
		CP-S		typ. < 5 ms	typ. < 15 ms
Residual ripple and switching peaks		BW = 20 MHz	typ. < 50 mV_{PP}		
Parallel connection			yes, up to 5 devices, to enable redundancy and to increase power, current not symmetrical (CP-S only redundancy)		
Series connection			yes, to increase voltage, for decoupling refer to the application manual		
Resistance to reverse feed			approx. 35 V DC		
Output circuit - No-load, overload and short-circuit behaviour			**see also U/I- and I/T-characteristic curves**		
Characteristic curve of output			U/I characteristic curve with power reserve		
Current limiting at short circuit			approx. 11 A	approx. 19 A	approx. 25 A
Short-circuit protection			continuous short-circuit stability		
Overload protection			thermal protection		
Starting of capacitive loads			unlimited		
General data					
Power dissipation			typ. < 15 W	typ. < 29 W	typ. < 58 W
Efficiency			typ. 89 %		
Discharge current for PE			< 3.5 mA		
MTBF		CP-C	500.000 h		
		CP-S	350.000 h		
Dimensions (W x H x D)			56.5 (60 2)) x 130 x 135.5 mm (2.22 (2.36 2)) x 5.12 x 5.35 in)	90 (93.5 2)) x 130 x 135.5 mm (3.54 (3.68 2)) x 5.12 x 5.35 in)	200 (203.5 2)) x 130 x 135.5 mm (7.87 (8.01 2)) x 5.12 x 5.35 in)
Weight		CP-C	approx. 0.96 kg (2.12 lb)	approx. 1.34 kg (2.95 lb)	approx. 3.15 kg (6.94 lb)
		CP-S		approx. 1.07 kg (2.36 lb)	approx. 2.83 kg (6.23 lb)
Minimum distance to other units		horizontal / vertical	10 mm / 80 mm (0.39 in / 3.15 in)		
Degree of protection		housing / terminals	IP20 / IP20		
Material of housing		housing shell / cover	aluminium / zinc-coated sheet steel		
Protection class (EN 61140)			I		
Mounting			DIN rail (IEC/EN 60715), snap-on mounting		
Mounting position			horizontal		

CP-S and CP-C
Technical data

Data at T_a = 25 °C, U_{in} = 230 V AC and rated values, unless otherwise indicated

Type			CP-C 24/5.0 CP-S 24/5.0	CP-C 24/10.0 CP-S 24/10.0	CP-C 24/20.0 CP-S 24/20.0
Electrical connection - Input circuit			[3]	[3]	-
Wire size	fine-strand with wire end ferrule		0.2-2.5 mm² (24-14 AWG)		2.5-10 mm² (14-8 AWG)
	fine-strand without wire end ferrule				0.5-10 mm² (20-8 AWG)
	rigid				0.5-16 mm² (20-6 AWG)
Stripping length			7 mm (0.28 in)		12 mm (0.47 in)
Tightening torque			0.4 Nm		1.2-1.5 Nm
Electrical connection - Output circuit			[3]	[3]	-
Wire size	fine-strand with wire end ferrule		0.12-2.5 mm² (26-14 AWG)		2.5-10 mm² (14-8 AWG)
	fine-strand without wire end ferrule				0.5-10 mm² (20-8 AWG)
	rigid				0.5-16 mm² (20-6 AWG)
Stripping length			8 mm (0.31 in)		12 mm (0,47 in)
Tightening torque			0.4 Nm		1.2-1.5 Nm
Environmental data					
Ambient temperature range		operation	-25...+70 °C		
		rated load	0...+60 °C (without derating)		
		storage	-40...+85 °C		
Damp heat (IEC/EN 60068-2-3)			93 % at +40 °C, no condensation		
Climatic category (IEC/EN 60721)			3K3		
Vibration (IEC/EN 60068-2-6)					
Shock (IEC/EN 60068-2-27)					
Isolation data					
Rated insulation voltage U_i between all isolated circuits (IEC/EN 60950-1; EN 50178)		input / output	300 V		
		input / PE	300 V		
		output / PE	50 V		
Rated impulse withstand voltage U_{imp} between all isolated circuits (IEC/EN 60950-1; EN 50178)		input / output	4 kV; 1.2/50 µs		
		input / PE	2.5 kV; 1.2/50 µs		
		output / PE	500 V; 1.2/50 µs		
Power-frequency withstand voltage test (test voltage) (routine test / type test)		input / output	1.5 kV AC / 3.0 kV AC		
		input / PE	1.5 kV AC / 3.0 kV AC		
		output / PE	500 V DC / 500 V DC		
Pollution degree (IEC/EN 60950-1; EN 50178)			2		
Overvoltage category (IEC/EN 60950-1; EN 50178)			II		
Standards					
Product standard			IEC/EN 61204		
Low Voltage Directive			2006/95/EC		
EMC Directive			2004/108/EC		
Electrical safety			EN 50178, EN 60950, UL 60950, UL 508		
Protective low voltage			SELV (EN 60950)		
Electromagnetic compatibility					
Interference immunity to			IEC/EN 61000-6-2		
electrostatic discharge		IEC/EN 61000-4-2	Level 4 (8 kV / 15 kV)		
radiated, radio-frequency, electromagnetic field		IEC/EN 61000-4-3	Level 3 (10 V/m)		
electrical fast transient / burst		IEC/EN 61000-4-4	Level 4 (4 kV)		
surge		IEC/EN 61000-4-5	Level 4 (2 kV symmetrical, level 3 - 3 kV asymmetrical)		
conducted disturbances, induced by radio-frequency fields		IEC/EN 61000-4-6	Level 3 (10 V)		
Interference emission			IEC/EN 61000-6-3		
high-frequency radiated		IEC/CISPR 22; EN 55022	Class B		
high-frequency conducted		IEC/CISPR 22; EN 55022	Class B		

[1] at U > 264 V use additionally an appropriate external fuse
[2] with lateral screw
[3] pluggable connecting terminals, actuate only when power is off

„Approvals and marks“ on page 3/4.

CP-S and CP-C
Technical data

Data at T_a = 25 °C, U_{in} = 230 V AC and rated values, unless otherwise indicated

Type		CP-C MM
Input circuit - Supply circuit		
Rated input voltage U_{in}		110-240 V AC / 100-350 V DC
Input voltage range		70-264 V AC / 80-350 V DC
Power consumption		2.5 VA / 1.5 W
Input circuit - Control circuit		
Kind of triggering		volt-free triggering
Control input, control function	Remote OFF	remote off
Threshold "Switching-off power supply unit"		R ≤ 1 kΩ
Threshold "Switching-on power supply unit"		R ≥ 10 kΩ
Input current		typ. 1 mA (200 mA for 200 µs)
Maximum cable length to the control input		25 m - 100 pF/m
Measuring circuit - INPUT		**powered by the input circuit of the power supply unit**
Monitoring function		undervoltage monitoring of input voltage of the power supply unit
Thresholds		85 V AC / 90 V DC
Hysteresis, related to the threshold value		AC: typ. -8 % / DC -30 %
Accuracy, tolerance		-5 % at AC and DC
Maximum measuring cycle		typ. < 50 ms
Measuring circuit - OUTPUT		**powered by the output circuit of the power supply unit**
Monitoring function		undervoltage monitoring of output voltage of the power supply unit
Thresholds		20 V DC
Hysteresis, related to the threshold value		typ. 5 %
Accuracy, tolerance		±1 %
Maximum measuring cycle		typ. < 10 ms
Indication of operational states		
Remote off	REMOTE OFF: green LED	⎍: „REMOTE OFF“ input R ≤ 1kΩ
Status of power supply input	Input OK: green LED	⎍: relay „INPUT OK“ energized
Status of power supply output	OUTPUT OK: green LED	⎍: relay „OUTPUT OK“ energized
Output circuits		**11-12/14, 21-22/24**
Kind of output		relays, 2 x 1 c/o contacts
Operating principle		closed-circuit principle
Contact material		AgNi
Rated voltage (VDE 0110, IEC/EN 60947-1)		250 V
Minimum switching voltage / Minimum switching current		24 V / 10 mA
Maximum switching voltage / Maximum switching current		250 V / 1 A
Rated operating current I_e (IEC/EN 60947-1)	AC-12 (resistive) at 230 V	1 A
	AC-15 (inductive) at 230 V	1 A
	DC-12 (resistive) at 24 V	1 A
	DC-13 (inductive) at 24 V	1 A
Mechanical lifetime		30 x 10^6 switching cycles
Electrical lifetime		0.1 x 10^6 switching cycles
Short circuit proof, maximum fuse rating	n/c contact	2 A, gL
	n/o contact	2 A, gL
General data		
Duty time		100 %
Dimensions (W x H x D, when mounted)		56.5 x 54 x 24 mm (2.22 x 2.13 x 0.94 in)
Weight		0.065 kg (0.14 lb)
Degree of protection	housing / terminals	IP20 / IP20
Material of housing		Plastic
Protection class (EN 61140)		II
Mounting		snap-on mounting, without any tool
Mounting position		plugged onto the power supply unit
Electrical connection		
Wire size	fine-strand with wire end ferrule	0.2-2.5 mm² (24-14 AWG)
	fine-strand without wire end ferrule	
	rigid	0.2-4 mm² (24-12 AWG)
Stripping length		7.5 mm (0.3 inch)
Tightening torque		0.4-0.6 Nm

CP-S and CP-C
Technical data

Data at T_a = 25 °C, U_{in} = 230 V AC and rated values, unless otherwise indicated


Type		CP-C MM
Environmental data		
Ambient temperature range	operation	-25...+70 °C
	storage	-40...+85 °C
Damp heat (IEC/EN 60068-2-3)		93 % at +40 °C, no condensation
Climatic category (IEC/EN 60721)		3K3
Vibration (IEC/EN 60068-2-6)		
Shock (IEC/EN 60068-2-27)		
Isolation data		
Rated insulation voltage U_i (IEC/EN 60974-1, EN 50178, VDE 0160)		250 V
Protective separation (EN 50178, EN 60950) supply / measuring circuits / relay outputs		yes
Rated impulse withstand voltage U_{imp} between all isolated circuits (IEC 664, VDE 0110)		4 kV; 1.2/50 µs
Test voltage between all circuits (type test)		2.5 kV AC
Pollution degree (EN 60950)		2
Overvoltage category (EN 60950)		II
Standards		
Product standard		IEC/EN 61204
Low Voltage Directive		2006/95/EC
EMC Directive		2004/108/EC
Electrical safety		EN 50178, EN 60950, UL 60950, UL 508
Elektromagnetic compatibility		
Interference immunity to		IEC/EN 61000-6-2
electrostatic discharge	IEC/EN 61000-4-2	Level 3 and 4 (6 kV / 8 kV)
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)
electrical fast transient / burst	IEC/EN 61000-4-4	Level 4 and 2 (4 kV power input / 1 kV control input)
surge	IEC/EN 61000-4-5	Level 3 and 2 (4 kV symmetrical power input / 1 kV control input)
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level (10 V)
Interference emission		IEC/EN 61000-6-3
high-frequency radiated	IEC/CISPR 22; EN 55022	Class B
high-frequency conducted	IEC/CISPR 22; EN 55022	Class B

„Approvals and marks“ on page 3/4.

CP-S and CP-C
Technical diagrams, Dimensional drawings


Technical diagrams

Output curve at 25 °C




CP-S 24/5.0

Output curve at 25 °C




CP-C 24/5.0


Temperature curve at U_{out} = 24 V DC




CP-S 24/5.0, CP-C 24/5.0




CP-S 24/10.0




CP-C 24/10.0




CP-S 24/10.0, CP-C 24/10.0



CP-S 24/20.0





CP-C 24/20.0




CP-S 24/20.0, CP-C 24/20.0

Dimensional drawings dimensions in mm

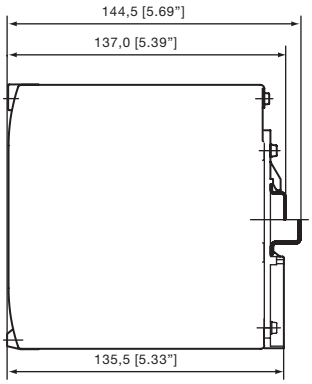


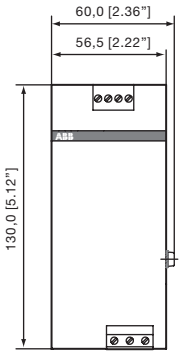


CP-S 24/5.0
CP-C 24/5.0
CP-A RU

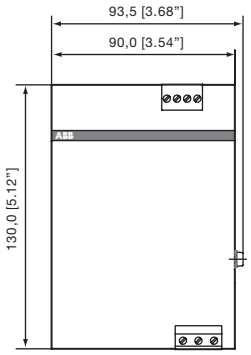

CP-S 24/10.0
CP-C 24/10.0

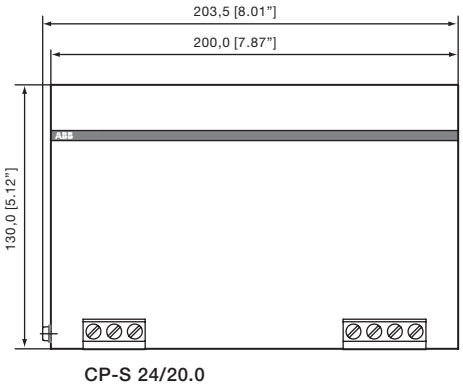

CP-S 24/20.0
CP-C 24/20.0



CP-C MM


Redundancy units
Ordering details



CP-A RU + CP-A CM



CP-A RU



CP-RUD



CP-D RU

Ordering details

Description	suitable for decoupling of two CP-24 V DC power supply units or suitable for decoupling of CP-E power supply units	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
2 inputs each up to 20 A and 1 output up to 40 A	≤ 40 V and ≥ 5 A	CP-A RU	1SVR427071R0000		0.89 (1.96)
Control module for CP-A RU redundancy units	-	CP-A CM	1SVR427075R0000		0.063 (0.14)
2 inputs each up to 2.5 A and 1 output up to 5 A	≤ 35 V and < 5 A	CP-RUD	1SVR423418R9000		0.15 (0.33)

Ordering details - CP-D RU for decoupling of two CP-D power supply units

Input voltage range	Rated input current	Rated output voltage / current	Type	Order code	Price	Weight (1 pce) kg (lb)
9-35 V DC	2 x 5 A	24 V DC / 1 x 10 A	CP-D RU	1SVR427049R0000		0.075 (0.165)

Redundancy units
Technical data

Type		CP-A RU	CP-A RU in combination with CP-A CM
Input circuit - Supply circuit		(+/ -, +/ -)	
Rated input voltage U_{in}		24 V DC	
Input voltage range per channel		10-28 V DC	13-28 V DC
Rated input current Iin per channel		1-20 A	
Maximum input current per channel		30 A for 300 s	
Transient overvoltage protection		yes	
Output circuit		(++/--)	
Rated output voltage U_{out}		24 V DC	
Voltage drop		typ. 0.6 V, max. 0.9 V	
Rated output current I_{out}		1-40 A	
Output ratings per channel	T_a = 60 °C	10-28 V DC / 40 A	13-28 V DC / 40 A
	T_a = 70 °C	10-28 V DC / 30 A	13-28 V DC / 30 A
Derating	60 °C < T_a ≤ 70 °C	2.5 % per Kelvin temperature increase	
Peak output current		60 A for 300 s	
Resistance to reverse feed		< 40 V	
General data			
Dimensions (W x H x D)		56.5 (60 [1]) x 130 x 135.5 mm; (2.22 (2.36 [1]) x 5.12 x 5.35 in)	
Weight		0.89 kg (1.96 lb)	
Minimum distance to other units	horizontal / vertical	10 mm / 50 mm (0.39 in / 1.97 in)	
Degree of protection	housing / terminals	IP20 / IP20	
Material of housing	housing shell / cover	aluminium / zinc-coated sheet steel	
Protection class		III [2]	
Mounting		DIN rail (IEC/EN 60715)	
Mounting position		horizontal	
Electrical connection - Input circuit / Output circuit			
Wire size	fine-strand with wire end ferrule	2.5-10 mm² (14-8 AWG)	
	fine-strand without wire end ferrule	0.5-10 mm² (20-8 AWG)	
	rigid	0.5-16 mm² (20-6 AWG)	
Stripping length		12 mm (0.47 in)	
Tightening torque		1.2-1.5 Nm	
Environmental data			
Ambient temperature range	operation	-25...+70 °C	
	rated load	-25...+60 °C (without derating)	
	storage	-40...+85 °C	
Damp heat (IEC/EN 60068-2-3)		93 % at 40 °C, no condensation	
Climatic category (IEC/EN 60721)		3K3	
Vibration (IEC/EN 60068-2-6)			
Shock (IEC/EN 60068-2-27)			
Isolation data			
Insulation voltage	between input / output / housing	500 V AC (routine test)	
Pollution degree (EN 50178)		2	
Standards			
Product standard		IEC/EN 61204	
Low Voltage Directive		2006/95/EC	
EMC Directive		2004/108/EC	
Electrical safety		EN 50178, EN 60950, UL 60950, UL 508	
Electromagnetic compatibility			
Interference immunity to		IEC/EN 61000-6-2	
electrostatic discharge	IEC/EN 61000-4-2	Level 3 (air discharge ±8 kV, contact discharge ±6 kV)	
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)	
electrical fast transient / burst	IEC/EN 61000-4-4	Level 3 (±2 kV)	
surge	IEC/EN 61000-4-5	Level 1 (±0.5 kV)	
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)	
Interference emission		IEC/EN 61000-6-3	
high-frequency radiated	IEC/CISPR 22 / EN 55022	Class B	
high-frequency conducted	IEC/CISPR 22 / EN 55022	Class B	

[1] incl. lateral screw

[2] This device is designed for connection to a safety extra-low voltage source. If no safety extra-low voltage is used at the input side, the lateral screw can be used for grounding of the housing (protection class I).

„Approvals and marks“ on page 3/4.

Redundancy units
Technical data

Type		CP-A CM
Input circuit - Supply circuit		
Rated input voltage U_{in}		24 V DC
Input voltage range		13-28 V DC
Rated input current	at rated sense load and 24 V DC	120 mA
Power consumption	at 24 V DC	approx. 1 W
Measuring circuit		**11-12/14, 21-22/24**
Monitoring function		undervoltage monitoring
Measuring voltage		rated operational voltage
Thresholds		14-28 V
Hysteresis, related to the threshold value		fix: 3-5 %
Accuracy, tolerance		10 % of full-scale value
Maximum measuring cycle		6 ms
Indication of operational states		
Status of input 1	IN 1: green LED	⎍: voltage at input 1 > than threshold 1 = no faults present
Status of input 2	IN 2: green LED	⎍: voltage at input 2 > than threshold 2 = no faults present
Output status	OUT: green LED	⎍: U_{OUT} > 3 V = no faults present
Output circuit		**+, +, -**
Kind of output		relays, 2 x 1 c/o contact
Contact material		AgNi
Operating principle		closed-circuit principle
Rated operational voltage U_e (IEC/EN 60947-1, VDE 0110)		250 V
Minimum switching voltage / Minimum switching current		24 V / 10 mA
Maximum switching voltage / Maximum switching current		250 V / 1 A
Rated operational current I_e (IEC/EN 60947-5-1)	AC-12 (resistive) at 230 V	1 A
	AC-15 (inductive) at 230 V	1 A
	DC-12 (resistive) at 24 V	1 A
	DC-13 (inductive) at 24 V	1 A
Mechanical lifetime		30 x 10^6 switching cycles
Electrical lifetime		0.1 x 10^6 switching cycles
Rating according UL 508	General purpose (GP) 250 V AC	1 A
Maximum fuse rating to achieve short-circuit protection	n/o contact	2 A, gL
	n/c contact	2 A, gL
Sense output (+, +, -)		1 SVR 427 075 R0000
Sense output voltage		13-28 V DC
Sense output current		0.1 A
Maximum fuse rating		For applications acc. UL the sense output shall be provided with a listed DC fuse 3 A
General data		
Duty time		100 %
Dimensions (W x H x D, when mounted)		56.5 x 54 x 24 mm (2.22 x 2.13 x 0.94 in)
Material of housing		plastic
Weight		0.063 kg (0.14 lb)
Degree of protection	housing / terminals	IP20 / IP20
Protection class		II
Mounting		snap-on mounting, without any tool
Mounting position		plugged onto the redundancy unit CP-A RU
Electrical conection		
Wire size	fine-strand with wire end ferrule	0.2-2.5 mm^2 (24-14 AWG)
	fine-strand without wire end ferrule	
	rigid	0.2-4 mm^2 (24-12 AWG)
Stripping length		7.5 mm (0.3 in)
Tightening torque		0.4-0.6 Nm
Isolation data		
Rated insulation voltage U_i (IEC/EN 60947-1, EN 50178, VDE 0160)		250 V
Rated impulse withstand voltage U_{imp} (type test) between all circuits (IEC 664, VDE 0110)		2.5 kV
Power-frequency withstand voltage test (routine test) between all circuits		1.2 kV AC
Protective separation (EN 50178) between input and output		yes
Pollution degree		2
Overvoltage category		II
Environmental data		
Ambient temperature range	operation	-25...+70 °C
	storage	-40...+85 °C
Damp heat (IEC/EN 60068-2-3)		93 %at 40 °C, no condensation
Climatic category (IEC/EN 60721)		3K3
Vibration (IEC/EN 60068-2-6)		
Shock (IEC/EN 60068-2-27)		

Redundancy units
Technical data

Type		CP-RUD
Input circuit - Supply circuit		**A: U1+/-U ; B: U2+/-U**
Rated input voltage U_{in}		24 V DC
Input voltage range		5-35 V DC
Rated input current I_{in} per channel		0.5-2.5 A
Maximum input current per channel		10 A for 300 s
Transient overvoltage protection		no
Output circuit		**L+, L+, L+, L-, L-, L-**
Rated output voltage U_{out}		24 V DC
Voltage drop		typ. 0.6 V, max. 0.7 V
Rated output current I_{out}		0.5-5 A
Peak output current		20 A for 150 s
Resistance to reverse feed		< 35 V
General data		
Dimensions (W x H x D)		22.5 x 78 x 100 mm (0.89 x 3.07 x 4.02 in)
Weight		0.135 kg (0.30 lb)
Minimum distance to other units	horizontal / vertical	10 mm / 10 mm (0.39 in / 0.39 in)
Degree of protection	housing / terminals	IP20 / IP20
Material of housing	housing shell / cover	plastic / plastic
Protection class		-
Mounting		DIN rail (IEC/EN 60715)
Mounting position		horizontal
Electrical connection - Input circuit / Output circuit		
Wire size	fine-strand with wire end ferrule	2 x 0.75-2.5 mm² (2 x 18-14 AWG)
	fine-strand without wire end ferrule	
	rigid	2 x 0.5-4 mm² (2 x 20-12 AWG)
Stripping length		7 mm (0.28 in)
Tightening torque		0.6-0.8 Nm
Environmental data		
Ambient temperature range	operation	-20...+60 °C
	rated load	-20...+60 °C
	storage	-40...+85 °C
Damp heat (IEC/EN 60068-2-3)		93 % at 40 °C, no condensation
Climatic category (IEC/EN 60721)		-
Vibration (IEC/EN 60068-2-6)		
Shock (IEC/EN 60068-2-27)		
Isolation data		
Insulation voltage	between input / output / housing	-
Pollution degree (EN 50178)		2
Standards		
Product standard		
Low Voltage Directive		2006/95/EC
EMC Directive		2004/108/EC
Electrical safety		EN 50178
Electromagnetic compatibility		
Interference immunity to		IEC/EN 61000-6-2
electrostatic discharge	IEC/EN 61000-4-2	Level 3 (air discharge ±8 kV, contact discharge ±6 kV)
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)
electrical fast transient/burst	IEC/EN 61000-4-4	Level 3 (±2 kV)
surge	IEC/EN 61000-4-5	Level 1 (±0.5 kV)
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)
Interference emission		IEC/EN 61000-6-3
high-frequency radiated	IEC/CISPR 22 / EN 55022	Class B
high-frequency conducted	IEC/CISPR 22 / EN 55022	Class B


[1] incl. lateral screw

[2] This device is designed for connection to a safety extra-low voltage source. If no safety extra-low voltage is used at the input side, the lateral screw can be used for grounding of the housing (protection class I).


Redundancy units
Technical data

Type		CP-D RU
Input circuit - Supply circuit		**IN 1 + + -, IN 2 + + -**
Rated input voltage U_{in}		24 V DC
Input voltage range		9-35 V DC
Rated input current I_{in} per channel		5 A
Maximum input current per channel		10 A for 300 s
Transient overvoltage protection		no
Output circuit		**OUT + + +, - - -**
Rated output voltage U_{out}		24 V DC
Voltage drop		typ. 0.5 V
Rated output current I_{out}		10 A
Resistance to reverse feed		< 35 V
General data		
MTBF		on request
Duty time		100 %
Dimensions (W x H x D)	product dimensions	35 x 91 x 56.5 mm (1.38 x 3.58 x 2.22 in)
	packaging dimensions	134 x 94 x 48 mm (5.28 x 3.70 x 1.89 in)
Weight	net weight	0.075 kg (0.165 lb)
	gross weight	0.130 kg (0.286 lb)
Material of housing		plastic
Mounting		DIN rail, snap-on mounting without any tool
Mounting position		horizontal
Minimum distance to other units	horizontal / vertical	25 mm (0.98 in) / 25 mm (0.98 in)
Electrical connection - Input circuit / Output circuit		
Wire size	fine-strand with (out)wire end ferrule	0.2-2.5 mm² (24-14 AWG)
	rigid	0.2-2.5 mm² (24-12 AWG)
Stripping length		7.0 mm (0.28 in)
Tightening torque		0.67 Nm (6 lb.in)
Environmental data		
Ambient temperature range	operation	-40...+70 °C
	storage	-40...+85 °C
Relative humidity	RH at 40 °C	20-95 %, no condensation
Vibration (IEC/EN 60068-2-6)		Mounting by rail: 10-500 Hz, 2 G, along X, Y, Z each axis, 60 min for each axis
Shock (IEC/EN 60068-2-27)		15 G, 11 ms, 3 axis, 6 faces, 3 times for each face
Standards		
Product standard		IEC/EN 61204-3
Low Voltage Directive		2006/95/EC
EMC Directive		2004/108/EC
RoHS Directive		2011/65/EC
Electromagnetic compatibility		
Interference immunity to		EN 55024
electrostatic discharge	IEC/EN 61000-4-2	Level 3, air discharge 8 kV, contact discharge 4 kV
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3, 10 V/m
electrical fast transient/burst	IEC/EN 61000-4-4	Level 3, 2 kV / 5 kHz
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3, 10 V
Interference emission		EN 55022
high-frequency radiated	IEC/CISPR 22 / EN 55022	Class B
high-frequency conducted	IEC/CISPR 22 / EN 55022	Class B


Redundancy units
Dimensional drawings

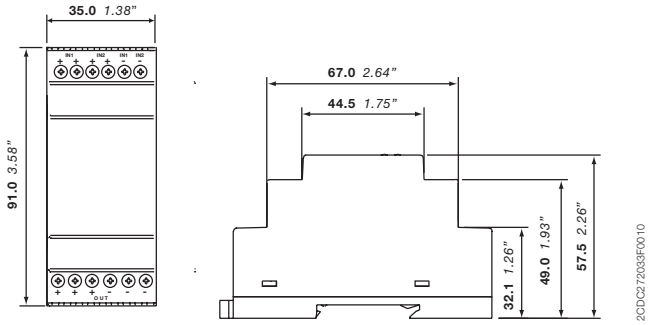


CP-D RU

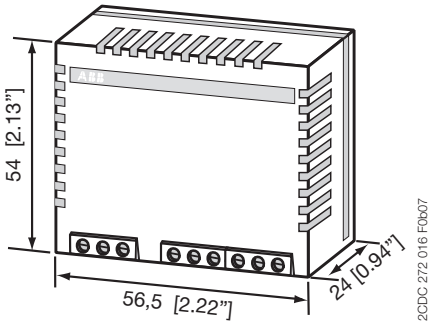

CP-A CM

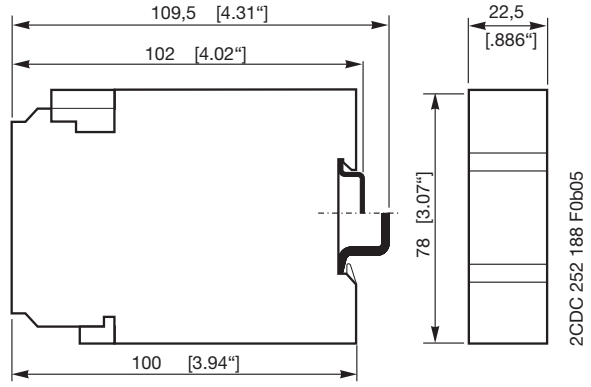

CP-RUD

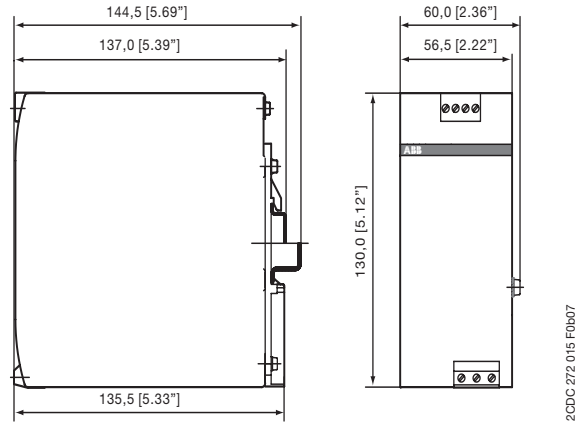

CP-A RU

CP-ASI range
Product group picture



CP-ASI range
Table of contents


CP-ASI

Product group picture 3/57
Table of contents 3/58
Benefits and advantages 3/59
Ordering details 3/60
Technical data 3/61
Technical diagrams 3/63
Dimensional drawings 3/64

CP-ASI range
Benefits and advantages

Characterics
- Rated output voltage 30.5 V DC for ASI-bus
- Rated output current up to 8.0 A
- High efficiency of up to 92 % [1)]
- Infrared addressing mode [2)]
- Low power dissipation and low heating
- Free convection cooling (no forced cooling with ventilators)
- Ambient temperature range during operation -10…70 °C [3)]
- Open-circuit, overload and short-circuit stable
- Integrated input fuse
- Tool-free mounting on DIN rail as well as demounting
- LEDs for the indication of operational states
- Approval[4)]: cULus LISTED /Mark: CE

[1)] Efficiency is depending on device
[2)] Except CP-ASI/4.0 DC/DC
[3)] Ambient temperature range CP-ASI/4.0 DC/DC -25…70°C
[4)] Approvals are related to rated input voltage U_{in}

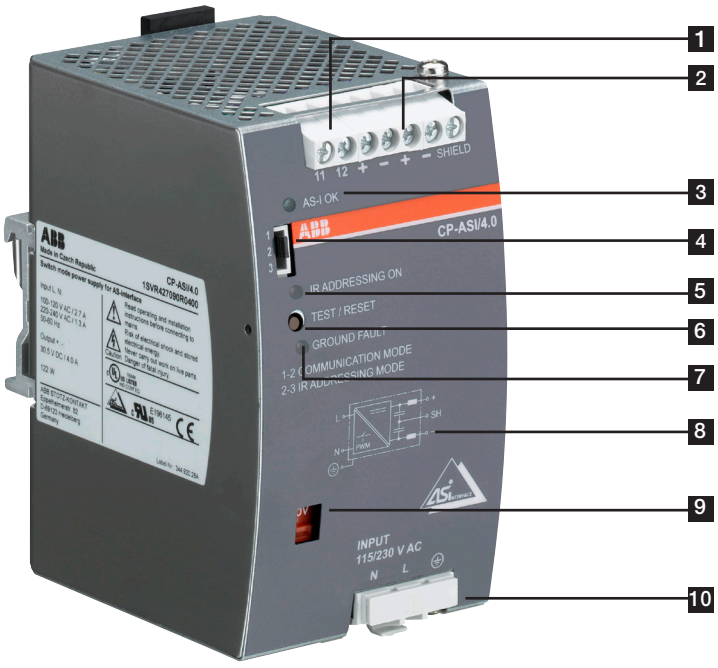

1 **Output +, -, +, -, SHIELD: output terminals**
2 **Signalling contact 11-12: ground fault signalling terminals**
3 **Indication of operational states**
AS-I OK: green LED - output voltage OK
4 **Configuration of operation mode Jumper**
5 **Indication of operational states**
IR ADDRESSING ON: red LED - infrared addressing mode active
6 **Test and reset button**
7 **Indication of operational states**
GROUND FAULT: red LED - ground fault detected
8 **Circuit diagram**
9 **Input voltage selector Adjustment of input voltage**
10 **Input L, N, PE: input terminals**

CP-ASI range
Ordering details


2CDC 271 002 S0012

CP-ASI/2.8


2CDC 271 003 S0012

CP-ASI/4.0 DC/DC


2CDC 271 004 S0012

CP-ASI/4.0


2CDC 271 005 S0012

CP-ASI/8.0

Description

The CP-ASI power supply range is specifically designed with integrated data decoupling for the supply of AS-Interface systems.
Up to 62 slaves (binary I/O devices) can be supplied with a single two-conductor cable.
The configurable IR addressing mode allows the easy assign of new ID addresses by means of an external infrared programming unit.

Ordering details

Input Voltage Range	Rated Output Voltage	Rated Output Current	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
85-132 V AC, 184-264 V AC	30.5 V DC	2.8 A	CP-ASI/2.8	1SVR427090R0280		0.495 (1.091)
85-132 V AC, 184-264 V AC	30.5 V DC	4.0 A	CP-ASI/4.0	1SVR427090R0400		0.653 (1.440)
18-32.4 V DC	30.5 V DC	4.0 A	CP-ASI/4.0 DC/DC	1SVR427095R0400		0.488 (1.076)
85-132 V AC, 184-264 V AC	30.5 V DC	8.0 A	CP-ASI/8.0	1SVR427090R0800		0.897 (1.978)

CP-ASI range
Technical data

Data at T_a = 25 °C, U_{in} = 230 V AC and rated values, unless otherwise indicated

Type		CP-ASI/2.8	CP-ASI/4.0	CP-ASI/8.0	CP-ASI/4.0 DC/DC
Input circuit - Supply circuit		L, N			
Rated input voltage U_{in}		-			24 V DC
	switch position 115 V	100-120 V AC			-
	switch position 230 V	220-240 V AC			-
Input voltage range		-			18.0-32.4 V DC
	switch position 115 V	85-132 V AC			-
	switch position 230 V	184-264 V AC	184-264 V AC / 240-300 V DC	184-264 V AC	-
Frequency range AC		47-63 Hz			
Typical input current		-			5.6 A
	switch position 115 V	2.0 A	2.7 A	6.0 A	-
	switch position 230 V	0.9 A	1.3 A	2.8 A	-
Allowed voltage between input and earth (ground)		CP-ASI/4.0 DC/DC: max. 60 V DC / 42.4 V AC			
Allowed input ripple voltage		CP-ASI/4.0 DC/DC: max. 5 Vpp, 47 Hz - 40 kHz			
Continuous input voltage with no damage to the DC/DC converter		-			max. 36.0 V DC
Turn-on voltage		-			typ. 17.5 V DC
Shut-down voltage		-			typ. 14.0 V DC
		-			typ. 35 V DC
Typical power consumption		94 W	135 W	261 W	132 W
Inrush current limiting / I^2t (cold start)		< 20 A (132 V AC) / approx. 1.5 A^2/s	< 44.7 A (120 V AC) / approx. 3.7 A^2/s	< 12 A (100 V AC) / approx. 1.0 A^2/s	< 1.8 A / approx. 1.0 A^2/s
		< 38 A (264 V AC) / approx. 1.8 A^2/s	< 49.3 A (132 V AC) / approx. 4.6 A^2/s	< 14 A (120 V AC) / approx. 1.5 A^2/s	-
		-	< 49.7 A (230 V AC) / approx. 2.5 A^2/s	< 24 A (220 V AC) / approx. 1.4 A^2/s	-
		-	< 57.5 A (264 V AC) / approx. 3.3 A^2/s	< 27 A (240 V AC) / approx. 1.6 A^2/s	-
Discharge current towards PE		< 3.5 mA			-
Power failure buffering time		-			max. 0.5 ms
	at 115 V AC	min. 35 ms	min. 40 ms	min. 20 ms	-
	at 230 V AC	min. 40 ms		min. 30 ms	-
Transient overvoltage protection		varistors			
Reverse input polarity protection		CP-ASI/4.0 DC/DC: included, unit does not start at reversed polarity			
Internal input fuse		8 A slow acting / 250 V AC	3.15 A slow acting / 250 V AC	8 A slow acting / 250 V AC	10 A slow acting
External fusing (not necessary, but recommended)		circuit breaker with C characteristic min 6 A, or alternatively 10 A with B characteristic			-
Power factor correction (PFC)	at 115 V AC	0.58		0.53	-
	at 230 V AC	0.53		0.48	-
Indication of operational states					
Output voltage	AS-I OK	LED green			
IR addressing mode	IR ADDRESSING ON	LED red			-
Overload	OVERLOAD		LED red		-
Output circuit		+,-			
Rated output voltage		30.5 V DC			
Rated output power		85 W	122 W	244 W	122 W
Tolerance of the output voltage		± 3 %			
Adjustment range of the output voltage		-	-	-	
Rated output current I_r	$T_a \leq 60$ °C	2.8 A	4.0 A	8.0 A	4.0 A
Derating of the output current	60 °C < $T_a \leq$ 70 °C	2.5 %/°C			
Signalling contact for ground fault		CP-ASI/4.0: max. 25 V AC or 60 V DC, 0.5 A			
Control time		< 2 ms			
Starting time after applying the supply voltage		max. 400 ms	max. 700 ms	max. 500 ms	max. 1 s (typ. 650 ms)
Rise time		max. 100 ms			-
	at rated load	-			typ. 100 ms
	with 5 mF	-			typ. 200 ms
Residual ripple	BW = 500 kHz	typ. < 50 mV_{pp}			
Switching peaks	BW = 20 MHz	typ. < 100 mV_{pp}			
Output circuit - No-load, overload and short-circuit behaviour					
Characteristic curve of output		U/I characteristic curve		Combined U/I characteristic curve and hiccup mode	U/I characteristic curve
Short-circuit protection		continuous short-circuit stability		temporary short-circuit stability	continuous short-circuit stability
Short-circuit behaviour		continuation with output power limiting		-	continuation with output power limiting
Current limiting at short circuit	min / max	3.2 A / 4.6 A	4.2 A / 6.5 A	12 A / 25 A (max. 5 s)	5.0 A / 9.0 A
Overload protection		output power limiting		temporary output power limiting	output power limiting
Overtemperature, overload and short circuit behaviour		CP-ASI/8.0: at 8.4 A < I_{max} < 12 A continuous current for 2-5 s, afterwards safety switch-off			
Overtemperature protection		CP-ASI/4.0 DC/DC: yes, automatic recovery after temperature went down			
No-load protection		continuous no-load stability			


CP-ASI range
Technical data

Type			CP-ASI/2.8	CP-ASI/4.0	CP-ASI/8.0	CP-ASI/4.0 DC/DC
General data						
MTBF			on request			
Power dissipation			typ. < 9.1 W (230 V AC, 2.8 A)	typ. < 13.5 W (230 V AC, 4.0 A)	typ. < 21.2 W (230 V AC, 8.0 A)	typ. < 12.7 W (24 V DC, 4.0 A)
Efficiency			typ. 90.5 %	typ. 90 %	typ. 92.0 %	typ. 90.5 %
Duty time			100 %			
Dimensions (W x H x D)		product dimensions	49 x 131 x 107 mm (1.93 x 5.16 x 4.21 in)	73 x 131 x 107 mm (2.87 x 5.16 x 4.21 in)	91 x 131 x 107 mm (3.58 x 5.16 x 4.21 in)	40 x 131 x 107 mm (1.58 x 5.16 x 4.21 in)
		packaging dimensions	151 x 65 x 140 mm (5.94 x 2.56 x 5.51 in)	151 x 98 x 140 mm (5.94 x 3.86 x 5.51 in)	151 x 120 x 140 mm (5.94 x 4.72 x 5.51 in)	151 x 65 x 140 mm (5.94 x 2.56 x 5.51 in)
Weight		net weight	0.495 kg (1.019 lb)	0.653 kg (1.440 lb)	0.897 kg (1.997 lb)	0.488 kg (1.076 lb)
		gross weight	0.568 kg (1.252 lb)	0.750 kg (1.653 lb)	1.015 kg (2.238 lb)	0.750 kg (1.287 lb)
Material of housing			metal			
Mounting			DIN rail (IEC/EN 60715), snap-on mounting without any tool			
Mounting position			horizontal			
Minimum distance to other units		horizontal / vertical	15 mm / 25 mm (0.59 / 0.99 in)			
Degree of protection		housing / terminals	IP20 / IP20			
Protection class			I			
Electrical connection						
Wire size	fine-strand with wire end ferrule		0.5-4 mm² (20-12 AWG)			
	fine-strand without wire end ferrule		0.5-4 mm² (20-12 AWG)			
	rigid		0.5-6 mm² (20-10 AWG)			
Stripping length			7 mm (0.28 in)			
Tightening torque			0.8 Nm (7.08 lb.in)			
Environmental data						
Ambient temperature range		operation	-10...+70 °C			-25...+70 °C
		rated load	-10...+60 °C			-25...+60 °C
		storage	-25...+85 °C			-40...+85 °C
Vibration (sinusoidal) (IEC/EN 60068-2-6)			2-17.8 Hz, amplitude ± 1.6 mm			
	sinusoidal (IEC/EN 60068-2-6)		17.8 Hz - 500 Hz, 2 g			
	random (IEC 60068-2-64)		2-800 Hz 0.5 s^2 (s^3)			
Shock (half-sine) (IEC/EN 60068-2-27)			15 g (6 ms), 10 g (11 ms)			
Isolation data						
Rated insulation voltage U_i (IEC/EN 60950-1, EN 50178)	input circuit / output circuit		300 V			50 V
	input / PE		300 V			50 V
	output / PE		50 V			
	shield / output		50 V			
	shield / PE		50 V			
Rated impulse withstand voltage U_{imp} (EN 50178)	input / output		6 kV 1.2/50 µs			1.5 kV 1.2/50 µs
	input / PE		4 kV 1.2/50 µs			0.8 kV 1.2/50 µs
	output / PE		500 V 1.2/50 µs			500 V 1.2/50 µs
Power-frequency withstand voltage test (test voltage) (routine test / type test)	input / output		2.5 kV AC / 3.0 kV AC			1.5 kV AC / 1.5 kV AC
	input / PE		2.5 kV AC / 2.5 kV AC			1.5 kV AC / 1.5 kV AC
	output / PE		500 V AC / 500 V AC			
Pollution degree (IEC/EN 60950-1)			2			
Overvoltage category (UL/IEC/EN 60950-1)		input	II (IEC/EN 60950-1), III (EN 50178)			
		output	II (IEC/EN 60950-1), II (EN 50178)			
Standards						
Low Voltage Directive			2006/95/EC			
EMC directive			2004/108/EC			
RoHS directive			2011/65/EC			
Electrical safety			IEC/EN 60950-1			
Protective low voltage			SELV (IEC/EN 60950-1), PELV			
Electromagnetic compatibility						
Interference immunity to			IEC/EN 61000-6-2			
electrostatic discharge	IEC/EN 61000-4-2		Level 4 (8 kV / 15 kV)			
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3		Level 3 (10 V/m)			
electrical fast transient/burst	IEC/EN 61000-4-4		input circuit: Level 4 (4 kV)			input circuit: Level 3 (2 kV)
			output circuit: Level 3 (2 kV)			output circuit: Level 2 (1 kV)
surge	IEC/EN 61000-4-5		input circuit: L-L Level 3 (2 kV) / L-PE Level 4 (4 kV)			input circuit: L-L Level 2 (1 kV) / L-PE Level 3 (2 kV)
			output circuit: Level 1 (0.5 kV)			output circuit: Level 1 (0.5 kV)
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6		Level 3 (10 V, 150 kHz - 80 MHz)			Level 3 (10 V, 150 kHz - 80 MHz)
voltage dips, short interruptions and voltag variations	IEC/EN 61000-4-11		Class 3			
Interference emission			IEC/EN 61000-6-3		IEC/EN 61000-6-4	IEC/EN 61000-6-3
high-frequency radiated	IEC/CISPR 22, EN 55022		Class B			
high-frequency conducted	IEC/CISPR 22, EN 55022		Class B			
limits for harmonic current emissions	IEC/EN 61000-3-2		Class A		-	-


CP-ASI range
Technical diagrams

Characteristic curve at T_a = 25 °C

CP-ASI 2.8

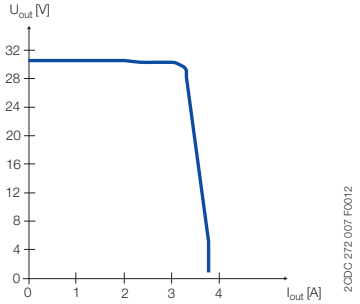


Output behaviour

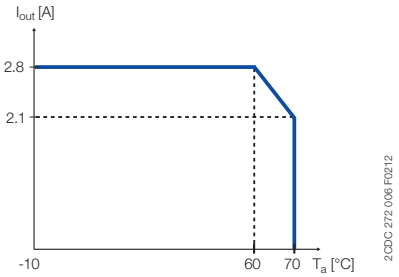


Characteristic curve of temperature at rated load

CP-ASI 4.0 DC/DC

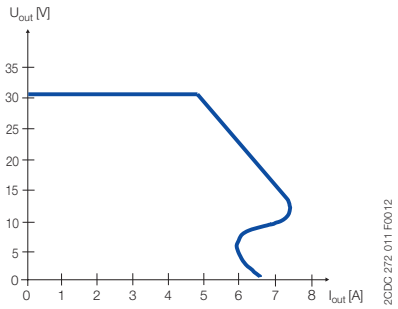


Output behaviour

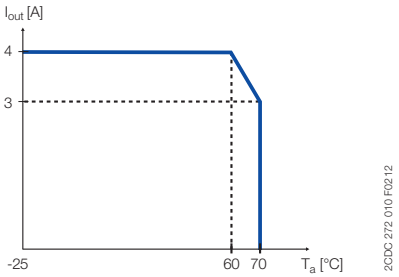


Characteristic curve of temperature at rated load

CP-ASI 4.0

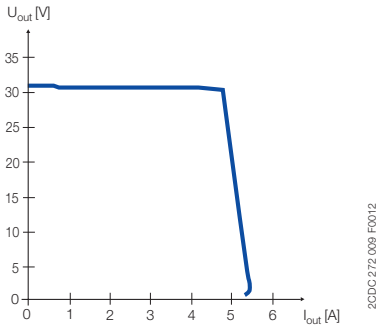


Output behaviour

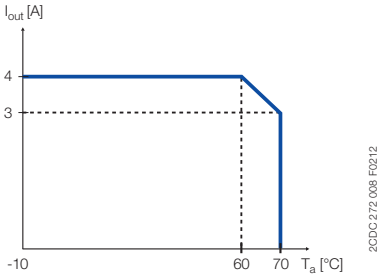


Characteristic curve of temperature at rated load

CP-ASI 8.0

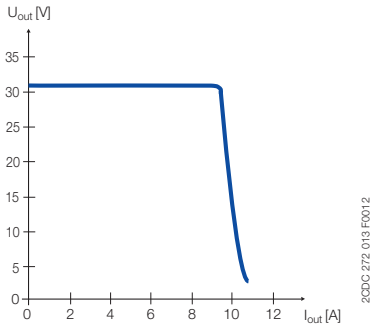

Output behaviour

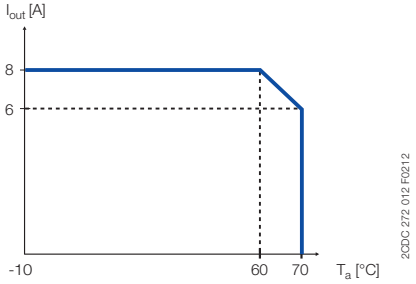


Characteristic curve of temperature at rated load


CP-ASI range
Dimensional drawings

Dimensions in mm/inch


CP-ASI 2.8

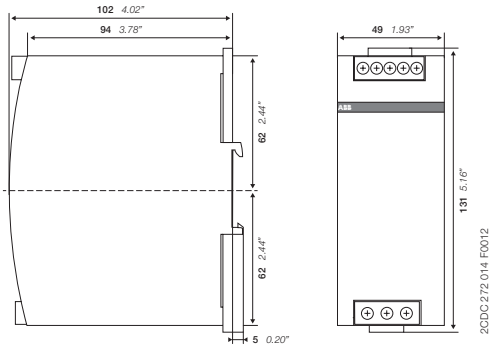


CP-ASI 4.0 DC/DC

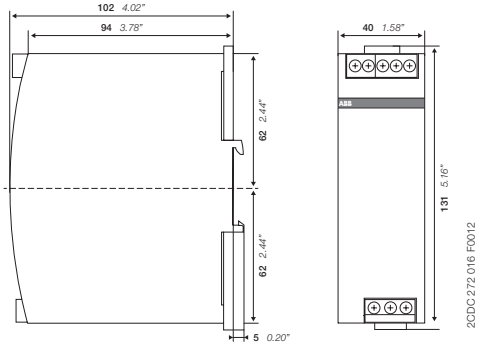

CP-ASI 4.0

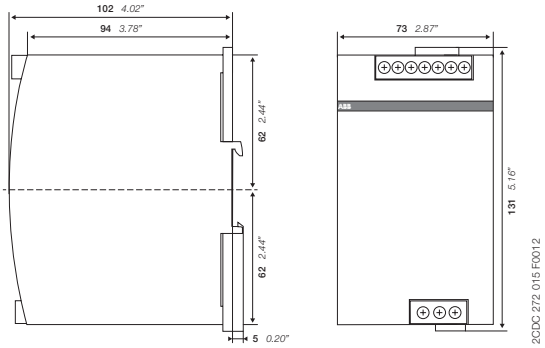

CP-ASI 8.0

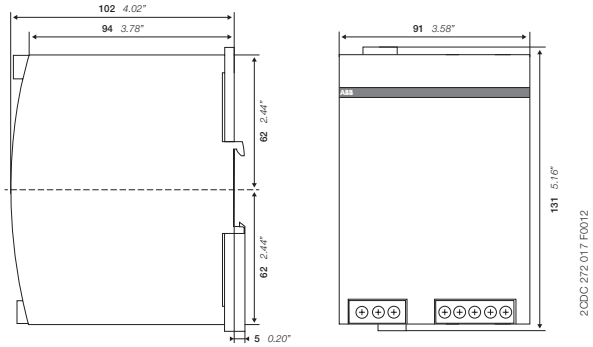

CP-B range
Product group picture



CP-B range
Table of contents

CP-B

Product group picture 3/65
Table of contents 3/66
Benefits and advantages 3/67
Ordering details 3/68
Technical data 3/69
Technical data, Technical diagrams 3/70
Dimensional drawings 3/71
Technical data 3/72

CP-B range
Benefits and advantages

Power supply systems have to be highly reliable in most areas of energy management and automation technology.
Often batteries are used for supporting the supply system in case of mains failures. Batteries have limited lifetimes depending on environmental parameters and have to be maintained regularly, which causes efforts and costs.

Using the latest ultra-capacitor technology, ABB offers an innovative and completely maintenance free new product for buffering the 24 V DC supply in case of interrupted mains on the primary side of the switch mode power supply.

The CP-B range is an ultra-capacitor buffer energy storage for power supply units which ensures a short term uninterrupted power supply system. In case of a power loss, the energy stored in the capacitor guarantees that the load is continually provided up to several hundred seconds depending on the load current.

Characteristics
- 3 buffer modules for buffering 24 V DC:
  CP-B 24/3.0 (3 A / 1 kWs[1])
  CP-B 24/10.0 (10 A / 10 kWs[1])
  CP-B 24/20.0 (20 A / 8 kWs[1])
- CP-B 24/3.0 and CP-B 24/20.0 expandable with additional extension module(s) CP-B EXT.2 (2 kWs[1])
- LEDs for status indication
- Relay contacts for status messaging
- Very high backup times (e.g. with CP-B 24/10.0 up to 8 minutes at 1 A load current)
- Short charging times
- High efficiency, higher than 90%
- Wide temperature range
- DIN rail mountable, compact housing

Advantages in comparison to battery buffers:
- Maintenance free
- No deep discharge
- Temperature resistant
- cULus LISTED (UL508, CSA22.2 No 14), EAC approvals

[1] internal energy buffer

		CP-B 24/3.0	CP-B 24/10.0	CP-B 24/20.0	CP-B EXT.2
Order code		1SVR427060R0300	1SVR427060R1000	1SVR427060R2000	1SVR427065R0000
Rated input voltage		24 V DC	24 V DC	24 V DC	–
Rated current		3 A DC	10 A DC	20 A DC	3 A DC
Energy storage (min.)		1.000 Ws	10.000 Ws	8.000 Ws	2.000 Ws
Typical charging time at load current	100 %	65 s	134 s	135 s	
	0 %	56 s	82 s	62 s	
Typical buffering time[1] at load current	100 %	13 s	38 s	15 s	
	50 %	28 s	76 s	30 s	
	25 %	66 s	140 s	60 s	
	10 %	148 s	380 s	150 s	

[1] buffering time ≈ $\frac{\text{energy storage x 0.9}}{\text{current x output voltage}}$



1 Input terminals
SHUT-DOWN+, SHUT-DOWN-: Input signal terminals
INPUT OK, BUFFER STATUS, FAILURE: Signalling contact – terminals
$L+_{IN}$, $L-_{IN}$: Input voltage terminals

2 Indication of operational states
OPERATION: Buffer module in operation (standby or buffering)
INPUT OK: Input voltage applied

3 Output terminals
$L+_{OUT}$, $L-_{OUT}$, $L-_{OUT}$: Output voltage terminals

CP-B range
Ordering details



CP-B 24/3.0



CP-B 24/10.0



CP-B 24/20.0

Description

Ultra capacitor based buffer units of the CP-B range offer highest reliability also in harsh enivronment. Due to the ultra-cap based technology the units are maintenance free, there will be no deep discharge and these products offer a very wide operational ambient temperature range.
CP-B range buffer units are an excellent solution to avoid voltage drops, for example in solar applications.

3


Ordering details

Rated input voltage	Rated current	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24 V DC	3 A DC	CP-B 24/3.0	1SVR427060R0300		0.55 (1.21)
	10 A DC	CP-B 24/10.0	1SVR427060R1000		2.10 (4.63)
	20 A DC	CP-B 24/20.0	1SVR427060R2000		2.20 (4.85)

Ordering details - Extension unit for CP-B 24/3.0 and CP-B 24/20.0

Rated voltage	Voltage range	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24 V DC	0-26.4 V DC	CP-B EXT.2	1SVR427065R0000		1.00 (2.20)

Example of application

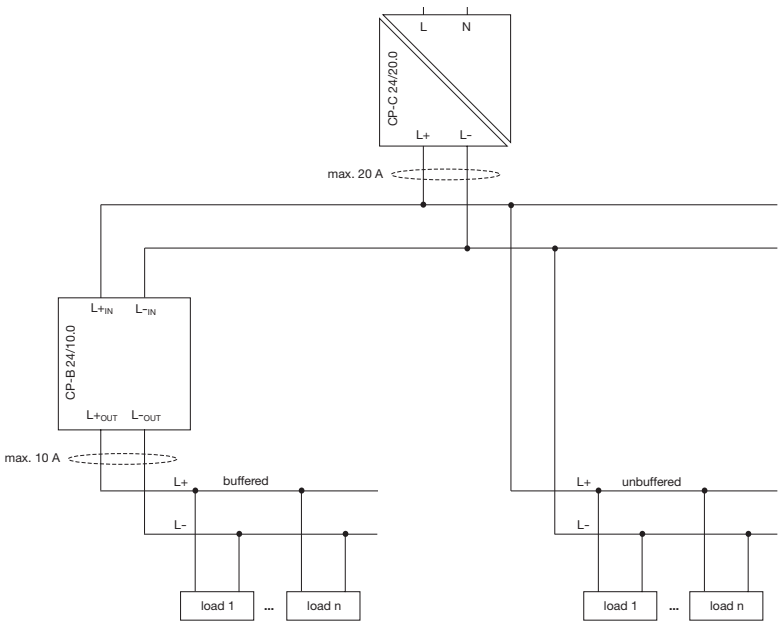

CP-B range
Technical data

Type		CP-B 24/3.0	CP-B 24/10.0	CP-B 24/20.0
Input circuit - Supply circuit		$L+_{IN}$ $L-_{IN}$		
Rated input voltage U_{in}		24 V DC		
Input voltage range		23.7-26.4 V DC	23.9-27 V DC	23.4-27.4 V DC
Minimum charging potential		23.7 V DC	23.9 V DC	23.4 V DC
Rated input current		3 A DC	10 A DC	20 A DC
Inrush current limiting		50 A / 1 ms	35 A / 2 ms	35 A / 2 ms
Transient overvoltage protection		suppressor diode	varistor / suppressor diode	varistor / suppressor diode
Internal input fuse (apparatus protection, not accessible)		4 A slow acting	15 A (FK2)	30 A (FK2)
Internal fuse capacitors circuit (not accessible)			25 A (FK2)	
Kind of input	SHUT-DOWN	-	control input	control input
	rated voltage	-	24 V DC	24 V DC
	voltage range	-	6-45 V DC	6-45 V DC
Output circuit		$L+_{OUT}$ $L-_{OUT}$ $L-_{OUT}$		
Rated output power		69 W	240 W	480 W
Rated output voltage Uout		24 V DC		
Output voltage (buffer mode)		23.0 V DC	23.2 V DC	23.2 V DC
Tolerance of the output voltage		+2...-10 %		
Rated output current Ir	Ta m 60 °C	3 A DC	10 A DC	20 A DC
Peak output current (fully loaded capacitors required)	Ta m 60 °C	6 A DC (min. 1.5 s)	20 A DC (10 A power supply + 10 A CP-B, min. 1.5 s)	40 A DC (min. 1.5 s)
Control of limiting current		-	10.3 A DC ±0.1A	-
Shut-down if limiting current is exceeded		-	after 1.5 s	-
Short-circuit protection (only via external fuse)		no continuous short-circuit stability		
Internal output fuse (not accessible)		-	15 A (FK2)	-
Required external fuse		3.15 A slow acting	10 A slow acting	25 A slow acting
Current limiting at output circuit		-	1.05...1.2 x I_r	-
Breaking capacity of output circuit	t= 2.5 ms	-	24 V DC, 10 A	-
Power failure buffering time [1]		load-dependent, min. 13 s at 100 % load	load-dependent, min. 38 s at 100 % load	load-dependent, min. 15 s at 100 % load
Overload protection		thermal protection		
Kind of output	INPUT OK	n/o contact		
	BUFFER STATUS	-	n/o contact	
	FAILURE	-	c/o contact	
Contact material		Ag + Au-clad		
Minimum switching voltage / Minimum switching current		5 V DC / 1 mA		
Maximum switching voltage / Maximum switching current		50 V AC / 1.0 A, 30 V DC / 0.5 A		
Mechanical lifetime		5 x 10^6 switching cycles		
Electrical lifetime		0.1 x 10^6 switching cycles		
Maximum fuse rating to achieve short-circuit protection	n/o or n/c contact	1.0 A AC / 0.5 A DC		
General data				
Maximum internal power consumption		7 W	20 W	40 W
Power consumption with unloaded output		0.75 W	3 W	1.6 W
Energy storage (min.)		1000 Ws	10000 Ws	8000 Ws
Typical charging time at load current	100 %	65 s	134 s	135 s
	0 %	56 s	82 s	62 s
Typical buffering time at load current [1]	100 %	13 s	38 s	15 s
	50 %	28 s	76 s	30 s
	25 %	66 s	140 s	60 s
	10 %	148 s	380 s	150 s
Efficiency		greater than 90 %		
Dimensions (W x H x D)	product dimensions	60 x 99 x 120 mm (2.36 x 3.90 x 4.72 in)	116 x 170 x 147 mm (4.57 x 6.69 x 5.79 in)	84 x 197 x 213 mm (3.31 x 7.76 x 8.39 in)
Weight	net weight	0.55 kg (1.21 lb)	2.1 kg (4.63 lb)	2.2 kg (4.85 lb)
Material	cover / housing shell	steel sheet powdered		
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool		
Mounting position		horizontal		
Minimum distance to other units	horizontal	not necessary		
	vertical	40 mm (1.58 in)		80 mm (3.15 in)
Pollution degree		2		
Degree of protection	housing / terminal	IP20		
Protection class (IEC/EN 61140)		III SELV / PELV (condition: power supply fulfills class III)		
Electrical connection - Input circuit / Output circuit		**pull spring terminals**	**pull spring terminals**	pluggable screw type terminals
Wire size	fine-strand with(out) wire end ferrule	0.08-1.0 mm² (28-18 AWG)	0.08-1.5 mm² (28-18 AWG)	0.2-4.0 mm² (24-12 AWG)
	rigid	0.08-1.5 mm² (28-16 AWG)	0.08-4.0 mm² (28-16 AWG)	0.2-6.0 mm² (24-10 AWG)
Stripping length		6.0 mm (0.24 in)		7.0 mm (0.28 in)


CP-B range
Technical data, Technical diagrams

Type		CP-B 24/3.0	CP-B 24/10.0	CP-B 24/20.0
Input circuit - Supply circuit		$L+_{IN}$ $L-_{IN}$		
Signalling circuit				
Wire size	fine-strand with(out) wire end ferrule	0.08-1.0 mm² (28-18 AWG)		0.14-1.0 mm² (26-16 AWG)
	rigid	0.08-1.5 mm² (28-16 AWG)		0.14-1.5 mm² (28-16 AWG)
Stripping length		6.0 mm (0.24 in)		7.0 mm (0.28 in)
Environmental data				
Ambient temperature	operation	-40...+60 °C		-20...+60 °C
	storage	-40...+60 °C		-20...+60 °C
Standards				
Product standard		EN 50178		
Low Voltage Directive		2006/95/EC		
EMC Directive		2004/108/EC		
RoHS Directive		2011/65/EC		
Electrical safety		EN 50178, EN 60950, UL 508		
Electromagnetic compatibility				
Interference immunity to		IEC/EN 61000-6-1, IEC/EN 61000-6-2		
electrostatic discharge	IEC/EN 61000-4-2	Level 3, 6 kV / 8 kV		
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3, 10 V/m (27-1000 MHz) / Level 2, 3 V/m (1400-2700 MHz)		
electrical fast transient/burst	IEC/EN 61000-4-4	Level 3, 2(1) kV / 5 kHz		
surge	IEC/EN 61000-4-5	Level 1, 0.5 kV		
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3, 10 V (150 kHz-80 MHz)		
voltage dips, short interruptions and voltage variations	IEC/EN 61000-4-11	buffered by ultra-capacitors		
Interference emission		EN 61000-6-3, EN 61000-6-4		
high-frequency radiated	DIN EN 55011	B/C1		
high-frequency conducted	DIN EN 55011	B/C1		


„Approvals and marks“ on page 3/4.

[1] buffering time ≈ $\frac{\text{energy storage x 0.9}}{\text{load current x output voltage}}$


Technical diagrams
Output curve at T_a = 25 °C

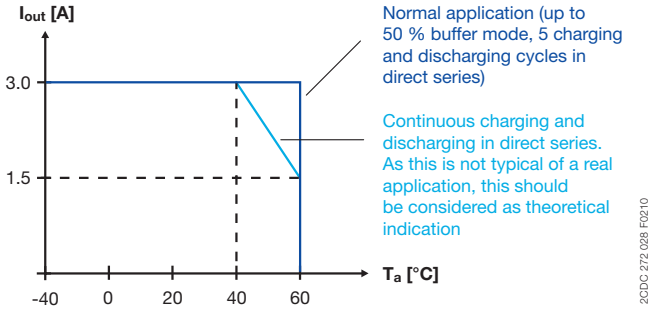

CP-B 24/3.0

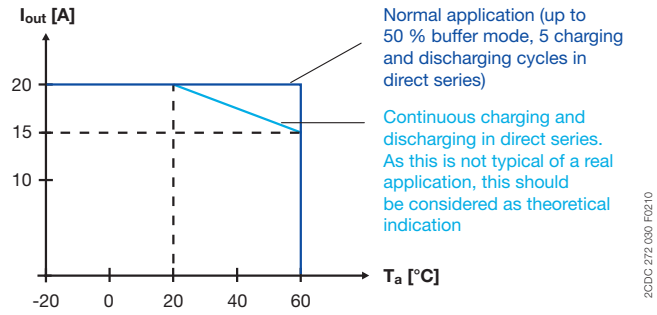


CP-B 24/20.0

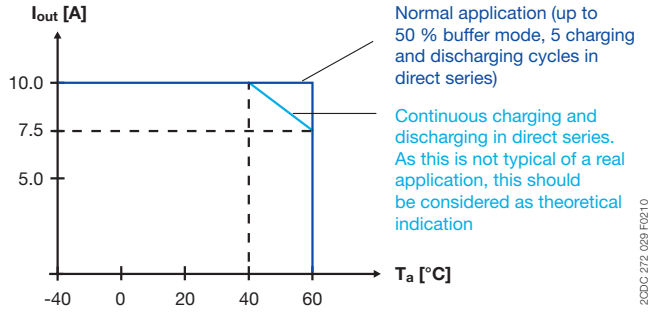

CP-B 24/10.0


Caracteristic curve of the temperature at rated load

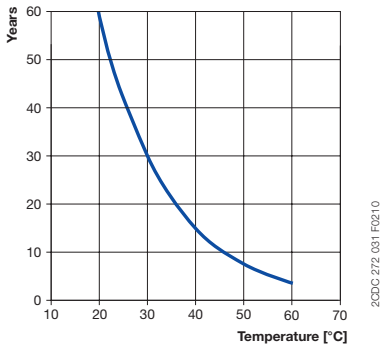


Capacitor's life span over temperature

CP-B range
Dimensional drawings


Dimensions in mm and inches

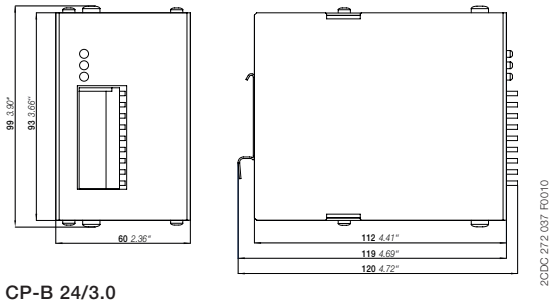


CP-B 24/3.0

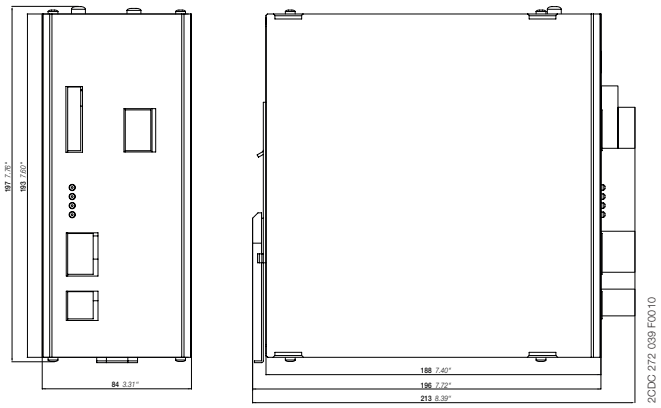

CP-B 24/20.0

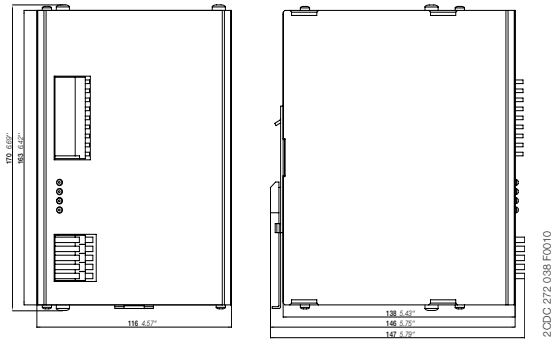

CP-B 24/10.0

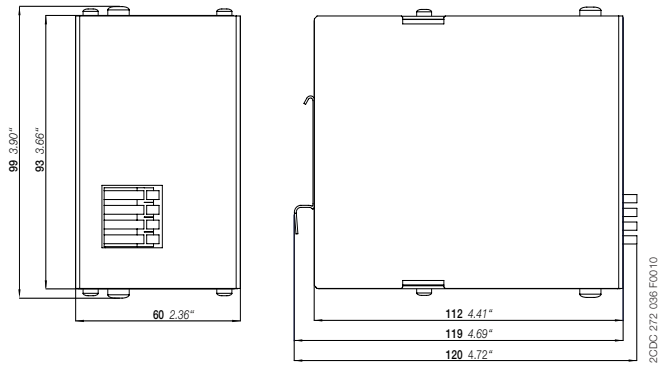

CP-B EXT.2


CP-B range
Technical data

Data at T_a = 25 °C and rated values, unless otherwise indicated

Type		CP-B EXT 2.0
Extension circuit		EXT+ EXT+ EXT- EXT-
Rated voltage		24 V DC
Voltage range		0-26.4 V DC
Rated current		3 A DC
Internal input fuse (apparatus protection, not accessible)		4 A slow acting (PTC)
Short-circuit protection		via internal 3 A fuse
Overload protection		only in combination with CP-B 24/3.0 or CP-B 24/20.0
Indication of operational states		
		status information and fault messages of the buffer module apply
General data		
Power consumption without load		0.5 W
Energy storage (min.)		2000 Ws
Dimensions (W x H x D)	product dimensions	60 x 99 x 120 mm (2.36 x 3.90 x 4.72 in)
	packaging dimensions	85 x 220 x 170 mm (3.35 x 8.66 x 6.69 in)
Weight	net weight	1.00 kg (0.20 lb)
Material	cover / housing shell	steel sheet powdered
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool
Mounting position		horizontal
Minimum distance to other units	horizontal	not necessary
	vertical	40 mm (1.58 in)
Pollution degree		2
Degree of protection	housing / terminal	IP20
Protection class (IEC/EN 61140)		III SELV / PELV (condition: power supply fulfills class III)
Electrical connection - Extension circuit		
Wire size	fine-strand with(out) wire end ferrule	0.08-1.0 mm² (28-18 AWG)
	rigid	0.08-1.5 mm² (28-16 AWG)
Stripping length		6.0 mm (0.24 in)
Signalling circuit		
Wire size	fine-strand with(out) wire end ferrule	0.08-1.0 mm² (28-18 AWG)
	rigid	0.08-1.5 mm² (28-16 AWG)
Stripping length		6.0 mm (0.24 in)
Environmental data		
Ambient temperature	operation	-40...+60 °C
	storage	-40...+60 °C
Vibration, sinusoidal	based on IEC/EN 60068-2-6	1.5 mm, 3-57.55 Hz; 2 g, 57.55-500 Hz, 10 cycles
Shock, half-sine	based on IEC/EN 60068-2-27	15 g, 11 ms, 3 axes, 6 faces, 3 times for each face
Standards		
Product standard		EN 50178
Low Voltage Directive		2006/95/EC
EMC Directive		2004/108/EC
RoHS Directive		2011/65/EC
Electrical safety		EN 50178, EN 60950, UL 508
Electromagnetic compatibility		
Interference immunity to		IEC/EN 61000-6-1, IEC/EN 61000-6-2
electrostatic discharge	IEC/EN 61000-4-2	Level 3, 6 kV / 8 kV
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3, 10 V/m (27-1000 MHz) / Level 2, 3 V/m (1400-2700 MHz)
electrical fast transient/burst	IEC/EN 61000-4-4	Level 3, 2(1) kV / 5 kHz
surge	IEC/EN 61000-4-5	Level 1, 0.5 kV
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3, 10 V (150 kHz-80 MHz)
voltage dips, short interruptions and voltage variations	IEC/EN 61000-4-11	buffered by ultra-capacitors
Interference emission		EN 61000-6-3, EN 61000-6-4
high-frequency radiated	DIN EN 55011	B/C1
high-frequency conducted	DIN EN 55011	B/C1

„Approvals and marks“ on page 3/4.

Electronic protection devices EPD24
Product group picture

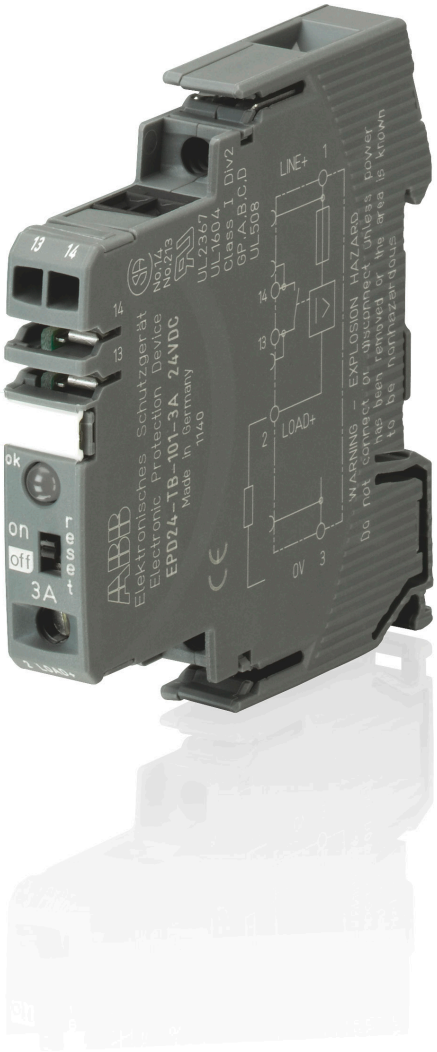


Electronic protection devices EPD24
Table of contents

Electronic protection devices EPD24

Product group picture 3/73
Table of contents 3/74
Ordering details 3/75
Technical data 3/76
Technical information 3/78
Approvals, safety instructions 3/79
Installation guidelines 3/80

Electronic protection devices EPD24
Ordering details

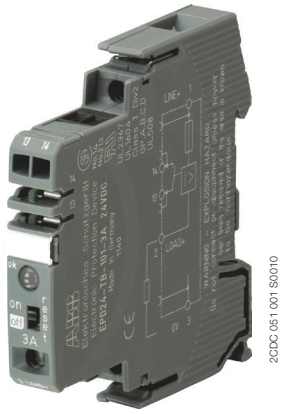

EPD24-TB-101-3A

The protection devices EPD24 extend the ABB product range of Modular DIN rail components by electronic overcurrent protection modules for selective protection of 24 V DC load circuits.
This protection is achieved by a combination of active electronic current limitation in the case of a short circuit and an overload deactivation from 1.1 x I_n upwards.
If a fault occurs in a load circuit, the protection device EPD24 will detect this rapidly and reliably, disable the power output transistor and hence interrupt the current flow in the defective circuit. The maximum possible overcurrent is always limited to 1.3…1.8 times the selected rated current. An activation of capacitive loads up to 20,000 µF is possible, deactivation only occurring in the case of overloads or short circuits. Selective deactivation of the defective current circuit means undefined error states and a complete system stop are prevented.

Features
- Selective load protection, one electronic tripping characteristic.
- Active current limitation for safe connection of capacitive loads up to 20,000 µF and on overload/short circuit.
- Current ratings 0.5 A...12 A.
- Reliable overload disconnection with 1.1 x I_N
- Manual ON/OFF button
- Clear status and failure indication through LED and integrated auxiliary contact.
- Integral fail-safe element adjusted to current rating.
- Width per unit only 12.5 mm.
- Rail mounting
- Ease of wiring through busbar LINE+ and 0 V as well as signal bars.
- UL- and CSA-approvals allow international use of the devices.

Ordering details

Ratedcurrent I_N A	bbn 40 16779 EAN	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
0.5	829960	EPD24-TB-101-0.5A	2CDE601101R2905		4	0.065 (1.433)
1	829984	EPD24-TB-101-1A	2CDE601101R2001		4	0.065 (1.433)
2	830003	EPD24-TB-101-2A	2CDE601101R2002		4	0.065 (1.433)
3	830027	EPD24-TB-101-3A	2CDE601101R2003		4	0.065 (1.433)
4	830041	EPD24-TB-101-4A	2CDE601101R2004		4	0.065 (1.433)
6	830065	EPD24-TB-101-6A	2CDE601101R2006		4	0.065 (1.433)
8	830089	EPD24-TB-101-8A	2CDE601101R2008		4	0.065 (1.433)
10	830102	EPD24-TB-101-10A	2CDE601101R2010		4	0.065 (1.433)
12	830126	EPD24-TB-101-12A	2CDE601101R2012		4	0.065 (1.433)

Ordering details

Description	bbn 40 16779 EAN	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Busbars for LINE+ and 0 V, grey insulation, length 500 mm [1]	830140	EPD-BB500	2CDE605100R0500		10	0.2 (0.441)
Signal Bars for aux. contacts, grey insulation, length 21 mm	830164	EPD-SB21	2CDE605200R0021		10	0.4 (0.882)


[1] Max. load with one line entry Imax = 50 A (recommended: mid line entry)
Max. load with two line entries Imax = 63 A

Electronic protection devices EPD24
Technical data

Wiring diagramm

EPD24-TB-101
without signal input
with signal output F
(Single signal, N/O)

Operating condition: 13-14 closed
Fault condition: 13-14 open

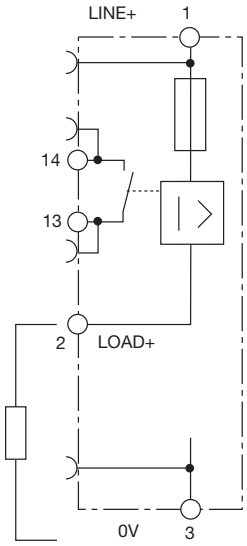

Operating data	
Operating voltage U_B	24 V DC (18...32 V)
Current rating I_N	fixed current ratings: 0.5, 1, 2, 3, 4, 6, 8, 10, 12 A
Closed current I_0	ON condition: typically 20...30 mA depending on signal output
Staus indication by means of	Green: unit is ON load circuit / Power-MOSFET is switched on
	Orange: in the event of overload or short circuit until electronic disconnection
	Red: unit electronically disconnected load circuit/Power-MOSFET OFF undervoltage (U_B < 8 V) after switch-on till the end of the delay period
	OFF: manually switched off or device is dead
	potential-free auxiliary contact F
	ON/OFF/ condition of switch
Load circuit	
Load output	Power-MOSFET switching output (high slide switch)
Overload disconnection	typically 1.1 x I_N (1.05...1.35 x I_N)
Short-circuit current I_K	active current limitation
Trip time	see time/current characteristics
For electronic disconnection	typically 3 s at I_{Load} > 1.1 x I_N typically 100 ms...3 s at I_{Load} > 1.8 x I_N (or 1.5 x I_N/1.3 x I_N,)
Temperature disconnection	internal temperature monitoring with electronic disconnection
Low voltage monitoring load output	with hysteresis, no reset required: load »OFF« at U_B< 8 V
Starting delay t_{Start}	typically 0.5 sec after every switch-on and after applying U_B
Disconnection of load circuit	electronic disconnection
Free-wheeling circuit	suitable external free-wheeling circuit to be used with inductive load
Several load outputs must not be connected in parallel	
Signal output	
Electrical data	potential-free auxiliary contact max. 30 V DC/0.5 A, min. 10 V DC/10 mA
ON condition LED green	voltage U_B applied, switch is in ON position no overload, no short circuit
OFF condition LED off	device switched off (switch is in OFF position) no voltage U_B applied
Fault condition LED orange	overload condition > 1.1 x I_N up to electronic disconnection
Fault condition LED red	electronic disconnection upon overload or short circuit Device switched off with control signal (switch is in ON position)
Aux. contact	single signal, make contact contact open, terminal 13-14
Fault	signal output fault conditions no operating voltage U_B ON/OFF switch is in OFF position red LED lighted (electronic disconnection)

Electronic protection devices EPD24
Technical data

General data	
Fail-Safe element	backup fuse for EPD24 not required because of the integral redundant fail-safe element
Housing material	moulded
Mounting	symmetrical rail to EN 50022-35x7.5
Ambient temperature	0...+50 °C (without condensation, see EN 60204-1)
Storage temperature	-20...+70 °C
Humidity	96 hrs/95 % RH/40 °C to IEC 60068-2-78, test Cab. climate class 3K3 to EN 60721
Vibration	3 g, test to IEC 60068-2-6 test Fc
Degree of protection	housing: IP20 DIN 40050 terminals: IP20 DIN 40050
EMC (EMC directive, CE logo)	emission: EN 61000-6-3 susceptibility: EN 61000-6-2
Isolations coordination (IEC 60934)	0.5 kV/pollution degree 2 reinforced insulation in operating area
Dielectric strength	max. 32 V DC (load circuit)
Isolation resistance (OFF condition)	n/a, only electronic disconnection
Approvals/Declarations of conformity	UL 2367 Solid State Overcurrent Protectors UL 1604, (class I, division 2, groups A, B, C, D) UL 508 CSA C22.2 No. 213 (class I, division 2) CSA C22.2 No. 142 CE logo
Dimensions (B x H x T)	12.5 x 80 x 83 mm
Weight	approx. 65 g
Terminals	**Line+/LOAD+/0V**
Screw terminals	M4
Max. cable cross section flexible with wire end ferrule w/wo plastic sleeve	0.5 – 10 mm^2
Multi-lead connection (2 identical cables) rigid/flexible	0.5 – 4 mm^2
Flexible with wire end ferrule without plastic sleeve	0.5 – 2.5 mm^2
Flexible with TWIN wire end ferrule with plastic sleeve	0.5 – 6 mm^2
Wire stripping length	10 mm
Tightening torque (EN 60934)	1.5 – 1.8 Nm
Terminals	**aux. contacts**
Screw terminals	M3
Max. cable cross section flexible with wire end ferrule w/wo plastic sleeve	0.25 - 2.5 mm^2
Wire stripping length	8 mm
Tightening torque (EN 60934)	0.5 Nm

Table 1: voltage drop, current limitation, max. load current


current rating	typically voltage drop	active current	max. load current at 100 % ON duty	
I_N	U_{ON} at I_N	limitation (typically)	$T_{ambient}$ = 40 °C	$T_{ambient}$ = 40 °C
0.5 A	70 mV	1.8 x I_N	0.5 A	0.5 A
1 A	80 mV	1.8 x I_N	1 A	1 A
2 A	130 mV	1.8 x I_N	2 A	2 A
3 A	80 mV	1.8 x I_N	3 A	3 A
4 A	100 mV	1.8 x I_N	4 A	4 A
6 A	130 mV	1.8 x I_N	6 A	5 A
8 A	120 mV	1.5 x I_N	8 A	7 A
10 A	150 mV	1.5 x I_N	10 A	9 A
12 A	180 mV	1.3 x I_N	12 A	10.8 A

Attention: when mounted side-by-side without convection the ERD24 should not carry more than 80 % of its rated load with 100 % ON duty due to thermal effects.

Electronic protection devices EPD24
Technical information

Time/Current characteristic curve (Tambient = 25 °C)

The trip time is typically 3 s in the range between 1.1 and 1.8 x I_N [1].
Electronic current limitation occurs at typically 1.8 x I_N [1] which means that under all overload conditions (independent of the power supply and the resistance of the load circuit) the max. overload before disconnection will not exceed 1.8 x I_N [1] times the current rating. Trip time is between 100 ms and 3 sec (depending on overload or at short circuit).
Without this current limitation a considerably higher overload current would flow in the event of an overload or short circuit.

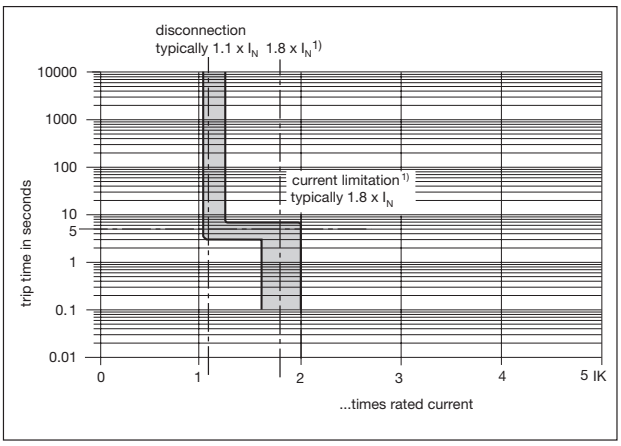

[1] Current limitation typically 1.8 x I_N at I_N = 0.5 A...6 A
Current limitation typically 1.5 x I_N at I_N = 8 A or 10 A
Current limitation typically 1.3 x I_N at I_N = 12 A

Maximum cable lenghts
EPD24 reliably trips from 0 Ω up to max. circuit resistance R_{max}.

Calculation of R_{max}

Selected rating I_N (A)	3	6
Operating voltage U_S (V DC) (= 80 % of 24 V) [2]	19.2	19.2
Trip current I_{ab} = 1.25 x I_N (A) (EPD24 trips after 3 s)	3.75	7.50
R_{max} (Ω) = (U_B/I_{ab}) -0.050	5.07	2.51

[2] Voltage drop of EPD24 and tolerance of trip point (typically 1.1 x I_N = 1.05 ... 1.35 x I_N) have been taken into account

Selection table for the incoming cable lengths with different cable cross-sections

Cable cross section A (mm²)	0.14	0.25	0.34	0.5	0.75	1.00	1.50
Cable length L (m) (= single length)	cable resistance (Ω) = (ρ_0 x 2 x L) / A [3]						
5	1.27	0.71	0.52	0.36	0.24	0.18	0.12
10	2.54	1.42	1.05	0.71	0.47	0.36	0.24
15	3.81	2.14	1.57	1.07	0.71	0.53	0.36
20	5.09	2.85	2.09	1.42	0.95	0.71	0.47
25	6.36	3.56	2.62	1.78	1.19	0.89	0.59
30	7.63	4.27	3.14	2.14	1.42	1.07	0.71
35	8.90	4.98	3.66	2.49	1.66	1.25	0.83
40	10.17	5.70	4.19	2.85	1.90	1.42	0.95
45	11.44	6.41	4.71	3.20	2.14	1.60	1.07
50	12.71	7.12	5.24	3.56	2.37	1.78	1.19
75	19.07	10.68	7.85	5.34	3.56	2.67	1.78
100	25.34	14.24	10.47	7.12	4.75	3.56	2.37
125	31.79	17.80	13.09	8.90	5.93	4.45	2.97
150	38.14	21.36	15.71	10.68	7.12	5.34	3.56
175	44.50	24.92	18.32	12.46	8.31	6.23	4.15
200	50.86	28.48	20.94	14.24	9.49	7.12	4.75
225	57.21	32.04	23.56	16.02	10.68	8.01	5.34
250	63.57	35.60	26.18	17.80	11.87	8.90	5.93

[3] Resistivity of copper $\rho 0$ = 0.0178 (Ω x mm²)/m
Example 1: max. length for 1.5 mm2 and 3 A: 214 m
Example 2: max. length for 1.5 mm2 and 6 A: 106 m

Example 3: mixed wiring: (Control cabinet --- sensor/actuator level)
R1 = 40 m for 1.5 mm² and R2 = 5 m for 0.25 mm²:
R1 = 0.95 Ω, R2 = 0.71 Ω, total (R1 + R2) = 1.66 Ω

Electronic protection devices EPD24
Approvals, Safety instructions

Please note

The user must ensure that the cable cross sections of the relevant load circuit are suitable for the current rating of the EPD24 used. Automatic start-up of machinery after shut down must be prevented (Machinery Directive 98/37/EG and EN 60204-1). In the event of a short circuit or overload the load circuit will be disconnected electronically by the EPD24.

Information on UL approvals/CSA approvals

UL1604
UL File # E 339238

CSA C22.2 No. 213 (Class I, Division 2)
CSA File # 2305929

Operating Temperature Code T5

– This equipment is suitable for use in Class I, Division 2, Groups A, B, C and D or non-hazardous locations only

WARNING:

– Exposure to some chemicals may degrade the sealing properties of materials used in the following device: relay Sealant Material:
  – Generic Name: Modified diglycidyl ether of bisphenol A
  – Supplier: Fine Polymers Corporation
  – Type: Epi Fine 4616L-160PK
– Casing Material:
  – Generic Name: Liquid Crystal Polymer
  – Supplier: Sumitomo Chemical
  – Type: E4008, E4009, or E6008

RECOMMENDATION:

– Periodically inspect the device named above for any degradation of properties and replace if degradation is found

WARNING – EXPLOSION HAZARD:

– Do not disconnect equipment unless power has been removed or the area is known to be non-hazardous
– Substitution of any components may impair suitability for Class I, Division 2

UL2367
Non-hazardous use - UL File # E 339236

UL 508
Non-hazardous use - UL File # E 149922


CSA C22.2 No. 14
CSA C22.2 No. 142 - CSA File # E 2305929


Class 2
Meets requirement for Class 2 current limitation (EPD24 ... -0,5 A/1 A/2 A/3 A)

Electronic protection devices EPD24
Installation guidelines

The EPD24 features an integral power distribution system.
The following wiring modes are possible with various pluggable current and signal busbars:

– LINE+ (24 V DC)
– 0 V
  Caution: The electronic devices EPD24 require a 0 V connection
– Auxiliary contacts

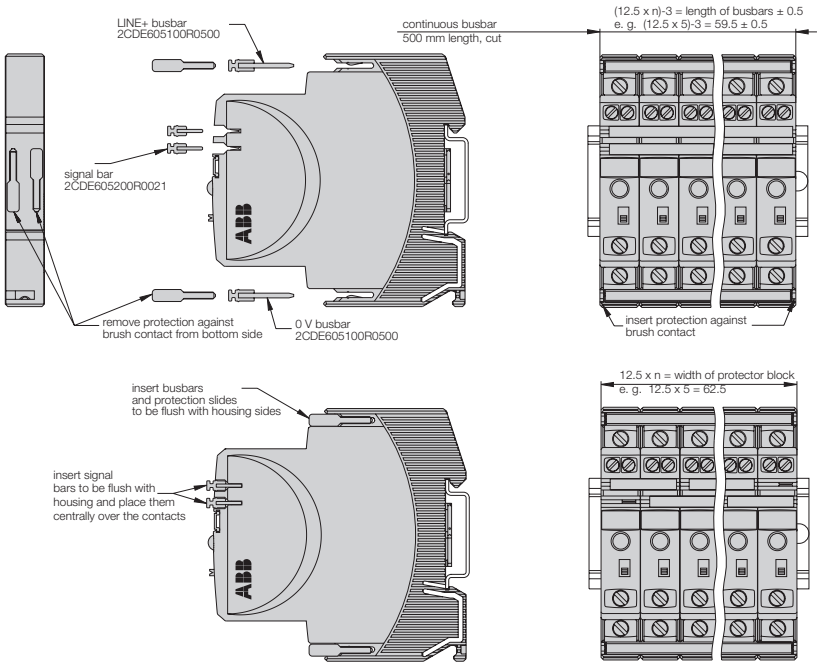

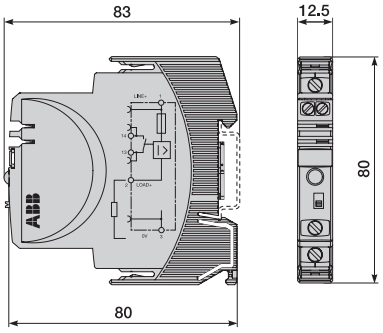

Mounting procedure

Before wiring insert busbars into protector block. A maximum of 10 connection cycles are permissible using connecting busbars.

Recommendation

After 10 units the busbars should be interrupted and receive a new entry live.

Table of length for busbars

(Order code 2CDE605100R0500)

No. of units	2	3	4	5	6	7	8	9	10
Length of busbar (mm) ± 0.5 mm	22	34.5	47	59.5	72	84.5	97	109.5	122

Analog signal converters, Serial data converters
Product group picture



Analog signal converters, Serial data converters
Table of contents

Analog signal converters, serial data converters

Overview 4/3
Analog signal converters - CC-E range 4/5
Table of contents 4/6
Benefits and advantages 4/7
Ordering details - Standard signal converters 4/8
Ordering details - RTD converters 4/9
Ordering details - Thermocouple converters 4/10
Ordering details - Measuring converters 4/11
DIP switch settings, Dimensional drawings 4/12
Wiring instructions 4/13
Technical data 4/14
Analog signal converters - CC-U range 4/17
Table of contents 4/18
Overview 4/19
Ordering details 4/21
Ordering details - Accessories 4/22
DIP switch settings 4/23
Wiring instructions 4/25
Technical information 4/26
Technical data 4/29
Technical diagr., Connection diagr., Dimensional drawings 4/32
Serial data converters 4/33
Table of contents 4/34
Benefits and advantages 4/35
Selection table 4/36
Ordering details 4/37
Technical information 4/38
Technical data 4/46

Analog signal converters, Serial data converters
Overview


Applications for analog signal processing and correct solution using CC-E and CC-U converters

Nearly every process includes a control system that receives data by means of analog signals and then evaluates the data and sets the respective parameters correspondingly.
When transmitting analog signals numerous problems may arise which can disturb or even block an ideal behavior of the process.
Below we have listed some processing problems together with the respective solutions to solve these problems:

Signal conversion
Sometimes the available signals cannot be processed by the controller or the actuator. In this case, signal converters are required to convert the input signal (or different input signals) to the desired output signal.

Signal amplification
If long lines or high burdens have to be operated, it may be necessary to amplify the signal. CC analog signal converters require only low input power and provide high output power. Thus, there are no restrictions for the converter's position on the line, i.e. it can be used
– for signal refreshing (1) at the end of the line (low input power)
– or for signal amplification (2) at the beginning of the line (high output power).

Signal filtering
Particularly on long lines or in rough industrial environments the signals are exposed to high electromagnetic interferences. The frequency of the coupled interference signals may be in the range of the common mains frequency (50 Hz) or even much higher (in case of frequency converters). According to the specific requirements, analog signal converters are available which provide reliable suppression of those interferences by means of an input low-pass filter.

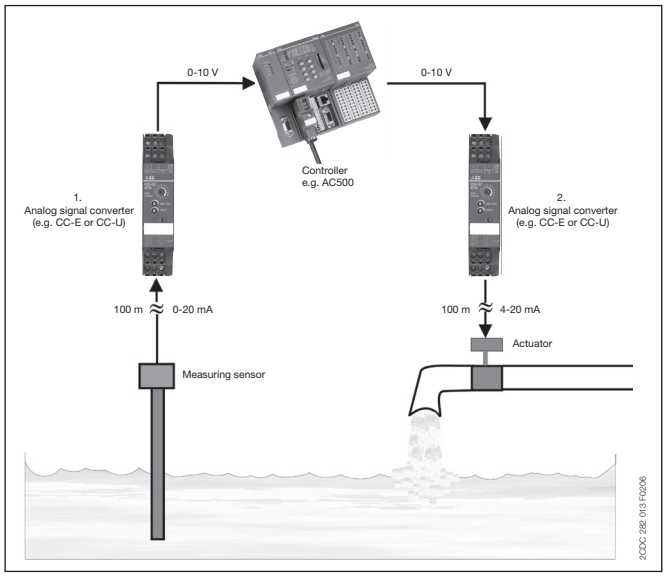

Signal separation
– Protection against overvoltage
The increased use of micro-electronics make controls much more sensitive against overvoltages, resulting from lightning discharges or switching processes. Suppression diodes are incorporated in the input of the CC analog signal converters which enable the converters to arrest overvoltages with low energy level (resulting from switching processes) by themselves. The products furthermore provide electrical isolation between input, output and supply circuit for protection of the controller connected to the output.

– Protection against ground loops
If components are used which refer to ground, the measuring signals can be falsified by a so-called ground loop. In this case, certain parts of the signal are transmitted via earth and not via the analog transmission line, thus causing incorrect evaluation of the signal. The electrical isolation between the input and the output disconnects these ground loops and thus enables correct signal transmission.

■ existing
▲ existing for some devices
▫ pending

Approvals		CC-E/STD	CC-E I/I	CC-U/STD	CC-U/STDR	CC-E/RTD	CC-U/RTD	CC-U/RTDR	CC-E/TC	CC-U/TC	CC-U/TCR	CC-E/I	CC-E I_{AC}/ILPO	CC-U/I	CC-U/V
	UL 508, CAN/CSA C22.2 No.14	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	UL 1604 (Class I, Div 2, hazardous locations), CAN/CSA C22.2 No.213	▲		■		▲	■		▲	■		▲		■	■
CB	CB scheme				■			■			■				
	CCC				■			■			■				
Marks															
CE	CE	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	C-Tick	■	■	■	■	■	■	■	■	■	■	■	■	■	■

Analog signal converters, Serial data converters
Overview

In the field of industrial data transmission, various processes of data transmission and interfaces are used today. Already existing systems need to be updated or connected to new devices for continuity of process. When new communication functions are not build-in, ABB propose a range of converters to be able to use from the standard RS232 or RS485, to the Ethernet open products or the Optical Fiber.
Ethernet communication is now one of the main features need in open communication, ABB propose the e-ILPH to connect the serial devices to the web world.

Uses

Adaptation
The use of converters allows the connection of two devices using different interfaces. To add new equipment to existing installations.

Electrical Isolation
To protect sensitive equipment it is sometimes necessary to use converters which allow electrical isolation.

To cross a disturbed environment
Some interfaces are more sensitive to noise. Electrically, it is preferable, in some cases, to change the interface or support.

Type of connection	Immunity to noise
RS232	Low
RS422	High
RS485	High
CL	High
OF	Very high
Ethernet	High

Multipoint connections
Some equipments are only designed to communicate in RS232 point to point connection. To communicate with several devices it is then necessary to use converters RS232 to RS422, RS485, CL or OF to reach multipoint mode.

Type of connection	Connection
RS232	Point to point
RS422	12 points
RS485	32 points
CL	5-6 points
OF	32 points
Ethernet	Point to point or multipoint

Increase in the transmission and amplification distances of the signals
Every connection has its own limits, to increase the communication distances you only have to change the type of link (converter) or amplify the signal (Repeater) using an ILPH.


Type of connection	Max. distances [1]
RS232	15 m
RS422	1.2km
RS485	1.2km
CL	300-500m
OF	4 km
Ethernet	100 m with CAT5 cable

[1] Depending on transmission speed


"World Wide" communication
Communication is more and more used with Ethernet support. The interests are to have a distant access, to use an already existing network and to upload information and data on a supervisor or a computer. The conversions from serial to Ethernet protocol are used to connect local network to Ethernet.

Protocol conversion
Modbus is one of the main protocols used in the industrial networks. The creation of Modbus/TCP allows an adapted access to the Ethernet network. So, the conversion between these 2 protocols is necessary.


Example :

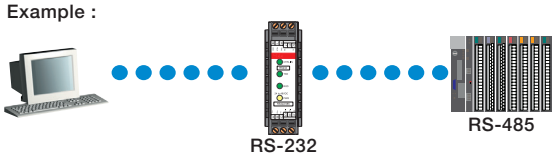


Example :

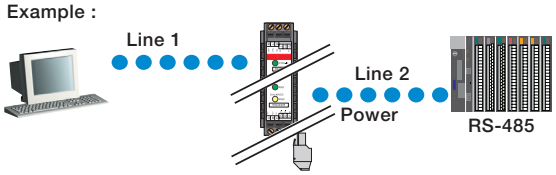


Example :

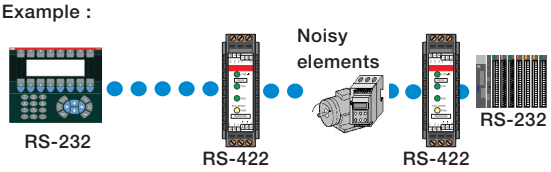


Example :

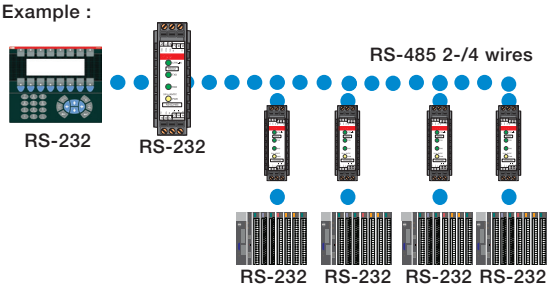


Example :

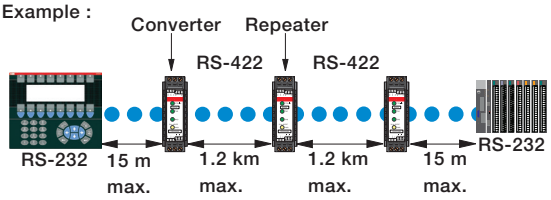

Example :

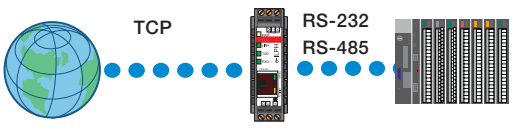

Example :

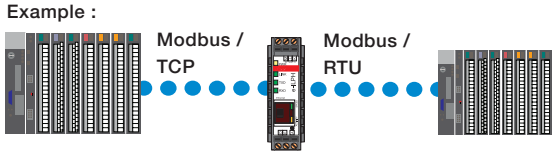

Analog signal converters - CC-E range
Product group picture




Analog signal converters - CC-E range
Table of contents

Analog signal converters - CC-E range

Benefits and advantages	4/7
Ordering details - Standard signal converters	4/8
Ordering details - RTD converters	4/9
Ordering details - Thermocouple converters	4/10
Ordering details - Measuring converters	4/11
DIP switch settings, Dimensional drawings	4/12
Wiring instructions	4/13
Technical data	4/14
Technical data	4/15
Technical data	4/16

Analog signal converters - CC-E range
Benefits and advantages

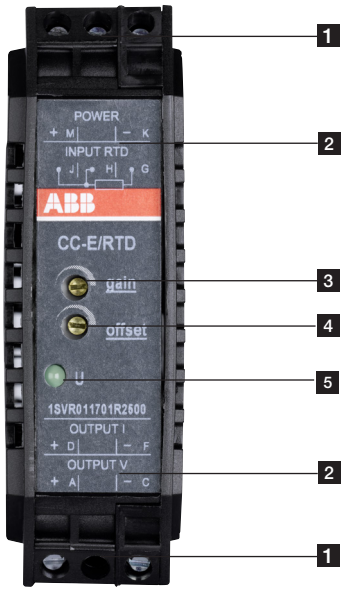

1 **Terminals M, K, J, H, G**
2 **Terminal explanation**
3 **Adjustment of gain**
4 **Adjustment of offset**
5 **Indication of operational states**
U - control supply voltage applied

CC-E range
– Universally configurable devices and single-function devices
– Adjustment and operating elements on the front side
– Safe operation by electrical 3-way isolation
– Unambiguous and clear connecting terminal markings

Conversion, measurement and separation of
– Standard signals (0-5 V, 0-10 V, 0-20 mA, 4-20 mA)
– Temperature signals of RTD sensors (PT 100)
– Thermocouple signals (types J and K)
– Current measurement signals (0-5 A, 0-20 A AC/DC)

Characteristics of single-function devices
– No adjustment or balancing necessary.

Characteristics of universal devices
– The required input and output ranges can be configured by means of directly accessible DIP switches positioned on the side
– Gain adjustment of ±5 % by means of an adjustment potentiometer on the front-side
– Offset adjustment of ±5 % by means of adjustment potentiometers on the front-side

CC-E/STD analog signal converter with 3-way electrical isolation
– 2 universally configurable devices (type CC-E/STD)
– 2x10 single-function devices
– "Plug and Work", no adjustment of single-function devices required

CC-E/RTD temperature signal converter for RTD sensors, linearized with 3-way electrical isolation
– 2 universally configurable devices (type CC-E/RTD)
– 2x12 single-function devices
– Plug and Work", no adjustment of single-function devices required
– Temperature signal converter for PT100 sensors
– 2- or 3-wire connection

CC-E/TC analog signal converter for thermocouple signals of the types J and K with 3-way electrical isolation
– 2 universally configurable devices (type CC-E/TC)
– 2x6 single-function devices
– "Plug and Work", no adjustment of single-function devices required
– Integrated cold-junction compensation

CC-E/I measuring converter for current signals 0-5 A, 0-20 A, AC/DC with 3-way electrical isolation
– 2 universally configurable devices (type CC-E/I)
– 2x6 single-function devices
– "Plug and Work", no adjustment of single-function devices required

CC-E I_{AC}/ILPO measuring converter without auxiliary power for sinusoidal currents 0-1 A, 0-5 A, output 4-20 mA
– Measuring converter for sinusoidal currents (0-1 A, 0-5 A)
– Measuring range selection by front-face sliding switch
– 4-20 mA output current in proportion to input current
– no additional power supply required

Loop-powered current/current isolator without external power supply for analog current signals of 0-20 mA and 4-20 mA
– Electrical isolation between input and output
– Very low internal voltage drop ≤ 2.5 V
– Available with one or two independent channels
– Width only 18 mm (1 and 2 channels)

Analog signal converters - CC-E range
Ordering details - Standard signal converters



CC-E/I



CC-E V/V



CC-E I/I-2

Ordering details - Standard signal converters

Supply voltage range	Input signal	Output signal	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24 V DC	0-5 V, 0-10 V, 0-20 mA, 4-20 mA	0-5 V, 0-10 V, 0-20 mA, 4-20 mA	CC-E/STD[1]	1SVR011700R0000		0.088 (0.194)
	0-10 V	0-10 V	CC-E V/V	1SVR011710R2100		0.083 (0.183)
		0-20 mA	CC-E V/I	1SVR011711R1600		0.084 (0.185)
		4-20 mA	CC-E V/I	1SVR011712R1700		0.084 (0.187)
	0-20 mA	0-10 V	CC-E I/V	1SVR011713R1000		0.082 (0.181)
		0-20 mA	CC-E I/I	1SVR011714R1100		0.084 (0.187)
		4-20 mA	CC-E I/I	1SVR011715R1200		0.084 (0.185)
	4-20 mA	0-10 V	CC-E I/V	1SVR011716R1300		0.084 (0.185)
		0-20 mA	CC-E I/I	1SVR011717R1400		
		4-20 mA	CC-E I/I	1SVR011718R2500		0.084 (0.187)
	-10...+10 V	-10...+10 V	CC-E V/V	1SVR011719R2600		0.082 (0.181)
110-240 V AC	0-5 V, 0-10 V, 0-20 mA, 4-20 mA	0-5 V, 0-10 V, 0-20 mA, 4-20 mA	CC-E/STD	1SVR011705R2100		0.090 (0.198)
	0-10 V	0-10 V	CC-E V/V	1SVR011720R2300		0.096 (0.212)
		0-20 mA	CC-E V/I	1SVR011721R1000		0.087 (0.192)
		4-20 mA	CC-E V/I	1SVR011722R1100		0.091 (0.200)
	0-20 mA	0-10 V	CC-E V/V	1SVR011723R1200		0.091 (0.200)
		0-20 mA	CC-E I/I	1SVR011724R1300		0.088 (0.194)
		4-20 mA	CC-E I/I	1SVR011725R1400		
	4-20 mA	0-10 V	CC-E V/V	1SVR011726R1500		0.096 (0.212)
		0-20 mA	CC-E I/I	1SVR011727R1600		0.087 (0.192)
		4-20 mA	CC-E I/I	1SVR011728R2700		0.088 (0.194)
loop powered	-10...+10 V	-10...+10 V	CC-E V/V	1SVR011729R2000		0.086 (0.190)
	0-20 mA, 4-20 mA	0-20 mA, 4-20 mA	CC-E I/I-1[2]	1SVR010200R1600		0.038 (0.084)
			CC-E I/I-2[2]	1SVR010201R0300		0.044 (0.097)

[1] UL 1604 Class I, Div.2 (universal device)
[2] CC-E-I/I-1 has 1 channel, CC-E-I/I-2 has 2 channels

Analog signal converters - CC-E range
Ordering details - RTD converters



CC-E/RTD

4

Ordering details - RTD converters

Supply voltage range	Input signal	Output signal	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24 V DC	refer to table	0-10 V, 0-20 mA, 4-20 mA	CC-E/RTD[1)]	1SVR011701R2500		0.091 (0.200)
	PT100 0...100 °C	0-10 V	CC-E RTD/V	1SVR011730R2500		0.084 (0.185)
		0-20 mA	CC-E RTD/I	1SVR011731R1200		0.086 (0.190)
		4-20 mA	CC-E RTD/I	1SVR011732R1300		
	PT100 -50...+50 °C	0-10 V	CC-E RTD/V	1SVR011733R1400		0.083 (0.183)
		0-20 mA	CC-E RTD/I	1SVR011734R1500		0.084 (0.185)
		4-20 mA	CC-E RTD/I	1SVR011735R1600		0.084 (0.187)
	PT100 0...300 °C	0-10 V	CC-E RTD/V	1SVR011736R1700		0.084 (0.185)
		0-20 mA	CC-E RTD/I	1SVR011737R1000		0.084 (0.187)
		4-20 mA	CC-E RTD/I	1SVR011738R2100		0.101
	PT100 -50...+250 °C	0-10 V	CC-E RTD/V	1SVR011739R2200		0.084 (0.185)
		0-20 mA	CC-E RTD/I	1SVR011740R0700		0.084 (0.187)
		4-20 mA	CC-E RTD/I	1SVR011741R2400		
110-240 V AC	refer to table	0-10 V, 0-20 mA, 4-20 mA	CC-E/RTD	1SVR011706R2200		0.093 (0.205)
	PT100 0...100 °C	0-10 V	CC-E RTD/V	1SVR011788R2400		0.086 (0.190)
		0-20 mA	CC-E RTD/I	1SVR011789R2500		0.088 (0.194)
		4-20 mA	CC-E RTD/I	1SVR011790R2200		0.089 (0.196)
	PT100 -50...+50 °C	0-10 V	CC-E RTD/V	1SVR011791R1700		0.087 (0.192)
		0-20 mA	CC-E RTD/I	1SVR011792R1000		0.089 (0.196)
		4-20 mA	CC-E RTD/I	1SVR011793R1100		
	PT100 0...300 °C	0-10 V	CC-E RTD/V	1SVR011794R1200		0.087 (0.192)
		0-20 mA	CC-E RTD/I	1SVR011795R1300		0.089 (0.196)
		4-20 mA	CC-E RTD/I	1SVR011796R1400		
	PT100 -50...+250 °C	0-10 V	CC-E RTD/V	1SVR011797R1500		0.086 (0.190)
		0-20 mA	CC-E RTD/I	1SVR011798R2600		0.089 (0.196)
		4-20 mA	CC-E RTD/I	1SVR011799R2700		0.088 (0.194)

[1)] B 1604 Class I, Div.2 (universal device)

Analog signal converters - CC-E range
Ordering details - Thermocouple converters



CC-E TC

Ordering details - Thermocouple Converters

Supply voltage range	Input signal	Output signal	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24 V DC	thermocouple types J and K	0-10 V, 0-20 mA, 4-20 mA	CC-E/TC[1)]	1SVR011702R2600		0.089 (0.196)
	type J 0...600 °C	0-10 V	CC-E TC/V	1SVR011750R0100		0.087 (0.192)
		0-20 mA	CC-E TC/I	1SVR011751R2600		0.084 (0.187)
		4-20 mA	CC-E TC/I	1SVR011752R2700		0.102
	type K 0...1000 °C	0-10 V	CC-E TC/V	1SVR011753R2000		0.084 (0.185)
		0-20 mA	CC-E TC/I	1SVR011754R2100		
		4-20 mA	CC-E TC/I	1SVR011755R2200		0.086 (0.190)
110-240 V AC	thermocouple types J and K	0-10 V, 0-20 mA, 4-20 mA	CC-E/TC	1SVR011707R2300		0.088 (0.194)
	type J 0...600 °C	0-10 V	CC-E TC/V	1SVR011760R0300		0.084 (0.187)
		0-20 mA	CC-E TC/I	1SVR011761R2000		0.088 (0.194)
		4-20 mA	CC-E TC/I	1SVR011762R2100		0.1 (0.220)
	type K 0...1000 °C	0-10 V	CC-E TC/V	1SVR011763R2200		0.086 (0.190)
		0-20 mA	CC-E TC/I	1SVR011764R2300		0.088 (0.194)
		4-20 mA	CC-E TC/I	1SVR011765R2400		0.086 (0.190)

[1)] B 1604 Class I, Div.2 (universal device)

Analog signal converters - CC-E range
Ordering details - Measuring converters



CC-E IAC/ILPO

4

Ordering details - Measuring Converters

Supply voltage range	Input signal	Output signal	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24 V DC	0-5 A, 0-20 A, AC/DC	0-10 V, 0-20 mA, 4-20 mA	CC-E/I[1]	1SVR011703R2700		0.096 (0.212)
	0-5 A, 0-20 A, AC	0-10 V	CC-E I_{AC}/V	1SVR011770R0500		0.090 (0.198)
		0-20 mA	CC-E I_{AC}/I	1SVR011771R2200		0.092 (0.203)
		4-20 mA	CC-E I_{AC}/I	1SVR011772R2300		
	0-5 A, 0-20 A, DC	0-10 V	CC-E I_{DC}/V	1SVR011773R2400		0.092 (0.207)
		0-20 mA	CC-E I_{DC}/I	1SVR011774R2500		0.091 (0.200)
		4-20 mA	CC-E I_{DC}/I	1SVR011775R2600		0.093 (0.205)
110-240 V AC	0-5 A, 0-20 A, AC/DC	0-10 V, 0-20 mA, 4-20 mA	CC-E/I	1SVR011708R0400		0.099 (0.218)
	0-5 A, 0-20 A, AC	0-10 V	CC-E I_{AC}/V	1SVR011780R1100		0.092 (0.203)
		0-20 mA	CC-E I_{AC}/I	1SVR011781R0600		0.092 (0.207)
		4-20 mA	CC-E I_{AC}/I	1SVR011782R0700		0.095 (0.209)
	0-5 A, 0-20 A, DC	0-10 V	CC-E I_{DC}/V	1SVR011783R0000		0.093 (0.205)
		0-20 mA	CC-E I_{DC}/I	1SVR011784R0100		0.095 (0.209)
		4-20 mA	CC-E I_{DC}/I	1SVR011785R1100		
loop powered	0-1 A, 0-5 A, AC	4-20 mA	CC-E I_{AC}/ILPO[2]	1SVR010203R0500		0.052 (0.115)

[1] Ⓝ 1604 Class I, Div.2 (universal device)
[2] for sinusoidal currents

Analog signal converters - CC-E range
DIP switch settings, Dimensional drawings

CC-E/STD, CC-E x/x (universal devices)

Input	Output	Switch 1	2	3	4	5	6	7	8
0...5 V	0...5 V			■	■	■	■	■	
	0...10 V			■	■		■	■	
	0...20 mA			■	■		■	■	
	4...20 mA			■	■		■		■
0...10 V	0...5 V			■	■	■		■	
	0...10 V			■	■	■	■	■	
	0...20 mA			■	■	■	■	■	
	4...20 mA			■	■	■	■		■
0...20 mA	0...5 V	■			■			■	
	0...10 V	■			■		■	■	
	0...20 mA	■			■		■	■	
	4...20 mA	■			■		■		■
4...20 mA	0...5 V	■	■					■	
	0...10 V	■	■				■	■	
	0...20 mA	■	■				■	■	
	4...20 mA	■			■		■	■	

2CDC 282 001 F0204

Legend	
■	ON
	OFF

2CDC 282 002 F0204

CC-E/RTD

Input	Output	Switch 1	2	3	4	5	6
0...100 °C	0...10 V						■
	0-20 mA						■
	4-20 mA					■	
0...300 °C	0-10 V			■			■
	0-20 mA			■			■
	4-20 mA			■		■	
0...500 °C	0-10 V		■	■			■
	0-20 mA		■	■			■
	4-20 mA		■	■		■	
-50...+50 °C	0-10 V	■					■
	0-20 mA	■					■
	4-20 mA	■				■	
-50...+250 °C	0-10 V	■		■			■
	0-20 mA	■		■			■
	4-20 mA	■		■		■	
-50...+450 °C	0-10 V	■	■	■			■
	0-20 mA	■	■	■			■
	4-20 mA	■	■	■		■	
High fail safe					■		
Low fail safe							

2CDC 282 006 F0208

Legend	
■	ON
	OFF
	no influence

2CDC 282 003 F0204

CC-E/TC

Input	Output	Switch 1	2	3	4	5	6
TC-J: 0...600 °C	0...10 V		■	■			■
	0...20 mA		■	■			■
	4...20 mA		■	■		■	
TC-K: 0...1000 °C	0...10 V	■					■
	0...20 mA	■					■
	4...20 mA	■				■	
High fail safe					■		
Low fail safe							

2CDC 282 007 F0208

Legend	
■	ON
	OFF
	no influence

2CDC 282 003 F0204

CC-E/I


Input	Output	Switch 1	2	3	4	5	6
I - DC I - AC	0...10 V	■					
I - DC I - AC	0...20 mA	■					
I - DC I - AC	4...20 mA	■	■	■			

2CDC 282 005 F0208

Legend	
■	ON
	OFF

2CDC 282 002 F0204


Input range selection - CC-E/I



2CDC 282 011 F0204


Dimensional drawings

CC-E/x

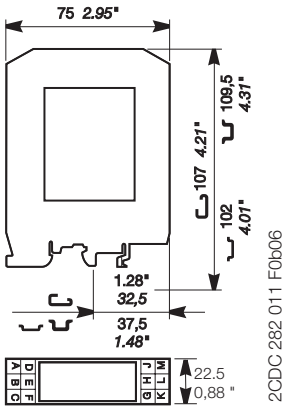

2CDC 282 011 F0b06


CC-E I_{AC}/ILPO, CC-E I/I

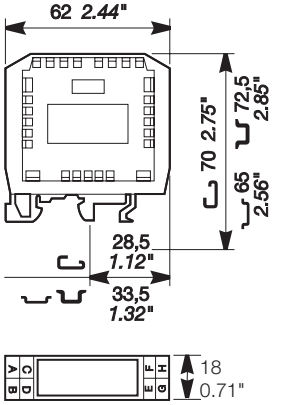


2CDC 282 012 F0b06

Analog signal converters - CC-E range
Wiring instructions

CC-E/STD, CC-E x/x (universal devices)

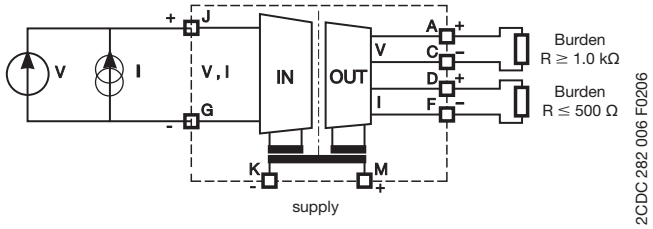


CC-E/RTD

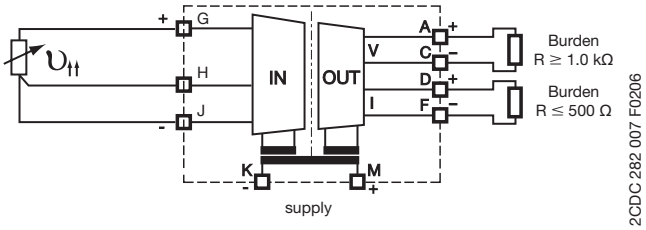


4


CC-E/TC

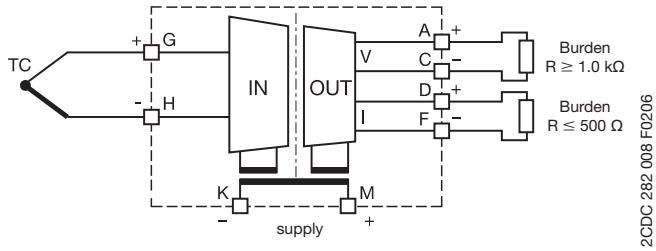


CC-E I_{AC}/ILPO

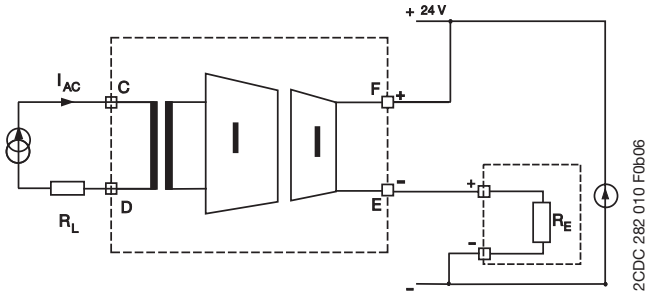


CC-E I/I-1

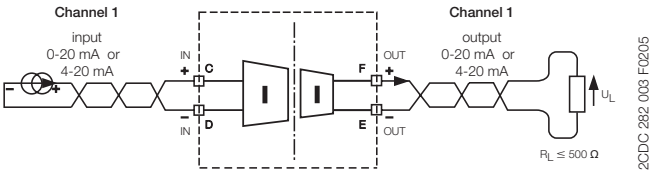

CC-E I/I-2

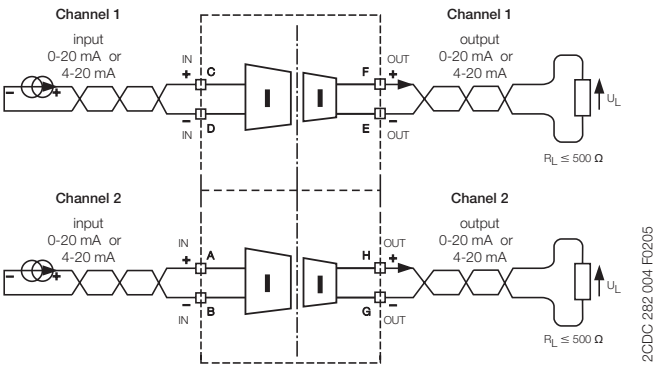

CC-E I/I

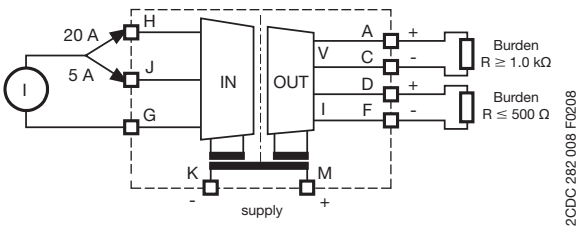

Analog signal converters - CC-E range
Technical data

Type		CC-E/STD / CC-E x/x		CC-E/RTD [3]	CC-E/TC
Input circuits - Analog inputs	**J-G-H**	**Current**	**Voltage**	**Temperature sensors**	**Thermocouples (IEC 584-1 and 2)**
Input signal		Standard signals		PT100	TC.K, TC.J
Rated input range		0...20 mA / 4...20 mA	0...5 V / 0...10 V / -10...+10 V	-50...+500 °C	TC.K: 0...1000 °C, TC.J: 0...600 °C
Limitation of input signals		+55 mA	± 11 V		
Influence of line resistance		-		< 0.01 %/Ω	< 0.5 % / 100 Ω
Gain adjustment range		± 5 % (universal devices)			
Offset adjustment range		± 5 % (universal devices)			
Input impedance		50 Ω	1 MΩ	-	-
Suppression at 50 Hz		-		-	> 35 dB
Common-mode rejection		-		100 dB	
Output circuits - Analog outputs	**D-F, A-C**	**Current**			**Voltage**
Output signal		0-20 mA, 4-20 mA			0-5 V, 0-10 V
Output burden		≤ 500 Ω			≥1.0 KΩ
Accuracy [1]		± 0.5 % of full-scale			
Residual ripple		< 0.5 %			
Response time		200 µs		10 ms	
Transmission frequency		2 kHz		80 Hz	2 Hz (up to -3 dB)
Reaction to input circuit interruption				High fail safe: Output voltage > 115 % of measuring range [2] Low fail safe: Output voltage < -0.6 V, output current = 0 mA	
Supply circuits	**K-M**	**DC versions**			**AC versions**
Supply voltage		24 V DC			110-240 V AC - 50/60 Hz
Supply voltage tolerance		-15...+15 %			-15...+10 %
Power consumption		1.5 W typ.			1.5 VA typ.
Indication of operational states					
Rated control supply voltage U_S		U: green LED			
General data					
Ambient temperature rangeoperation / storage		0...+60 °C / -20...+80 °C			
Temperature coefficient		± 500 ppm/°C			
Degree of protection (DIN 40050)		IP20			
Mounting position		ventilation slots on top and bottom			
Mounting		DIN rail (IEC/EN 60715), snap-on mounting			
Electrical connection					
Wire size	rigid	0.2-4 mm² (24-12 AWG)			
	fine-strand with(out) wire end ferrule	0.2-2.5 mm² (24-14 AWG)			
Stripping length		7 mm (0.28 inch)			
Tightening torque		0.5 Nm (4.4 lb.in)			
Electromagnetic compatibility					
Interference immunity		EN 61000-6-2			
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (±6 kV / ±8 kV)			
electromagnetic field(HF radiation resistance)	IEC/EN 61000-4-3	10 V/m			
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (±2 kV / 5 kH)			
powerful impulses (Surge)	IEC/EN 61000-4-5	±2 kV / ±1 kV			
HF line emission	IEC/EN 61000-4-6	10 V			
Interference emission	EN 61000-6-4	Class B			
Isolation data					
Test voltage between all isolated circuits		2.5 kV AC			
Rated insulation voltage		-		-	-

[1] Includes non-linearity and factory setting, influenced by supply voltage and output load.
[2] Only -/RTD and -/TC: Single-function devices respond with Low fail safe to input signal interruptions.
[3] When connecting a 2-wire sensor, the terminals J and H have to be jumpered.

Approvals on page 4/4.

Analog signal converters - CC-E range
Technical data

Type		CC-E I/I-1 / CC-E I/I-2
Input circuits - Analog inputs		**Current**
Input current I_{IN}		0-20 mA, 4-20 mA
Min. input current		< 100 µA
Max. input current		50 mA[1] (V_{IN} < 18 V)
Input voltage U_{IN}		< 2.5 V + (I_{IN} x R_L)
Input voltage drop U_i		< 2.5 V (20 mA, RL = 0 Ω)
Max. input voltage		18 V[1] (I_{IN} < 50 mA)
Output circuits		
Output current I_{OUT}		0-20 mA, 4-20 mA
Output load R_L		0-500 Ω
Output voltage U_{OUT}		I_{OUT} x RL
Residual ripple		< 20 mV_{pp} (500 Ω, 20 mA)
Response time (0-100 %)		< 15 ms (0-500 Ω, 20 mA), < 5 ms (500 q, 20 mA, 25 °C)
Accuracy		≤ 0.1 % of full-scale (20 mA)
Load influence (0-500 Ω)		≤ ±0.05 % / 100 Ω, ≤ -0.1 % / 100 Ω (25 °C)
General data		
Width of the enclosure		18 mm
Weight	1 channel	approx. 0.037 kg (0.082 (0.181) lb)
	2 channel	approx. 0.044 (0.097) kg (0.097 lb)
Mounting position		any
Degree of protection	enclosure / terminals	IP20 / IP20
Ambient temperature range	operation / storage	-25...+60 °C / -40...+85 °C
Temperature coefficient		< ±50 ppm / °C
Mounting		DIN rail (IEC/EN 60715)
Electrical connection		
Wire size	rigid	0.2-4 mm^2 (24-12 AWG)
	fine-strand with(out) wire end ferrule	0.2-2.5 mm^2 (24-14 AWG)
Stripping length		7 mm (0,28 inch)
Tightening torque		0.5 Nm (4.4 lb.in)
Standards		
Product standard		EN 50178
Low Voltage Directive		2006/95/EC
EMC Directive		2004/108/EC
Electromagnetic compatibility		
Interference immunity		EN 61000-6-2
electrostatic discharge (ESD)	EN 61000-4-2	Level 3 (±6 kV / ±8 kV)
electromagnetic field (HF radiation resistance)	EN 61000-4-3	10 V/m
fast transients (Burst)	EN 61000-4-4	Level 3 (±2 kV / 5 kH)
powerful impulses (Surge)	EN 61000-4-5	±2 kV / ±1 kV
HF line emission	EN 61000-4-6	10 V
magnetic fields	EN 61000-4-8	30 A/m
Interference emission		EN 61000-6-4
Radiated noise	EN 55011	Class B
Operational reliability (EN 68-2-6)		4 g
Mechanical resistance (EN 68-2-6)		10 g
Environmental testing (IEC 68-2-30 Db)		24 h cycle, 55 °C, 93 % rel., 96 h
Isolation data		
Insulation voltage input / output		500 V_{eff} / 50 Hz
Insulation voltage between channels		5 kV_{eff} / 50 Hz (device with 2 channels)
Pollution category		2
Overvoltage category		II

[1] The input parameters have to be limited to the indicated maximum values.

Approvals on page 4/4.

Analog signal converters - CC-E range
Technical data

Type		CC-E/I		CC-E I_{AC}/ILPO
		J-G-H		C-D
Input circuits - Analog inputs		AC current	DC current	2 meas. ranges selectable
Rated input range		0-5 A / 0-20 A	0-5 A / 0-20 A	0-1 A / 0-5 A / sinusoidal
Measuring frequency				50/60 Hz
Overload capacity of inputs	input range 1	10 x I_{Nom} (50 A) for max. 1 s		10 x I_{Nom} (50 A) for max. 2 s
	input range 2	10 x I_{Nom} (200 A) for max. 1 s		10 x I_{Nom} (200 A) for max. 2 s
Gain adjustment range		±5 % (universal devices)		-
Offset adjustment range		±5 % (universal devices)		-
Input impedance / resistance		5A : 65 mΩ	20 A : 2.5 mΩ	5 mΩ
Output circuits - Analog outputs		D-F Current	A-C Voltage	F-E passive current output in proportion to input current
Output signal		0-20 mA / 4-20 mA	0-10 V	4-20 mA
Output burden / load		≤ 500 Ω	≥ 1.0 Ω	12 V DC: 150 Ω, 24 V DC: 750 Ω 30 V DC: 1050 Ω
Accuracy [1]		± 2 % of full-scale		
Offset adjustment range		±5 % (universal device)		± 5 %
Gain adjustment range		±5 % (universal device)		± 20 %
Residual ripple		< 0.5 %		
Response time		0.5 s		0.6 s
Transmission frequency		DC or 50/60 Hz		AC: 50/60 Hz
Reaction to input circuit interruption		Low fail safe: output voltage < 200 mV, output current < 400 µA		-
Supply circuits	**K-M**	DC versions	AC versions	
Supply voltage		24 V DC	110-240 V AC 50/60 Hz	12-30 V DC
Supply voltage tolerance		-15...+15 %	-15...+10 %	-
Power consumption		typ 1.5 W	typ 1.5 VA	-
Indication of operational states				
Supply voltage		U: green LED		-
General data				
Ambient temperature rangeoperation / storage		0...+60 °C / -20...+80 °C		-20...+60 °C / -40...+80 °C
Temperature coefficient		± 500 ppm/°C		300 ppm/°C
Degree of protection (DIN 40050)		IP20		
Mounting position		ventilation slots on top and bottom		
Mounting		DIN rail (IEC/EN 60715), snap-on mounting		
Electrical connection				
Wire size	rigid	0.2-4 mm² (24-12 AWG)		
	fine-strand with(out) wire end ferrule	0.2-2.5 mm² (24-14 AWG)		
Stripping length		7 mm (0.28 inch)		
Tightening torque		0.5 Nm (4.4 lb.in)		
Electromagnetic compatibility				
Interference immunity		EN 61000-6-2		
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (±6 kV / ±8 kV)		
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3	10 V/m		
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (±2 kV / 5 kH)		
powerful impulses (Surge)	IEC/EN 61000-4-5	±2 kV / ±1 kV		
HF line emission	IEC/EN 61000-4-6	10 V		
Interference emission	EN 61000-6-4	Class B		
Isolation data				
Test voltage (between all isolated circuits)		2.5 kV AC		
Rated insulation voltage		-		250 V AC

[1] Includes non-linearity and factory setting, influenced by supply voltage and output load.

Approvals on page 4/4.

Analog signal converters - CC-U range
Product group picture



Analog signal converters - CC-U range
Table of contents

Analog signal converters - CC-U range


Overview 4/19
Ordering details 4/21
Ordering details - Accessories 4/22
DIP switch settings 4/23
Wiring instructions 4/25
Technical information 4/26
Technical data 4/29
Technical diagr., Connection diagr., Dimensional drawings 4/32

Analog signal converters - CC-U range
Overview

CC-U range
– 8 different standard signal outputs on one device
– Input and output side universally configurable
– Also available with 2 threshold relay outputs
– Adjustment and operating elements on the front side
– Safe operation by electrical 3-way isolation
– Plug-in connecting terminals, unambiguously and clearly marked

Conversion, measurement and separation of
– Standard signals
– Signals of RTD sensors (PT10, PT100, PT1000)
– Thermocouple signals
– TRMS values of currents and voltages

Characteristics
– The required input and output ranges can be configured for all devices by means of directly accessible DIP switches positioned on the side.
– Due to the wide input range of the gain and offset stages all input signals between the minimum and the maximum input value can be universally converted to all common output signals.
– Devices for DC or AC (50/60 Hz) supply available.

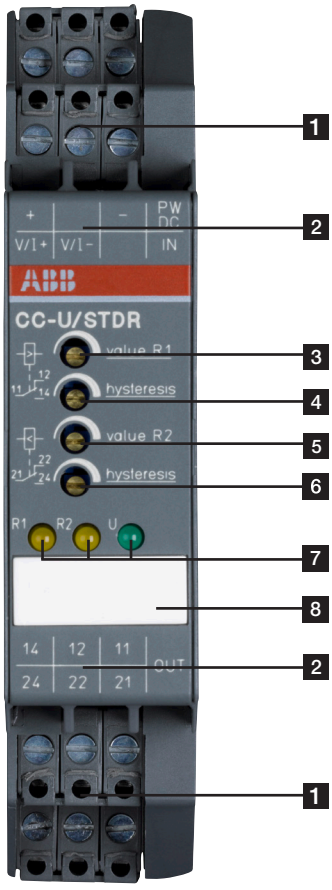

1 **Terminals +, V/I+, V/I-, PW DC, IN, -**
2 **Terminal explanation**
3 **Adjustment of resistance value R1**
4 **Adjustment of hysteresis**
5 **Adjustment of resistance value R2**
6 **Adjustment of hysteresis**
7 **Indication of operational states**
R1 yellow LED - resistance value R1
R2 yellow LED - resistance value R2
U green LED - supply voltage
8 **Marker label**

Analog signal converters - CC-U range
Overview

CC-U/STD universal signal converter with 3-way electrical isolation
- More than 120 configurations possible
- Configurable output signal response on input voltage signal interruption (low fail safe / high fail safe)
- Adjustment and operating elements on the front
- Short-circuit proof signal outputs
- Plug-i connecting terminals for inputs, outputs and supply
- Very fast signal transmission enables use in control systems

CC-U/STDR universal signal converter for standard signals, with 2 threshold relay outputs and with 3-way electrical isolation
- Standard signal converter with 7 setting ranges
- 2 threshold relay outputs with one c/o contact each (threshold and respective hysteresis can be adjusted independently from each other)
- Open-circuit or closed-circuit principle configurable by means of a DIP switch
- 2 yellow LEDs for clear status indication of the output relays
- Plug-in connecting terminals for inputs, outputs and supply

CC-U/RTD universal signal converter for PT10, PT100, PT1000 temperature sensors (acc. to IEC 751 and JIS C 16041), linearized with 3-way electrical isolation)
- Configurable output signal response on input signal interruption (low / high fail safe)
- Adjustment and operating elements on the front-side
- Short-circuit proof signal outputs
- Plug-in connecting terminals for inputs, outputs and supply
- 2- or 3-wire connection

[1] Japanese standard

CC-U/RTDR universal signal converter for temperature and resistance signals, with 2 threshold relay outputs and 3-way electrical isolation
- Temperature signal converter for PT100 signals (5 ranges up to 800 °C) and variable resistances from 0-380 Ω
- 2 threshold relay outputs with one c/o contact each (threshold and respective hysteresis can be adjusted independently from each other)
- Open-circuit or closed-circuit principle configurable by means of a DIP switch
- 2 yellow LEDs for clear status indication of the output relays
- Plug-in connecting terminals for inputs, outputs and supply
- 2- or 3-wire connection

CC-U/TC universal signal converter for thermocouples with 3-way electrical isolation
- Temperature signal converter for thermo-couples of the types K, J, T, S, E, N, R, B
- Continuously adjustable voltage signal input 0-10 mV and 0-50 mV
- Differential temperature meas. possible (see wiring instructions page 4/17)
- Configurable output signal response on input signal interruption (low fail safe / high fail safe)
- Adjustment and operating elements on the front-side
- Short-circuit proof signal outputs
- Plug-in connecting terminals for inputs, outputs and supply
- Cold-junction compensation selectable

CC-U/TCR universal signal converter for thermocouples, with 2 threshold relay outputs and 3-way electrical isolation
- Temperature signal converter for thermocouples of the types K, J, T, S
- 2 threshold relay outputs with one change-over contact each (threshold and respective hysteresis can be adjusted independently from each other)
- Open-circuit or closed-circuit principle configurable by means of a DIP switch
- 2 yellow LEDs for clear status indication of the output relays
- Plug-in connecting terminals for inputs, outputs and supply
- Integrated cold-junction compensation

CC-U/V universal measuring converter for RMS values of 0-600 V, with 3-way electrical isolation
- RMS converter for voltage signals up to 600 V of any wave form (DC, DC with superimposed AC components, pure sinusoidal, triangular, phase-angle controlled, etc. in a measuring range of 0-600 Hz)
- Adjustment and operating elements on the front
- Short-circuit proof signal outputs
- Plug-in connecting terminals for inputs, outputs and supply

CC-U/I universal measuring converter for RMS values of 0-1 A and 0-5 A, with 3-way electrical isolation
- RMS converter for current signals up to 1 A and up to 5 A of any wave form (DC, DC with superimposed AC components, pure sinusoidal, triangular, phase-angle controlled, etc. in a measuring range of 0-600 Hz)
- Adjustment and operating elements on the front
- Short-circuit proof signal outputs
- Plug-in connecting terminals for inputs, outputs and supply

Analog signal converters - CC-U range
Ordering details


2CDC 281 003 F0003

CC-U/STDR

Ordering details - Standard Signal Converters

Supply voltage range	Input signal	Output signal	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24-48 V DC, 24 V AC	refer to table	refer to table	CC-U/STD	1SVR040000R1700		0.125 (0.276)
110-240 V AC, 100-300 V DC				1SVR040001R0400		0.126 (0.278)
24-48 V DC, 24 V AC		2 c/o	CC-U/STDR[1]	1SVR040010R0000		0.142 (0.313)
110-240 V AC, 100-300 V DC				1SVR040011R2500		


2CDC 281 005 F0003

CC-U/RTD

Ordering details - RTD Converters

Supply voltage range	Input signal	Output signal	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24-48 V DC, 24 V AC	refer to table	refer to table	CC-U/RTD	1SVR040002R0500		0.126 (0.278)
110-240 V AC, 100-300 V DC				1SVR040003R0600		0.128 (0.282)
24-48 V DC, 24 V AC		2 c/o	CC-U/RTDR[1]	1SVR040012R2600		0.146 (0.322)
110-240 V AC, 100-300 V DC				1SVR040013R2700		0.148 (0.326)


2CDC 281 008 F0003

CC-U/TC

Ordering details - Thermocouple Converters

Supply voltage range	Input signal	Output signal	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24-48 V DC, 24 V AC	refer to table	refer to table	CC-U/TC	1SVR040004R0700		0.130 (0.287)
110-240 V AC, 100-300 V DC				1SVR040005R0000		0.128 (0.282)
24-48 V DC, 24 V AC		2 c/o	CC-U/TCR[1]	1SVR040014R2000		0.145 (0.320)
110-240 V AC, 100-300 V DC				1SVR040015R2100		


2CDC 281 012 F0003


CC-U/I

Ordering details - Measuring Converters


Supply voltage range	Input signal	Output signal	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24-48 V DC, 24 V AC	refer to table	refer to table	CC-U/I[2]	1SVR040006R0100		0.128 (0.282)
110-240 V AC, 100-300 V DC				1SVR040007R0200		0.127 (0.280)
24-48 V DC, 24 V AC			CC-U/V[3]	1SVR040008R1300		0.128 (0.282)
110-240 V AC, 100-300 V DC				1SVR040009R1400		

[1] with relay output
[2] for current RMS values
[3] for voltage RMS values


Analog signal converters - CC-U range
Ordering details - Accessories



ADP.01



MAR.01



Sealable cover - COV.01

Ordering details - Accessories

For type	Width in mm	Type	Order code	Price	Pkg qty	Weight (1 pce) g (oz)
CC-U	22.5	ADP.01	1SVR430029R0100		1	18.4 (0.65)
CC-U		MAR.01	1SVR366017R0100		10	0.19 (0.007)
CC-U	22.5	COV.01	1SVR430005R0100		1	5.2 (0.18)

Analog signal converters - CC-U range
DIP switch settings

CC-U/STD

Input	Switch 1								Gain	Coarse Type
	1	2	3	4	5	6	7	8		
Potentiometer	■								0	0
0...50 mV									A...D	C
0...100 mV									4...5	5
0...250 mV									0...1	1
0...500 mV	■								7...9	8
0...1 V	■								3...4	3
0...2.5 V	■								0	0
0...5 V		■							5...7	6
0...10 V		■							2	2
1...5 V		■		■	■				7...9	8
2... 10 V		■		■	■				2...4	3
-10...+10 V		■	■		■				0	0
0...125 mV									3...4	3
0...8 V		■							3...4	3
-22.5...+22.5 mV			■		■				B...F	D
-11...+11 V		■	■		■				0	0
2.5...7.5 V		■			■				5...7	6
3.33...9.99 V		■			■				3...4	4
10...0 V		■	■						2	2
100...0 mV			■						4...5	5
0...1 mA	■								A...D	B
0...20 mA	■	■							2...4	3
4...20 mA	■	■			■	■			4...5	4
10...50 mA	■	■			■	■			0...1	1
20...4 mA	■	■		■	■				4...5	4
20...0 mA	■	■		■					4...2	3
-0.45...+0.45 mA	■			■		■			B...F	D
-55...+55 mA	■		■	■		■			4...6	5
High fail safe *)							■		-	-
Low faile safe *)								■	-	-
No fail safe *)									-	-

2CDC 282 019 F0203

*) Detection of input voltage signal interruptions:
If the input signal circuit is interrupted, the output signal changes to the adjusted minimum value (low fail safe) or maximum value (high fail safe).
If "No fail safe" is configured, input signal interruptions are not detected.

Output	Switch 2					
	1	2	3	4	5	6
0...5 V			■		■	
0...10 V					■	
1...5 V	■	■	■		■	
2...10 V	■	■	■			
-10...+10 V				■		
-5...+5 V				■	■	
-10...0 V			■	■		
-5...0 V			■	■	■	
0...6.66 V		■			■	
-10...+3.33 V		■		■		
-5...+1.66 V		■		■	■	
0...8 V		■	■			
0...4 V		■	■		■	
-10...-2 V		■	■	■		
-5...-1 V		■	■	■	■	
1.25...6.25 V	■		■		■	
-7.5...+2.5 V	■		■	■		
-3.75...+1.25 V	■		■	■	■	
1.66...8.33 V	■	■			■	
-6.66...+6.66 V	■	■		■		
-3.33...+3.33 V	■	■		■	■	
-8...0 V	■	■	■	■		
-4...0 V	■	■	■	■	■	
0...1 mA					■	
0...20 mA					■	■
4...20 mA	■	■	■			
0...10 mA				■	■	
0...0.5 mA				■		■
0...13.33 mA			■		■	■
0...666 µA			■		■	
0...16 mA			■	■		■
0...800 µA			■	■		
0...8 mA			■	■	■	■
0...400 µA			■	■	■	
2.5...12.5 mA	■		■		■	■
125...625 µA	■		■		■	
3.33...16.66 mA	■	■	■		■	■
166...833 µA	■	■	■		■	
0.2...1 mA	■	■	■	■		
2...10 mA	■	■	■	■	■	■
100...500 µA	■	■	■	■	■	

2CDC 282 020 F0203

Legend
■ ON
OFF
no influence

2CDC 282 003 F0204

CC-U/STDR with relay output

Input	Switch					
	1	2	3	4	5	6
0...10 V						
0...5 V	■					
0...1 V		■				
-10...+10 V			■			
1...5 V	■				■	
0...20 mA		■		■		
4...20 mA		■		■	■	
Output						
Closed-circuit principle						■
Open-circuit principle						

2CDC 282 005 F0204

Legend
■ ON
OFF
no influence

2CDC 282 003 F0204

CC-U/RTD

Input		Switch 1						Switch 2						Gain
Type	Range	1	2	3	4	5	6	1	2	3	4	5	6	Coarse
PT10	0...500 °C	■							■		■			F
	0...550 °C	■							■		■			E
	0...600 °C	■							■		■			D
	0...650 °C	■							■					C
	0...700 °C	■							■					B
	0...750 °C	■							■					A
	0...800 °C	■							■					9
	0...850 °C	■							■					8
PT100	0...50 °C		■					■						F
	0...60 °C		■					■						E
	0...70 °C		■					■						B
	0...80 °C		■					■						A
	0...90 °C		■					■						9
	0...100 °C		■					■						8
	0...200 °C		■					■						3
	0...300 °C		■					■						2
	0...400 °C		■					■						1
	0...500 °C		■					■						0
PT1000	0...10 °C			■										8
	0...20 °C			■										3
	0...30 °C			■										2
	0...40 °C			■										1
	0...50 °C			■										0
	0...60 °C			■										0
Low fail safe *)													■	-
High fail safe *)														-

2CDC 282 023 F0203

*) Detection of input signal interruptions:
If the input signal circuit is interrupted, the output signal changes to the adjusted minimum value (low fail safe) or maximum value (high fail safe).

Output	Switch 3					
	1	2	3	4	5	6
0...5 V			■		■	
0...10 V					■	
1...5 V	■	■	■		■	
2...10 V	■	■	■			
-10...+10 V				■		
-5...+5 V				■	■	
-10...0 V			■	■		
-5...0 V			■	■	■	
0...6.66 V	■				■	
-10...+3.33 V	■			■		
-5...+1.66 V	■			■	■	
0...8 V	■	■	■			
0...4 V	■	■	■		■	
-10...-2 V	■	■	■	■		
-5...-1 V	■	■	■	■	■	
1.25...6.25 V	■		■		■	
-7.5...+2.5 V	■		■	■		
-3.75...+1.25 V	■		■	■	■	
1.66...8.33 V	■	■			■	
-6.66...+6.66 V	■	■		■		
-3.33...+3.33 V	■	■		■	■	
-8...0 V	■	■	■	■		
-4...0 V	■	■	■	■	■	
0...1 mA					■	
0...20 mA					■	■
4...20 mA	■	■	■			■
0...10 mA			■		■	■
0...0.5 mA			■		■	
0...13.33 mA		■			■	■
0...666 µA		■			■	
0...16 mA		■	■			■
0...800 µA		■	■			
0...8 mA		■	■		■	■
0...400 µA		■	■		■	
2.5...12.5 mA	■		■		■	■
125...625 µA	■		■		■	
3.33...16.66 mA	■	■			■	■
166...833 µA	■	■			■	
0.2...1 mA	■	■	■			
2...10 mA	■	■	■		■	■
100...500 µA	■	■	■		■	

2CDC 282 024 F0203

Legend
■ ON
OFF
no influence

2CDC 282 003 F0204

CC-U/RTDR with relay output

Input PT100	Switch					
	1	2	3	4	5	6
0...100 °C	■					
0...200 °C		■				
0...400 °C			■			
0...600 °C				■		
0...800 °C					■	
Output						
Closed-circuit principle						■
Open-circuit principle						

2CDC 282 007 F0204

Legend
■ ON
OFF
no influence

2CDC 282 003 F0204

Analog signal converters - CC-U range
DIP switch settings

CC-U/V

Output	Switch 1	2	3	4	5	6
0...5 V			■		■	
0...10 V					■	
1...5 V	■	■	■		■	
2...10 V	■	■	■			
-10...+10 V				■		
-5...+5 V				■	■	
-10...0 V			■	■		
-5...0 V			■	■	■	
0...6.66 V	■				■	
-10...+3.33 V	■		■			
-5...+1.66 V	■		■	■		
0...8 V	■	■				
0...4 V	■	■			■	
-10...-2 V	■	■	■			
-5...-1 V	■	■	■	■		
1.25...6.25 V	■		■		■	
-7.5...+2.5 V	■		■	■		
-3.75...+1.25 V	■		■	■	■	
1.66...8.33 V	■	■				
-6.66...+6.66 V	■	■		■		
-3.33...+3.33 V	■	■		■	■	
-8...0 V	■	■	■	■		
-4...0 V	■	■	■	■	■	
0...1 mA					■	
0...20 mA					■	■
4...20 mA	■	■	■		■	■
0...10 mA			■		■	
0...0.5 mA			■		■	■
0...13.33 mA	■				■	■
0...666 µA	■				■	
0...16 mA	■	■				■
0...800 µA	■	■				
0...8 mA	■	■			■	■
0...400 µA	■	■			■	
2.5...12.5 mA	■		■		■	■
125...625 µA	■		■		■	
3.33...16.66 mA	■	■			■	■
166...833 µA	■	■			■	
0.2...1 mA	■	■	■			
2...10 mA	■	■	■		■	■
100...500 µA	■	■	■		■	

2CDC 282 029 F0203

Legend
■ ON
OFF
no influence

2CDC 282 003 F0204

CC-U/TC

Output	Switch 3	1	2	3	4	5	6
0...5 V				■		■	
0...10 V						■	
1...5 V		■	■	■		■	
2...10 V		■	■	■			
-10...+10 V					■		
-5...+5 V					■	■	
-10...0 V				■	■		
-5...0 V				■	■	■	
0...6.66 V		■				■	
-10...+3.33 V		■		■			
-5...+1.66 V		■		■	■		
0...8 V		■	■				
0...4 V		■	■			■	
-10...-2 V		■	■	■			
-5...-1 V		■	■	■	■		
1.25...6.25 V		■		■		■	
-7.5...+2.5 V		■		■	■		
-3.75...+1.25 V		■		■	■	■	
1.66...8.33 V		■	■				
-6.66...+6.66 V		■	■		■		
-3.33...+3.33 V		■	■		■	■	
-8...0 V		■	■	■	■		
-4...0 V		■	■	■	■	■	
0...1 mA						■	
0...20 mA						■	■
4...20 mA		■	■	■			■
0...10 mA				■		■	
0...0.5 mA				■		■	■
0...13.33 mA			■			■	■
0...666 µA			■			■	
0...16 mA			■	■			■
0...800 µA			■	■			
0...8 mA			■	■		■	■
0...400 µA			■	■		■	
2.5...12.5 mA		■		■		■	■
125...625 µA		■		■		■	
3.33...16.66 mA		■	■			■	■
166...833 µA		■	■			■	
0.2...1 mA		■	■	■			
2...10 mA		■	■	■		■	■
100...500 µA		■	■	■		■	

2CDC 282 017 F0208

Legend
■ ON
OFF
no influence

2CDC 282 003 F0204

Input Type	Range	Switch 1	2	3	4	5	6	Switch 2	1	2	3	4	5	6
K	0-100...900 °C		■		■				■	■				
	0-250...1350 °C		■		■				■	■				■
J	0-100...750 °C	■							■	■				
T	0-100...400 °C		■	■					■	■	■			
	-150-0...400 °C		■	■					■	■	■	■		
S	0-250...1550 °C		■	■		■	■			■				
E	0-100...700 °C								■	■				
	0-200...1000 °C								■	■				■
N	0-100...650 °C		■			■			■	■				
	0-200...1300 °C		■			■			■	■				■
R	0-250...1350 °C		■	■	■	■	■			■				
	0-450...1700 °C		■	■	■	■	■		■	■				■
B	0-700...1750 °C		■	■	■	■	■							
mV	0-2...10 mV		■	■	■	■	■							
	0-10...50 mV													
Low fail safe *)														
High fail safe *)														■

2CDC 282 010 F0204

*) Detection of input signal interruptions:
If the input signal circuit is interrupted, the output signal changes to the adjusted minimum value (low fail safe) or maximum value (high fail safe).

CC-U/I

Output	Switch 1	2	3	4	5	6
0...5 V			■		■	
0...10 V					■	
1...5 V	■	■	■		■	
2...10 V	■	■	■			
-10...+10 V				■		
-5...+5 V				■	■	
-10...0 V			■	■		
-5...0 V			■	■	■	
0...6.66 V		■			■	
-10...+3.33 V		■		■		
-5...+1.66 V		■		■	■	
0...8 V		■	■			
0...4 V		■	■		■	
-10...-2 V		■	■	■		
-5...-1 V		■	■	■	■	
1.25...6.25 V	■				■	
-7.5...+2.5 V	■		■	■		
-3.75...+1.25 V	■		■	■	■	
1.66...8.33 V	■	■			■	
-6.66...+6.66 V	■	■		■		
-3.33...+3.33 V	■	■		■	■	
-8...0 V	■	■	■	■		
-4...0 V	■	■	■	■	■	
0...1 mA					■	
0...20 mA					■	■
4...20 mA	■	■	■			■
0...10 mA			■		■	■
0...0.5 mA			■		■	
0...13.33 mA		■			■	■
0...666 µA		■			■	
0...16 mA		■	■			■
0...800 µA		■	■			
0...8 mA		■	■		■	■
0...400 µA		■	■		■	
2.5...12.5 mA	■		■		■	■
125...625 µA	■		■		■	
3.33...16.66 mA	■	■			■	■
166...833 µA	■	■			■	
0.2...1 mA	■	■	■			
2...10 mA	■	■	■		■	■
100...500 µA	■	■	■		■	

2CDC 282 029 F0203

Legend
■ ON
OFF
no influence

2CDC 282 003 F0204

CC-U/TCR with relay output

Input Type	Range	Switch 1	2	3	4	5	6
J	0...240 °C				■		
	0...480 °C			■	■		
	0...1200 °C						
K	0...250 °C	■			■		
	0...500 °C	■		■	■		
	0...1350 °C	■					
T	-150...+120 °C	■			■	■	
	0...220 °C	■			■		
	0...400 °C	■		■	■		
S	0...210 °C		■		■		
	0...380 °C		■	■	■		
	0...860 °C		■				
	0...1550 °C		■	■			
Output							
Closed-circuit principle							■
Open-circuit principle							


2CDC 282 004 F0204

Legend
■ ON
OFF
no influence


2CDC 282 003 F0204

Analog signal converters - CC-U range
Wiring instructions


CC-U/STD

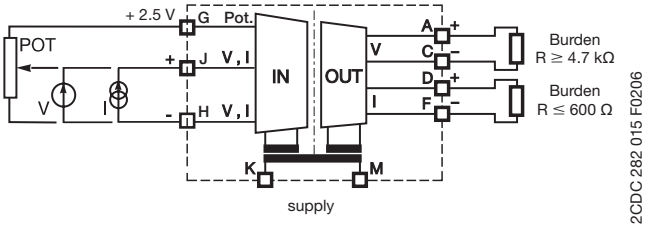


CC-U/STDR with relay output

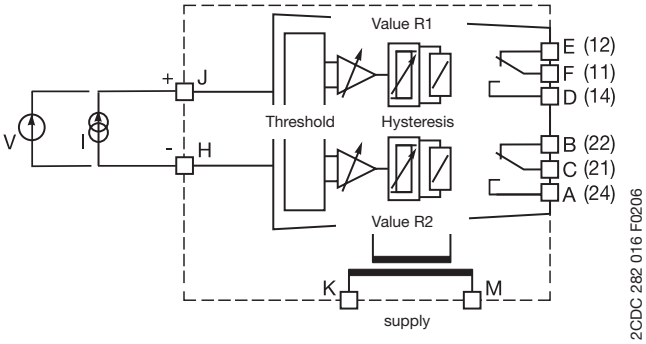


CC-U/RTD

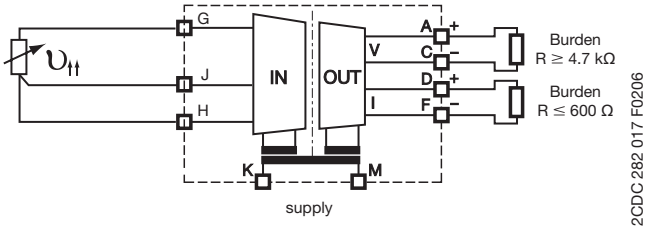


CC-U/RTDR with relay output

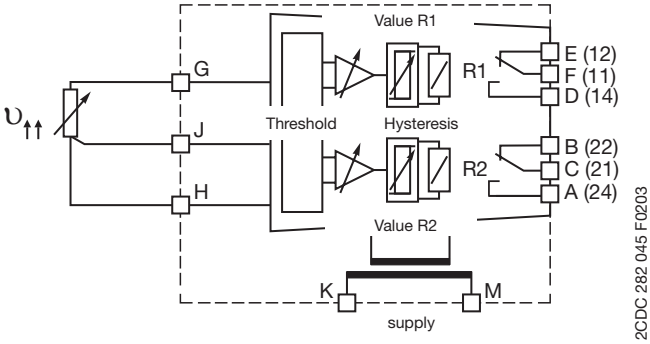


CC-U/V

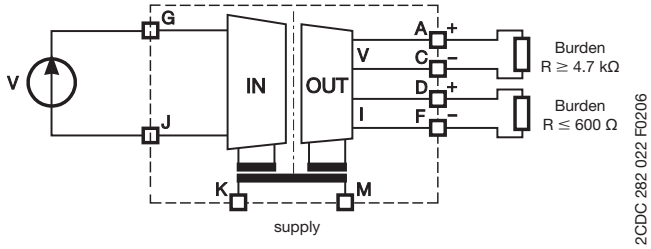


CC-U/I

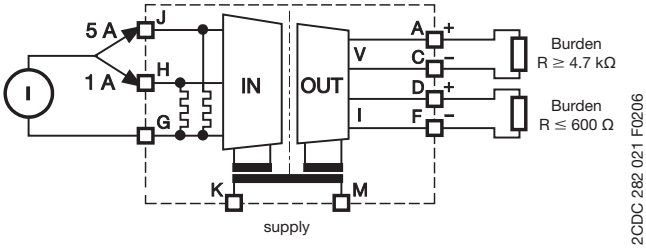


CC-U/TC

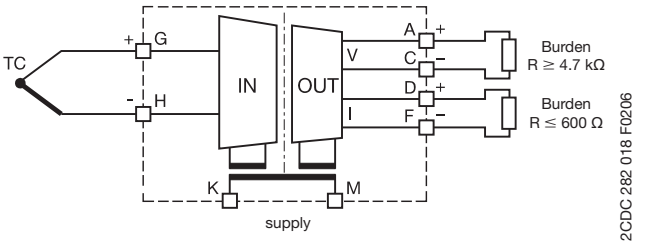



without cold-junction compensation:
switch SW2.2 = OFF


CC-U/TCR with relay output

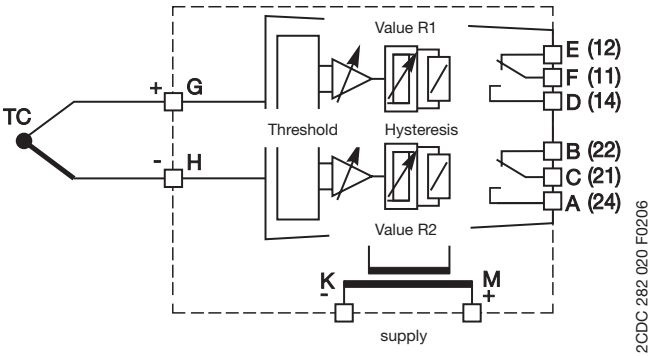

Analog signal converters - CC-U range
Technical information


CC-U/STD

Adjustment range

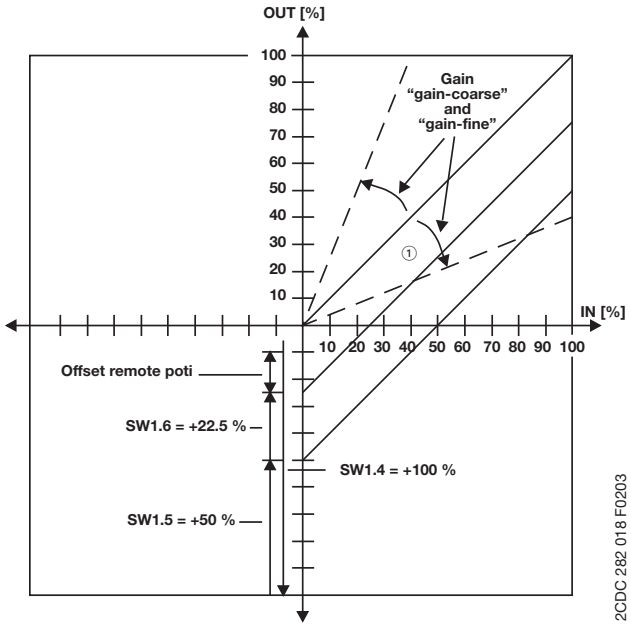


CC-U/STDR with relay output

Function diagrams

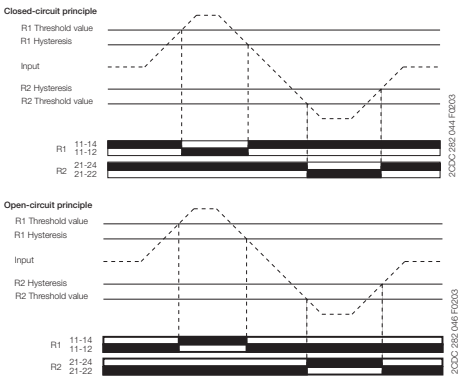

Switching points

Switching points of the output relay depending on the input range, configuration open-circuit principle

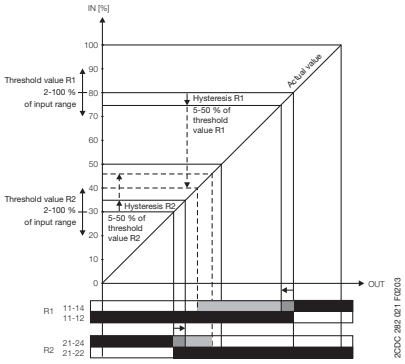


Analog signal converters - CC-U range
Technical information

CC-U/RTD

Characteristic curves


Resistance of PT10, PT100 and PT1000 sensors depending on the temperature

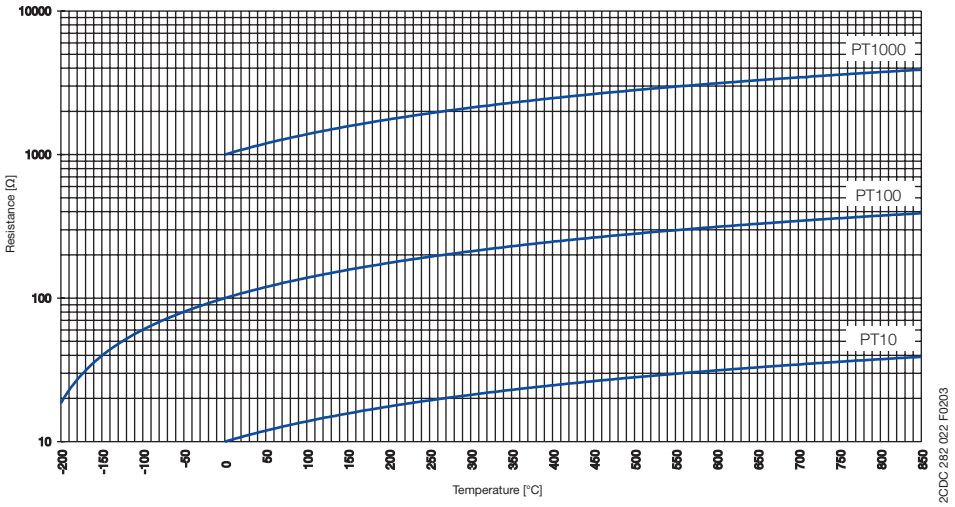


CC-U/RTDR with relay output

Switching points

Switching points of the output relay depending on the input range, configuration open-circuit principle

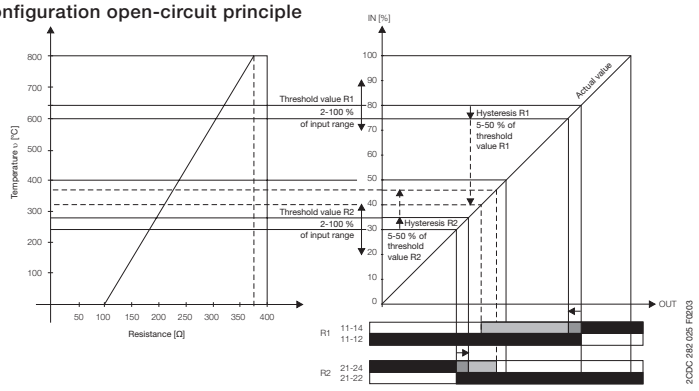

Function diagrams

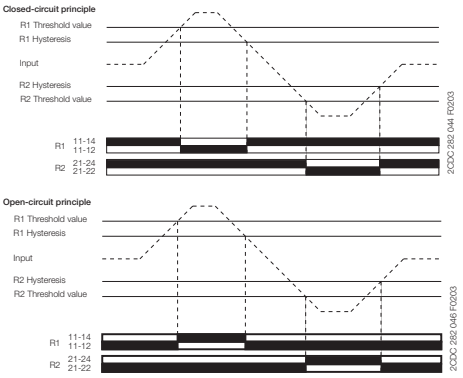

CC-U/V


Input range selection

Selecting input range by front-face rotary switch	Switch position
0...100 V	1
0...150 V	2
0...250 V	3
0...300 V	4
0...400 V	5
0...450 V	6
0...550 V	7
0...600 V	8

2CDC 282 012 F0204

Example of application


RMS measurement and conversion of a phase-angle controlled voltage signal L1 = 230 V

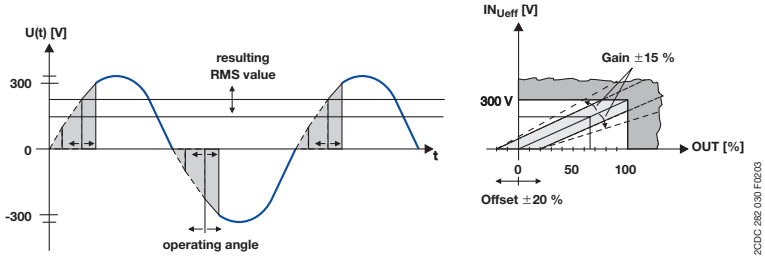

Analog signal converters - CC-U range
Technical information


CC-U/I

Input range selection



Example of application


RMS measurement and conversion of a current signal

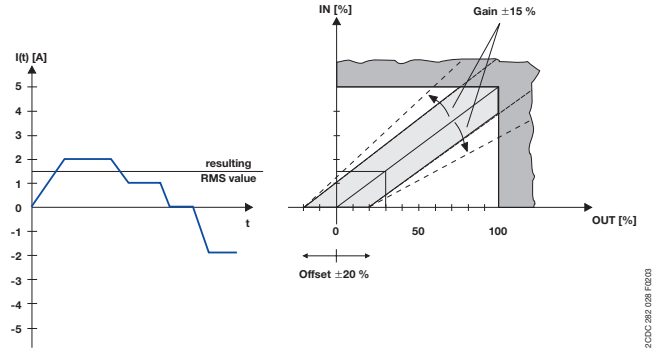

CC-U/TC


Characteristic curve

Thermocouple voltages depending on the temperature

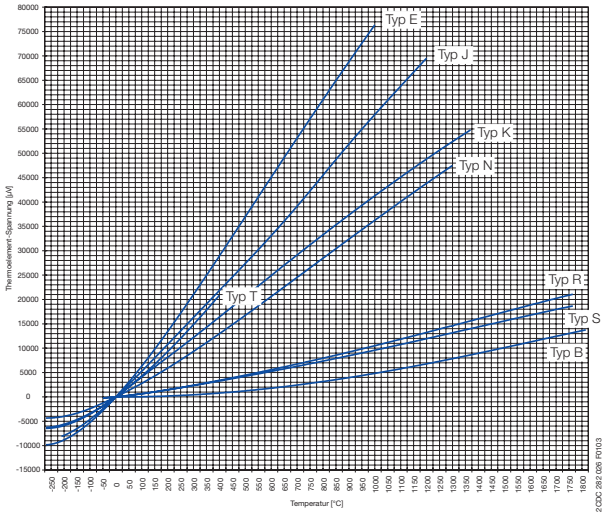


CC-U/TCR with relay output

Function diagrams

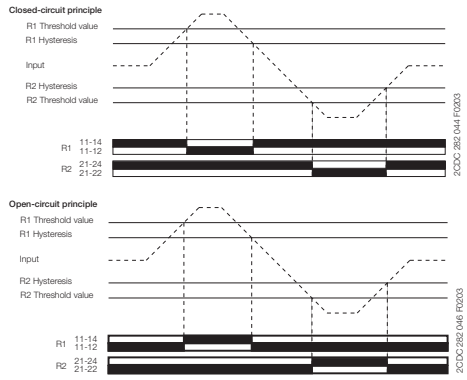

Switching points

Switching points of the output relay depending on the input range, configuration open-circuit principle

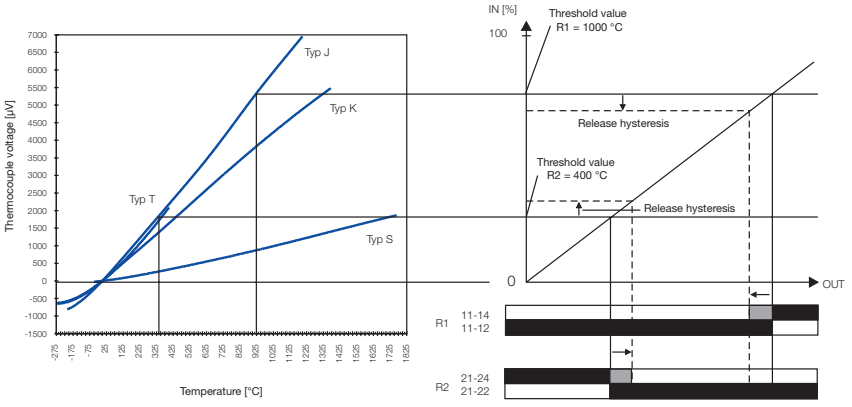

Analog signal converters - CC-U range
Technical data

Type		CC-U/STD			CC-U/RTD [3]	CC-U/TC
Input circuits - Analog inputs	**J-G-H**	**Current**	**Voltage**	**Potentio-meter**	**Temperature sen-sors**	**Thermocouples (IEC 584-1 and 2)**
Input signal		0-20 mA 4-20 mA 10-50 mA 0-1 mA	0-100 mV 0-1 V 0-5 V 1-5 V 0-10 V 2-10 V ± 10 V	470 Ω -1 MΩ [2]	PT10, PT100, PT1000 (IEL 751 and JICC 1604)	TC.K TC.J TC.T TC.S TC.E TC.N TC.R TC.B
Limitation of input signals		± 55 mA	± 11 V		-	-
Rated input range		-	-	-	Max. temperature adjustable: 6-60 °C for PT1000 50-500 °C for PT100 500-850 °C for PT10	refer to temperature specs. of individual thermocouples
Influence of line resistance		-	-	-	0.015 °C/Ω	< 0.01 % / 100 Ω
Gain adjustment range (universal devices)		0.9-110 mA	45 mV - 22 V	-	see DIP switch settings	
Offset adjustment range (universal devices)		-137.5...+62.5 %			± 5 %	± 10 %
Input impedance		for different ranges			-	-
without detection of input signal interruption		51 Ω	6 MΩ	3 GΩ	-	-
with detection of input signal interruption		51 Ω	3.5 MΩ	9.5 GΩ	-	-
Suppression at 50 Hz		-	-	-	-	> 40 dB
Common-mode rejection		-	-	-	120 dB	105 dB
Output circuits - Analog outputs	**D-F, A-C**	**Current**				**Voltage**
Output signal		0-20 mA, 4-20 mA				0-5 V, 1-5 V, 0-10 V, 2-10 V, ± 10 V
Output burden		≤ 600 Ω				≥ 4.7 KΩ
Accuracy [1]		±0.1 % of full-scale			±0.2 % of full-scale	±0.1 % of full-scale
Residual ripple		-			< 0.15 %	-
Response time		200 µs			10 ms	200 ms
Transmission frequency		1 kHz			80 Hz	2 Hz (to -3 dB)
Supply circuits	**K-M**	**DC versions**				**AC versions**
Rated supply voltage		24-48 V DC				110-240 V AC
Supply voltage range		24-48 V DC / 24 V AC				110-240 V AC / 100-300 V DC
Supply voltage tolerance		DC: -15...+15 %				AC: -15...+10 %
Rated frequency		0 Hz or 50/60 Hz				
Power consumption		2 W at 24 V DC				4.5 VA at 230 V AC
Indication of operational states						
Supply voltage		U: green LED				
General data						
Ambient temperature rangeoperation / storage		-20...+60 °C / -40...+80 °C				
Temperature coefficient		±150 ppm/°C			±250 ppm/°C	±200 ppm/°C at min. offset ±400 ppm/°C at max. offset
Mounting position		any				
Mounting		DIN rail (IEC/EN 60715), snap-on mounting / screw mounting with adapter				
Electrical connection						
Wire size	rigid	plug-connector with screw terminals 0.2-2.5 mm² (24-12 AWG)				
	fine-strand with(out) wire end ferrule	plug-connector with screw terminals 0.2-2.5 mm² (24-12 AWG)				
Stripping length		7 mm (0.28 inch)				
Tightening torque		0.4 Nm (3.5 ib.in)				
Electromagnetic compatibility						
Interference immunity		EN 61000-6-2				
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (±6 kV / ±8 kV)				
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3	10 V/m				
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (±2 kV / 5 kH)				
powerful impulses (Surge)	IEC/EN 61000-4-5	±2 kV / ±1 kV				
HF line emission	IEC/EN 61000-4-6	10 V				
Interference emission	EN 61000-6-4	Class B				
Isolation data						
Isolation test (between all isolated circuits)		1.5 kV				
Test voltage (between all isolated circuits)		1.5 kV / 50 Hz				

[1] Includes non-linearity and factory setting, influenced by supply voltage and output load.
[2] Detection of an input signal break (fail safe) and resistance > 10 kΩ results in a linearity of ±0.2 %.
[3] When connecting a 2-wire sensor, the terminals J and H have to be jumpered.

Approvals on page 4/4.

Analog signal converters - CC-U range
Technical data

Type			CC-U/STDR		CC-U/RTDR [1]	CC-U/TCR
Input circuits - Analog inputs		**J-H**	**Current**	**Voltage**	**Temperature sensors**	**Thermocouples (IEC 584-1 and 2)**
Measuring signal / input range			0-20 mA 4-20 mA	0-1 V / 1-5 V 0-10 / ±10 V	PT100	TC.K, TC.J TC.T, TC.S
Input resistance			approx. 50 Ω	approx. 1.5 MΩ		
Adjustable threshold			2-100 % of selected input range			
Adjustable hysteresis			5-50 % of threshold			
Repeat accuracy (constant parameters)			±0.5 % of full-scale			
Output circuits - Relay outputs		**E-D-F, B-C-A**	**Relay, 2 c/o contacts**			
Rated switching voltage			250 V AC			
Rated switching current	AC-12 (resistive) 230 V		4 A			
	AC-15 (inductive) 230 V		3 A			
	DC-12 (resistive) 24 V		4 A			
	DC-13 (inductive) 24 V		2 A			
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)		B 300			
	max. rated operational voltage		300 V AC			
	max. continuous thermal current at B 300		5 A			
	max. making/breaking apparent power at B 300		3600/360 VA			
Minimum switching voltage			12 V			
Minimum switching current / power			10 mA / 0.6 VA (W)			
Response time			10 ms			
Mechanical lifetime			30 x 10^6 switching cycles			
Electrical lifetime	at AC-12, 230 V, 4 A		0.1 Mio. switching cycles			
Supply circuits		**K-M**	**DC versions**		**AC versions**	
Rated supply voltage			24-48 V DC		110-240 V AC	
Supply voltage range			24-48 V DC / 24 V AC		110-240 V AC / 100-300 V DC	
Supply voltage tolerance			DC: -15...+15 %		AC: -15...+10 %	
Rated frequency			0 Hz or 50/60 Hz			
Power consumption			2 W at 24 V DC		4.5 VA at 230 V AC	
Indication of operational states						
Supply voltage			U: green LED			
1st / 2nd output relay energized			R1: yellow LED / R2: yellow LED			
General data						
Ambient temperature range	operation / storage		-20...+60 °C / -40...+80 °C			
Temperature coefficient			±300 ppm/°C			
Mounting position			any			
Mounting			DIN rail (IEC/EN 60715), snap-on mounting / screw mounting with adapter			
Electrical connection						
Wire size	rigid		plug-connector with screw terminals 0.2-2.5 mm^2 (24-12 AWG)			
	fine-strand with(out) wire end ferrule		plug-connector with screw terminals 0.2-2.5 mm^2 (24-12 AWG)			
Stripping length			7 mm (0.28 inch)			
Tightening torque			0.4 Nm (3.5 ib.in)			
Electromagnetic compatibility						
Interference immunity			EN 61000-6-2			
electrostatic discharge (ESD)	IEC/EN 61000-4-2		Level 3 (±6 kV / ±8 kV)			
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3		10 V/m			
fast transients (Burst)	IEC/EN 61000-4-4		Level 3 (±2 kV / 5 kH)			
powerful impulses (Surge)	IEC/EN 61000-4-5		±2 kV / ±1 kV			
HF line emission	IEC/EN 61000-4-6		10 V			
Interference emission	EN 61000-6-4		Class B			
Isolation data						
Insulation voltage (between all isolated circuits)			2.5 kV			
Test voltage (between all isolated circuits)			2.5 kV			

[1] When connecting a 2-wire sensor, the terminals J and H have to be jumpered.

Approvals on page 4/4.

Analog signal converters - CC-U range
Technical data

Type		CC-U/I	CC-U/V
Input circuits - Analog inputs	**J-G-H**	**any current signals, RMS measurement**	**any voltage signals, RMS measurement**
Rated input range		0-1 A 0-5 A	0-100 V, 0-150V, 0-250 V 0-300 V, 0-400 V, 0-450 V 0-550 V, 0-600 V
Measuring frequency		0-600 Hz	
Overload capacity of inputs	input range 1	10 x I_{Nom} (10 A) for max. 2 s	-
	input range 2	10 x I_{Nom} (50 A) for max. 2 s	-
Gain adjustment range		±15 %	
Offset adjustment range		±20 %	
Input impedance / resistance		1A: 60 mΩ, 5 A: 12 mΩ	> 800 kΩ
Output circuits - Analog outputs	**D-F, A-C**	**Current**	**Voltage**
Output signal		0-20 mA, 4-20 mA	0-5 V, 1-5 V, 0-10 V, 2-10 V, ± 10 V
Output load		≤ 600 Ω	≥ 4.7 KΩ
Accuracy[1)]		±0.5 % of full-scale	
Temperature coefficient		±250 ppm/°C max.	±300 ppm/°C max.
Residual ripple		< 0.15 %	
Response time		150 ms	
Supply circuits	**K-M**	**DC versions**	**AC versions**
Rated supply voltage		24-48 V DC	110-240 V AC
Supply voltage range		24-48 V DC, 24 V AC	110-240 V AC, 100-300 V DC
Supply voltage tolerance		DC: -15...+15 %	AC: -15...+10 %
Rated frequency		0 Hz or 50/60 Hz	
Power consumption		2 W at 24 V DC	4.5 VA at 230 V AC
Indication of operational states			
Supply voltage		U: green LED	
General data			
Ambient temperature range	operation / storage	-20...+60 °C / -40...+80 °C	
Mounting position		any	
Mounting		DIN rail (IEC/EN 60715), snap-on mounting / screw mounting with adapter	
Electrical connection			
Wire size	rigid	plug-connector with screw terminals 0.2-2.5 mm2 (24-12 AWG)	
	fine-strand with(out) wire end ferrule	plug-connector with screw terminals 0.2-2.5 mm2 (24-12 AWG)	
Stripping length		7 mm (0.28 inch)	
Tightening torque		0.4 Nm (3.5 lb.in)	
Standards			
Product standard		-	
Low Voltage directive		2006/95/EC	
EMC directive		2004/108/EC	
RoHS directive		2011/65/EC	
Electromagnetic compatibility			
Interference immunity		EN 61000-6-2	
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (±6 kV / ±8 kV)	
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3	10 V/m	
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (±2 kV / 5 kH)	
powerful impulses (Surge)	IEC/EN 61000-4-5	±2 kV / ±1 kV	
HF line emission	IEC/EN 61000-4-6	10 V	
Interference emission	EN 61000-6-4	Class B	
Isolation data			
Insulation voltage (between all isolated circuits)		1.5 kV	
Test voltage (between all isolated circuits)		1.5 kV / 50 Hz	


[1)] Includes non-linearity and factory setting, influenced by supply voltage and output load.

Approvals on page 4/4.


Analog signal converters - CC-U range
Technical diagr., Connection diagr., Dimensional drawings

Technical diagrams
Load limit curves CC-U/xxR


Resistive AC load




Resistive DC load



Derating curve




Connection diagram CC-U/x
Width 22.5 mm (0.89 in)

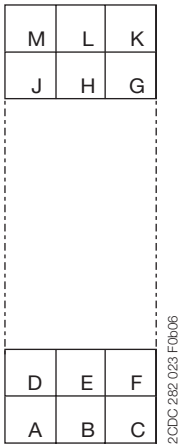

Dimensional drawings Dimensions in mm and inches

CC-U/x , CC-U/xR



Serial data converters
Product picture



Serial data converters
Table of contents

Serial data converters

Benefits and advantages 4/35
Selection table 4/36
Ordering details 4/37
Technical information 4/38
Technical data 4/46

Serial data converters
Benefits and advantages

ILPH RS 232 - 485 / Ethernet
- Electrical isolation between power supply and input/output
- RS232 on SUBD 9 points or screw connectors
- RS485 on removable screw connectors
- Ethernet 10/100 Mbit/s, RJ45 connector
- Power supply 10-34 VDC and 10-24 VAC
- Possible to have a redundant 10-34 VDC power supply
- Economic with low consumption
- Up to 100m with CAT5 cable without Hub or Switch
- Good EMC characteristics
- Up to 2 Modbus®\TCP Masters

Available modes:
- Modbus®\TCP to Modbus® RTU
- Transparent Client or Server mode
- SMTP mode (Mail mode)

Standards: TPC/IP, TELNET, DHCP, FTP
- Specifics functions in Modbus® protocol:
- Concentrator (Asynchronous mode) up to 1200 words
- AC31 programming
  Modbus® Easy Net mode : this mode could be used to exchange data without a Modbus®/TCP master. The data are logged in a table and could be distributed to one or all the others e-ILPH participants on Ethernet.

ILPH RS 232 / RS 422 - 485
- Electrical isolation between power supply and input/output
- RS 485 switch on 2 or 4 wires
- Baudrate up to 38.4 kbit/s
- Transmission distance up to 1200 m
- RS 485 1 or 2 pair handling
- Usable in "noisy" environments
- 24...48 V DC and 115...230 V AC power supply
- CE marked

ILPH RS 422 - 485 / RS 422 - 485
Electrical isolated connection between an RS 422-485 (1 or 2 pairs) and an RS 422 485 (1 or 2 pairs) serial link. It amplifies the signal beyond the 1200 m limit distance of the RS 422-485 and only needs a minimum of 1.5 character delay time to switch off the RS 485 drivers.
- Electrical isolation between power supply/output and input/output
- Baudrate up to 500 kbit/s (up to 200 m)
- Transmission distance up to 1200m at 38.4 kbit/s
- Usable in "noisy" environments
- 2/4 wires automatic handling
- 24 V DC power supply
- CE marked

ILPH RS 232 / RS 422 - 485
RS 232 to RS 422-485 serial link with or without electrical isolation
- Baudrate up to 38.4 kbit/s
- Transmission distance up to 1200 m
- RS 485 1 or 2 pair handling
- Usable in "noisy" environments
- 24 V DC power supply
- CE marked

ILPH RS 485 / FO
Converter for RS 485 (1 pair) to optical fiber serial link glass.
- Electrical isolation between power supply and input/output
- Baud rate up to 1.5 Mbit/s
- Transmission distance up to 4 km
- Usable in "very noisy" environments
- 20...42 V AC/DC power supply
- CE marked

ILPH RS 232 / CL
Electrical isolated Converter for RS 232 to current loop serial link.
- Electrical isolation between power supply/current loop and RS 232/current loop
- Active/Passive 0...20 mA / 4...20 mA selectable
  Positive or negative logic selectable
- Baudrate up to 38.4 kbit/s
- Transmission distance up to 1200 m
- Usable in "noisy" environments
- 24 V DC power supply
- CE marked

ILPH RS 232 / RS 232
3 way electrical isolator between RS 232 serial interface and another RS 232 serial interface.
- Ensures triple insulation between the 2 serial interfaces and between each and power supply
- Baudrate up to 19.2 kbit/s (up to 64 kbit/s depending on cable)
- Transmission distance up to 15 m
- Can be used in "noisy" environments
- Power supply from 24...48 V DC and 115...230 V AC CE marking

ILPH RS 232 / FO
- Converter for RS 232 to fiber optical serial link glass.
- Electrical isolation between power supply and input/output
- Baud rate up to 115.2 kbit/s
- Transmission distance up to 4 km
- Usable in "very noisy" environments
- 20...42 V AC/DC power supply
- CE marked

ILPH CL / RS 422 - 485
Electrical isolated converter for current loop to RS 422-485 (1 or 2 pairs) serial link.
- Electrical isolation between power supply/current loop and RS 422-485/current loop
- Active/passive 0...20 mA / 4...20 mA selectable
  Positive or negative logic selectable
- Baudrate up to 38.4 kbit/s (up to 2400 m)
  Transmission distance up to 2400 m (1200 m RS 485 and 1200 m current loop)
- Usable in "noisy" environments
- 24 V DC power supply
- CE marked

Serial data converters
Selection table

	RS 232	RS 422 / RS 485	CL	FO-S	Ethernet	24 V DC	24-48 V DC	110-240 V AC	24-42 V AC/DC	10-34 VDC, 10-24 VAC	Insulation IN=Input PS=Power supply Out=Output Wi=Without insulation	Part numbers
RS 232	■						■				In-Ps-Out	1SNA 684 234 R2000
		■				■					Wi	1SNA 684 231 R2500
		■				■					In-Out	1SNA 684 233 R2700
		■					■				In-Ps-Out	1SNA 684 333 R2300
		■						■			In-Ps-Out	1SNA 684 334 R2400
			■			■					In-Out	1SNA 684 202 R0100
				■					■		In-Ps-Out	1SNA 684 236 R2200
RS 422/RS485		■				■					In-Out	1SNA 684 212 R2200
			■			■					In-Out	1SNA 684 232 R2600
RS 485				■					■		In-Ps-Out	1SNA 684 246 R0400
RS 232 / RS 485					■					■	In-Ps-Out	1SNA 684 252 R0200

RS 232 - EIA-232 / V.24 / V.28
- Point-to-point connection
- Max. 15 m transmission distance
- Rate up to 19.2 kbit/s
- Full-duplex

RS 422 - EIA-422 / V.11
- Point-to-point connection
- (1 Transmitter - 10 Receivers)
- Differential voltage transmission
- Full-duplex
- Up to 1200 m/ 10 Mbit/s
- Good EMC characteristics

Current loop(TTY)
- Point-to-point / multi-point connection
- Active or passive current loop
- Full-duplex
- Up to 1200 m/19.2 kBit/s
- Good EMC characteristics

RS 485 - ISO/IEC/EIA-485
- Multi-point connection up to 32 units
- Differential voltage transmission
- Half-duplex on 1 pair
- Full-duplex on 2 pairs
- Up to 1200 m / 10 Mbit/s
- Good EMC characteristics

Optical fiber interface
- Point-to-point connection
- Full-duplex
- From 40 m up to 4km transmission distance
- Excellent EMC characteristics

Ethernet Interface
- Point to point connexion or multipoint connection.
- Up to 100 m using CAT5 cable without Hub or Switch
- 10/100 Mbit/s
- Good EMC characteristics

Serial data converters
Ordering details



ILPH RS 232-RS 485 / Ethernet




ILPH RS 232 / RS 422-485

Ordering details


Description	Type	Order code	Price	Weight (1 pce) kg (lb)
Serial data converter e-ILPH	ILPH RS 232-RS 485 / Ethernet	1SNA684252R0200		0.12 (0.265)
Serial link interface without electrical isolation	ILPH RS 232 / RS 422-485	1SNA684231R2500		0.1 (0.220)
Serial link interface with electrical isolation	ILPH RS 232 / RS 422-485	1SNA684233R2700		0.1 (0.220)
Serial link interface 3 way electrical isolation	ILPH RS 232 / RS 422-485 (24-48 V DC power supply)	1SNA684333R2300		0.1 (0.220)
	ILPH RS 232 / RS 422-485 (115-230 V AC power supply)	1SNA684334R2400		
Serial link interface 3 way electrical isolation	ILPH RS 232 / RS 232 (24-48 V DC power supply)	1SNA684234R2000		0.1 (0.220)
	ILPH RS 232 / RS 232 (115-230 V AC power supply)	1SNA684234R0200		
Serial link interface with electrical isolation	ILPH RS 422 - 485 / RS 422 - 485 (24 V DC power supply)	1SNA684212R2200		0.1 (0.220)
Serial link interface 3 way electrical isolation	ILPH RS 232 / FO-S (24...42 V AC/DC power supply)	1SNA684236R2200		0.15 (0.331)
Serial link interface 3 way electrical isolation	ILPH RS 485 / FO-S (24...42 V AC/DC power supply)	1SNA684246R0400		0.15 (0.331)
Serial link interface with electrical isoaltion	ILPH BdC /RS 422 - 485 (24 V DC power supply)	1SNA684232R2600		0.1 (0.220)
Serial link interface with electrical isolation	ILPH RS 232 (24 V DC power supply)	1SNA684202R0100		0.1 (0.220)


Serial data converters
Technical information

ILPH RS 232 - 485 Ethernet
1SNA684252R0200




SubD9 connector
pin 2 = RX
pin 3 = TX
pin 5 = GND
pin 7 = RTS




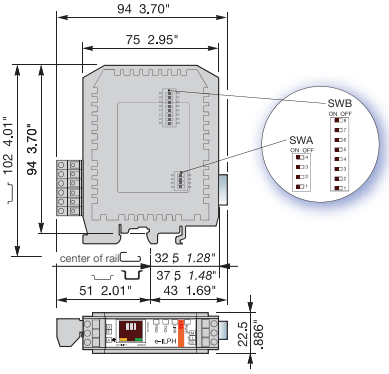

ILPH RS 232 / RS 422-485 (without isolation)
1SNA684231R2500




RS 422 - RS 485 SERIAL LINK (2 wires)

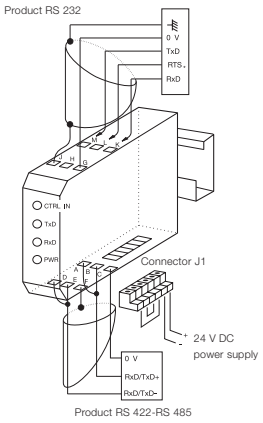


*CAUTION:
When the RTS Signal is not activated, M terminal (RxD ILPH) has to be connected to L terminal (CTRL IN).

RS 422 - RS 485 SERIAL LINK (4 wires)

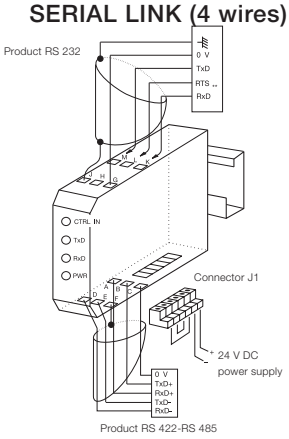

** CAUTION :
To be connected to 2 wired RS 485 only (not possible for 4 wired RS 422).
When the RTS Signal is not activated, M terminal (RxD ILPH) has to be connected to L terminal (CTRL IN).

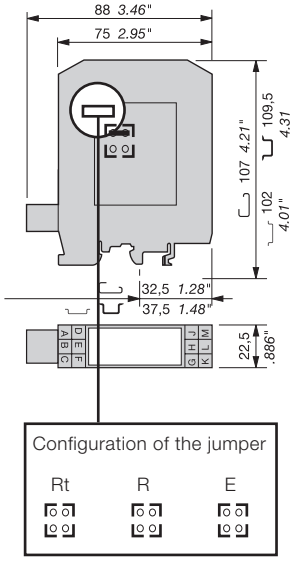

RS 485 LINK ON ONE PAIR

without isolation	R		R ON/ OFF	Jumper R in position RON/OFF
	E		E ON/ OFF	Jumper E in position EON/OFF

The Receiver and the Transmitter are activated alternately (never at the same time) depending on the status of the CTRL IN signal.

CTRL IN STATUS	ACTION ON RS 485
0 logic (+3V ≤ U ≤ +25V)	Transmitter active / Receiver inactive
1 logic (-25V ≤ U ≤ -3V)	Transmitter inactive / Receiver active
High impedance	Transmitter inactive / Receiver active

NOTE : For RS 232 products running the RTS (REQUEST TO SEND) signal, connect RTS to CTRL IN. Otherwise, connect M (RxD ILPH) to L (CTRL IN).

POLARIZATION OF THE RS 422 - RS 485 LINE

The line must always be polarized.
The ILPH is used to polarize the reception channel :

Connection by 1 wire	P+ (J1.1) with 5V (J1.4)
Connection by 1 wire	P- (J1.2) with 0V (J1.3)

RS 485 LINK ON TWO PAIRS

without isolation	R		R ON	Jumper R in position RON
	E		E ON/ OFF	Jumper E in position EON/OFF

Receiver permanently active
Transmitter controlled by the signal CTRL IN (see table for Transmitter operation as a function of CTRL IN)

RS422 LINK ON TWO PAIRS

without isolation	R		R ON	Jumper R in position RON
	E		E ON	Jumper E in position EON

The Transmitter and Receiver are both permanently active.


ADAPTING THE RS 422 - RS 485 LINE

The line must always be adapted to the level of the reception channel of each subscriber forming the end of the bus. The ILPH is used to adapt the reception channel by setting the jumper Rt correctly :


Rt		* Line adaptation, Rt = 120 Ω (general case)
		* Line adaptation, Rt = 220 Ω
		* No line adaptation, Rt = ∝

Serial data converters
Technical information

ILPH RS 232 / RS 422-485 (with isolation)
1SNA684233R2700




RS 422 - RS 485 WIRE SERIAL LINKS

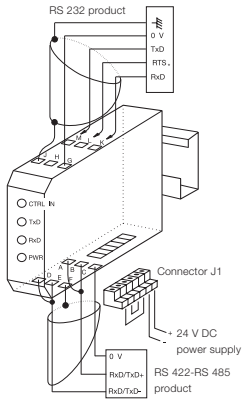


* **CAUTION** :
If the RTS signal is not generated, connect M (RxD ILPH) to L (CTRL IN).

RS 422 - RS 485 WIRE SERIAL LINKS

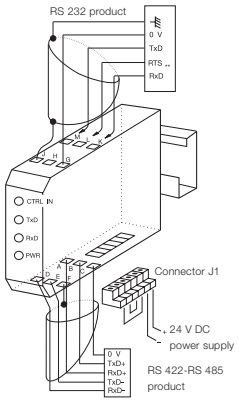

** **CAUTION** :
Only to be connected for RS 485 two pairs (of no use for RS 422 two pairs).
If the RTS signal is not generated, connect M (RxD ILPH) to L (CTRL IN).

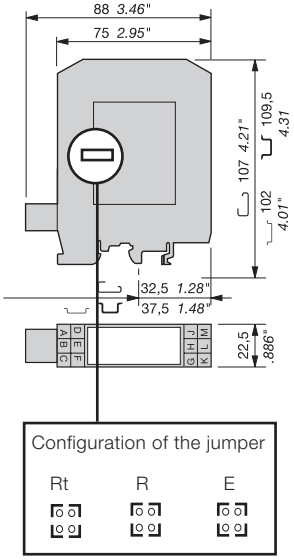

RS 485 LINK ON ONE PAIR

Isolated	R		R ON/ OFF	Jumper R in position RON/OFF
	E		E ON/ OFF	Jumper E in position EON/OFF

The Receiver and the Transmitter are activated alternately (never at the same time) depending on the status of the CTRL IN signal.

CTRL IN STATUS	ACTION ON RS 485
0 logic (+3 V ≤ U ≤ +25 V)	Transmitter active / Receiver inactive
1 logic (-25 V ≤ U ≤ -3V)	Transmitter inactive / Receiver active
High impedance	Transmitter inactive / Receiver active

NOTE : For RS 232 products running the RTS (REQUEST TO SEND) signal, connect RTS to CTRL IN. Otherwise, connect M (RxD I LPH) to L (CTRL IN).

POLARIZATION OF THE RS 422 - RS 485 LINE

The line must always be polarized.
The ILPH is used to polarize the reception channel :

Connection by 1 wire	P+ (J1.1) with 5V (J1.4)
Connection by 1 wire	P- (J1.2) with 0V (J1.3)

RS 485 LINK ON TWO PAIRS

Isolated	R		R ON	Jumper R in position RON
	E		E ON/ OFF	Jumper E in position EON/ OFF

Receiver permanently active
Transmitter controlled by the signal CTRL IN (see table for Transmitter operation as a function of CTRL IN)

RS422 LINK ON TWO PAIRS

Isolated	R		R ON	Jumper R in position RON
	E		E ON	Jumper E in position EON


The Transmitter and Receiver are both permanently active.


ADAPTING THE RS 422 - RS 485 LINE

The line must always be adapted to the level of t he reception channel of each subscriber forming the end of the bus. The ILPH is used to adapt the reception channel by setting the jumper Rt correctly :


Rt		* Line adaptation, Rt = 120 Ω (general case)
		* Line adaptation, Rt = 220 Ω
		* No line adaptation, Rt = ∝

ILPH RS 232 / RS 422 - 485 (eletrical isolated)
1SNA684333R2300, 1SNA684334R2400



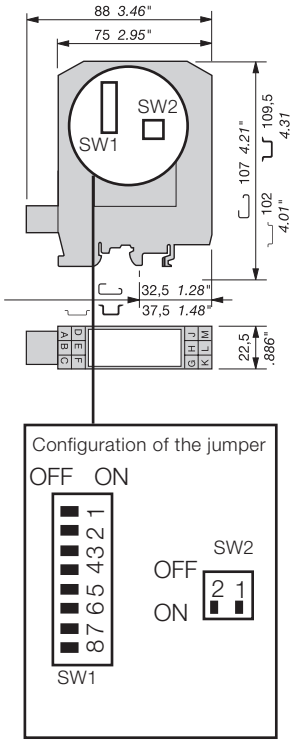

RS 422 - RS 485
2 WIRE SERIAL LINK

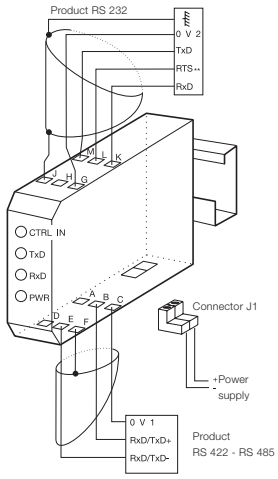

***CAUTION :**
When the RTS signal is not generated, set SW2-1 in position ON.


RS 485 LINK ON ONE PAIR
Set SW1-1, SW1-3, SW1-6, SW1-7 and SW1-8 to position ON. The receiver and the transmitter are activated alternately (never at the same time), depending on the status of the CTRL IN signal.

CTRL IN STATUS	Action on RS 485
0 Logic (3 V ≤ U ≤ + 25 V)	Transmitter active / Receiver inactive
1 Logic (-25 V ≤ U ≤ -3 V)	Transmitter inactive / Receiver active
High impedance	Transmitter inactive / Receiver active

CAUTION : For RS 232 products running the RTS signal (REQUEST TO SEND), connect RTS to CTRL IN.
Otherwise, set SW2-1 to position ON.

RS 485 LINK ON TWO PAIRS
Set SW1-1, SW1-3, SW1-7 in position OFF.
Set SW1-6, SW1-8 in position ON.
The receiver is permanently active.
The transmitter is controlled by the signal CTRL IN (see table for transmitter operation as a fonction of CTRL IN).

RS 422 - RS 485
4 WIRE SERIAL LINKS

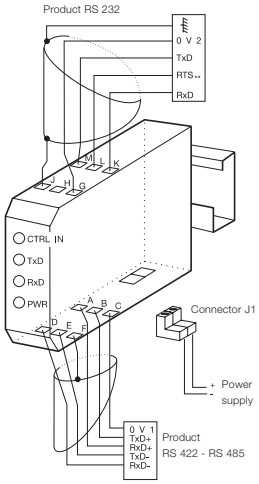

****CAUTION :**
Only to be connected for RS 485 two pairs (of no use for RS 422 two pairs).
If the RTS signal is not generated, set SW2-1 in position ON.


RS 422 LINK ON TWO PAIRS
Set SW1-1, SW1-3, SW1-7 and SW1-8 in position OFF.
Set SW1-6 in position ON.
Transmitter and receiver are both permanently active.


POLARIZATION OF THE RS 422 - RS 485 LINE
The line must always be polarized.
The ILPH is used to polarize the reception channel.
Set SW1-4 and SW1-5 in position ON.


ADAPTING THE RS 422 - RS 485 LINE
The line must always be adapted to the level of the reception channel of each subscriber forming the end of the bus.
The ILPH is used to adapt the reception channel by setting the jumper SW1-2 correctly :
SW1-2 in position ON ⇒ line adaptation
Rt = 120 Ω (standard)
SW1-2 in position OFF ⇒ no line adaptation
Rt = ∝

Serial data converters
Technical information


ILPH RS 232 / RS 232 (eletrical isolated)
1SNA684234R2000, 1SNA684244R0200




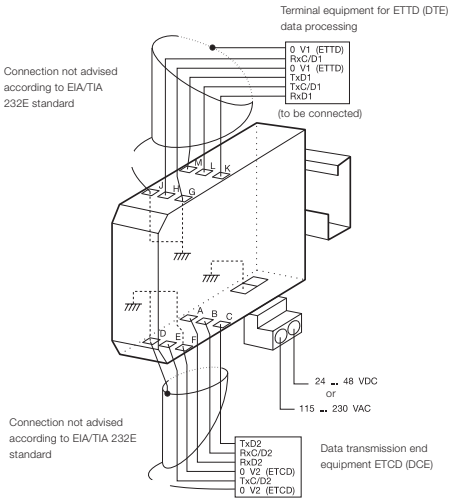


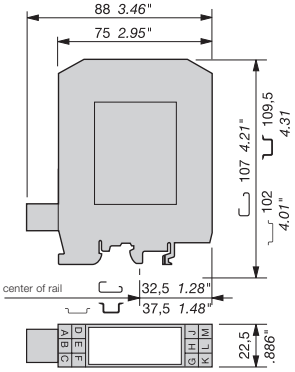

ILPH RS 232 / FO
1SNA684236R2200




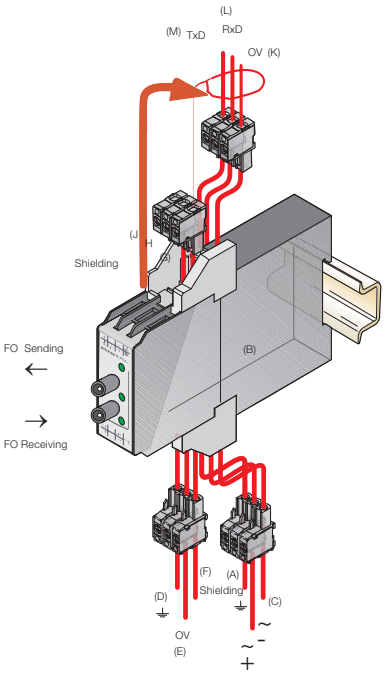





Serial data converters
Technical information

ILPH RS 485 / FO
1SNA684246R0400



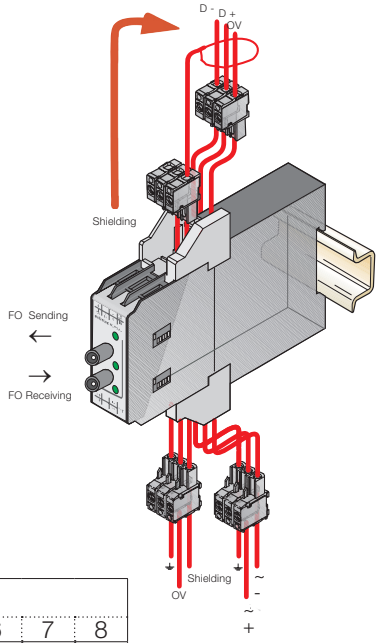

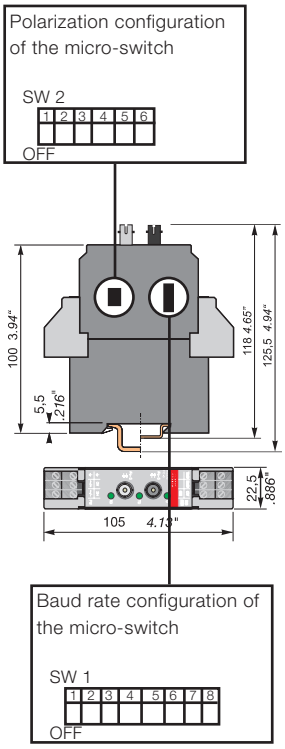


Baud rate:
SW1 DIP switch configuration

Baudrate bit/s	SW 1							
	1	2	3	4	5	6	7	8
1500000		■		■	■			
500000	■		■		■			
375000	■	■				■		
187500	■		■		■	■		
136000		■				■		
115200		■	■		■	■		
93750	■	■	■	■			■	
75000	■		■	■		■	■	
57600			■	■	■	■	■	
38400			■		■	■		
19200	■		■			■	■	
9600		■					■	
4800		■	■	■	■	■		■
300			■					■

End-of-line resistor, polarization:
SW2 DIP switch configuration

Baudrate bit/s	SW 2					
	1	2	3	4	5	6
Polarization		■	■			
EOL 60 ohm				■	■	■
EOL 120 ohm					■	■
EOL 180 ohm				■	■	
EOL 240 ohm					■	
EOL indefinite						

ILPH RS 422 - 485 / RS 422 / - 485
1SNA684212R2200




	INT 1	INT 2	INT 3	INT 4
BAUD RATE	1234	1234	1234	123456
FULL DUPLEX	0000	0000	XXX1	XXX101
500 Kb/s	1111	1111	XXX0	XXX000
187.5 Kb/s	1111	1110	XXX0	XXX000
93.75 Kb/s	1111	1100	XXX0	XXX000
38.4 Kb/s	1111	1000	XXX0	XXX000
19.2 Kb/s	1111	0000	XXX0	XXX000
9.6 Kb/s	1110	0000	XXX0	XXX000
4.8 Kb/s	1100	0000	XXX0	XXX000
2.4 Kb/s	1000	0000	XXX0	XXX000
1.2 Kb/s	0000	0000	XXX0	XXX000


N_U = not used
X = zero

1 = contact closed
0 = contact open (aus) (off)


RS 422 - RS 485 2 wire serial link

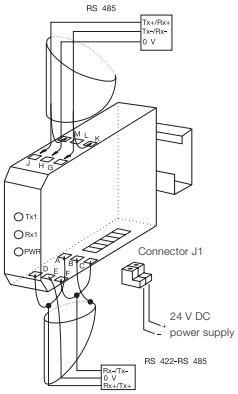

RS 422 - RS 485 4 wire serial link

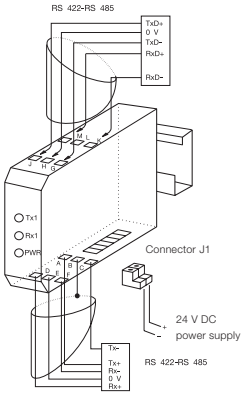

Caution :
The transmission channels of both RS 422 - RS 485 serial link interfaces always have to be independently polarized.

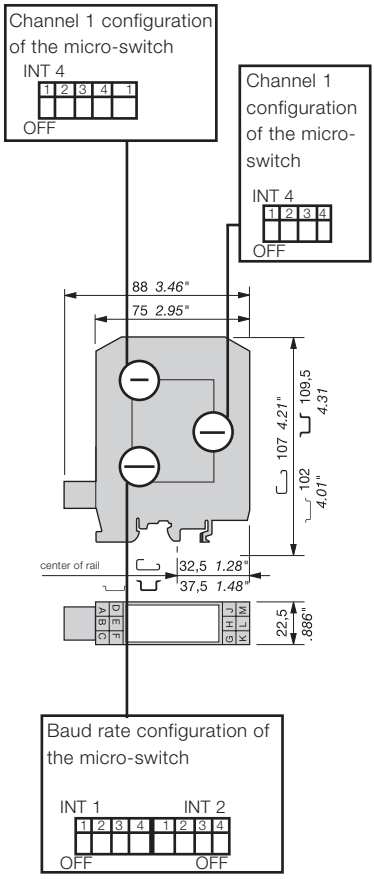


RS 422 - RS 485 DRIVERS CONTROL

The RS 422 - RS 485 Drivers Control (transmitters and receivers) makes the ILPH easy to use. The control of the 2 channels is completely automatic ; you only have to configure the baud rate needed. The minimum turn off delay is about 1.5 character/ time from 27 µs to 10 ms depending on the baud rate selected.

POLARIZATION OF THE RS 422 - RS 485 CONNECTIONS


The connections must always be polarized. The ILPH is used to polarize the reception channels:

INT 3



INT 3.1 / INT 3.2 } "ON", polarizes the reception channel Rx2

INT 4




INT 4.1 / INT 4.2 } "ON", polarizes the reception channel Rx1


ADAPTING THE RS 422 - RS 485 CONNECTIONS

The connections must always be adjusted to the level of the reception channel of each subscriber forming the end of the bus. The ILPH is used to adjust the reception channel by setting the micro-switch INT 3.3 and INT 4.3.

INT 3




INT 4



INT 3.3 and INT 4.3 "ON" 120 Ω set adjustment

BAUD RATE

By using the 8 micro-switches inside the box.




Permits to define up to 8 transmission speeds and to select the Full Duplex operation mode (RS 422 / RS 422) in addition with the INT 3.4 INT 4.4 and INT 4.5 micro switches.

Serial data converters
Technical information

ILPH CL / RS 422 - 485
1SNA684232R2600

LINE AMPLIFIER CONFIGURATION

Configuration of amplifiers of the RS 422 - RS 485 (Receiver, Transmitter) line provides greater flexibility of use.The various configurations can be selected using the 2 jumpers (R INT2, E INT1) located inside the box.



RS 485 LINK ON ONE PAIR

R INT2 R ON — R ON/OFF Jumper R in position R ON/OFF
E INT3 E ON / OFF — E ON/OFF Jumper E in position E ON/OFF

The Receiver and the Transmitter are activated alternately (never at the same time) depending on the status of the Current Loop Reception signal.

RS 485 LINK ON TWO PAIRS

R INT2 R ON — R ON Jumper R in position R ON
E INT3 E ON / OFF — E ON/OFF Jumper E in position E ON/OFF


Receiver permanently active. Transmitter controlled by the Current Loop Reception signal.

RS 422 LINK ON TWO PAIRS

R INT2 R ON — R ON Jumper R in position R ON
E INT3 E ON — E ON Jumper E in position E ON


The Receiver and the Transmitter are both permanently active.

RS 422 - RS 485 4 wire serial link

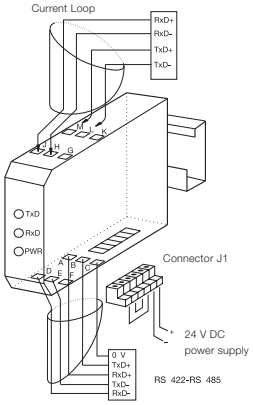

Note :
The TxD channel of the RS 422 - RS 485 link must be polarized independently too.

RS 422 - RS 485 2 wire serial link

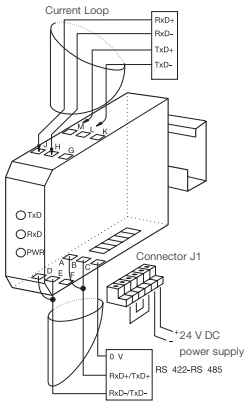

CONNECTIONS

Example of connection with a CL (current Loop) product, Transmission (TxD) in active mode and Reception (RxD) in passive mode.
Then, the ILPH must be configured and connected Reception (RxD) in passive mode and Transmission (TxD) in active mode.
Note : For any other configuration, see schematic diagram or front sticker of the product.


POLARIZATION OF THE RS 422 - RS 485 LINE

The line must always be polarized. The ILPH is used to polarize the reception channel :
Connection by 1 wire P+ (J1.1) with 5 Viso (J1.4)
Connection by 1 wire P- (J1.2) with 0 Viso (J1.3)


ADAPTING THE RS 422 - RS 485 LINE


The line must always be adapted to the level of the reception channel of each subscriber forming the end of the bus. The ILPH is used to adapt the reception channel by setting the jumper Rt correctly :

Rt INT1 — * Line adaptation, Rt = 120 Ω (Standard)
Rt INT1 — * No line adaptation, Rt = ∞



Transmission (TxD) active
Transmission(TxD) passive
Reception (RxD) active
Reception (RxD) passive
4...20 mA Signal
0...20 mA Signal
Signal logic 1 = 20 mA
Signal logic 0 = 20 mA



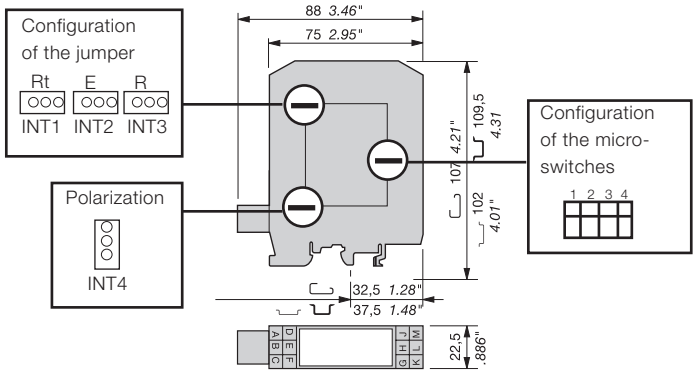


POLARIZATION


The polarization can be configured using the INT4 jumper.

INT4 Protection ON
INT4 Protection OFF, used if power supply at minimum value (21.6 V).

Serial data converters
Technical information

ILPH RS 232 / CL
1SNA684202R0100

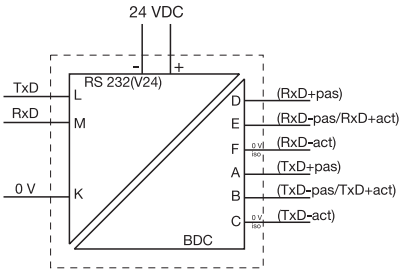

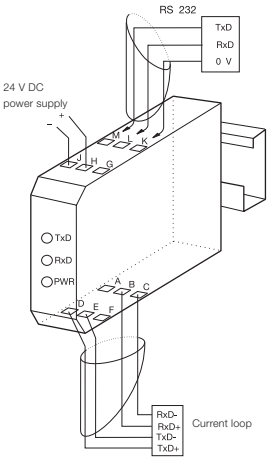

CONNECTIONS

Example of connection with a CL (Current Loop) product, Transmission (TxD) in active mode and Reception (RxD) in passive mode. Then, the ILPH must be configured and connected Reception (RxD) in passive mode and Transmission (TxD) in active mode.

CAUTION: For any other configuration, see schematic diagram or front sticker of the product.

CONFIGURATION

The various configurations can be selected using the 4 micro-switches located inside the box.

OPERATING MODE ACTIVE OR PASSIVE


The Current Loop's Transmission and Reception can be independently in active or passive mode.
Select operating mode using **S1** and **S2**.



S1 Transmission(TxD) ON = Active / OFF = Passive
S2 Reception (RxD) ON = Active / OFF = Passive

SIGNAL LEVEL

Select signal level 4-20 mA or 0-20 mA. This selection is made using micro-switch S3




S3 ON = 4-20 mA / OFF = 0-20 mA

Caution : It is not possible to select a 4-20 mA signal when the Reception is in active mode.

LOGIC LEVEL


Configuration: Positive logic (0 Logic = 20 mA)
or negative logic (1 Logic = 20 mA)

using micro-switch S4



S4 ON = (1 = 20 mA) / OFF = (0 = 20 mA)

ILPH RS 232 / CL

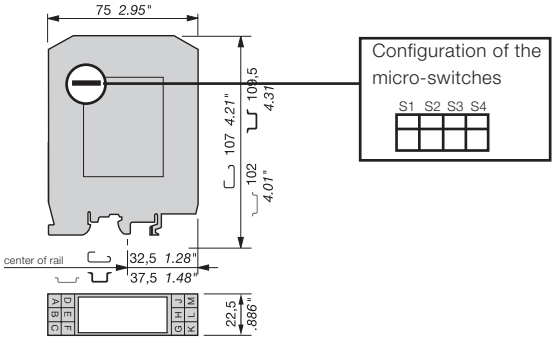

Serial data converters
Technical data

Technical data
Data at T_a = 25 °C and rated values, unless otherwise indicated

	ILPH RS 232 - 485 / Ethernet
Power supply 1	
Voltage	10...34 V DC, 10...24 V AC
Voltage tolerance	-10%, +10%
Consumption	2 W max
Connections	coding screw removable connector 0 to 2.5 mm² (22-14 AWG)
Power supply 2	
Voltage	10...34 V DC
Voltage tolerance	-10%, +10%
Consumption	2 W max
Connections	screw connector (AWG 20)
Serial link 1: RS 232	EIA RS 232
Overvoltage protection	integrated
Baud rate / Transmission distance	max. 115.2 kbits/s / max. 15 m
Connections	2.5 mm² screw connector (AWG 20) or male SubD 9 points
Serial link 2: RS 485	EIA RS 485
Voltage	integrated
Line polarization	integrated
End line resistance	integrated
Baud rate / Transmission distance	max. 115.2 kbits/s / max. 1200 m
Connections	coding screw removable connector 0 to 2.5 mm² (22-14 AWG)
Ethernet link	
Overvoltage protection	integrated
Baud rate / Transmission distance	10-100 Mbits/s / max. 100 m without Hub or Switch with CAT5 cable
Connections	RJ45 connector
Traffic indication	
Voltage	1 yellow LED
Status of signal	3 green LED (RxD, TxD, LINK), 2 amber or green LED (Speed, Activity)
EMC behavior	
Electrostatic discharge	EN 61000-4-2
Radiated electromagnetic field	EN 61000-4-3
Burst	EN 61000-4-4
Surge	EN 61000-4-5
Electromagnetic compatibility	EN 55022
Other characteristics	
Electrical isolation between serial link / power supply / Ethernet link	750 VDC / 1500 VAC
Configuration of the operating mode	using internal switches or/and software (TELNET or HYPERTERMINAL)
Operating temperature	0°C ... +60°C
Storage temperature	-20°C ... +70°C
Mounting	any required
DIN rail fixing (EN 50002)	snap-on mounting
Wire size	2.5 mm² / stranded with ferrule, 4 mm² solid
Dimensions (WxDxH)	94 x 22.5 x 100 mm
Weight	120 g

Serial data converters
Technical data

Technical data

Data at T_a = 25 °C and rated values, unless otherwise indicated

	ILPH RS 232 / RS 422 - 485 (without isolation)
Power supply	polarized
Voltage	24 V DC
Voltage tolerance	8.5...28 V DC
Supply current	100 mA max
Connections	removable screw connectors (AWG 20)
Serial link 1: RS 232	EIA RS 232 C / CCITT V24 V28
Overvoltage protection	integrated (transil 8 kV 1.2/50 µs)
Baud rate / Transmission distance	max. 38.4 kbits/s / max. 1200 m
Connections	2.5 mm² screw connectors (AWG 20)
Serial link 2: RS 422-485	EIA RS 485 and EIA RS 422 / CCITT V11
Overvoltage protection	integrated (transil 8 kV 1.2/50 µs)
Baud rate / Transmission distance	max. 38.4 kbits / max. 1200 m
Connections	2.5 mm² screw connectors (AWG 20)
Traffic indication	
Voltage	1 yellow LED
Connections	2 green LED (RxD, TxD)
EMC behavior	
Electrostatic discharge	EN 61000-4-2 level 3 6/8 kV
Radiated electromagnetic field	EN 61000-4-3 level 310 V/m
Burst	EN 61000-4-4 level 3 1 kV
Electromagnetic compatibility	EN 55022 class B
Other characteristics	
Electrical isolation between serial link / power supply / Ethernet link	no
Configuration of the operating mode	using internal jumper
Operating temperature	0°C ... +50°C
Storage temperature	-25°C ... +80°C
Mounting	any required
DIN rail fixing (EN 50002)	snap-on mounting
Wire size	2.5 mm² / stranded with ferrule, 4 mm² solid
Dimensions (WxDxH)	88 x 22.5 x 100 mm
Weight	100 g

Serial data converters
Technical data

Technical data

Data at T_a = 25 °C and rated values, unless otherwise indicated

	ILPH RS 232 / RS 422 - 485 (isolated)
Power supply	polarized
Voltage	24 V DC
Voltage tolerance	8.5...28 V DC
Supply current	100 mA max
Connections	Removable screw connectors (Omniconnect)
Serial link 1: RS 232	EIA RS 232 C / CCITT V24 V28
Overvoltage protection	integrated (transil 8 kV 1.2/50µs)
Baud rate / Transmission distance	max. 38.4 kbits/s / max. 15 m
Connections	2.5 mm² screw connectors (AWG 20)
Serial link 2: RS 422-485	EIA RS 485 and EIA RS 422 / CCITT V11
Overvoltage protection	integrated (transil 8 kV 1.2/50 µs)
Baud rate / Transmission distance	max. 38.4 kbits / max. 1200 m
Connections	2.5 mm² screw connectors (AWG 20)
Traffic indication	
Voltage	1 yellow LED
Connections	3 green LED (RxD, TxD and CTRL-IN)
EMC behavior	
Electrostatic discharge	EN 61000-4-2 level 3 6/8 kV
Radiated electromagnetic field	EN 61000-4-3 level 310 V/m
Burst	EN 61000-4-4 level 3 1 kV
Electromagnetic compatibility	EN 55022 class B
Other characteristics	
Electrical isolation between serial link / power supply / Ethernet link	500 V DC
Configuration of the operating mode	using internal jumper
Operating temperature	0°C ... +50°C
Storage temperature	-25°C ... +80°C
Mounting	any required
DIN rail fixing (EN 50002)	snap-on mounting
Wire size	2.5 mm² / stranded with ferrule, 4 mm² solid
Dimensions (WxDxH)	88 x 22.5 x 100 mm
Weight	100 g

Serial data converters
Technical data

Technical data

Data at T_a = 25 °C and rated values, unless otherwise indicated

	ILPH RS 232 / RS 422 - 485 (3 way electrical isolated)	
Power supply	Polarization for DC model	
Voltage	24...48 V DC	115...230 V AC (50/60 Hz)
Voltage tolerance	-15% ... +20%	-15% ... +15%
Supply current	24 V DC<110 mA, 48 V DC<55 mA, 115 V AC<40 mA, 230 V DC<26 mA	
Supply power	~ 3 W	~ 3 VA
Connections	Removable screw connector (Omniconnect)	
Serial link 1: RS 232	EA / TIA RS 232 new revision / CCITT V24 V28	
Overvoltage protection	integrated (transil 8 kV 1.2/50 µs)	
Baud rate / Transmission distance	max. 19,2 kbits/s / max. 15 m / 2500 pF	
Connections	2.5 mm² screw (AWG 20)	
Serial link 2: RS 422-485	EIA / TIA RS 232 new revision / CCITT V24 V28	
Overvoltage protection	integrated (transil 8 kV 1.2/50µs)	
Baud rate / Transmission distance	max. 19.2 kbits/s / max. 15 m	
Connections	2.5 mm² screw (AWG 20)	
Traffic indication		
Voltage	1 yellow LED	
Connections	4 green LED (RxD, RxC/D, TxD, TxC/D)	
EMC behavior		
Electrostatic discharge	EN 61000-4-2 level 3 6/8 kV	
Radiated electromagnetic field	EN 61000-4-3 level 3 10 V/m	
Burst	EN 61000-4-4 level 3 1 kV	
Electromagnetic compatibility	EN 55022 class B	
Other characteristics		
Electrical isolation between RS 232 / Power supply / RSS 422-RS 485	1,5 kV	
Configuration of the operating mode	No	
Operating temperature	0°C ... +50°C	
Storage temperature	-25°C ... +80°C	
Mounting	any required	
DIN rail fixing (EN 50002)	snap-on mounting	
Wire size	2.5 mm² / stranded with ferrule, 4 mm² solid	
Dimensions (WxDxH)	88 x 22,5 x 100 mm	
Weight	100 g	

Serial data converters
Technical data

Technical data
Data at T_a = 25 °C and rated values, unless otherwise indicated

	ILPH RS 232 / RS 232	
Power supply	DC model polarized	
Voltage	24...48 V DC	115...230 V AC (50/60Hz)
Voltage tolerance	-15%...+20%	-15%...+15%
Supply current	24 V DC<155 mA;48 V DC<77 mA;110 V AC<40 mA;230 V DC<26 mA	
Supply power	~ 3.15 W	~ 3.15 VA
Connections	Removable screw connector (Omniconnect)	
Interface 1: RS 232	EIA / TIA RS 232 new revision / CCITT V24 V28	
Overvoltage protection	integrated (transil 8 kV 1.2/50 µs)	
Transmission capacity / Transmission distance	max. 19.2 kbits/s / max. 15 m / 2500 pF	
Connections	2.5 mm² screw (AWG 20)	
Interface 2: RS 232	EIA / TIA RS 232 new revision / CCITT V24 V28	
Overvoltage protection	integrated (transil 8 kV 1.2/50 µs)	
Transmission capacity / Transmission distance	max. 19.2 kbits/s / max. 15 m	
Connections	2.5 mm² screw (AWG 20)	
Traffic indication		
Voltage	1 yellow LED	
Connections	4 green LED (RxD, RxC/D, TxD, TxC/D)	
EMC behavior		
Electrostatic discharge	EN 61000-4-2 level 3 6/8 kV	
Radiated electromagnetic field	EN 61000-4-3 level 3 10 V/m	
Burst	EN 61000-4-4 level 3 1 kV	
Electromagnetic compatibility	EN 55022 class B	
Other characteristics		
Electrical isolation between serial link / power supply / Ethernet link	1.5 kV	
Configuration of the operating mode	No	
Operating temperature	0°C ... +50°C	
Storage temperature	-25°C ... +80°C	
Mounting	any required	
DIN rail fixing (EN 50002)	snap-on mounting	
Wire size	2.5 mm² / stranded with ferrule, 4 mm² solid	
Dimensions (WxDxH)	88 x 22.5 x 100 mm	
Weight	100 g	

Serial data converters
Technical data

Technical data
Data at T_a = 25 °C and rated values, unless otherwise indicated

	ILPH RS 422 - 485 / RS 422 - 485
Power supply	DC model polarized
Voltage	24 V DC
Voltage tolerance	+/-15%
Supply current	120 mA max.
Connections	Removable screw connector (Omniconnect)
Interface 1: RS 422-485	EIA / RS 485 and EIA RS 422 / CCITT V11
Overvoltage protection	integrated (transil 8 kV 1.2/50 µs)
RS 485 data switching	Time switching / Time delay transmission/reception 27 µs ...10 ms
Baud rate / Transmission distance	from 1.2 to 500 kbits/s / max. 1200 m up to 38.4 kbit/s
Connections	2.5 mm² screw (AWG 20)
Interface 2: RS 422-485	EIA / RS 485 and EIA RS 422 / CCITT V11
Overvoltage protection	integrated (transil 8 kV 1.2/50 µs)
RS 485 data switching	Time switching / Time delay transmission/reception 27 µs ...10 ms
Baud rate / Transmission distance	from 1.2 to 500 kbits/s / max. 1200 m up to 38.4 kbit/s
Connections	2.5 mm² screw (AWG 20)
Traffic indication	
Voltage	1 yellow LED
Connections	2 green LED (RxD, TxD,)
EMC behavior	
Electrostatic discharge	EN 61000-4-2 level 3 6/8 kV
Radiated electromagnetic field	EN 61000-4-3 level 3 10 V/m
Burst	EN 61000-4-4 level 3 1 kV
Electromagnetic compatibility	EN 55022 class B
Other characteristics	
Electrical isolation between RS 232 / Power supply / RSS 422-RS 485	500 V DC
Configuration of the operating mode	using internal DIP switches
Operating temperature	0°C ... +50°C
Storage temperature	-25°C ... +80°C
Mounting	any required
DIN rail fixing (EN 50002)	snap-on mounting
Wire size	2.5 mm² / stranded with ferrule, 4 mm² solid
Dimensions (WxDxH)	88 x 22.5 x 100 mm
Weight	100 g

Serial data converters
Technical data

Technical data
Data at T_a = 25 °C and rated values, unless otherwise indicated

	ILPH RS 232 / FO	
Power supplies		
Supply voltage	24...42 V AC/DC (50/60 Hz)	110...240 V AC/DC (50/60 Hz)
Voltage tolerance	-15% ... +10%	-15% ... +10%
Connections	Omniconnect pluggable connector	
Interface 1: RS 232	CCITT V.24/DIN 66020- CCITT V.28 DIN 66259-EIA 232 E	
Protection	Integrated (transil 8 kV 1.2/50µs)	
Max. speed / max. distance	Max. 115.2 kbits/s / max. 15 m / 2500 pF	
Connections	Omniconnect pluggable connector	
Fiber optic interface 2	DIN VDE 0888-1	
Type of fiber / Connections	Multimode fiber Glass : ST connector; Plastic : FSMA screw connector	
Wave length	Glass : 820 nm; Plastic : 655 nm	
Max. transmission power	Glass : 50/125 µm : -14.4 db/m; Glass : 62.5/125 µm : -14 db/m; Plastic : 980/1000 µm : -8 db/m	
Max. reception power	Glass : -28 db/m; Plastic : -20 db/m	
Max. speed	Max. 115.2 kbits/s	
Max. distance	Glass : 50/125 µm : 3 km; Glass : 62.5/125 µm : 4 km; Plastic : 980/1000 µm : 40 m	
Status indication		
Power supply / Data exchange	1 green LED / 2 green LEDs (RxD, TxD)	
EMC behavior		
Electrostatic discharge	EN 61000-4-2 Level 3 6/8 kV	
Radiated electromagnetic field	EN 61000-4-3 Level 3 10 V/m	
Burst	EN 61000-4-4 Level 3 1 kV	
Electromagnetic compatibility	EN 55022 Class B	
Other characteristics		
Electrical isolation input / power supply / output	2.5 kV	
Operating temperature	-20°C ... +60°C	
Storage temperature	-40°C ... +85°C	
Mounting	Onto DIN Rail (EN 50002)	
Connections	14 AWG (2.5 mm²) fine stranded / 12 AWG (4 mm²) rigid	
Dimensions (WxDxH)	105 x 22.5 x 112 mm / 4.13 x 0.89 x 4.41"	
Weight	150 g / 0.33 lb	

Serial data converters
Technical data

Technical data
Data at T_a = 25 °C and rated values, unless otherwise indicated

	ILPH RS 485 / FO	
Power supplies		
Supply voltage	24...42 V AC/DC (50/60 Hz)	110...240 V AC/DC (50/60 Hz)
Voltage tolerance	-15% ... +10%	-15% ... +10%
Connections	Omniconnect pluggable connector	
Interface 1: RS 232	ISO / IEC 8482 / DIN 66 259-4; EIA 485	
Protection	Integrated (transil 8 kV 1.2/50µs)	
Max. speed / max. distance	Max. 1.5 Mbits/s / max. 1200 m (38.4 kbit/s)	
Connections	Omniconnect pluggable connector	
Fiber optic interface 2	DIN VDE 0888-1	
Type of fiber / Connections	Multimode fiber Glass : ST connector; Plastic : FSMA screw connector	
Wave length	Glass : 820 nm; Plastic : 655 nm	
Max. transmission power	Glass : 50/125 µm : -14.4 db/m; Glass : 62.5/125 µm : -14 db/m; Plastic : 980/1000 µm : -8 db/m	
Max. reception power	Glass : -28 db/m; Plastic : -20 db/m	
Max. speed	Max. 1.5 Mbits/s	
Max. distance	Glass : 50/125 µm : 3 km; Glass : 62.5/125 µm : 4 km; Plastic : 980/1000 µm : 40 m	
Status indication		
Power supply / Data exchange	1 green LED / 2 green LEDs (RxD, TxD)	
EMC behavior		
Electrostatic discharge	EN 61000-4-2 Level 3 6/8 kV	
Radiated electromagnetic field	EN 61000-4-3 Level 3 10 V/m	
Burst	EN 61000-4-4 Level 3 1 kV	
Electromagnetic compatibility	EN 55022 Class B	
Other characteristics		
Electrical isolation input / power supply / output	2.5 kV	
Operating temperature	-20°C ... +60°C	
Storage temperature	-40°C ... +85°C	
Mounting	Onto DIN Rail	
Connections	14 AWG (2.5mm²) / fine stranded, 12 AWG (4 mm²) rigid	
Dimensions (WxDxH)	105 x 22.5 x 112 mm / 4.13 x 0.89 x 4.41"	
Weight	150 g / 0.33 lb	

Serial data converters
Technical data

Technical data
Data at T_a = 25 °C and rated values, unless otherwise indicated

	ILPH RS 422 - 485 (for current loop)
Power supply	DC model polarized
Voltage	24 V DC
Voltage tolerance	+/-10%
Supply current	120 mA max.
Connections	Removable screw connector (Omniconnect)
Interface 1: Current loop	active/passive 0...20 mA / 4...20 mA, mode is settable
Logic level	0 = 20 mA or 1 = 20 mA, settable
Baud rate / Transmission distance	max. 38.4 kbit/s / max. 1200 m
Connections	2.5 mm² screw (AWG 20)
Serial link 2: RS 422/485	EIA RS 485 and EIA RS 422 / CCITT V 11
Overvoltage protection	integrated (transil 8 kV 1.2/50 µs)
Baud rate / Transmission distance	max. 38.4 kbit/s / max. 1200 m
Connections	2.5 mm² screw (AWG 20)
Traffic indication	
Voltage	1 yellow LED
Status of signal	2 green LED (RxD, TxD)
EMC behavior	
Electrostatic discharge	EN 61000-4-2 level 2 4/4 kV
Radiated electromagnetic field	EN 61000-4-3 level 3 10 V/m
Burst	EN 61000-4-4 level 1 0.5 kV
Electromagnetic compatibility	EN 55022 class B
Other characteristics	
Electrical isolation between input / output and power supply / output	depending on Current Loop (active/passive); 500 V DC (active) / 2000 V DC (passive)
RS 422-485 power supply	500 V DC
Configuration of the operating mode	using internal DIP switches
Operating temperature	0°C ... +50°C
Storage temperature	-25°C ... +80°C
Mounting	any required
DIN rail fixing (EN 50002)	snap-on mounting
Wire size	2.5 mm² / stranded with ferrule, 4 mm² solid
Dimensions (WxDxH)	88 x 22.5 x 100 mm
Weight	100 g


Serial data converters
Technical data

Technical data
Data at T_a = 25 °C and rated values, unless otherwise indicated

	ILPH RS 232 / CL
Power supply	DC model polarized
Voltage	24 V DC
Voltage tolerance	+/-10%
Supply current	120 mA max.
Connections	Removable screw connector (Omniconnect)
Serial link 2: RS 232	EIA RS 232 C / CCITT V 24 V 28
Logic level	integrated (transil 8 kV 1.2/50 µs)
Baud rate / Transmission distance	max. 38.4 kbit/s / max. 15 m
Connections	2.5 mm² screw (AWG 20)
BdC serial link 2: RS 422/485	active/passive 0...20 mA / 4...20 mA mode settable
Overvoltage protection	0=20 mA or 1=20 mA settable
Baud rate / Transmission distance	max. 38.4 kbit/s / max. 1200 m
Connections	2.5 mm² screw (AWG 20)
Traffic indication	
Voltage	1 yellow LED
Status signal	2 green LED (RxD, TxD)
EMC behavior	
Electrostatic discharge	EN 61000-4-2 level 3 6/8 kV
Radiated electromagnetic field	EN 61000-4-3 level 3 10 V/m
Burst	EN 61000-4-4 level 3 1 kV
Electromagnetic compatibility	EN 55022 class B
Other characteristics	
Electrical isolation between Current loop / RS 232	depending on current loop (active/passive) 500 V DC (active) / 2000 V DC (passive)
Electrical isolation between Current loop / power supply	500 V DC (active) / 2000 V DC (passive)
Configuration of the operating mode	using internal DIP switches
Operating temperature	0°C ... +50°C
Storage temperature	-25°C ... +80°C
Mounting	any required
DIN rail fixing (EN 50002)	snap-on mounting
Wire size	2.5 mm² / stranded with ferrule, 4 mm² solid
Dimensions (WxDxH)	88 x 22.5 x 100 mm
Weight	100 g

Serial data converters
Notes

Interface relays and optocouplers
Product group picture

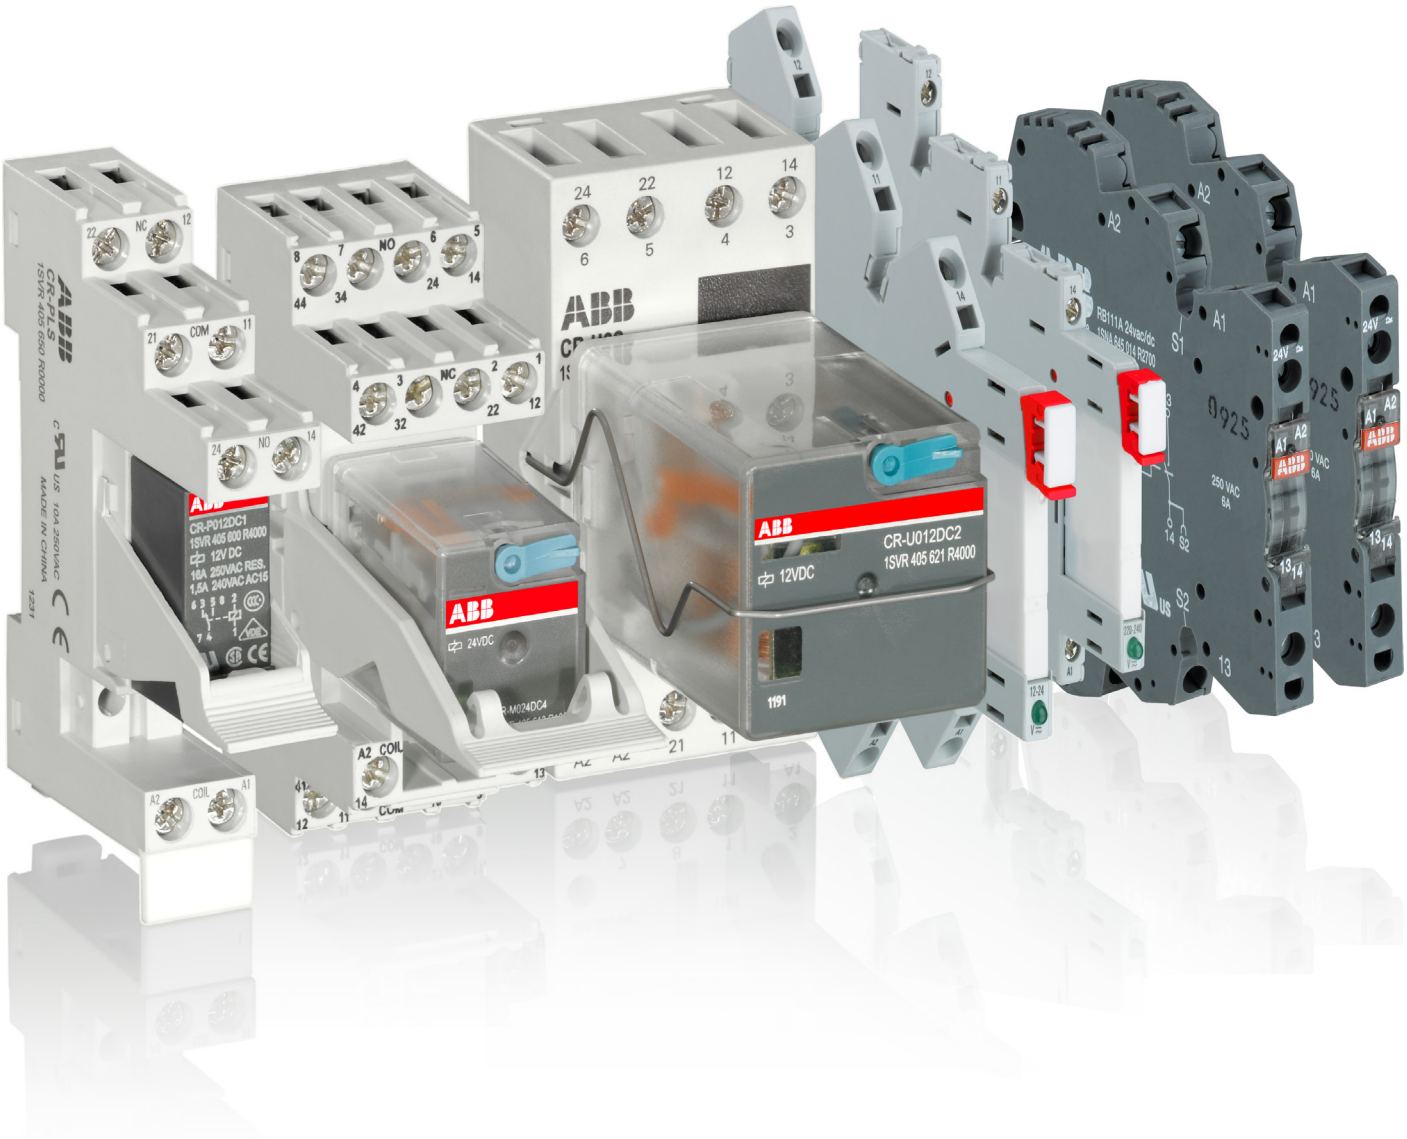


Interface relays and optocouplers
Table of contents

Interface Relays and Optocouplers

Pluggable interface relays 5/3
Table of contents 5/4
Benefits and advantages 5/5
Approvals and marks 5/7
Ordering details - CR-S range 5/8
Ordering details - CR-P range 5/9
Ordering details - CR-M range 5/10
Ordering details CR-P/M functional modules 5/13
Ordering details - CR-U range 5/14
Ordering details - CR-U accessories 5/15
Technical data - CR-P, CR-M, CR-U 5/16
Technical data, load limit curves - CR-P, CR-M, CR-U 5/18
Technical data - Sockets for CR-P and CR-M 5/19
Technical data - Sockets for CR-U 5/20
Technical data - CR-S range 5/21
Technical data - CR-S range sockets 5/22
Load limit curves 5/23
Connection diagrams 5/24
Dimensional drawings 5/25
Interface relays and optocouplers R600 range 5/27
Table of contents 5/28
Benefits and advantages 5/29
Type designators 5/30
Interface relays R600 range..... 5/31
Benefits and advantages 5/31
Selection 5/33
Ordering details 5/35
Connection diagrams 5/37
Technical data 5/38
General technical data 5/43
Dimensional drawings, Load limit curves 5/44
Optocouplers R600 range..... 5/45
Selection 5/45
Ordering details 5/47
Connection diagrams 5/48
Technical data 5/49

Pluggable interface relays
Product group picture

5

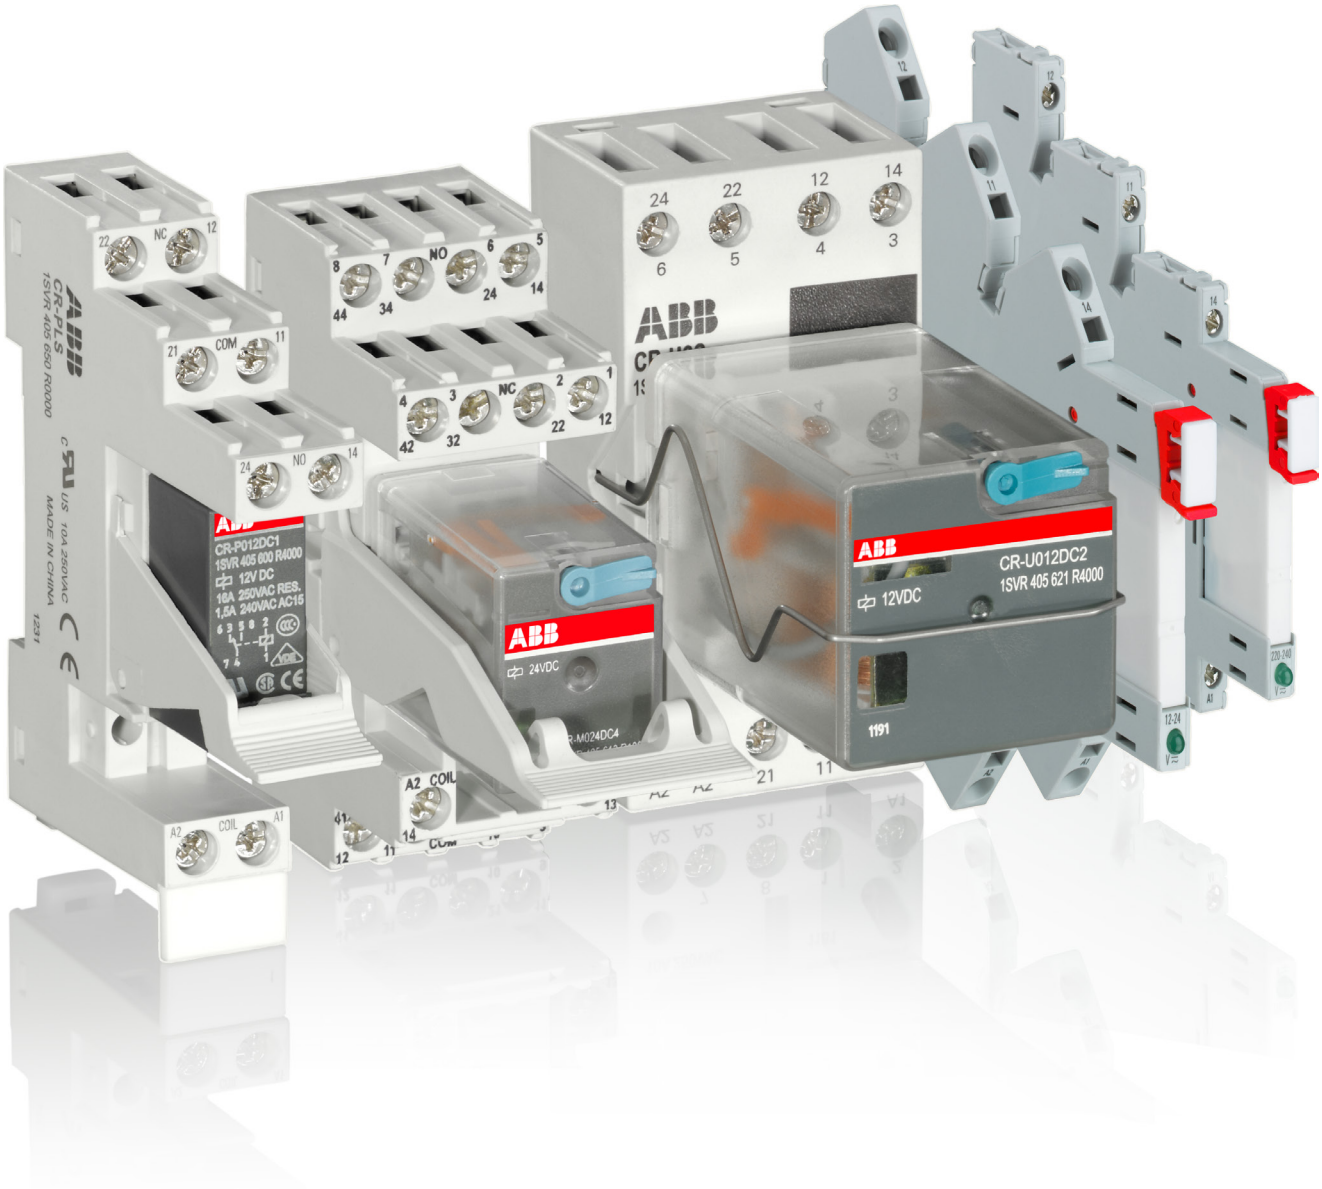

Pluggable interface relays
Table of contents


Pluggable interface relays

Benefits and advantages	5/5
Approvals and marks	5/7
Ordering details - CR-S range	5/8
Ordering details - CR-P range	5/9
Ordering details - CR-M range	5/10
Ordering details CR-P/M functional modules	5/13
Ordering details - CR-U range	5/14
Ordering details - CR-U accessories	5/15
Technical data - CR-P, CR-M, CR-U	5/16
Technical data, load limit curves - CR-P, CR-M, CR-U	5/18
Technical data - Sockets for CR-P and CR-M	5/19
Technical data - Sockets for CR-U	5/20
Technical data - CR-S range	5/21
Technical data - CR-S range sockets	5/22
Load limit curves	5/23
Connection diagrams	5/24
Dimensional drawings	5/25


Pluggable interface relays
Benefits and advantages

Slim relays CR-S
- Standard slim relays (5 mm), sockets (6.2 mm) and accessories
- Combination of 9 different rated control supply voltages possible:
  - DC versions: 5 V, 12 V, 24 V
  - AC/DC versions: 12 V, 24 V, 48 V, 60 V, 110 V, 230 V
- Output: 1 c/o (SPDT) contacts (6 A), standard and goldplated contacts
- Cadmium-free contact material
- All sockets with LED
- Screw and spring connection terminals
- Jumper bar (red, black, blue), marker and separator available as accessories

Pluggable pcb relays CR-P
- 9 different coil voltages
  - DC versions: 12 V, 24 V, 48 V, 110 V
  - AC versions: 24 V, 48 V, 110 V, 120 V, 230 V
- Output contacts:
  - 1 c/o contact (16 A) or
  - 2 c/o contacts (8 A)
    optionally equipped with gold contacts
- Logical or standard sockets
- Cadmium-free contact material
- Width of socket: 15,5 mm
- Pluggable function modules
  - Reverse polarity protection/Free wheeling diode
  - LED indication
  - RC elements
  - Overvoltage protection

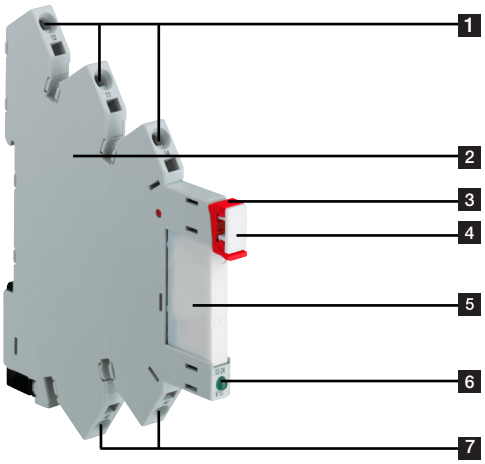

1 Output contacts
2 Socket
3 Relay holder
4 Marker
5 Interface relay
6 LED green: Control supply voltage applied
7 Control supply voltage

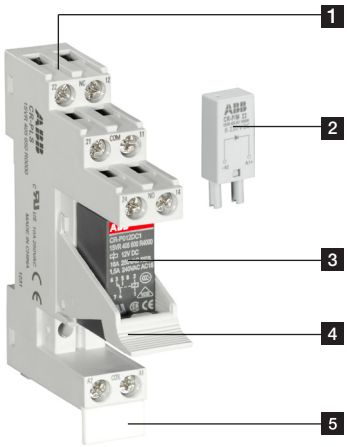


1 Socket
2 Pluggable function module
3 Interface relay
4 Holder
5 Marker label

Pluggable interface relays
Benefits and advantages


Pluggable miniature relays CR-M
- 2 different coil voltages
  - DC versions: 12 V, 24 V, 48 V, 60 V, 110 V, 125 V, 220 V
  - AC versions: 24 V, 48 V, 110 V, 120 V, 230 V
- Output contacts
  - 2 c/o contacts (12 A) or
  - 3 c/o contacts (10 A) or
  - 4 c/o contacts (6 A)

  optionally equipped with gold contacts, LED and free wheeling diode
- Integrated test button for manual actuation and locking of the output contacts (blue = DC, orange = AC) that can be removed if necessary
- With or without integrated LED
- Logical or standard sockets
- Cadmium-free contact material
- Width on socket: 27 mm
- Pluggable function modules
  - Reverse polarity protection/Free wheeling diode
  - LED indication
  - RC elements
  - Overvoltage protection

Pluggable universal relays CR-U
- 12 different coil voltages
  - DC versions: 12 V, 24 V, 48 V, 110 V, 125 V, 220 V
  - AC versions: 24 V, 48 V, 60 V, 110 V, 120 V, 230 V
- Output contacts
  - 2 c/o contacts (10 A) or
  - 3 c/o contacts (10 A)
- Integrated test button for manual actuation and locking of the output contacts (blue = DC, orange = AC) that can be removed if necessary
- With or without integrated LED
- Cadmium-free contact material
- Width on socket: 38 mm
- Pluggable function modules
  - Reverse polarity protection/Free wheeling diode
  - LED indication
  - RC elements
  - Overvoltage protection
  - Multifunction time module

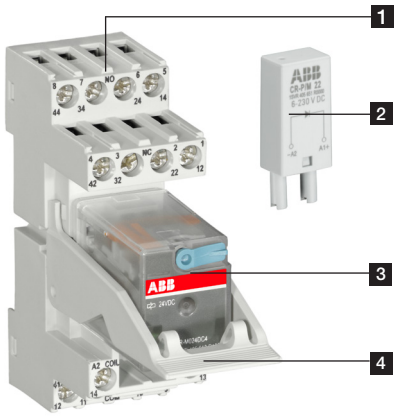

1 Socket
2 Pluggable function module
3 Interface relay
4 Holder

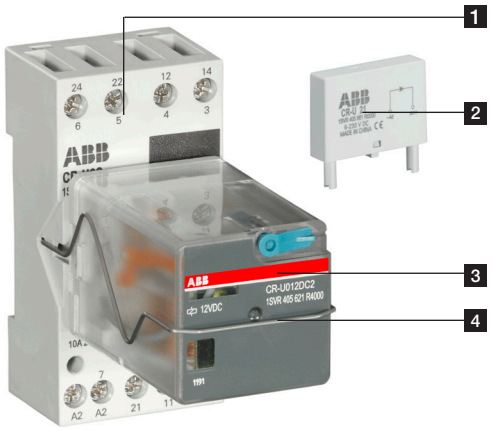


1 Socket
2 Pluggable function module
3 Interface relay
4 Holder

Pluggable interface relays
Approvals and marks


Kind of connecting terminals

Kinds of sockets


Standard sockets - Position of connecting terminals:
Coil connection (A1-A2) on lower socket side, contact connections (n/o and n/c contacts) on the lower and upper socket side.
Logical sockets - Position of connecting terminals:
Coil connection (A1-A2) on lower socket side, all contact connections (common contacts, n/o and n/c contacts) on upper socket side.
Details see connection diagrams



Screw type



Spring type



Fork type

5

Approvals and marks

■ existing
□ pending

		Relays					Sockets								Modules	
Approvals		CR-S	CR-P	CR-M	CR-U		CR-S sockets	CR-PLS CR-PSS	CR-PLC	CR-M..L.. CR-M..SS	CR-M..SF	CR-U..S CR-U..E	CR-U..SM		CR-P/M	CR-U
	ANSI/UL 508	■	■	■	■		■	■	■	■	■				■	■ [6]
	CAN/CSA C22.2 No.14	■	■	■			■	■ [1]	■	■ [2]	■	■ [3]	■		■	■ [6]
	CAN/CSA C22.2 No.14	■	■	■	■		■									
	VDE	■ [8]	■	■ [4]	■		■ [8]									
	EAC	■	■	■	■		■	■	■	■	■	■	■		■	■
	Lloyds Register			■ [5]	■											
	CCC		■	■	■											
	CQC	■														
	RMRS		■	■ [7]	■ [7]		■	■	■	■	■	■	■			
Marks																
CE	CE	■	■	■	■		■	■	■	■	■	■	■		■	■

[1] except CR-PLSx
[2] except CR-M...LC
[3] except CR-U3E
[4] except 125 V DC devices
[5] only devices with 4 c/o contacts
[6] except CR-U61D, CR-U61DV
[7] except 60 V and 125 V devices
[8] only relays and sockets with screw terminals

Pluggable interface relays
Ordering details - CR-S range



CR-S

RS, SS = screw connection type
RZ, SZ = spring connection type

Description

The pluggable interface relays of the CR-S Range are used for electrical isolation, amplification and signal matching between the electronic controlling, e.g. PLC, iPC or field bus systems and the sensor / actuator level. The CR-S Range combines the flexibility of a modular system and the ability of switching high currents on a small footprint thus can be used in applications where space saving is essential.

Ordering details - CR-S range pluggable interface relays

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
5 V DC	1 c/o (SPDT) standard contacts	250 V, 6 A	CR-S005VDC1R	1SVR405501R1010		10	0.005 (0.011)
12 V DC			CR-S012VDC1R	1SVR405501R2010			
24 V DC			CR-S024VDC1R	1SVR405501R3010			
48 V DC			CR-S048VDC1R	1SVR405501R4010			
60 V DC			CR-S060VDC1R	1SVR405501R5010			
5 V DC	1 c/o (SPDT) gold plated contacts	12 V, 250 mA (3W)[1]	CR-S005VDC1RG	1SVR405501R1020		10	0.005 (0.011)
12 V DC			CR-S012VDC1RG	1SVR405501R2020			
24 V DC			CR-S024VDC1RG	1SVR405501R3020			
48 V DC			CR-S048VDC1RG	1SVR405501R4020			
60 V DC			CR-S060VDC1RG	1SVR405501R5020			

Ordering details - CR-S range complete interface relays (relay + socket)

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
24 V AC/DC	1 c/o (SPDT) standard contacts	250 V, 6 A	CR-S024VADC1CRS	1SVR405541R3110		10	0.03 (0.066)
			CR-S024VADC1CRZ	1SVR405541R3210			
110 V AC/DC			CR-S110VADC1CRS	1SVR405541R6110			
			CR-S110VADC1CRZ	1SVR405541R6210			
230 V AC/DC			CR-S230VADC1CRS	1SVR405541R7110			
			CR-S230VADC1CRZ	1SVR405541R7210			
24 V AC/DC	1 c/o (SPDT) gold plated contacts	12 V, 250 mA (3W)[1]	CR-S024VADC1CRGS	1SVR405541R3120		10	0.03 (0.066)
			CR-S024VADC1CRGZ	1SVR405541R3220			
110 V AC/DC			CR-S110VADC1CRGS	1SVR405541R6120			
			CR-S110VADC1CRGZ	1SVR405541R6220			
230 V AC/DC			CR-S230VADC1CRGS	1SVR405541R7120			
			CR-S230VADC1CRGZ	1SVR405541R7220			

[1] If specified maximum values exceeded, the gold plating is destroyed. The maximum values of the standard contacts are then valid.

Ordering details - CR-S range sockets

Rated control supply voltage	Connection type	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
6-24 V DC	Screw	CR-S006/024VDC1SS	1SVR405521R1100		10	0.025 (0.055)
	Spring	CR-S006/024VDC1SZ	1SVR405521R1200			
12-24 V AC/DC	Screw	CR-S012/024VADC1SS	1SVR405521R3100			
	Spring	CR-S012/024VADC1SZ	1SVR405521R3200			
48-60 V AC/DC	Screw	CR-S048/060VADC1SS	1SVR405521R5100			
	Spring	CR-S048/060VADC1SZ	1SVR405521R5200			
110-125 V AC/DC	Screw	CR-S110/125VADC1SS	1SVR405521R6100			
	Spring	CR-S110/125VADC1SZ	1SVR405521R6200			
220-240 V AC/DC	Screw	CR-S220/240VADC1SS	1SVR405521R7100			
	Spring	CR-S220/240VADC1SZ	1SVR405521R7200			

Ordering details - CR-S range accessories

Version	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Jumper bar 20 pole, blue color	CR-SJB20-BLUE	1SVR405598R0700		10	0.008 (0.018)
Jumper bar 20 pole, red color	CR-SJB20-RED	1SVR405598R0800			
Jumper bar 20 pole, black color	CR-SJB20-BLACK	1SVR405598R0900			
Marker block	CR-SM	1SNB041391R0610		10	0.0036 (0.0079)
Separator	CR-SSEP	1SVR405599R0000		10	0.012 (0.026)

Pluggable interface relays
Ordering details - CR-P range



2CDC 291 045 F0004

CR-P

5


Ordering details - CR-P range

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
12 V DC	1 c/o (SPDT)	250 V, 16 A	CR-P012DC1	1SVR405600R4000		10	0.014 (0.031)
24 V DC			CR-P024DC1	1SVR405600R1000			
48 V DC			CR-P048DC1	1SVR405600R6000			
110 V DC			CR-P110DC1	1SVR405600R8000			
24 V AC			CR-P024AC1	1SVR405600R0000			
48 V AC			CR-P048AC1	1SVR405600R5000			
110 V AC			CR-P110AC1	1SVR405600R7000			
120 V AC			CR-P120AC1	1SVR405600R2000			
230 V AC			CR-P230AC1	1SVR405600R3000			
12 V DC	2 c/o (SPDT)	250 V, 8 A	CR-P012DC2	1SVR405601R4000		10	0.014 (0.031)
24 V DC			CR-P024DC2	1SVR405601R1000			
48 V DC			CR-P048DC2	1SVR405601R6000			
110 V DC			CR-P110DC2	1SVR405601R8000			
24 V AC			CR-P024AC2	1SVR405601R0000			
48 V AC			CR-P048AC2	1SVR405601R5000			
110 V AC			CR-P110AC2	1SVR405601R7000			
120 V AC			CR-P120AC2	1SVR405601R2000			
230 V AC			CR-P230AC2	1SVR405601R3000			
24 V DC	2 c/o (SPDT) gold contact	250 V, 8 A	CR-P024DC2	1SVR405606R1000		10	0.014 (0.031)
24 V AC			CR-P024AC2G	1SVR405606R0000			
110 V AC			CR-P110AC2G	1SVR405606R7000			
230 V AC			CR-P230AC2G	1SVR405606R3000			



2CDC 291 006 F0011

CR-PLS


2CDC 291 004 F0007

CR-PJ

Ordering details - Accessories

Version	Connection terminal	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Logical socket with protective separation	screw	CR-PLS	1SVR405650R0000		10	0.045 (0.099)
Logical socket	screw	CR-PLSx	1SVR405650R0100			0.043 (0.095)
	spring	CR-PLC	1SVR405650R0200			0.042 (0.093)
Standard socket	screw	CR-PSS	1SVR405650R1000			0.038 (0.084)
Plastic holder for socket		CR-PH	1SVR405659R0000		10	0.002 (0.004)
Jumper bar for sockets with screw connection		CR-PJ	1SVR405658R5000			0.018 (0.040)
Marker		CR-PM	1SVR405658R0000		10	0.0002 (0.0004)

Pluggable interface relays
Ordering details - CR-M range



CR-M

Ordering details - CR-M range without LED

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
12 V DC	2 c/o (SPDT)	250 V, 12 A	CR-M012DC2	1SVR405611R4000		10	0.033 (0.073)
24 V DC			CR-M024DC2	1SVR405611R1000			
48 V DC			CR-M048DC2	1SVR405611R6000			
60 V DC			CR-M060DC2	1SVR405611R4200			
110 V DC			CR-M110DC2	1SVR405611R8000			
125 V DC			CR-M125DC2	1SVR405611R8200			
220 V DC			CR-M220DC2	1SVR405611R9000			
24 V AC			CR-M024AC2	1SVR405611R0000			
48 V AC			CR-M048AC2	1SVR405611R5000			
110 V AC			CR-M110AC2	1SVR405611R7000			
120 V AC			CR-M120AC2	1SVR405611R2000			
230 V AC			CR-M230AC2	1SVR405611R3000			
12 V DC	3 c/o (SPDT)	250 V, 10 A	CR-M012DC3	1SVR405612R4000		10	0.033 (0.073)
24 V DC			CR-M024DC3	1SVR405612R1000			
48 V DC			CR-M048DC3	1SVR405612R6000			
60 V DC			CR-M060DC3	1SVR405612R4200			
110 V DC			CR-M110DC3	1SVR405612R8000			
125 V DC			CR-M125DC3	1SVR405612R8200			
220 V DC			CR-M220DC3	1SVR405612R9000			
24 V AC			CR-M024AC3	1SVR405612R0000			
48 V AC			CR-M048AC3	1SVR405612R5000			
60 V AC			CR-M060AC3	1SVR405612R5200			
110 V AC			CR-M110AC3	1SVR405612R7000			
120 V AC			CR-M120AC3	1SVR405612R2000			
230 V AC			CR-M230AC3	1SVR405612R3000			
12 V DC	4 c/o (SPDT)	250 V, 6 A	CR-M012DC4	1SVR405613R4000		10	0.033 (0.073)
24 V DC			CR-M024DC4	1SVR405613R1000			
48 V DC			CR-M048DC4	1SVR405613R6000			
60 V DC			CR-M060DC4	1SVR405613R4200			
110 V DC			CR-M110DC4	1SVR405613R8000			
125 V DC			CR-M125DC4	1SVR405613R8200			
220 V DC			CR-M220DC4	1SVR405613R9000			
24 V AC			CR-M024AC4	1SVR405613R0000			
48 V AC			CR-M048AC4	1SVR405613R5000			
110 V AC			CR-M110AC4	1SVR405613R7000			
120 V AC			CR-M120AC4	1SVR405613R2000			
230 V AC			CR-M230AC4	1SVR405613R3000			

Pluggable interface relays
Ordering details - CR-M range



CR-M

5

Ordering details - CR-M range with LED

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
12 V DC	2 c/o (SPDT)	250 V, 12 A	CR-M012DC2L	1SVR405611R4100		10	0.033 (0.073)
24 V DC			CR-M024DC2L	1SVR405611R1100			
48 V DC			CR-M048DC2L	1SVR405611R6100			
60 V DC			CR-M060DC2L	1SVR405611R4300			
110 V DC			CR-M110DC2L	1SVR405611R8100			
125 V DC			CR-M125DC2L	1SVR405611R8300			
220 V DC			CR-M220DC2L	1SVR405611R9100			
24 V AC			CR-M024AC2L	1SVR405611R0100			
48 V AC			CR-M048AC2L	1SVR405611R5100			
110 V AC			CR-M110AC2L	1SVR405611R7100			
120 V AC			CR-M120AC2L	1SVR405611R2100			
230 V AC			CR-M230AC2L	1SVR405611R3100			
12 V DC	3 c/o (SPDT)	250 V, 10 A	CR-M012DC3L	1SVR405612R4100		10	0.033 (0.073)
24 V DC			CR-M024DC3L	1SVR405612R1100			
48 V DC			CR-M048DC3L	1SVR405612R6100			
60 V DC			CR-M060DC3L	1SVR405612R4300			
110 V DC			CR-M110DC3L	1SVR405612R8100			
125 V DC			CR-M125DC3L	1SVR405612R8300			
220 V DC			CR-M220DC3L	1SVR405612R9100			
24 V AC			CR-M024AC3L	1SVR405612R0100			
48 V AC			CR-M048AC3L	1SVR405612R5100			
110 V AC			CR-M110AC3L	1SVR405612R7100			
120 V AC			CR-M120AC3L	1SVR405612R2100			
230 V AC			CR-M230AC3L	1SVR405612R3100			
12 V DC	4 c/o (SPDT)	250 V, 6 A	CR-M012DC4L	1SVR405613R4100		10	0.033 (0.073)
24 V DC			CR-M024DC4L	1SVR405613R1100			
48 V DC			CR-M048DC4L	1SVR405613R6100			
60 V DC			CR-M060DC4L	1SVR405613R4300			
110 V DC			CR-M110DC4L	1SVR405613R8100			
125 V DC			CR-M125DC4L	1SVR405613R8300			
220 V DC			CR-M220DC4L	1SVR405613R9100			
24 V AC			CR-M024AC4L	1SVR405613R0100			
48 V AC			CR-M048AC4L	1SVR405613R5100			
110 V AC			CR-M110AC4L	1SVR405613R7100			
120 V AC			CR-M120AC4L	1SVR405613R2100			
230 V AC			CR-M230AC4L	1SVR405613R3100			

Ordering details - CR-M range with LED and free-wheeling diode

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
24 V DC	4 c/o (SPDT)	250 V, 6 A	CR-M024DC4LD	1SVR405614R1100		10	0.033 (0.073)

Ordering details - CR-M range with gold contacts

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
24 V DC	4 c/o (SPDT), gold contacts	250 V, 6 A	CR-M024DC4G	1SVR405618R1000		10	0.033 (0.073)
24 V AC			CR-M024AC4G	1SVR405618R0000			
110 V AC			CR-M110AC4G	1SVR405618R7000			
230 V AC			CR-M230AC4G	1SVR405618R3000			

Pluggable interface relays
Ordering details - CR-M range



2CDC 291 002 F0015

CR-M

Ordering details – CR-M range with gold contacts and LED

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
12 V DC	4 c/o (SPDT) with gold contacts and LED	250 V / 6 A	CR-M012DC4LG	1SVR405618R4100		10	0.033 (0.073)
24 V DC			CR-M024DC4LG	1SVR405618R1100			
48 V DC			CR-M048DC4LG	1SVR405618R6100			
60 V DC			CR-M060DC4LG	1SVR405618R4300			
110 V DC			CR-M110DC4LG	1SVR405618R8100			
125 V DC			CR-M125DC4LG	1SVR405618R8300			
220 V DC			CR-M220DC4LG	1SVR405618R9100			
24 V AC			CR-M024AC4LG	1SVR405618R0100		10	0.033 (0.073)
48 V AC			CR-M048AC4LG	1SVR405618R5100			
110 V AC			CR-M110AC4LG	1SVR405618R7100			
120 V AC			CR-M120AC4LG	1SVR405618R2100			
230 V AC			CR-M230AC4LG	1SVR405618R3100			


Ordering details – CR-M range with gold contacts, LED and free-wheeling diode

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
12 V DC	4 c/o (SPDT) with gold contacts, LED and free-wheeling diode		CR-M012DC4LDG	1SVR405618R4400		10	0.033 (0.073)
24 V DC			CR-M024DC4LDG	1SVR405618R1400			



2CDC 291 009 F0011

CR-M4SS



2CDC 291 005 F0007

CR-MJ

Ordering details - Accessories

Version	Connection terminal	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Logical socket for 2 c/o	screw	CR-M2LS	1SVR405651R1100		10	0.055 (0.121)
Logical socket for 3 c/o		CR-M3LS	1SVR405651R2100			0.062 (0.137)
Logical socket for 2/4 c/o		CR-M4LS	1SVR405651R3100			0.066 (0.146)
Logical socket for 2 c/o	spring	CR-M2LC	1SVR405651R1200		10	0.065 (0.143)
Logical socket for 2/4 c/o		CR-M4LC	1SVR405651R3200			0.066 (0.146)
Standard socket for 2 c/o	screw	CR-M2SS	1SVR405651R1000		10	0.066 (0.146)
Standard socket for 3 c/o		CR-M3SS	1SVR405651R2000			0.068 (0.150)
Standard socket for 2/4 c/o		CR-M4SS	1SVR405651R3000			0.070 (0.154)
Standard socket for 2 c/o	fork type	CR-M2SF	1SVR405651R1300		10	0.040 (0.088)
Standard socket for 2/4 c/o		CR-M4SF	1SVR405651R3300			0.048 (0.106)
Plastic holder		CR-MH	1SVR405659R1000		10	0.003 (0.007)
Metal holder		CR-MH1	1SVR405659R1100		10	0.0005 (0.001)
Jumper bar for sockets with screw connection		CR-MJ	1SVR405658R6000		10	0.029 (0.064)
Marker		CR-MM	1SVR405658R1000		10	0.0005 (0.001)

Pluggable interface relays
Ordering details CR-P/M functional modules



2CDC 291 005 S0011


CR-P/M ...

5


Ordering details - CR-P/M range (all products stocked)

Rated control supply voltage	Description	Version	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
6-220 V DC	Diode - Reverse polarity protection/free wheeling diode	A1+, A2-	CR-P/M 22	1SVR405651R0000		10	0.003 (0.007)
6-24 V DC	Diode and LED - Reverse polarity protection/free wheeling diode	red, A1+, A2-	CR-P/M 42	1SVR405652R0000		10	0.003 (0.007)
		green, A1+, A2-	CR-P/M 42V	1SVR405652R1000			
24-60 V DC		red, A1+, A2-	CR-P/M 42B	1SVR405652R4000			
		green, A1+, A2-	CR-P/M 42BV	1SVR405652R4100			
110-230 V DC		red, A1+, A2-	CR-P/M 42C	1SVR405652R9000			
		green, A1+, A2-	CR-P/M 42CV	1SVR405652R9100			
6-24 V AC/DC	Spark quenching		CR-P/M 52B	1SVR405653R0000		10	0.003 (0.007)
24-60 V AC/DC			CR-P/M 52D	1SVR405653R4000			
110-230 V AC/DC			CR-P/M 52C	1SVR405653R1000			
6-24 V AC/DC	Diode, LED and reverse polarity protection	red, for DC A1+, A2-	CR-P/M 62	1SVR405654R0000		10	0.003 (0.007)
		green, for DC A1+, A2-	CR-P/M 62V	1SVR405654R1000			
24-60 V AC/DC		red, for DC A1+, A2-	CR-P/M 62E	1SVR405654R4000			
		green, for DC A1+, A2-	CR-P/M 62EV	1SVR405654R4100			
110 V DC 110-230 V AC		red, for DC A1+, A2-	CR-P/M 92	1SVR405654R0100			
		green, for DC A1+, A2-	CR-P/M 92V	1SVR405654R1100			
6-24 V AC/DC	Varistor and LED Overvoltage protection	red, for DC A1+, A2-	CR-P/M 62C	1SVR405655R0000		10	0.003 (0.007)
		green, for DC A1+, A2-	CR-P/M 62CV	1SVR405655R1000			
24-60 V AC/DC		red, for DC A1+, A2-	CR-P/M 62D	1SVR405655R4000			
		green, for DC A1+, A2-	CR-P/M 62DV	1SVR405655R4100			
110 V DC 110-230 V AC		red, for DC A1+, A2-	CR-P/M 92C	1SVR405655R0100			
		green, for DC A1+, A2-	CR-P/M 92CV	1SVR405655R1100			
24 V AC	Overvoltage protection		CR-P/M 72	1SVR405656R0000		10	0.002 (0.004)
115 V AC			CR-P/M 72A	1SVR405656R1000			
230 V AC			CR-P/M 82	1SVR405656R2000			


Connection diagrams




CR-P/M 22




CR-P/M 42, CR-P/M 42B, CR-P/M 42C, CR-P/M 42V, CR-P/M 42BV, CR-P/M 42CV




CR-P/M 52B, CR-P/M 52C CR-P/M 52D,



CR-P/M 62, CR-P/M 62E, CR-P/M 92, CR-P/M 62V, CR-P/M 62EV, CR-P/M 92V



CR-P/M 62C, CR-P/M 62D, CR-P/M 92C, CR-P/M 62CV, CR-P/M 62DV CR-P/M 92CV



CR-P/M 72, CR-P/M 82 CR-P/M 72A,

Pluggable interface relays
Ordering details - CR-U range



CR-U

Description

Interface relays are widely used in various industrial applications:
As an interface they link the electronic controlling, e.g. PLC (programmable logic controller), PC or field bus systems, to the sensor / actuator level. Here, they take on various functions: Switching of AC or DC loads with different resistive, inductive and capacitive parts, switching voltages from a few mV up to 250 V, switching currents from a few mA up to 16 A, amplification of weak control signals, electrical isolation of control and load circuits, and signal multiplying. In contrast to electronic switching devices, interface relays don't use additional internal protective circuits and thus are overload-proof against short-time variations like current or voltage peaks.

Ordering details - CR-U range

Rated control supply voltage	Outputs	Contact ratings	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
12 V DC	2 c/o without LED	250 V, 10 A	CR-U012DC2	1SVR405621R4000		10	0.083 (0.183)
24 V DC			CR-U024DC2	1SVR405621R1000			
48 V DC			CR-U048DC2	1SVR405621R6000			
110 V DC			CR-U110DC2	1SVR405621R8000			
220 V DC			CR-U220DC2	1SVR405621R9000			
24 V AC			CR-U024AC2	1SVR405621R0000			
48 V AC			CR-U048AC2	1SVR405621R5000			
110 V AC			CR-U110AC2	1SVR405621R7000			
120 V AC			CR-U120AC2	1SVR405621R2000			
230 V AC			CR-U230AC2	1SVR405621R3000			
12 V DC	3 c/o without LED	250 V, 10 A	CR-U012DC3	1SVR405622R4000		10	0.083 (0.183)
24 V DC			CR-U024DC3	1SVR405622R1000			
48 V DC			CR-U048DC3	1SVR405622R6000			
110 V DC			CR-U110DC3	1SVR405622R8000			
125 V DC			CR-U125DC3	1SVR405622R8200			
220 V DC			CR-U220DC3	1SVR405622R9000			
24 V AC			CR-U024AC3	1SVR405622R0000			
48 V AC			CR-U048AC3	1SVR405622R5000			
60 V AC			CR-U060AC3	1SVR405622R5200			
110 V AC			CR-U110AC3	1SVR405622R7000			
120 V AC			CR-U120AC3	1SVR405622R2000			
230 V AC			CR-U230AC3	1SVR405622R3000			
12 V DC	2 c/o with LED	250 V, 10 A	CR-U012DC2L	1SVR405621R4100		10	0.083 (0.183)
24 V DC			CR-U024DC2L	1SVR405621R1100			
48 V DC			CR-U048DC2L	1SVR405621R6100			
110 V DC			CR-U110DC2L	1SVR405621R8100			
220 V DC			CR-U220DC2L	1SVR405621R9100			
24 V AC			CR-U024AC2L	1SVR405621R0100			
48 V AC			CR-U048AC2L	1SVR405621R5100			
110 V AC			CR-U110AC2L	1SVR405621R7100			
120 V AC			CR-U120AC2L	1SVR405621R2100			
230 V AC			CR-U230AC2L	1SVR405621R3100			
12 V DC	3 c/o with LED	250 V, 10 A	CR-U012DC3L	1SVR405622R4100		10	0.083 (0.183)
24 V DC			CR-U024DC3L	1SVR405622R1100			
48 V DC			CR-U048DC3L	1SVR405622R6100			
110 V DC			CR-U110DC3L	1SVR405622R8100			
220 V DC			CR-U220DC3L	1SVR405622R9100			
24 V AC			CR-U024AC3L	1SVR405622R0100			
48 V AC			CR-U048AC3L	1SVR405622R5100			
110 V AC			CR-U110AC3L	1SVR405622R7100			
120 V AC			CR-U120AC3L	1SVR405622R2100			
230 V AC			CR-U230AC3L	1SVR405622R3100			



CR-U2S

Ordering details - Accessories

Version	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Socket for 2 c/o and module	CR-U2S	1SVR405670R0000		10	
Socket for 3 c/o and module	CR-U3S	1SVR405660R0000			
Socket for 3 c/o	CR-U3E	1SVR405660R0100			
Socket small for 2 c/o	CR-U2SM	1SVR405670R1100			
Socket small for 3 c/o	CR-U3SM	1SVR405660R1100			
Holder for CR-U socket	CR-UH	1SVR405669R0000			

Pluggable interface relays
Ordering details - CR-U accessories



2CDC 291 004 S0011

CR-U...



2CDC 291 032 F0005


CR-U T

Ordering details - CR-U range (all products stocked)


Rated control supply voltage	Description	Version	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
6-220 V DC	Diode - Reverse polarity protection/ free wheeling diode	A1+, A2-	CR-U 21	1SVR405661R0000		10	0.007 (0.015)
6-24 V DC	Diode and LED - Reverse polarity protection/ free wheeling diode	red, A1+, A2-	CR-U 41	1SVR405662R0000		10	0.007 (0.015)
		green, A1+, A2-	CR-U 41V	1SVR405662R1000			
24-60 V DC		red, A1+, A2-	CR-U 41B	1SVR405662R4000			
		green, A1+, A2-	CR-U 41BV	1SVR405662R4100			
110 V DC		red, A1+, A2-	CR-U 41C	1SVR405662R9000			
		green, A1+, A2-	CR-U 41CV	1SVR405662R9100			
6-24 V AC/DC	Spark quenching		CR-U 51B	1SVR405663R0000		10	0.007 (0.015)
24-60 V AC/DC			CR-U 51D	1SVR405663R4000			
110-230 V AC/DC			CR-U 51C	1SVR405663R1000			
6-24 V AC/DC	Diode and LED	red, for DC A1+, A2-	CR-U 61	1SVR405664R0000		10	0.007 (0.015)
		green, for DC A1+, A2-	CR-U 61V	1SVR405664R1000			
24-60 V AC/DC		red, for DC A1+, A2-	CR-U 61E	1SVR405664R4000			
		green, for DC A1+, A2-	CR-U 61EV	1SVR405664R4100			
110 V DC 110-230 V AC		red, for DC A1+, A2-	CR-U 91	1SVR405664R0100			
		green, for DC A1+, A2-	CR-U 91V	1SVR405664R1100			
6-24 V AC/DC	Varistor and LED Overvoltage protection	red, for DC A1+, A2-	CR-U 61C	1SVR405665R0000		10	0.007 (0.015)
		green, for DC A1+, A2-	CR-U 61CV	1SVR405665R1000			
24-60 V AC/DC		red, for DC A1+, A2-	CR-U 61D	1SVR405665R4000			
		green, for DC A1+, A2-	CR-U 61DV	1SVR405665R4100			
110 V DC 110-230 V AC		red, for DC A1+, A2-	CR-U 91C	1SVR405665R0100			
		green, for DC A1+, A2-	CR-U 91CV	1SVR405665R1100			
24 V AC	Overvoltage protection, varistor		CR-U 71	1SVR405666R0000		10	0.007 (0.015)
115 V AC			CR-U 71A	1SVR405666R1000			
230 V AC			CR-U 81	1SVR405666R2000			
24-240 V AC/DC	Multifunction time module	pluggable onto CR-U2S and CR-U3S	CR-U T	1SVR405667R0000		10	0.014 (0.031)

All CR-U modules can be plugged onto sockets CR-U2S and CR-U3S.


Connection diagrams




CR-U 21




CR-U 41, CR-U 41B, CR-U 41C, CR-U 41V, CR-U 41BV, CR-U 41CV




CR-U 51B, CR-U 51C CR-U 51D



CR-U 61, CR-U 61E, CR-U 91, CR-U 61V, CR-U 61EV, CR-U 91V



CR-U 61C, CR-U 61CV, CR-U 61D, CR-U 61DV, CR-U 91C, CR-U 91CV



CR-U 71, CR-U 71A , CR-U 81

Pluggable interface relays
Technical data - CR-P, CR-M, CR-U

Input circuit - coil data
CR-P range



	Rated control supply voltage U_s	Rated frequency	Make voltage (at 20 °C)	Maximum-voltage (at 55 °C)	Break voltage	Rated power	Coil resistance (at 20 °C)	Tolerance of coil resistance
DC coils	12 V DC	-	8.4 V DC	30.6 V DC	≥ 0.1 U_s	0.4-0.48 W	360 Ω	± 10%
	24 V DC	-	16.8 V DC	61.2 V DC	≥ 0.1 U_s	0.4-0.48 W	1440 Ω	± 10%
	48 V DC	-	33.6 V DC	122.4 V DC	≥ 0.1 U_s	0.4-0.48 W	5700 Ω	± 10%
	110 V DC	-	77 V DC	280 V DC	≥ 0.1 U_s	0.4-0.48 W	25200 Ω	± 10%
AC coils	24 V AC	50 / 60 Hz	19.2 V AC	28.8 V AC	≥ 0.15 U_s	0.75 VA	400 Ω	± 10%
	48 V AC	50 / 60 Hz	38.4 V AC	57.6 V AC	≥ 0.15 U_s	0.75 VA	1550 Ω	± 10%
	110 V AC	50 / 60 Hz	88 V AC	132 V AC	≥ 0.15 U_s	0.75 VA	8900 Ω	± 10%
	120 V AC	50 / 60 Hz	96 V AC	144 V AC	≥ 0.15 U_s	0.75 VA	10200 Ω	± 10%
	230 V AC	50 / 60 Hz	184 V AC	276 V AC	≥ 0.15 U_s	0.75 VA	38500 Ω	± 10%

CR-M range



	Rated control supply voltage U_s	Rated frequency	Make voltage (at 20 °C)	Maximum voltage (at 55 °C)	Break voltage	Rated power	Coil resistance (at 20 °C)	Tolerance of coil resistance
DC coils	12 V DC	-	9.6 V DC	13.2 V DC	≥ 0.1 U_s	0.9 W	160 Ω	± 10%
	24 V DC	-	19.2 DC	26.4 V DC	≥ 0.1 U_s	0.9 W	640 Ω	± 10%
	48 V DC	-	38.4 V DC	52.8 V DC	≥ 0.1 U_s	0.9 W	2600 Ω	± 10%
	60 V DC	-	48 V DC	66 V DC	≥ 0.1 U_s	0.9 W	4000 Ω	± 10%
	110 V DC	-	88 V DC	121 V DC	≥ 0.1 U_s	0.9 W	13600 Ω	± 10%
	125 V DC	-	100 V DC	137.5 V DC	≥ 0.1 U_s	0.9 W	16000 Ω	± 10%
	220 V DC	-	176 V DC	242 V DC	≥ 0.1 U_s	0.9 W	54000 Ω	± 10%
AC coils	24 V AC	50 / 60 Hz	19.2 V AC	26.4 V AC	≥ 0.2 U_s	1.6 VA	158 Ω	± 10%
	48 V AC	50 / 60 Hz	38.4 V AC	52.8 V AC	≥ 0.2 U_s	1.6 VA	640 Ω	± 10%
	60 V AC	50 / 60 Hz	48 V AC	66 V AC	≥ 0.2 U_s	1.6 VA	930 Ω	± 10%
	110 V AC	50 / 60 Hz	88 V AC	121 V AC	≥ 0.2 U_s	1.6 VA	3450 Ω	± 10%
	120 V AC	50 / 60 Hz	96 V AC	132 V AC	≥ 0.2 U_s	1.6 VA	3770 Ω	± 10%
	230 V AC	50 / 60 Hz	184 V AC	253 V AC	≥ 0.2 U_s	1.6 VA	16100 Ω	± 10%

CR-U range



	Rated control supply voltage U_s	Rated frequency	Make voltage (at 20 °C)	Maximum voltage (at 55 °C)	Break voltage	Rated power	Coil resistance (at 20 °C)	Tolerance of coil resistance
DC coils	12 V DC	-	9.6 V DC	13.2 V DC	≥ 0.1 Us	1.5 W	110 Ω	± 10 %
	24 V DC	-	19.2 V DC	26.4 V DC	≥ 0.1 Us	1.5 W	430 Ω	± 10 %
	48 V DC	-	38.4 V DC	52.8 V DC	≥ 0.1 Us	1.5 W	1750 Ω	± 10 %
	110 V DC	-	88.0 V DC	121.0 V DC	≥ 0.1 Us	1.5 W	9200 Ω	± 10 %
	125 V DC	-	100 V DC	137.5 V DC	≥ 0.1 Us	1.5 W	11000 Ω	± 10 %
	220 V DC	-	176.0 V DC	242.0 V DC	≥ 0.1 Us	1.5 W	37000 Ω	± 10 %
AC coils	24 V AC	50 / 60 Hz	19.2 V AC	26.4 V AC	≥ 0.15 U_s	2.8 VA (50 Hz) 2.5 VA (60 Hz)	75 Ω	± 10 %
	48 V AC	50 / 60 Hz	38.4 V AC	52.8 V AC	≥ 0.15 U_s	2.8 VA (50 Hz) 2.5 VA (60 Hz)	305 Ω	± 10 %
	60 V AC	50 / 60 Hz	48.0 V AC	66.0 V AC	≥ 0.15 U_s	2.8 VA (50 Hz) 2.5 VA (60 Hz)	475 Ω	± 10 %
	110 V AC	50 / 60 Hz	88.0 V AC	121.0 V AC	≥ 0.15 U_s	2.8 VA (50 Hz) 2.5 VA (60 Hz)	1700 Ω	± 10 %
	120 V AC	50 / 60 Hz	96.0 V AC	132.0 V AC	≥ 0.15 U_s	2.8 VA (50 Hz) 2.5 VA (60 Hz)	1910 Ω	± 10 %
	230 V AC	50 / 60 Hz	184.0 V AC	253.0 V AC	≥ 0.15 U_s	2.8 VA (50 Hz) 2.5 VA (60 Hz)	7080 Ω	± 10 %

Pluggable interface relays
Technical data - CR-P, CR-M, CR-U

Type			CR-P...1	CR-P...2	CR-M...2	CR-M...3	CR-M...4	CR-U...2	CR-U...3
Output circuit(s)			11-12/14	11-12/14 21-22/24	11-12/14 21-22/24	11-12/14 21-22/24 31-32/34	11-12/14 21-22/24 31-32/34 41-42/44	11-12/14 31-32/34	11-12/14 21-22/24 31-32/34
Kind of output			Relay, 1 c/o	Relay, 2 c/o	Relay, 2 c/o	Relay, 3 c/o	Relay, 4 c/o	Relay, 2 c/o	Relay, 3 c/o
Contact material			AgNi	AgNi AgNi/Au 5 µm	AgNi	AgNi	AgNi AgNi/Au 5 µm	AgNi	
Rated operational voltage U_e (VDE 0110, IEC 60947-1)			250 V						
Minimum switching voltage			5 V		10 V (AgNi)		5 V (AgNi/Au)	10 V	
Maximum switching voltage		DC	300 V DC		250 V DC				
		AC	440 V AC		250 V AC			440 V AC	
Minimum switching current			5 mA (AgNi), 2 mA (AgNi/Au)		5 mA (AgNi)	5 mA (AgNi)	2 mA (AgNi/Au)	5 mA	
Rated free air thermal current I_{th}			16 A	8 A	12 A	10 A	6 A	10 A	
Rated operational current (IEC 60947-5-1)	AC-12 (resistive)	230 V	16 A	8 A	12 A	10 A	6 A	10 A	
	AC-15 (inductive)	230 V	1.5 A	1.5 A	1.5 A	1.5 A	1 A	1.5 A	
	AC-15 (inductive)	120 V	3 A				1.5 A	3 A	
	DC-12 (resistive)	24 V	16 A	8 A	12 A	10 A	6 A	10 A	
	DC-13 (inductive)	24 V	2.5 A	2 A	2.5 A	2.5 A	2 A	2 A	
	DC-13 (inductive)	120 V	0.22 A						
	DC-13 (inductive)	250 V	0.1 A						
AC rating (UL 508)	Utilization category (pilot duty) (Contact rating code designation)		B300		B300			B300	
	max. rated operational voltage		300 V AC		300 V AC			300 V AC	
	Max. continuous thermal current at utilization category		5 A		5 A	5 A	2.5 A	5 A	
	Max. making / breaking apparent power at utilization category		3600 / 360 VA		3600 / 360 VA		1800 / 180 VA	3600/360 VA	
	Utilization category (resistive) (CSA22.2 No.14....)		16 A, 250 V AC	8 A, 250 V AC	10 A, 250 V AC 12 A, 150 V AC	6 A, 250 V AC 10 A, 150 V AC	5 A, 250 V AC 10 A, 150 V AC	10 A, 250 V AC (resistive + single-phase)	
DC rating * (UL 508; NEMA ICS-5)	Utilization category (pilot duty) (Contact rating code designation)		R300						
	Max. rated operational voltage		300 V DC						
	Max. continuous thermal current at utilization category		1 A						
	Max. making / breaking apparent power at utilization category		28 VA						
	Utilization category (resistive) (CSA22.2 No.14....)		-	10 A, 24 V DC	-			10 A, 28 V DC	
Maximum making (inrush) current			30 A	15 A	24 A	20 A	12 A	20 A	
Minimum switching power			0.3 W (AgNi), 0.05 W (AgNi/Au)		0.3 W (AgNi), 0.1 W (AgNi/Au)			0.3 W	
Maximum switching (breaking) power		AC1 (resistive)	4000 VA	2000 VA	3000 VA	2500 VA	1500 VA	2500 VA	
Contact resistance			≤ 100 mΩ						
Maximum operating frequency		rated load AC-1	600 switching cycles/h		1200 switching cycles/h				
		without load	72000 switching cycles/h		18000 switching cycles/h			12000 switching cycles/h	
Mechanical lifetime			> 3 x 10^7 switching cycles		> 2 x 10^7 switching cycles				
Electrical lifetime		electrical AC1 (resistive)	> 0.7 x 10^5 switching cycles (16 A, 250 V)	> 10^5 switching cycles (8 A, 250 V)	> 10^5 switching cycles (12 A, 250 V)	(10 A, 250 V)	(6 A, 250 V)	> 10^5 switching cycles (12 A, 250 V)	
		cos φ	see reduction factor F						
Response time			typ. 7 ms		typ. 13 ms (DC),10 ms (AC)			typ. 18 ms (DC), 12 ms (AC)	
Release time			typ. 3 ms		typ. 3 ms (DC), 8 ms (AC)			typ. 7 ms (DC), 10 ms (AC)	
Isolation data									
Rated insulation voltage			400 V AC		250 V AC				
Insulation class			C250 / B400		C250 / B250			C250	
Rated impulse withstand voltage U_{imp}	between coil and contacts		5 kV AC		2.5 kV AC				
	between open contacts		1 kV AC		1.5 kV AC				
	between c/o (SPDT) contacts		-	2.5 kV AC	2.5 kV AC		≥ 2 kV AC	2 kV AC	
Clearance between coil and contacts			≥ 10 mm		≥ 2.5 mm		≥ 1.6 mm	≥ 3 mm	
Creepage distancebetween coil and contacts			≥ 10 mm		≥ 4 mm		≥ 3.2 mm	≥ 4.2 mm	
Overvoltage category			III		III		II	III	
Pollution degree			3		3		2	3	

* Those ratings are based on different type tests but they are not covered by the cULus or CSA approvals.


Pluggable interface relays
Technical data, load limit curves - CR-P, CR-M, CR-U

Type		CR-P...1	CR-P...2	CR-M...2	CR-M...3	CR-M...4	CR-U...2	CR-U...3
General data								
Dimensions (W x H x D) when mounted		12.7 x 29 x 15.7 mm		21.2 x 27.5 x 35.6 mm			35 x 35 x 54.4 mm	
Weight		14 g (0.031 lb)		35 g (0.077 lb)			83 g (0.18 lb)	
Mounting		on socket (see accessories)						
Mounting position		any						
Degree of protection		IP 67		IP 40				
Electrical connection								
Connection		by socket						
Environmental data								
Ambient temperature range	operation	DC: -40...+85 °; AC: -40...+70 °C		DC: -40...+70 °; AC: -40...+55 °C				
	storage	-40 ... +85 °C						
Vibration resistance 10-150 Hz	n/o contact	10 g		5 g			5 g	
	n/c contact	10 g	5 g	5 g			5 g	
Shock resistance	n/o contact	30 g	20 g	10 g			10 g	
	n/c contact	30 g	20 g	5 g			10 g	
Standards								
Product standard		IEC/EN 60255-23, IEC/EN 60664-1, IEC/EN 61810-1		IEC/EN 60255-23, IEC/EN 60810-1, IEC/EN 61810-7			IEC/EN 60255-1	
Low Voltage Directive		2006/95/EC						

Approvals see page 5/6.


Load limit curves - Maximum switching power at resistive DC load

CR-P with 1 c/o contact

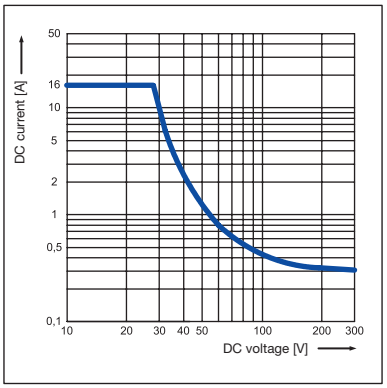


2CDC 292 005 F0204

CR-P with 2 c/o contacts

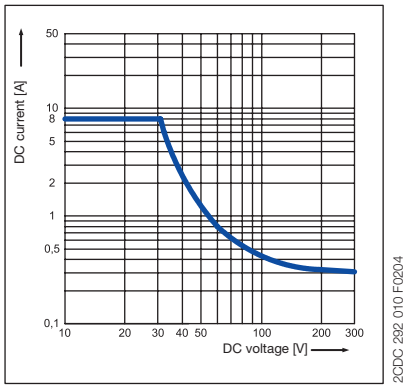


2CDC 292 010 F0204

CR-U with 2 and 3 c/o contacts

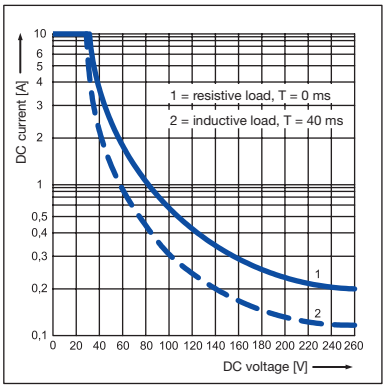


2CDC 292 028 F0204

CR-M with 2 c/o contacts

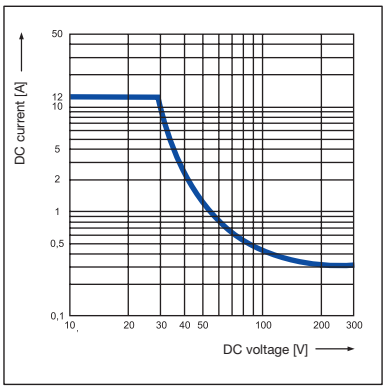


2CDC 292 015 F0204

CR-M with 3 c/o contacts

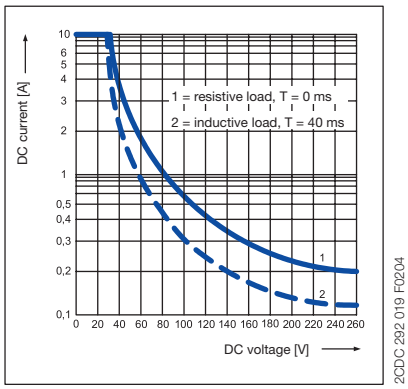

2CDC 292 019 F0204

CR-M with 4 c/o contacts

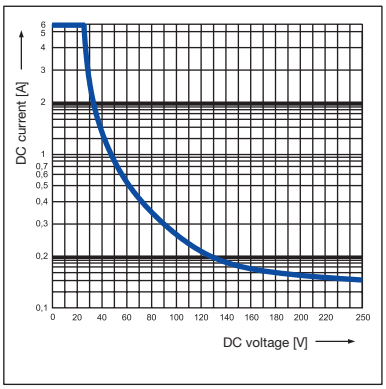

2CDC 292 023 F0204

Pluggable interface relays
Technical data - Sockets for CR-P and CR-M

Output circuits	CR-PLS	CR-PLS(x)	CR-PSS	CR-PLC	CR-MxLS	CR-MxSS	CR-MxSF	CR-MxLC
Output circuits	11-12/14, 21-22/24				11-12/14, 21-22/24, ...			
Number of poles	2				2, 3 or 4		2 or 4	
Rated voltage	250 V AC	300 V AC	250 V AC		250 V AC			300 V AC
Rated current	2 x 10 A[1)]	2 x 12 A[1)]	2 x 10 A[1)]		7 A			10 A
General data								
Dimensions without holder and module (L x W x H)	76 x 15.8 x 62 mm (2.992 x 0.622 x 2.441 in)	78.5 x 15.5 x 61 mm (3.011 x 0.610 x 2.402 in)	76 x 15.8 x 42.8 mm (2.992 x 0.622 x 1.685 in)	97.5 x 16.3 x 45.2 mm (3.839 x 0.642 x 1.780 in)	75 x 27.2 x 60.8 mm (2.952 x 1.071 x 2.394 in)	75.2 x 27.2 x 42.6 mm (2.961 x 1.071 x 1.677 in)	66.7 x 30.3 x 29 mm (2.626 x 1.193 x 1.142 in)	95 x 31 x 42.5 mm (3.74 x 1.22 x 1.67 in)
Degree of protection terminals	IP 20 B (EN 60529)							
Temperature range operation	-40...+70 °C	-40...+85 °C	-40...+70 °C		-40...+70 °C			-25...+85 °C
Temperature range storage	-40...+70 °C	-40...+85 °C	-40...+70 °C		-40...+70 °C			
Connection type	screw connection			spring connection	screw connection		fork type screw	spring connection
Maximum number of wires per connecting terminal	2			2 (one per connection point)	2		-	2 (one per connection point)
Wire size rigid					2 x 2.5 mm² (2 x 14 AWG)		2 x 1.5 mm² (2 x 16 AWG)	0.2 - 1.5 mm² (24 x 16 AWG)
Wire size fine-strand	2 x 2.5 mm² (2 x 14 AWG)			0.2-1.5 mm² (24-16 AWG)				
Wire size with wire end ferule	2 x 1.5 mm² (2 x 16 AWG)				2 x 1.5 mm² (2 x 16 AWG)			
Stripping length	-				7 mm (0.28 in)		-	-
Tightening torque	0.6 Nm	0.8 Nm	0.6 Nm		0.6 Nm (5.31 lb.in)			
Maximum clamping force with 0.2 mm²	-	-	-	10 N	-	-	-	10 N
Maximum clamping force with 1.5 mm²	-	-	-	40 N	-	-	-	40 N
Maximum clamping force with wire end ferrule	-				-	-	-	> 40 N
Mounting	DIN rail (IEC/EN 60715)							
Material socket	PA 6+GF - V2				PA 6+GF - V2			
Material contacts	CuZn33				CuZn33			
Material contact surface	5 µ Ni	5 µ tinned	5 µ Ni		5 µ Ni		6 µ Ni	5 µ tinned
Material terminals	8 µ Ni	8 µ galvanized	8 µ Ni	XCrNi Steel	8 µ Ni			CCSC
Material combi screw M3	8.8 Steel, 5µ Ni			-	8.8 Steel, 5µ Ni			-
Isolation data								
Insulation voltage	> 5 kV	> 3 kV	> 5 kV		> 3 kV		> 4 kV	
Isolation between coil and contacts	EN 61984			VDE 0106 / 101	EN 61984		-	DIN EN 61140, VDE 0140-1
Clearance and creepage distance	EN 61984			DIN EN 60664-1	EN 61984		DIN EN 60664-1	
Standards								
Products standard	EN 61984				EN 61984		-	-
Low Voltage Directive	2006/95/EC				2006/95/EC			
EMC Directive	-				2004/108/EC			

[1)] Loads >10 A (>12 A for CR-PLSx) require jumpering of terminal 11 with 21, 12 with 22, and 14 with 24

Pluggable interface relays
Technical data - Sockets for CR-U

Output circuits		CR-U2S	CR-U3S	CR-U3E	CR-UxSM
Output circuits		11-12/14, 21-22/24,...			
Number of poles		2	3		2 or 3
Rated voltage		250 V AC		300 V AC	250 V
Rated current		10 A			
General data					
Dimensions without holder and module (L x W x H)		75.3 x 37.3 x 26 mm (2.965 x 1.469 x 1.024 in)	75.3 x 38.1 x 26 mm (2.965 x 1.500 x 1.024 in)	70 x 38 x 26 mm (2.756 x 1.496 x 1.024 in)	61.8 x 38.1 x 26 mm (2.756 x 1.500 x 1.024 in)
Degree of protection	terminals	IP 20 B (EN 60529)			
Temperature range	operation	-40...+70 °C		-40...+85 °C	-40...+70 °C
	storage	-40...+70 °C		-40...+85 °C	-40...+70 °C
Wire size	rigid	2 x 2.5 mm² (2 x 14 AWG)			
	fine-strand	2 x 2.5 mm² (2 x 14 AWG)			
	with wire end ferule	2 x 1.5 mm² (2 x 16 AWG)			
Tightening torque		0.6 Nm		0.8 Nm	0.6 Nm
Mounting		DIN rail (IEC/EN 60715)			
Material	socket	PA 6+GF - V2			
	contacts	CuZn33			
	contact surface	6 µ Ni			3 µ Ni
	terminals	8 µ Ni		8 µ galvanized	10 µ Ni
	combi screw M3	8.8 Steel, 5µ Ni			Steel, 8 µ Ni
Isolation data					
Insulation voltage		> 2 kV			
Isolation between coil and contacts		EN 61984			
Clearance and creepage distance		EN 61984			
Standards					
Products standard		EN 61984: 2001			
Low Voltage Directive		2006/95/EC			

Pluggable interface relays
Technical data - CR-S range


	Rated control supply voltage U_s	Make voltage (at 23 °C)	Maxium voltage (at 55 °C)	Break voltage	Rated power	Coil resistance (at 23 °C)	Tolerance of coil resistance
CR-S005VDC1R(G)	5 V DC	3.75 V DC	7.5 V DC	0.25 V DC	170 mW	147 Ω	± 10 %
CR-S012VDC1R(G)	12 V DC	9 V DC	18 V DC	0.6 V DC	170 mW	848 Ω	± 10 %
CR-S024VDC1R(G)	24 V DC	18 V DC	36 V DC	1.2 V DC	170 mW	3390 Ω	± 15 %
CR-S048VDC1R(G)	48 V DC	36 V DC	72 V DC	2.4 V DC	210 mW	10600 Ω	± 15 %
CR-S060VDC1R(G)	60 V DC	45 V DC	90 V DC	3 V DC	210 mW	16600 Ω	± 15 %

Output circuits			
Output circuits			11-12/14
Kind of output			1 c/o (SPDT)
Contact material			$AgSnO_2$ / $AgSnO_2$/Au
Rated operational voltage U_e (IEC/EN 60947-1)			250 V AC
Minimum switching voltage			12 V DC
Maximum switching voltage			400 V AC / 125 V DC
Minimum switching current			100 mA ($AgSnO_2$) / 10 mA ($AgSnO_2$/Au)
Rated free air thermal current I_{th}			5 A
Rated operational current (IEC/EN 60947-5-1)	AC12 (resistive)	230 V	6 A
	AC15 (inductive)	230 V	1.5 A
	AC15 (inductive)	120 V	3 A
	DC12 (resistive)	24 V	6 A
	DC13 (inductive)	24 V	1 A
	DC13 (inductive)	120 V	0.22 A
	DC13 (inductive)	250 V	0.11 A
AC rating (UL 508; NEMA ICS-5)	Utilization category (pilot duty) (Contact rating code designation)		B300
DC rating (UL 508; NEMA ICS-5)	Utilization category (pilot duty) (Contact rating code designation)		R300
Maximum making (inrush) current			15 A, 240 V AC
Minimum switching power			100 mA/12 V ($AgSnO_2$) / 50 mW ($AgSnO_2$/Au)
Maximum switching (breaking) power	AC1 (resistive)		1500 VA, 250 V AC
Contact resistance			100 mΩ (at 1 A/ 6 V DC)
Maximum operating frequency	rated load AC1		360 switching cycles/h
	without load		18000 switching cycles/h
Mechanical lifetime			1 x 10^7 switching cycles
Electrical lifetime	AC1 (resistive)		(n/c) 3 x 10^4 switching cycles (at +85 °C) (n/o) 1 x 10^4 switching cycles (at +85 °C)
Response time			8 ms
Release time			4 ms
Isolation data			
Rated insulation voltage			250 V AC
Rated impulse withstand voltage U_{imp}	between coil and contacts		4000 V AC 1 min
	between open contacts		1000 V AC 1 min
Clearance	between coil and contacts		5.5 mm (0.217 in)
Creepage distance	between coil and contacts		8 mm (0.315 in)
Overvoltage category			III
Pollution degree			2
General data			
Dimensions (W x H x D)			28 x 5 x 15 mm (1.102 x 0.196 x 0.590 in)
Weight			5 g (0.011 lb)
Mounting			on socket
Mounting position			any
Degree of protection			RT II and RT III
Electrical connection			
Connection			by socket
Environmental data			
Ambient temperature range	operation		-40...+85 °C
	storage		0...+40 °C
Vibration resistance (10-150 Hz)	n/o contact		10 Hz to 55 Hz 1mm DA
	n/c contact		10 Hz to 55 Hz 1mm DA
Shock resistance	n/o contact		Functional 49 m/s² / Destructive 980 m/s²
	n/c contact		Functional 49 m/s² / Destructive 980 m/s²
Standards			
Product standard			IEC 61810-1
Low Voltage Directive			2006/95/EC


Pluggable interface relays
Technical data - CR-S range sockets

Input circuits		CR-S 6-24 V	CR-S 12-24 V	CR-S 48-60 V	CR-S 110-125 V	CR-S 220-240 V
Rated control supply voltage U_s		6-24 V DC	2-24 V AC/DC	48-60 V AC/DC	110-125 V AC/DC	220-240 V AC/DC
Rated control supply voltage U_s tolerance		(0.8-1.2) U_n	(0.8-1.1) U_n			
Typical current		11-29 mA	11-16 mA	3.6-4.5 mA	3.6 mA	3.6 mA
Response time		8 ms				
Release time		4 ms				
Status device		green LED				
Protective circuit		yes				
Output circuits						
Output circuits		11-12/14				
Number of poles		1				
Rated voltage		250 V AC				
Rated current		6 A				
General data for CR-S with screw connection terminal						
Dimensions without holder (L x W x H)		88.3 x 6.3 x 70.9 mm (3.476 x 0.248 x 2.789 in)				
Degree of protection (EN 60529)		Degree of protection (EN 60529) IP20 (terminals)				
Temperature range	operation	-40...+70 °C			-40...+55 °C	
	storage	0...+40 °C				
Connection type		Screw				
Maximum nuber of wires per connection terminal		2				
Wire size	rigid	1 x 2.5 mm² (1 x 14 AWG) ; 2 x 1.5 mm² (2 x 16 AWG)				
	fine-strand	1 x 2.5 mm² (1 x 14 AWG); 2 x 1.5 mm² (2 x 16 AWG)				
	with wire end ferule	1 x 2.5 mm² (1 x 14 AWG); 2 x 1.0 mm² (2 x 18 AWG)				
Tightening torque		0.5 Nm (4.426 lb.in)				
Stripping length		7 mm (0.276 in)				
Mounting (IEC/EN 60715)		DIN rail				
Material	socket	PA6 +GF-V2				
	contacts	CuZn36				
	contact surface	3 µ Ni/Sn				
	terminals	CuZn40, 3 µ Ni				
	combi screw M3	Fe				
General data for CR-S with spring connection terminal						
Dimensions without holder (L x W x H)		88.3 x 6.3 x 70.9 mm (3.476 x 0.248 x 2.789 in)				
Degree of protection (EN 60529)		Degree of protection (EN 60529) IP20 (terminals)				
Temperature range	operation	-40...+70 °C			-40...+55 °C	
	storage	0...+40 °C				
Connection type		Spring				
Maximum nuber of wires per connection terminal		1				
Wire size		2.5 mm² (14 AWG) rigid, fine-strand and with wire end ferule				
Stripping length		7 mm (0.276 in)				
Mounting (IEC/EN 60715)		DIN rail				
Material	socket	PA6 +GF-V2				
	contacts	CuZn36				
	contact surface	3 µ Ni/Sn				
	spring terminals	SUS301				
Isolation data						
Isolation between coil and contacts		5000 V AC				
Resistance to shock coil to contact		1000 MΩ				
Clearance and creepage distance		IEC/EN 61984				
Standards						
Product stancard		IEC/EN 61984: 2001				
Low Voltage Directive		2006/95/EC				

Load limit curves - Max. DC load breaking capacity

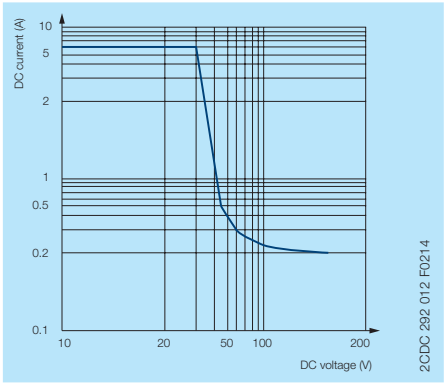


Endurance curve

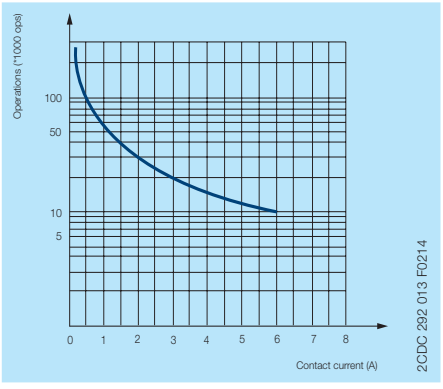

Pluggable interface relays
Load limit curves


Load limit curves - Electrical lifetime at resistive AC load

CR-P with 1 c/o contact

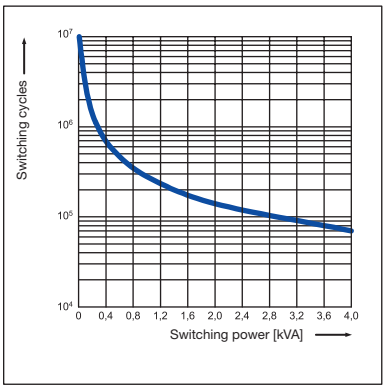


2CDC 292 003 F0204

CR-P with 2 c/o contacts

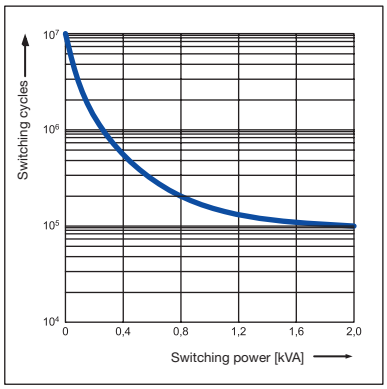


2CDC 292 009 F0204

CR-U with 2 and 3 c/o contacts

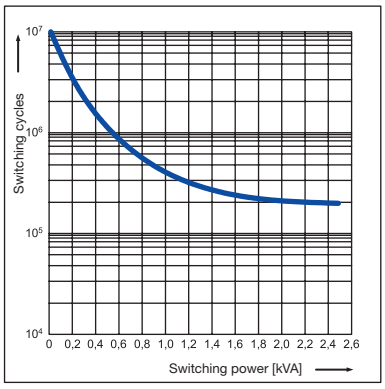


2CDC 292 027 F0204

CR-M with 2 c/o contacts

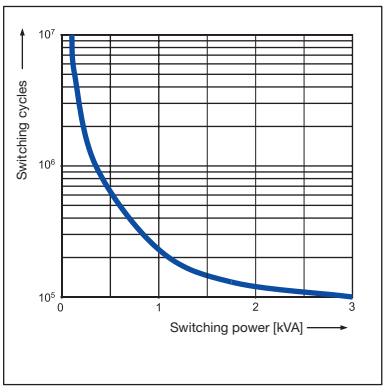


2CDC 292 013 F0204

CR-M with 3 c/o contacts

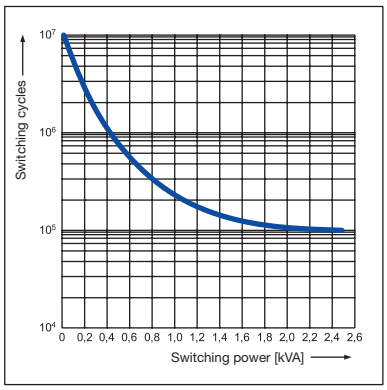

2CDC 292 018 F0204


CR-M with 4 c/o contacts

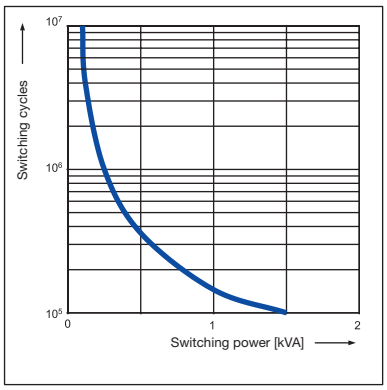

2CDC 292 022 F0204


Reduction factor F at inductive AC load

CR-P

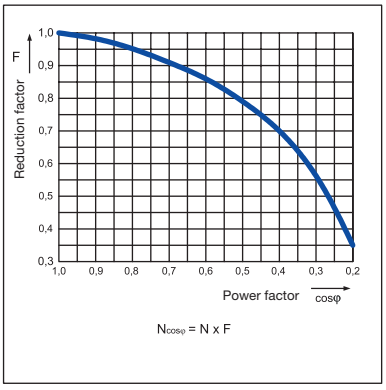


2CDC 292 004 F0204

CR-M

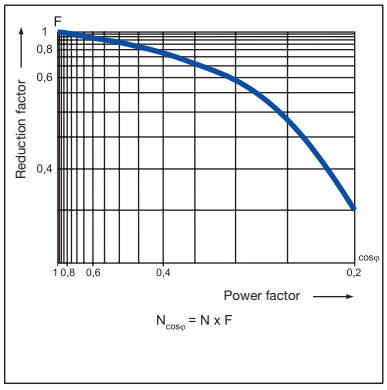

2CDC 292 014 F0204


CR-U

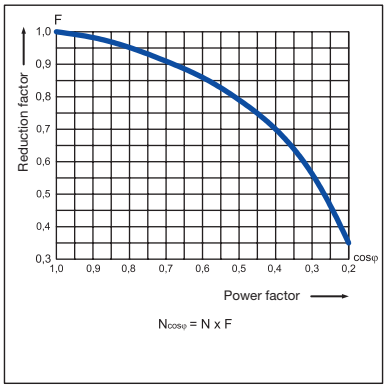


2CDC 292 029 F0204

Pluggable interface relays
Connection diagrams


Connection diagrams




CR-P with 1 c/o contact




CR-M with 2 c/o contacts




CR-M with 3 c/o contacts




CR-U with 2 c/o contacts




CR-P with 2 c/o contacts



CR-M with 4 c/o contacts




CR-S




CR-U with 3 c/o contacts


Dimensional drawings Dimensions in mm and inches




CR-P

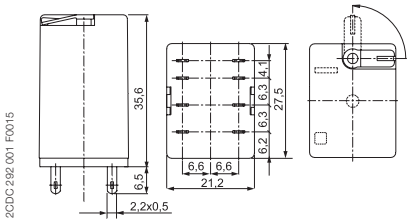


CR-M with 2 c/o contacts

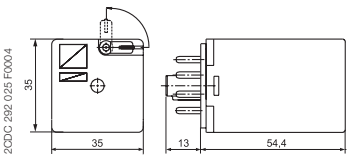


CR-U with 2 c/o contacts

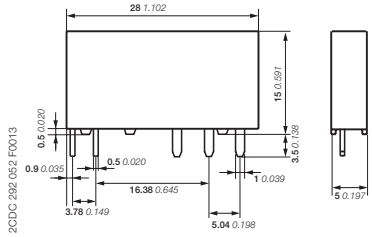


CR-S

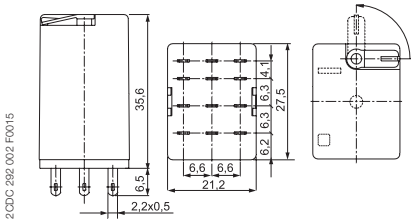

CR-M with 3 c/o contacts

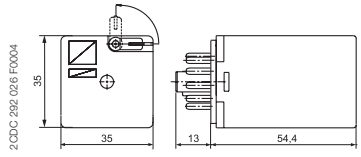


CR-U with 3 c/o contacts

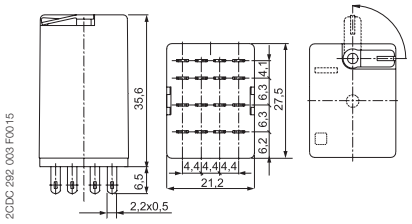


CR-M with 4 c/o contacts

Pluggable interface relays
Dimensional drawings


Dimensions in mm and inches

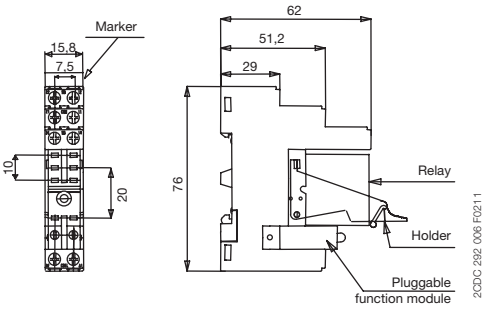


CR-PLS - screw connection

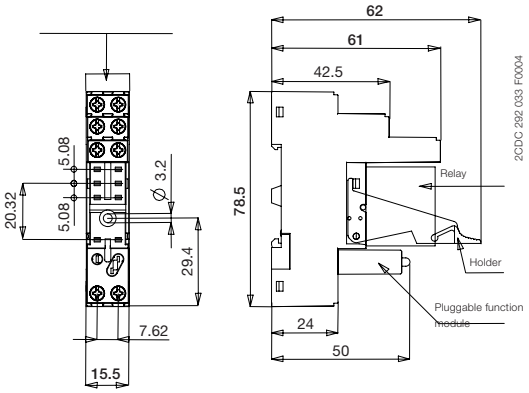


CR-PLSx - screw connection

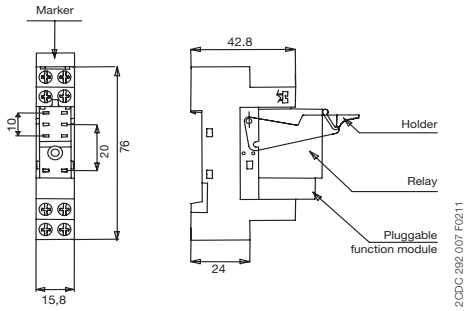


CR-PSS - screw connection

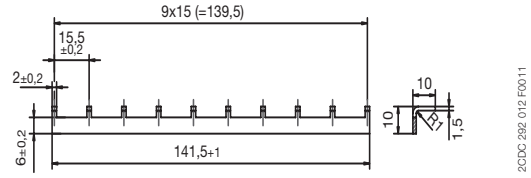


CR-PJ

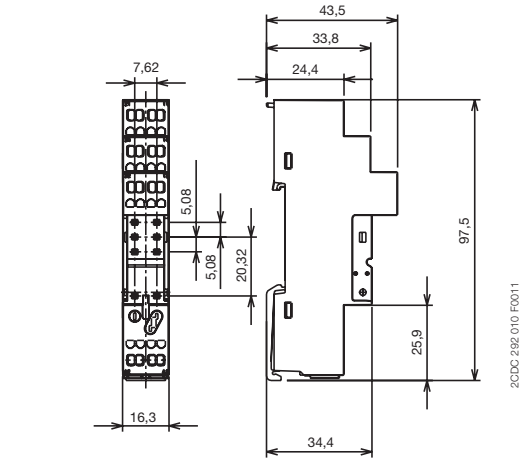


CR-PLC - spring connection

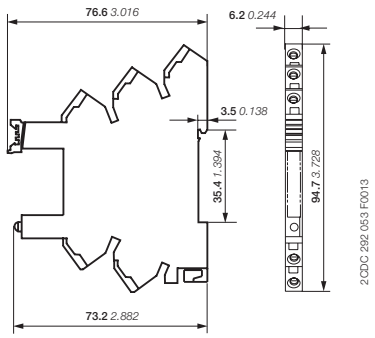

Spring socket for CR-S range interface relays

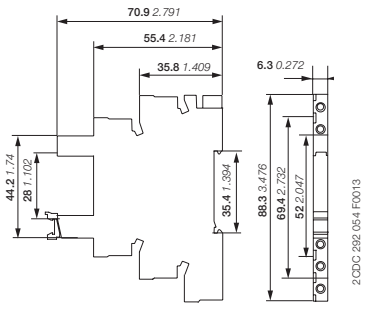


Screw socket for CR-S range interface relays

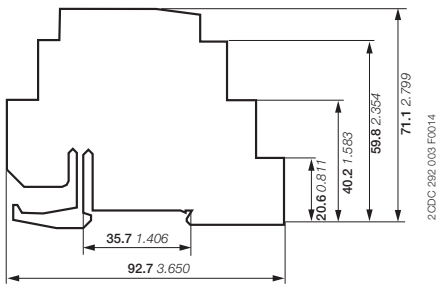

Separator for CR-S


Jumper

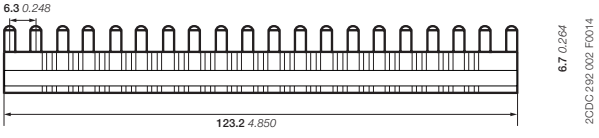


Jumper bar CR-S

Pluggable interface relays
Dimensional drawings


Dimensions in mm and inches

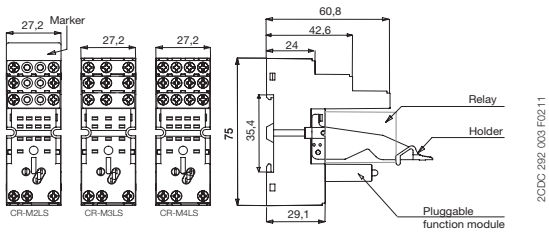


CR-M2LS - CR-M3LS - CR-M4LS - screw connection

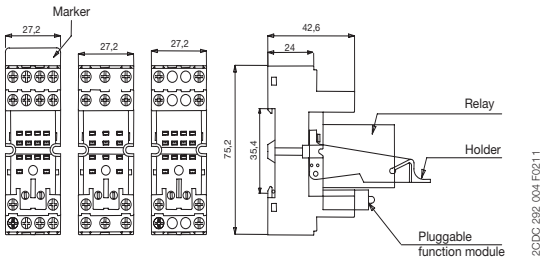


CR-M2SS - CR-M3SS - CR-M4SS - screw connection

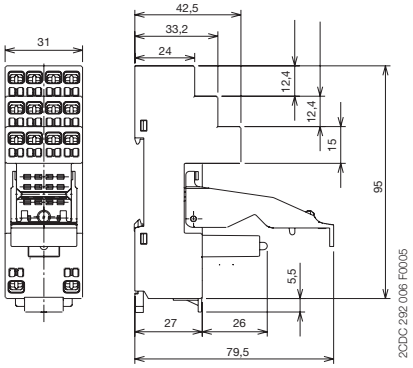


CR-M2LC , CR-M4LC - spring connection

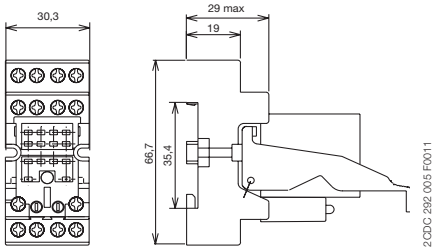


CR-MxSF - screw connection

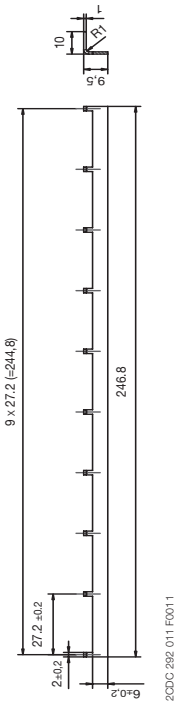


CR-MJ

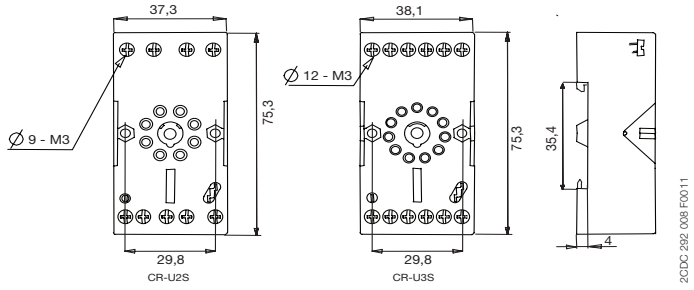


CR-U2S - CR-U3S

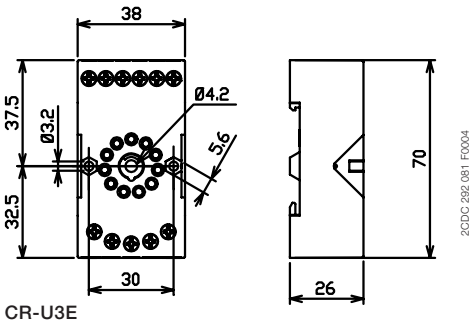

CR-U3E

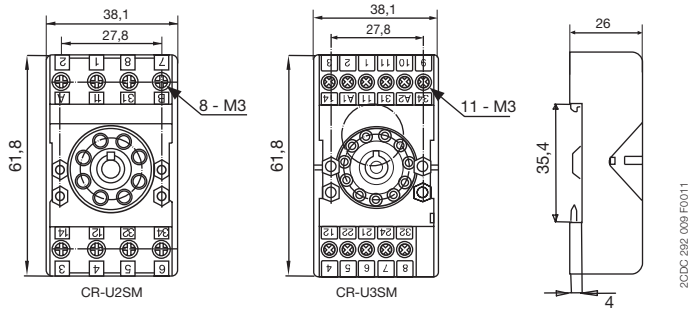


CR-U2SM

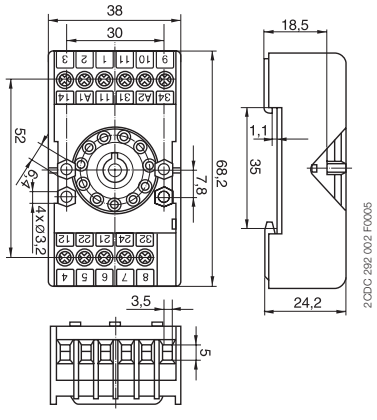

CR-U3SM

Interface relays and optocouplers R600 range
Product group picture

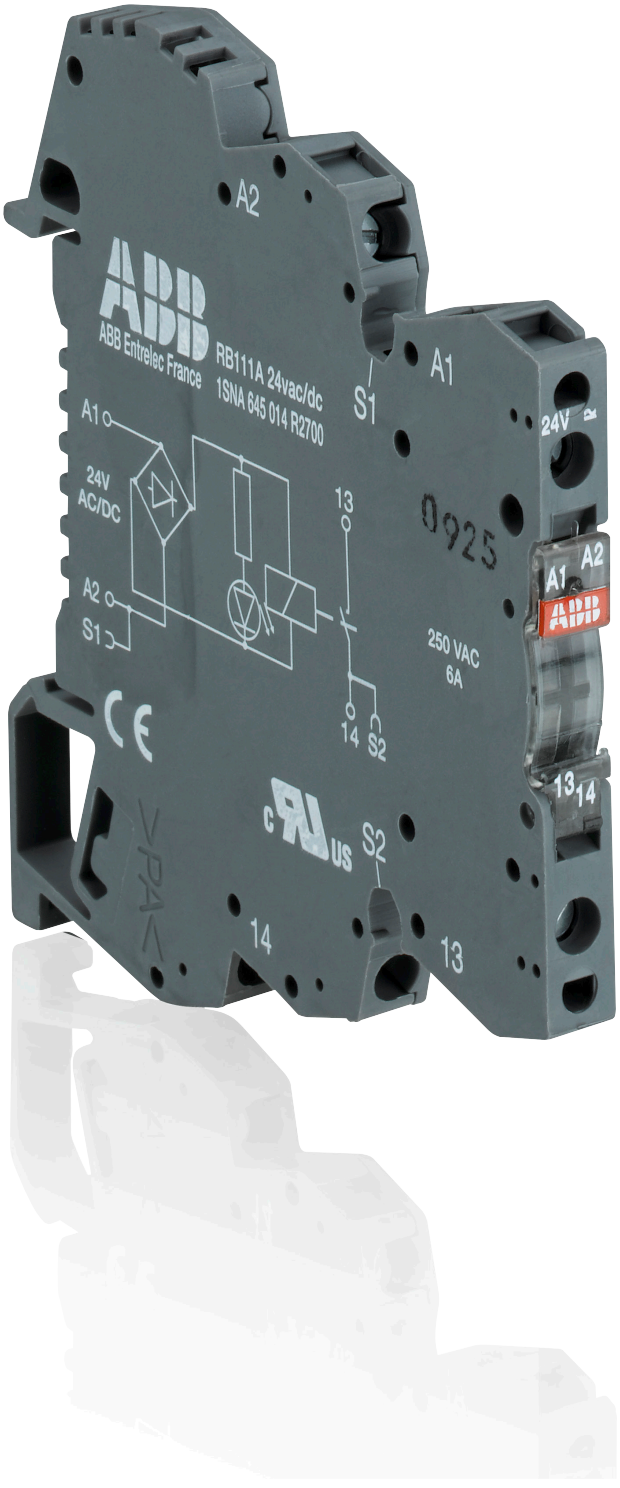

Interface relays and optocouplers R600 range
Table of contents

Interface relays and optocouplers R600 range

Benefits and advantages 5/29
Type designators 5/30
Interface relays R600 range 5/31
Benefits and advantages 5/31
Selection 5/33
Ordering details 5/35
Connection diagrams 5/37
Technical data 5/38
General technical data 5/43
Dimensional drawings, Load limit curves 5/44
Optocouplers R600 range 5/45
Selection 5/45
Ordering details 5/47
Connection diagrams 5/48
Technical data 5/49

Interface relays and optocouplers R600 range
Benefits and advantages



R600 series

5

Standard range in screw clamp or spring clamp versions


- Spacing : 6 mm or 12 mm
- Wire size : 2.5 mm² (4 mm² solid wire)
- Contact type : 1 NO, 1 NC, 1 SPDT, 1 DPDT from 1 mA to 8 A / 250 V


In today's automation systems, PLCs are the core of industry. They link sensors and actuators to the process, which are connected to the PLC via conventional wires.
However these PLCs are not completely isolated from the industrial environment, hence over voltage picks and transient currents can affect their operating functions. And additionally, their application field is often limited to 24 VDC / 100 mA.
So, with the aim to adapt application voltage and/or current and provide as well the right electrical isolation to the PLC, it is recommended to install per I/O the right interface providing both voltage-current level adaptation and isolation protection.
This interfacing is possible thanks to ABB's relays and optocouplers ranges, which offer wide adaptation in both voltage (from 5 to 400 V) and current (from 10-7 to 16 A) as well as high isolation between input and output from 2 to 4 KV.


Interface relays and optocouplers R600 range
Type designators

SERIES	CODE	NB OF RELAYS	CONTACT TYPE	NB OF CONTACTS PER RELAY	PARTICULARITIES
R600 screw type	R / B	☐	☐	☐	☐
R600 spring type	R / B / R	☐	☐	☐	☐
		1	0 1 2	1 2	None / A / R

Description of contact types

0  1 Normally Closed 1 NC


1  1 Normally Open 1 NO


2  1 Change Over or Single Pole Double Through

Features

None Input voltage DC
A Input voltage AC/DC


R RC circuit protection :

 - Input protection against leakage current

 - Increases relay contacts life


Interface relays R600 range
Benefits and advantages

Characteristics
- Standard range available with screw or spring-type terminals
- 8 different rated control supply voltages:
  DC versions: 5 V, 12 V, 24 V
  AC/DC versions: 24 V, 48-60 V, 115 V, 230 V, 60-230 V
- Output: 1 n/c contact, 1 n/o contact, 1 c/o (SPDT) contact, 2 c/o (SPDT) contacts
- Devices with output contacts protected by built in RC circuit, which result in increased contact life
- Devices with leakage current protection on the input side
- Available with visible or covered switch on the front of the unit, for the configuration of manual or automatic actuation
- With connection for jumper bar, except 2 c/o devices and some discontinued devices
- Width: 6 mm (0.236 in) or 12 mm (0.472 in)
- LED for the indication of the operational state
- Accessories: Jumper bars, separator end section
- Approvals / Marks
  (pending) /

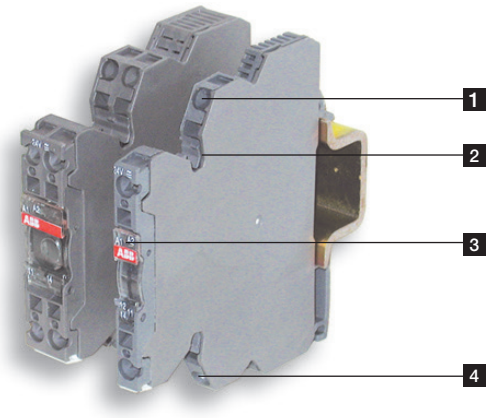

1 Input - Control supply voltage
2 Jumper bar connection
3 Indication of operational states (green LED)
4 Output


Excellent adaption and conversion of digital signals

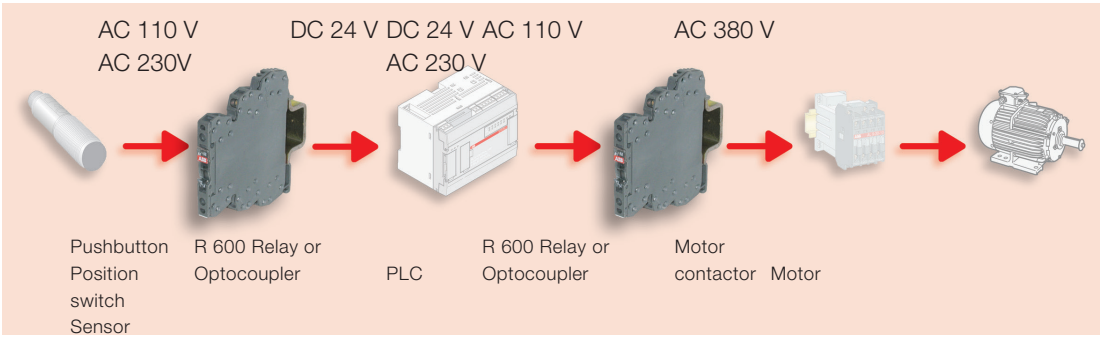


Interface relays R600 range
Benefits and advantages

Interface relays are electromechanic and electronic input and output modules for electrical isolation, levelling, noise suppression or signal amplification between control unit and process.
Boxed interface relays are used for electrical isolation, amplification and signal matching between the electronic controlling, e.g. PLC (programmable logic controller), PC or field bus systems and the sensor / actuator level. The compact design and different connection terminal possibilities optimize your panel installation.


Increased contact life
The contacts of some devices are protected by built in RC-circuits which result in increased contact life.



Variety of connections
R600 relays and optocouplers are available with both screw terminals or spring terminals.




Space safing
With a width of only 6 mm or 12 mm the compact design safes space in each cabinet.

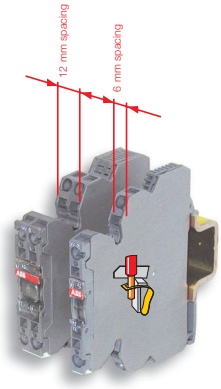


Functioning status
Functioning display through a green LED.



Only one part number AC/DC




Measurement & Test
Holes for holding DIA. 2 mm test plugs to simplify any measurement or test.



Interface relays R600 range
Selection

Type	Order number	Input voltage																																				
		5 V DC	12 V DC	24 V DC	48-60 V DC	115 V DC	230 V DC	60-230 V DC	24 V AC	48-60 V AC	115 V AC	230 V AC	60-230 V AC	Output rating	10 mA - 6 A	1 mA - 6 A	1 mA - 8 A	Output contacts	c/o	n/o	n/c	Terminal type	Screw	Spring															
RB 121-5VDC	1SNA645034R2300	■													■				1				■																
RB 121-5VDC	1SNA645036R2500															■			1					■															
RBR 121-5VDC	1SNA645534R2500	■													■				1				■																
RBR 121-5VDC	1SNA645536R2700															■			1					■															
RB121-12VDC	1SNA645073R0000		■												■				1				■																
RB121-12VDC	1SNA645035R2400		■													■			1					■															
RB121-AU-12VDC	1SNA645075R0000		■												■				1				■																
RBR121-AU-12VDC	1SNA645575R0000		■													■			1					■															
RBR121-12VDC	1SNA645535R2600		■												■				1				■																
RBR121-12VDC	1SNA645573R0000		■													■			1					■															
RB 101AR-24VAC/DC	1SNA645019R0400			■					■						■					1	1		■																
RBR 101AR-24VAC/DC	1SNA645519R0600			■					■							■				1	1			■															
RB 111A-24VAC/DC	1SNA645014R2700			■					■						■					1			■																
RB 111AR-24VAC/DC	1SNA645018R0300			■					■							■				1				■															
RBR 111A-24VAC/DC	1SNA645514R2100			■					■						■					1			■																
RB 121A-24VAC/DC	1SNA645001R0300			■					■						■						1		■																
RB 121A-24VAC/DC	1SNA645005R0700			■					■							■					1			■															
RBR 121A-24VAC/DC	1SNA645501R0500			■					■						■						1		■																
RBR 121A-24VAC/DC	1SNA645505R0100			■					■							■					1			■															
RB 122A-24VAC/DC	1SNA645012R2500			■					■						■						1		■																
RBR 122A-24VAC/DC	1SNA645512R2700			■					■							■					1			■															
RB121-24VDC	1SNA645071R0000			■											■				1				■																
RBR121-24VDC	1SNA645571R0000			■												■			1					■															
RB121-AU-24VDC	1SNA645072R0000			■											■				1				■																
1SNA645572R0000	1SNA645572R0000			■												■			1					■															
RB 121A-48-60VAC/DC	1SNA645002R0400			■						■					■						1		■																
RB 121A-48-60VAC/DC	1SNA645006R0000			■						■						■					1			■															
RBR 121A-48-60VAC/DC	1SNA645502R0600			■						■					■						1		■																
RBR 121A-48-60VAC/DC	1SNA645506R0200			■						■						■					1			■															
RB 122A-48-60VAC/DC	1SNA645040R1500			■						■					■						1		■																
RBR 122A-48-60VAC/DC	1SNA645540R1700			■						■						■					1			■															

Interface relays R600 range
Selection

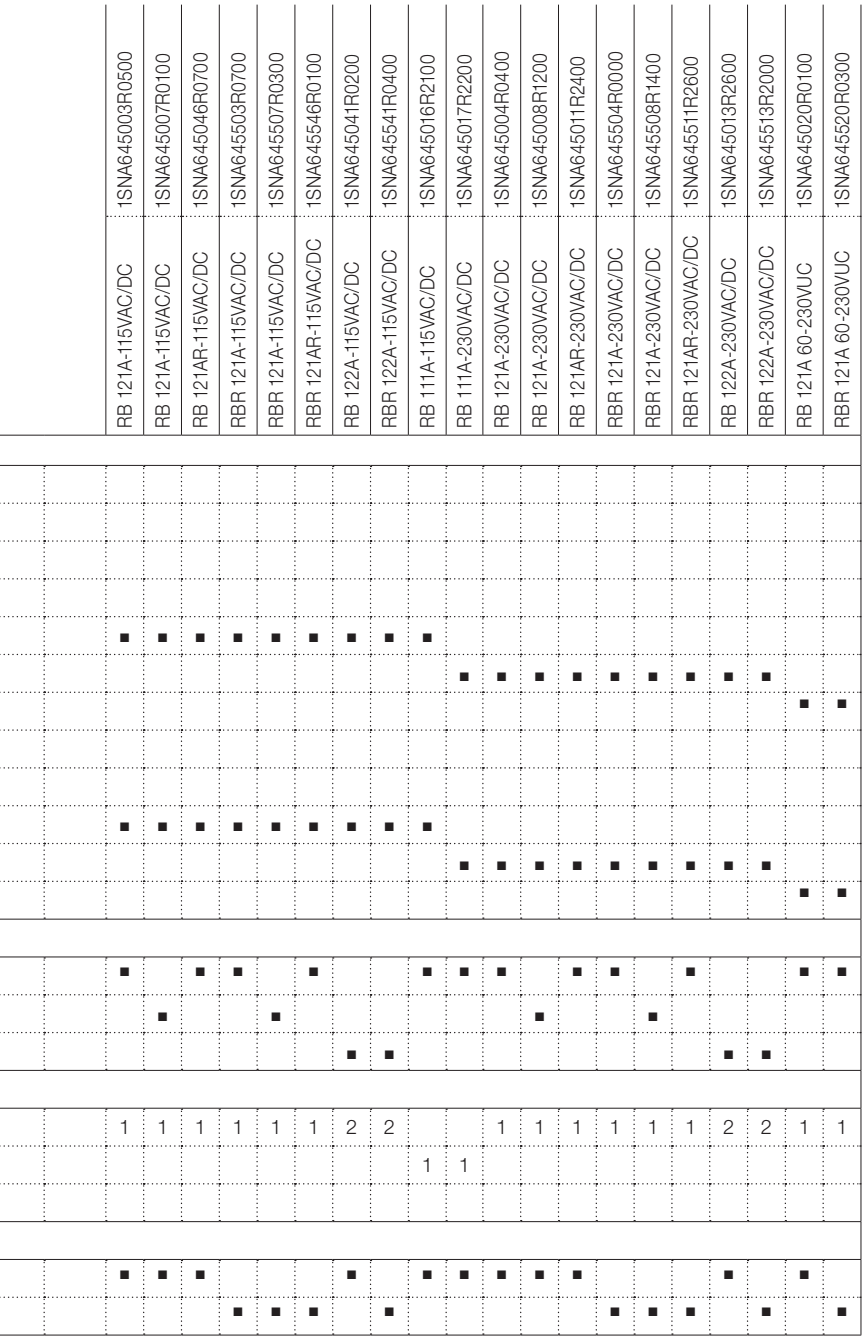

Interface relays R600 range
Ordering details



R600 - 6 mm

screw terminals

spring terminals

Ordering details - 1 n/c contact: 250 V, 10 mA - 6 A (high level), width 12 mm

Rated control supply voltage	Particularities and connection type		Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
24 V AC/DC	RC circuit parallel to contact on output side		RB101AR-24VAC/DC	1SNA645019R0400		5	0.04 (0.088)
			RBR101AR-24VAC/DC	1SNA645519R0600			

Ordering details - 1 n/o contact: 250 V, 10 mA - 6 A (high level) width 6 mm

Rated control supply voltage	Particularities and connection type		Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
24 V AC/DC			RB111A-24VAC/DC	1SNA645014R2700		10	0.02 (0.044)
115 V AC/DC			RB111A-115VAC/DC	1SNA645016R2100			
230 V AC/DC			RB111A-230VAC/DC	1SNA645017R2200			
24 V AC/DC			RBR111A-24VAC/DC	1SNA645514R2100			

Ordering details - 1 n/o contact: 250 V, 10 mA - 6 A (high level), width 12 mm

Rated control supply voltage	Particularities and connection type		Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
24 V AC/DC	RC circuit parallel to contact on output side		RB111AR-24VAC/DC	1SNA645018R0300		5	0.04 (0.088)
			RBR111AR-24VAC/DC	1SNA645518R0500			

Ordering details - 1 c/o (SPDT) contact: 250 V, 1 mA - 6 A (low level), width 6 mm

Rated control supply voltage	Particularities and connection type		Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
5 V DC	A1-A2 polarized		RB121-5VDC	1SNA645036R2500		10	0.02 (0.044)
12 V DC			RB121-AU-12VDC	1SNA645075R0000			
24 V DC			RB121-AU-24VDC	1SNA645072R0000			
24 V AC/DC			RB121A-24VAC/DC	1SNA645005R0700			
48-60 V AC/DC			RB121A-48-60VAC/DC	1SNA645006R0000			
115 V AC/DC			RB121A-115VAC/DC	1SNA645007R0100			
230 V AC/DC			RB121A-230VAC/DC	1SNA645008R1200			
5 V DC	A1-A2 polarized		RBR121-5VDC	1SNA645536R2700			
12 V DC			RBR121-AU-12VDC	1SNA645575R0000			
24 V DC			RBR121-AU-24VDC	1SNA645572R0000			
24 V AC/DC			RBR121A-24VAC/DC	1SNA645505R0100			
48-60 V AC/DC			RBR121A-48-60VUC	1SNA645506R0200			
115 V AC/DC			RBR121A-115VAC/DC	1SNA645507R0300			
230 V AC/DC			RBR121A-230VAC/DC	1SNA645508R1400			

Interface relays R600 range
Ordering details



R600 - 12 mm

screw terminals

spring terminals

Ordering details - 1 c/o (SPDT) contact: 250 V, 10 mA - 6 A (high level), width 6 mm

Rated control supply voltage	Particularities and connection type		Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
5 V DC	A1-A2 polarized		RB121-5VDC	1SNA645034R2300		10	0.02 (0.044)
12 V DC	A1-A2 polarized		RB121-12VDC	1SNA645035R2400			
12 V DC			RB121-12VDC	1SNA645073R0000			
24 V DC			RB121-24VDC	1SNA645071R0000			
24 V AC/DC			RB121A-24VAC/DC	1SNA645001R0300			
48-60 V AC/DC			RB121A-48-60VAC/DC	1SNA645002R0400			
115 V AC/DC			RB121A-115VAC/DC	1SNA645003R0500			
230 V AC/DC			RB121A-230VAC/DC	1SNA645004R0400			
5 V DC	A1-A2 polarized		RBR121-5VDC	1SNA645534R2500			
12 V DC	A1-A2 polarized		RBR121-12VDC	1SNA645535R2600			
12 V DC			RBR121-12VDC	1SNA645573R0000			
24 V DC			RBR121-24VDC	1SNA645571R0000			
24 V AC/DC			RBR121A-24VAC/DC	1SNA645501R0500			
48-60 V AC/DC			RBR121A-48-60VUC	1SNA645502R0600			
115 V AC/DC			RBR121A-115VAC/DC	1SNA645503R0700			
230 V AC/DC			RBR121A-230VAC/DC	1SNA645504R0000			


Ordering details - 1 c/o (SPDT) contact: 250 V, 10 mA - 6 A (high level), width 12 mm

Rated control supply voltage	Particularities and connection type		Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
60-230 V AC/DC			RB121A-60-230VUC	1SNA645020R0100			
115 V AC/DC	Leakage current protection, input side		RB121AR-115VAC/DC	1SNA645046R0700			
230 V AC/DC			RB121AR-230VAC/DC	1SNA645011R2400			0.04 (0.088)
60-230 V AC/DC			RBR121A-60-230VUC	1SNA645520R0300			
115 V AC/DC	Leakage current protection, input side		RBR121AR-115VAC/DC	1SNA645546R0100			
230 V AC/DC			RBR121AR-230VAC/DC	1SNA645511R2600			

Ordering details - 2 c/o (SPDT) contacts: 250 V, 1 mA - 8 A (low level), width 12 mm

Rated control supply voltage	Connection type	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
24 V AC/DC		RB122A-24VAC/DC	1SNA645012R2500		5	0.04 (0.088)
48-60 V AC/DC		RB122A-48-60VAC/DC	1SNA645040R1500			
115 V AC/DC		RB122A-115VAC/DC	1SNA645041R0200			
230 V AC/DC		RB122A-230VAC/DC	1SNA645013R2600			
24 V AC/DC		RBR122A-24VAC/DC	1SNA645512R2700			
48-60 V AC/DC		RBR122A-48-60VUC	1SNA645540R1700			
115 V AC/DC		RBR122A-115VAC/DC	1SNA645541R0400			
230 V AC/DC		RBR122A-230VAC/DC	1SNA645513R2000			

Ordering details - Accessories




Description	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
24 V AC/DC	BJ 612-10	1SNA290488R0100		10	0.05 (0.11)
48-60 V AC/DC	BJ 612-20	1SNA206754R0000			0.01 (0.022)
230 V AC/DC	SC 612	1SNA290474R0200			0.05 (0.11)


Interface relays R600 range
Connection diagrams

11-12	n/c contact
13-14	n/o contact
11-12/14	1st c/o contact
21-22/24	2nd c/o contact


A1-A2	Control supply voltage
S1	Connection for jumper bar (input side)
S2	Connection for jumper bar (output side)

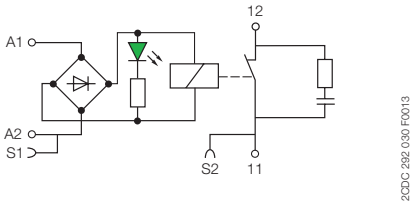


RB/RBR 101 AR

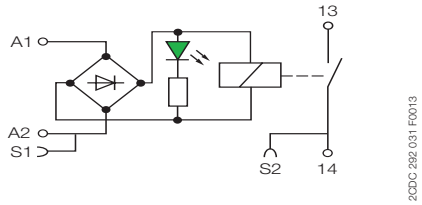


RB/RBR 111 A - 24 V AC/DC

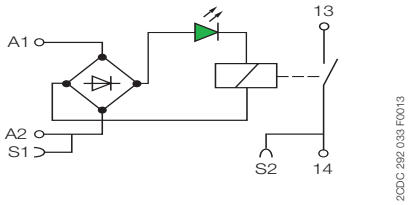


RB/RBR 111 A - 48/60/115/230 V AC/DC

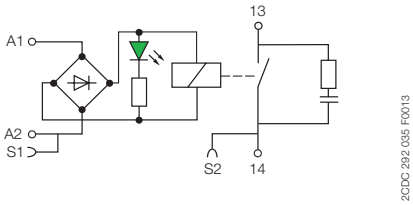


RB/RBR 111 AR

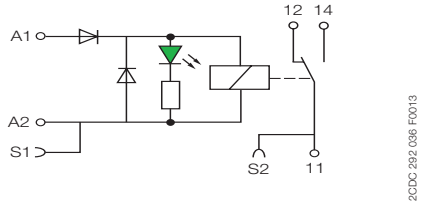


RB/RBR 121
- 5 V DC, A1-A2 polarized
- 12 V DC, A1-A2 polarized, i.e. only:
1SNA645035R2400, 1SNA645535R2600

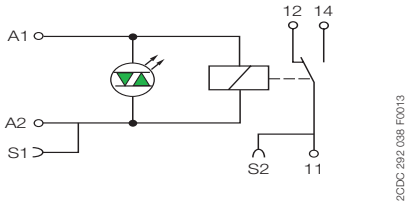


RB/RBR 121 (AU)
- 12/24 V DC, except:
1SNA645035R2400, 1SNA645535R2600
see connection diagram RB...121-5VDC

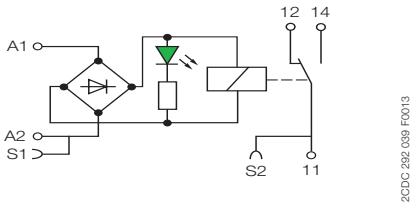


RB/RBR 121 A - 24 V AC/DC

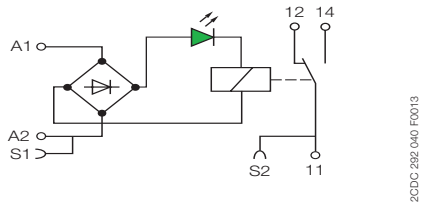


RB/RBR 121 A - 48/60/115/230 V AC/DC

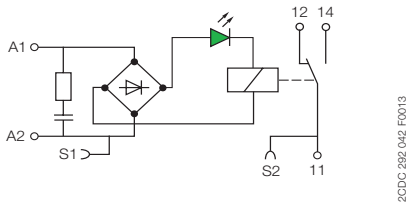

RB/RBR 121 AR

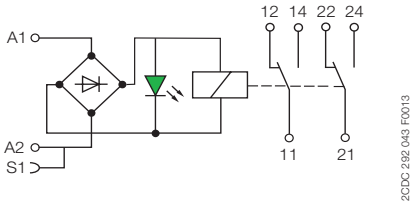

RB/RB 122 A - 24/48/60 V AC/DC

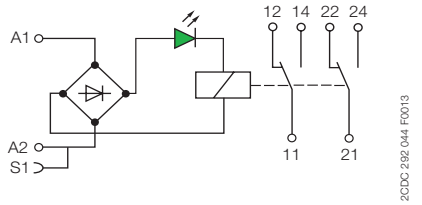

RB/RBR 122 A - 115/230 V AC/DC

Interface relays R600 range
Technical data

Technical data

		RB... 111A high level				
Input circuit						
Rated control supply voltage U_s		24 V AC/DC	48 V AC/DC	60 V AC/DC	115 V AC/DC	230 V AC/DC
Rated control supply voltage U_s tolerance	DC	-15 %, +20 %				-15 %, +10 %
	AC	-/+ 10 %				
Rated frequency		50/60 Hz				
Typical power consumption		0.24 W	0.34 W	0.54 W	0.46 W	0.8 W
Typical current		10 mA	7 mA	9 mA	4 mA	3.5 mA
Drop-out voltage		4.5 V	8 V	8 V	17 V	27 V
Indication of operational states	green LED	⎍: control supply voltage applied				
Output circuit						
Kind of output	13-14	relay, 1 n/o contact				
Rated operational voltage U_e (IEC/EN 60947-1)		250 V AC				
Minimum switching voltage		12 V				
Maximum switching voltage		250 V AC				
Minimum switching current		10 mA				
Rated free air thermal current I_{th}		6 A				
Rated operational current (IEC/EN 60947-5-1)	AC-12 (resistive) 230 V	6 A				
	AC-15 (inductive) 230 V	1.5 A				
	AC-15 (inductive) 120 V	3 A				
	DC-12 (resistive) 24 V	6 A				
	DC-13 (inductive) 24 V	1 A				
	DC-13 (inductive) 120 V	0.2 A				
	DC-13 (inductive) 230 V	0.1 A				
AC rating (UL 508; NEMA ICS-5)	Utilization category (pilot duty)	B300				
DC rating (UL 508; NEMA ICS-5)	Utilization category (pilot duty)	R300				
Minimum switching power		0.6 W / 0.6 VA				
Mechanical lifetime		1 x 10^7 switching cycles				
Electrical lifetime	at AC-15	1 x 10^5 switching cycles				
Response time		5 ms	5 ms	5 ms	6 ms	7 ms
Release time		8 ms	8 ms	8 ms	15 ms	15 ms
Dimensions and weight		**RB 111 A**			**RBR 111 A**	
Weight	net weight	0.02 kg (0.044 lb)				
Dimension	product dimension	6 x 70 x 75 mm (0.236 x 2.76 x 2.95 in)			6 x 75 x 75 mm (0.236 x 2.95 x 2.95 in)	

Interface relays R600 range
Technical data

Technical data

		RB... 111AR high level	RB... 101AR high level
Input circuit			
Rated control supply voltage U_s		24 V AC/DC	
Rated control supply voltage U_s tolerance	DC	-15 %, +20 %	
	AC	-/+ 10 %	
Rated frequency		50/60 Hz	
Typical power consumption		0.24 W	
Typical current		10 mA	
Drop-out voltage		4.5 V	
Indication of operational states	green LED	⎍⎍: control supply voltage applied	
Output circuit			
Kind of output	11-12	-	relay, 1 n/c contact
	13-14	relay, 1 n/o contact	-
Rated operational voltage U_e (IEC/EN 60947-1)		250 V AC	
Minimum switching voltage		12 V	
Maximum switching voltage		250 V AC	
Minimum switching current		10 mA	
Rated free air thermal current I_{th}		6 A	
Rated operational current (IEC/EN 60947-5-1)	AC-12 (resistive) 230 V	6 A	
	AC-15 (inductive) 230 V	1.5 A	
	AC-15 (inductive) 120 V	3 A	
	DC-12 (resistive) 24 V	6 A	
	DC-13 (inductive) 24 V	1 A	
	DC-13 (inductive) 120 V	0.2 A	
	DC-13 (inductive) 230 V	0.1 A	
AC rating (UL 508; NEMA ICS-5)	Utilization category (pilot duty)	B300	
DC rating (UL 508; NEMA ICS-5)	Utilization category (pilot duty)	R300	
Minimum switching power		0.6 W / 0.6 VA	
Mechanical lifetime		1 x 10^7 switching cycles	
Electrical lifetime	at AC-15	1 x 10^5 switching cycles	
Response time		5 ms	
Release time		8 ms	
Dimensions and weight		**RB 111AR / RB 101AR high level**	**RBR 111A / RBR 111AR high level**
Weight	net weight	0.03 kg (0.066 lb)	
Dimension	product dimension	12 x 70 x 75 mm (0.472 x 2.76 x 2.95 in)	12 x 75 x 75 mm (0.472 x 2.95 x 2.95 in)

Interface relays R600 range
Technical data

Technical data

		RB... 121 / RB... 121A high level						
Input circuit								
Rated control supply voltage U_s		5 V DC	12 V DC	24 V AC/DC	48 V AC/DC	60 V AC/DC	115 V AC/DC	230 V AC/DC
Rated control supply voltage U_s tolerance	DC	-15 %, +20 %						-15 %, +10 %
	AC	-		-/+ 10 %				
Rated frequency		-		50/60 Hz				
Typical power consumption		0.2 W	0.2 W	0.24 W	0.33 W	0.54 W	0.46 W	0.8 W
Typical current		40 mA	16 mA	10 mA	7 mA	9 mA	4 mA	3.5 mA
Drop-out voltage		1.2 V	2.2 V	4.5 V	8 V	8 V	17 V	27 V
Indication of operational states	green LED	⎍: control supply voltage applied						
Output circuit								
Kind of output	11-12/14	relay, 1 c/o (SPDT) contact						
Rated operational voltage U_e (IEC/EN 60947-1)		250 V AC						
Minimum switching voltage		12 V						
Maximum switching voltage		250 V AC						
Minimum switching current		10 mA						
Rated free air thermal current I_{th}		6 A						
Rated operational current (IEC/EN 60947-5-1)	AC-12 (resistive) 230 V	6 A						
	AC-15 (inductive) 230 V	1.5 A						
	AC-15 (inductive) 120 V	3 A						
	DC-12 (resistive) 24 V	6 A						
	DC-13 (inductive) 24 V	1 A						
	DC-13 (inductive) 120 V	0.2 A						
	DC-13 (inductive) 230 V	0.1 A						
AC rating (UL 508; NEMA ICS-5)	Utilization category (pilot duty)	B300						
DC rating (UL 508; NEMA ICS-5)	Utilization category (pilot duty)	R300						
Minimum switching power		0.6 W / 0.6 VA						
Mechanical lifetime		1 x 10^7 switching cycles						
Electrical lifetime	at AC-15	1 x 10^5 switching cycles						
Response time		5 ms	5 ms	5 ms	5 ms	5 ms	6 ms	7 ms
Release time		8 ms	8 ms	8 ms	8 ms	8 ms	15 ms	16 ms
Dimensions and weight		**RB 121 / RB 121A high level**			**RBR 121 / RBR 121 A high level**			
Weight	net weight	0.02 kg (0.044 lb)						
Dimension	product dimension	6 x 70 x 75 mm (0.236 x 2.76 x 2.95 in)			6 x 75 x 75 mm (0.236 x 2.95 x 2.95 in)			

5

Interface relays R600 range
Technical data

Technical data

		RB... 121 / RB... 121A low level						
Input circuit								
Rated control supply voltage U_s		5 V DC	12 V DC	24 V AC/DC	48 V AC/DC	60 V AC/DC	115 V AC/DC	230 V AC/DC
Rated control supply voltage U_s tolerance	DC	-15 %, +20 %						-15 %, +10 %
	AC	-		-/+ 10 %				
Rated frequency		-		50/60 Hz				
Typical power consumption		0.2 W	0.2 W	0.24 W	0.33 W	0.54 W	0.46 W	0.8 W
Typical current		40 mA	16 mA	10 mA	7 mA	9 mA	4 mA	3.5 mA
Drop-out voltage		1.2 V	2.2 V	4.5 V	8 V	8 V	17 V	27 V
Indication of operational states	green LED	⎍⎍: control supply voltage applied						
Output circuit								
Kind of output	11-12/14	relay, 1 c/o (SPDT) contact						
Rated operational voltage U_e (IEC/EN 60947-1)		250 V AC						
Minimum switching voltage		5 V						
Maximum switching voltage		250 V AC						
Minimum switching current		1 mA						
Rated free air thermal current I_{th}		6 A						
Rated operational current (IEC/EN 60947-5-1)	AC-12 (resistive) 230 V	6 A						
	AC-15 (inductive) 230 V	1.5 A						
	AC-15 (inductive) 120 V	3 A						
	DC-12 (resistive) 24 V	6 A						
	DC-13 (inductive) 24 V	1 A						
	DC-13 (inductive) 120 V	0.2 A						
	DC-13 (inductive) 230 V	0.1 A						
AC rating (UL 508; NEMA ICS-5)	Utilization category (pilot duty)	B300						
DC rating (UL 508; NEMA ICS-5)	Utilization category (pilot duty)	R300						
Minimum switching power		0.05 W / 0.05 VA						
Mechanical lifetime		1 x 10^7 switching cycles						
Electrical lifetime	at AC-15	1 x 10^5 switching cycles						
Response time		5 ms	5 ms	5 ms	5 ms	5 ms	6 ms	7 ms
Release time		8 ms	8 ms	8 ms	8 ms	8 ms	15 ms	16 ms
Dimensions and weight		RB 121 / RB 121A low level			RBR 121 / RBR 121 A low level			
Weight	net weight	0.02 kg (0.044 lb)						
Dimension	product dimension	6 x 70 x 75 mm (0.236 x 2.76 x 2.95 in)			6 x 75 x 75 mm (0.236 x 2.95 x 2.95 in)			

Interface relays R600 range
Technical data

Technical data

		RB... 121AR	
Input circuit			
Rated control supply voltage U_s		115 V AC/DC	230 V AC/DC
Rated control supply voltage U_s tolerance	DC	-20%, +15%	-10%, +15%
	AC	-/+ 10 %	
Rated frequency		50/60 Hz	
Typical power consumption		2 W	2.8 W
Typical current		18 mA	12 mA
Drop-out voltage		17 V	27 V
Indication of operational states	green LED	⎍: control supply voltage applied	
Output circuit			
Kind of output	11-12/14	relay, 1 c/o (SPDT) contact	
Rated operational voltage U_e (IEC/EN 60947-1)		250 V AC	
Minimum switching voltage		12 V	
Maximum switching voltage		250 V AC	
Minimum switching current		10 mA	
Rated free air thermal current I_{th}		6 A	
Rated operational current (IEC/EN 60947-5-1)	AC-12 (resistive) 230 V	6 A	
	AC-15 (inductive) 230 V	1.5 A	
	AC-15 (inductive) 120 V	3 A	
	DC-12 (resistive) 24 V	6 A	
	DC-13 (inductive) 24 V	1 A	
	DC-13 (inductive) 120 V	0.2 A	
	DC-13 (inductive) 230 V	0.1 A	
AC rating (UL 508; NEMA ICS-5)	Utilization category (pilot duty)	B300	
DC rating (UL 508; NEMA ICS-5)	Utilization category (pilot duty)	R300	
Minimum switching power		0.6 W / 0.6 VA	
Mechanical lifetime		1 x 10^7 switching cycles	
Electrical lifetime	at AC-15	1 x 10^5 switching cycles	
Response time		6 ms	7 ms
Release time		15 ms	16 ms
Dimensions and weight		**RB 121AR**	**RBR 121AR**
Weight	net weight	0.03 kg (0.066 lb)	
Dimension	product dimension	12 x 70 x 75 mm (0.472 x 2.76 x 2.95 in)	12 x 75 x 75 mm (0.472 x 2.95 x 2.95 in)

Technical data

		RB... 122A low level				
Input circuit						
Rated control supply voltage U_s		24 V AC/DC	48 V AC/DC	60 V AC/DC	115 V AC/DC	230 V AC/DC
Rated control supply voltage U_s tolerance	DC	-15 %, +20 %				-15 %, +10 %
	AC	-/+ 10 %				
Rated frequency		50/60 Hz				
Typical power consumption		0.48 W	0.62 W	0.96 W	0.58 W	1.15 W
Typical current		20 mA	13 mA	16 mA	5 mA	5 mA
Drop-out		5.4 V	8.8 V	8.8 V V	20 V	10 V
Indication of operational states	green LED	⎍: control supply voltage applied				
Output circuit						
Kind of output	11-12/14	relay, 1st c/o (SPDT) contact				
	21-22/24	relay, 2nd c/o (SPDT) contact				
Rated operational voltage U_e (IEC/EN 60947-1)		250 V AC				
Minimum switching voltage		5 V				
Maximum switching voltage		250 V DC - 250 V AC				
Minimum switching current		1 mA				
Rated free air thermal current I_{th}		8 A		5 A		
Rated operational current (IEC/EN 60947-5-1)	AC-12 (resistive) 230 V	8 A		5 A		
	DC-12 (resistive) 24 V	8 A		5 A		
Minimum switching power		5 mW / 5 mVA				
Mechanical lifetime		2 x 10^7 switching cycles				
Electrical lifetime	at AC-15	1 x 10^5 switching cycles				
Response time		6 ms	10 ms	10 ms	6 ms	6 ms
Release time		10 ms	14 ms	14 ms	15 ms	15 ms
Dimensions and weight		**RB 122A low level**			**RBR 122A low level**	
Weight	net weight	0.03 kg (0.066 lb)				
Dimension	product dimension	12 x 70 x 75 mm (0.472 x 2.76 x 2.95 in)			12 x 75 x 75 mm (0.472 x 2.95 x 2.95 in)	

Interface relays R600 range
General technical data


Technical data

		RB	RBR
General data			
Material of housing		UL 94 V0	
Mounting		DIN Rail	
Degree of protection	housing / terminals	IP20 NEMA1	
Electrical connection		**Screw terminal**	**Spring-type terminal**
Wire size	fine-stranded	0.22-2.5 mm² (24-14 AWG)	
	rigid	0.2-4 mm² (24-12 AWG)	0.2-2.5 mm² (24-14 AWG)
Stripping length		9 mm / 0.354 in	
Tightening torque		0.4-0.6 Nm (3.5-5.3 lb.in)	
Environmental data			
Ambient temperature ranges	storage	-40...+80 °C	
	operation	-20...+70 °C	
Isolation data			
Rated insulation voltage U_i (IEC/EN 60950-1, EN 50178)		4000 V RMS	
Rated impulse withstand voltage U_{imp} (EN 50178)	input / output	4000 V RMS (RB122A: 3800 V RMS, RB111AR: 3500 V RMS)	
	shock coil / output	4000 V RMS	
	output / output	1000 V RMS	


5

Interface relays R600 range
Dimensional drawings, Load limit curves

All interface relays of R600 range




Screw clamp module




Spring clamp module

Load limit curves

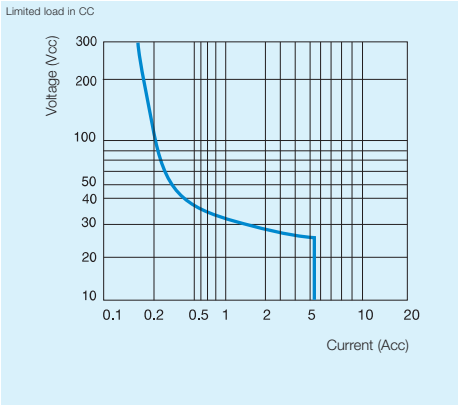

Versions with 1 n/o, 1 n/c or 1 c/o contact

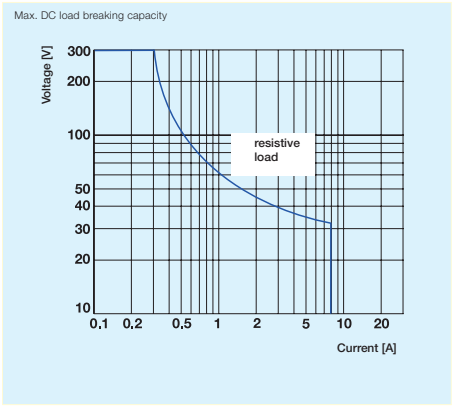

Versions with 2 c/o contacts

	DC-12	AC-12	DC-13	AC-15
24 V	6 A	6 A	1	3 A
110/120 V	0,3 A	6 A	0.2 A	3 A
220/230 V	0.2 A	6 A	0.1 A	3 A

Optocouplers R600 range
Selection

Order number	1SNA645047R0000	1SNA645547R0200	1SNA645021R2600	1SNA645521R2000	1SNA645049R1200	1SNA645549R1400	1SNA645022R2700	1SNA645522R2100	1SNA645050R1700	1SNA645550R1100	1SNA645051R0400	1SNA645025R2200	1SNA645024R2100	1SNA645551R0600	1SNA645525R2400	1SNA645524R2300	1SNA645053R0600	1SNA645553R0000	1SNA645054R0700	1SNA645058R1300	1SNA645554R0100	1SNA645558R1500	1SNA645026R2300	1SNA645059R1400	1SNA645526R2500	1SNA645559R1600	1SNA645027R2400	1SNA645029R0600	1SNA645527R2600	1SNA645529R0000
Type	OBIC 0100 5-12VDC	OBRIC 0100 5-12VDC	OBIC 0100 24VDC	OBRIC 0100 24VDC	OBIC 0100 48-60VAC/DC	OBRIC 0100 48-60VAC/DC	OBIC 0100 115-230VAC/DC	OBRIC 0100 115-230VAC/DC	OBOC 1000-5-12VDC	OBROC 1000-5-12VDC	OBOC 1000-24VDC	OBOC 1500-24VAC/DC	OBOC 5000-24VDC	OBROC 1000-24VDC	OBROC 1500-24VAC/DC	OBROC 5000-24VDC	OBOC 1000-48-60VAC/DC	OBROC 1000-48-60VAC/DC	OBOC 1000-115VAC/DC	OBOC 5000-115VAC/DC	OBROC 1000-115VAC/DC	OBROC 5000-115VAC/DC	OBOC 1000-230VAC/DC	OBOC 5000-230VAC/DC	OBROC 1000-230VAC/DC	OBROC 5000-230VAC/DC	OBOA 1000-24VDC	OBOA 2000-24VDC	OBROA 1000-24VDC	OBROA 2000-24VDC
Input voltage																														
5-12 V DC	■	■							■	■																				
24 V DC			■	■							■	■	■	■	■	■											■	■	■	■
48-60 V DC					■	■											■	■												
115-230 V DC							■	■																						
115 V DC																			■	■	■	■								
230 V DC							■	■															■	■	■	■				
24 V AC												■			■															
48-60 V AC					■	■											■	■												
115-230 V AC							■	■																						
115 V AC																			■	■	■	■								
230 V AC																							■	■	■	■				
Output rating																														
100 mA	■	■	■	■	■	■	■	■																						
2 A									■	■	■	■		■	■		■	■	■		■		■		■			■		■
5 A													■			■				■		■		■		■				
1 A																											■		■	
Output voltage																														
58 V DC	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■				
230 V AC																												■		■
400 V AC																											■		■	
Terminal type																														
Screw	■		■		■		■		■		■	■	■				■		■	■			■	■			■	■		
Spring		■		■		■		■		■				■	■	■		■			■	■			■	■			■	■

Optocouplers R600 range
Selection

	OBOA 1000-48-60VAC/DC	OBROA 1000-48-60VAC/DC	OBOA 1000-115VAC/DC	OBROA 1000-115VAC/DC	OBOA 1000-230VAC/DC	OBROA 1000-230VAC/DC
	1SNA645061R0600	1SNA645561R0000	1SNA645062R0700	1SNA645562R0100	1SNA645028R0500	1SNA645528R0700
	■	■				
			■	■		
					■	■
	■	■				
			■	■		
					■	■
	■	■	■	■	■	■
	■	■	■	■	■	■
	■		■		■	
		■		■		■

Optocouplers R600 range
Ordering details




5

screw terminals

spring terminals


Ordering details - R600 range

R600 Optocoupler		Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
Optocoupler module 100 mA/DC		OBIC 0100-5-12VDC	1SNA645047R0000		10	0.02 (0.44)
		OBIC 0100-24VDC	1SNA645021R2600			
		OBIC 0100-48-60VAC/DC	1SNA645049R1200			
		OBIC 0100-115-230VAC/DC	1SNA645022R2700			
Optocoupler module 100 mA/DC		OBRIC 0100-5-12VDC	1SNA645547R0200		10	0.02 (0.44)
		OBRIC 0100-24VDC	1SNA645521R2000			
		OBRIC 0100-48-60VAC/DC	1SNA645549R1400			
		OBRIC 0100-115-230VAC/DC	1SNA645522R2100			
Optocoupler module 2 A/DC		OBOC 1000-5-12VDC	1SNA645050R1700		10	0.02 (0.44)
		OBOC 1000-24VDC	1SNA645051R0400			
		OBOC 1500-24VAC/DC	1SNA645025R2200			
		OBOC 1000-48-60VAC/DC	1SNA645053R0600			
		OBOC 1000-115VAC/DC	1SNA645054R0700			
		OBOC 1000-230VAC/DC	1SNA645026R2300			
Optocoupler module 2 A/DC		OBROC 1000-5-12VDC	1SNA645550R1100		10	0.02 (0.44)
		OBROC 1000-24VDC	1SNA645551R0600			
		OBROC 1500-24VAC/DC	1SNA645525R2400			
		OBROC 1000-48-60VAC/DC	1SNA645553R0000			
		OBROC 1000-115VAC/DC	1SNA645554R0100			
		OBROC 1000-230VAC/DC	1SNA645526R2500			
Optocoupler module 5 A/DC		OBOC 5000-24VDC	1SNA645024R2100		10	0.02 (0.44)
		OBOC 5000-115VAC/DC	1SNA645058R1300			
		OBOC 5000-230VAC/DC	1SNA645059R1400			
Optocoupler module 5 A/DC		OBROC 5000-24VDC	1SNA645524R2300		10	0.02 (0.44)
		OBROC 5000-115VAC/DC	1SNA645558R1500			
		OBROC 5000-230VAC/DC	1SNA645559R1600			
Optocoupler module 1 A/AC 6 mm spacing		OBOA 1000-24VDC	1SNA645027R2400		10	0.03 (0.066)
		OBOA 1000-48-60VAC/DC	1SNA645061R0600			
		OBOA 1000-115VAC/DC	1SNA645062R0700			
		OBOA 1000-230VAC/DC	1SNA645028R0500			
Optocoupler module 2 A/AC 12 mm spacing		OBOA 2000-24VDC	1SNA645029R0600		5	0.03 (0.066)
Optocoupler module 1 A/AC 6 mm spacing		OBROA 1000-24VDC	1SNA645527R2600		10	0.03 (0.066)
		OBROA 1000-48-60VAC/DC	1SNA645561R0000			
		OBROA 1000-115VAC/DC	1SNA645562R0100			
		OBROA 1000-230VAC/DC	1SNA645528R0700			
Optocoupler module 2 A/AC 12 mm spacing		OBROA 2000-24VDC	1SNA645529R0000		5	0.03 (0.066)




Accessories	Type	Order code	Price	Pkg qty	Weight (1 pce) kg (lb)
End section	BADH V0	1SNA116900R2700		50	
	BADL V0	1SNA399903R0200		50	
	BAM2 V0	1SNA399967R0100		50	
Seperator end section	SC 612	1SNA290474R0200		10	
Divisible shunt 10 poles	BJ 612-10	1SNA290488R0100		10	
Divisible shunt 20 poles	BJ 612-20	1SNA206754R0000		10	
Test plug DIA. 2 mm	FC2	1SNA645531R2200		10	
Marking method	RC65 / RC610	see marking			


Optocouplers R600 range
Connection diagrams




OB...IC 0100 - 5-12 V DC
115-230 V AC/DC




OB...IC 0100
24 V DC
24-48-60 V AC/DC




OB...OC 1000 - 5-12 V DC



OB...OC 1500 - 24 V AC/DC
OB...OC 1000
24 V DC
48-60-115-230 V AC/DC



OB...OC 5000
24 V DC
24-48-60-115-230 V AC/DC



OB...OA 1000
24 V DC
48-60-115-230 V AC/DC
OB...OA 2000 - 24 V DC


Optocouplers R600 range
Technical data

Optocoupler : 5 to 58 V DC output / 100 mA - 6 mm 0.236“ spacing


		OB...IC 0100							
Relay characteristics coil									
Input voltage: +20%, -15% on DC ; 10%, -10% on AC		5 V DC - 12 V DC		24 V DC		48 V AC/DC	60 V AC/DC	115 V AC/DC	230 V AC/DC
Frequency						50 / 60 Hz			
Input current AC/DC		5 mA	9 mA	4 mA		4 mA	5 mA	7 mA / 16 mA	11.5 mA / 25 mA
Pull-in voltage at Is=100%		4 V		15 V		25 V		60 V AC / 70 V DC	
Switching time C / O		10 µs / 500 µs							
Operating frequency		1000 Hz				5 ms / 20 ms		5 ms / 15 ms	
Permissible leakage current						20 Hz			
Output		0.9 mA		1 mA		0.9 mA		1.6 mA	
Output voltage		4.5 to 58 V DC							
Output current min.		1 mA							
Output current max.		100 mA							
Output leakage current at $U_{max.}$		< 50 µA							
Residual voltage at I max and U rated	typical	1 V							
	max	1.3 V							
Frequency on inductive load									
Isolation Input / Output	input / Output	2500 V RMS							
Temperature	storage	-40...+80 °C							
	operating	-20...+70 °C [1]							
Other characteristics		Screw clamp				Spring clamp			
Body material	grey	UL 94 V0							
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)				0.2-2.5 mm² (24-12 AWG)			
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)							
Rated wire size		2.5 mm² (12 AWG)							
Wire stripping length		9 mm (0.354 in)							
Recommended screwdriver		3.5 mm (0.137 in)							
Protection		IP20 NEMA1							
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)							
Approvals		c UL us (pending for 12 V DC) , CSA (pending), GL , LRS , CE							
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IEC 1000-4-2, 3, 4, 5, 6.							

[1] Over 55°C, blocks have to be mounted on horizontal rail with 10 mm spacing between each block. For vertical rail mounting use temperature is 15°C less decreased.

Dimensional drawings



Screw clamp module



Spring clamp module


Optocouplers R600 range
Technical data

Optocoupler : 5 to 58 V DC output / 2 A - 6 mm 0.236“ spacing


		OB...OC 0100			OB..OC 1500	OB...OC 1000			
Relay characteristics coil									
Input voltage: +20%, -15% on DC ; 10%, -10% on AC		5 V DC - 12 V DC		24 V DC	24 V AC/ DC	48 V AC/ DC	60 V AC/ DC	115 V AC/ DC	230 V AC/ DC
Frequency					50 / 60 Hz				
Input current		5 mA	9 mA	4 mA	6.3 mA	4 mA	5.1 mA	4.2 mA	4 mA
Pull-in voltage at Is=100%		4 V		15 V	15 V	27 V		50 V	80 V
Switching time C / O		15 µs / 250 µs		30 µs / 400 µs	1 ms / 7 ms	5 ms / 20 ms		500 µs / 10 ms	1 ms / 15 ms
Operating frequency		2000 Hz		1000 Hz	60 Hz	20 Hz			
Permissible leakage current		1 mA		0.8 mA	0.9 mA	1 mA		0.3 mA	
Output									
Output voltage		4.5 to 58 V DC							
Output current min.		1 mA							
Output current max.		2 A							
Output leakage current at $U_{max.}$		< 50 µA							
Residual voltage at I max and U rated	typical	0.1 V							
	max	0.5 V							
Frequency on inductive load									
Isolation Input / Output	input / Output	2500 V RMS							
Temperature	storage	-40...+80 °C							
	operating	-20...+70 °C [1]							
Other characteristics		Screw clamp				Spring clamp			
Body material	grey	UL 94 V0							
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)				0.2-2.5 mm² (24-12 AWG)			
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)							
Rated wire size		2.5 mm² (12 AWG)							
Wire stripping length		9 mm (0.354 in)							
Recommended screwdriver		3.5 mm (0.137 in)							
Protection		IP20 NEMA1							
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)							
Approvals		c UL us (pending for 12 V DC) , (pending), , LRS , CE							
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IEC 1000-4-2, 3, 4, 5, 6.							

[1] Over 55°C, blocks have to be mounted on horizontal rail with 10 mm spacing between each block. For vertical rail mounting use temperature is 15°C less decreased.

Dimensional drawings



Screw clamp module



Spring clamp module


Optocouplers R600 range
Technical data

Optocoupler : 5 to 58 V DC output / 5 A - 6 mm 0.236“ spacing


		OB... OC 5000		
Input				
Input voltage		24 V DC	115 V AC/DC	230 V AC/DC
Frequency			50 / 60 Hz	50 / 60 Hz
Input current		5.4 mA	4.2 mA	4 mA
Pull-in voltage at Is=100%		12 V	50 V	80 V
Switching time C / O		30 µs / 400 µs	500 µs / 10 ms	1ms / 15 ms
Operating frequency		1000 Hz	50 Hz	35 Hz
Permissible leakage current		0.8 mA	0.3 mA	0.3 mA
Output				
Output voltage		4.5- 58 V DC		
Output current min.		1 mA		
Output current max.		5 A		
Output leakage current at U_{max}		< 50 µA		
Residual voltage at I max and U rated	typical	0.1 V		
	max	0.5 V		
Frequency on inductive load		See Note 1		
Isolation Input / Output	input / Output	2500 V RMS		
Temperature				
Ambient temperature	storage	-40...+80 °C		
	operating	See derating curve		
Other characteristics				
Body material	grey	UL 94 V0		
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)		
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)		
Rated wire size		2.5 mm² (12 AWG)		
Wire stripping length		10 mm (0.394 in)		
Recommended screwdriver		3.5 mm (0.137 in)		
Protection		IP20 NEMA1		
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)		
Approvals		c UL us (pending), CE		
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IEC 1000-4-2, 3, 4, 5, 6.		

5

Dimensional drawings



Screw clamp module



Spring clamp module


Optocouplers R600 range
Technical data

Optocoupler : 24 to 400 V AC output / 1 A or 2 A max. - 6 mm or 12 mm spacing


		OB...OA 1000					OB...OA 2000
Relay characteristics coil							
Input voltage: +20%, -15% on DC ; 10%, -10% on AC		24 V DC	48 V AC/DC	60 V AC/DC	115 V AC/DC	230 V AC/DC	24 V DC
Frequency			50/60 Hz				
Input current		3.6 mA	4.3 mA	5.5 mA	4.15 mA	4.6 mA	3.6 mA
Pull-in voltage at Is=100%		14 V	15 V	18 V	60 V	135 V	14 V
Switching time C / O		150 µs / 1 ms	3 ms / 30 ms		2.2 ms / 18 ms	2.5 ms / 25 ms	150 µs / 1 ms
Operating frequency		500 Hz	20 Hz		25 Hz	20 Hz	500 Hz
Permissible leakage current		1 mA					
Output							
Output voltage		24-400 V AC					10-230 V AC
Frequency		50/60 Hz					
Output current min.		25 mA					
Output current max.		1 A					2 A
Output leakage current at U_{max}		< 0.50 mA					
Residual voltage at I max and U rated	typical	1 V					
	max	1.6 V					
Frequency on inductive load							
Isolation Input / Output	input / Output	2500 V RMS					
Temperature	storage	-40...+80 °C					
	operating	-20...+70 °C [1]					
Other characteristics		Screw clamp			Spring clamp		
Body material	grey	UL 94 V0					
Wire size	Solid wire	0.2 - 4 mm² (24-12 AWG)			0.2-2.5 mm² (24-12 AWG)		
	Stranded wire	0.22 - 2.5 mm² (24-12 AWG)					
Rated wire size		2.5 mm² (12 AWG)					
Wire stripping length		9 mm (0.354 in)					
Recommended screwdriver		3.5 mm (0.137 in)					
Protection		IP20 NEMA1					
Recommended torque		0.4-0.6 Nm (3.5-5.3 lb.in)					
Approvals		c UL us (pending for 12 V DC) , (pending), , LRS , CE					
Reference standards		CEI 947-7-1 / CEI 947-1 / CEI 1131-2 (in relevant parts) / CEI 60664-1 / CEM : IEC 1000-4-2, 3, 4, 5, 6.					

[1] Over 55°C, blocks have to be mounted on horizontal rail with 10 mm spacing between each block. For vertical rail mounting use temperature is 15°C less decreased.

Dimensional drawings



Screw clamp module



Spring clamp module

Logic relays
Product group picture



Logic relays
Table of contents

Logic relays


Logic relays 6/1
Product group picture 6/1
Table of contents 6/2
System overview 6/3
Approvals and marks 6/5
Ordering details - Stand alone logic relays 6/6
Ordering details - Expandable logic relays 6/7
Ordering details 6/8
Ordering details - Display systems 6/9
Technical data 6/10
Dimensional drawings 6/24

Logic relays
System overview

Concept
CL range logic relays are suitable for small and medium-sized control tasks and are able to substitute logic wiring in a quick and simple manner.
They can be used for applications in control as well as for timing functions, e.g.
– in buildings, lighting systems, air-conditioning systems, general control functions,
– in small machines and systems or
– as stand-alone control module for small applications.

Steps to the application of CL range
– CL range can be used easily, rapidly and comfortably without any time-consuming planning and programming.
– The user can discover the advantages and the benefit of these logic relays in no time at all.
– CL range provides for the control statements according to a simple circuit diagram.
– Setup, storage, simulation and documentation are performed using the compact and user-friendly CL-SOFT software (CL-LAS.PS002).

Software characteristics (CL-SOFT)
– Display on a PC monitor according to IEC, ANSI
– Different languages to choose from
– Easy installation on all Microsoft WindowsTM operating systems

Logic links instead of wiring


Documentation (download from the internet)
Logic relay manual: 1SVC440795M0100
Remote display manual: 1SVC440795M2100
Display system manual: 1SVC440795M1100

Technical data overview

Logic relays
– 8 or 12 digital inputs
– 4 or 6 digital relay outputs
– optionally with 4 or 8 transistor outputs
– 128 rungs
– 3 contacts as n/o or n/c contacts in series plus 1 coil per rung
– optionally with 2 or 4 analog inputs (not 100-240 V AC version)
– power flow display for checking the circuit diagram (devices with display)
– expansions for local or remote level
– enclosure color RAL 7035
– DIN rail mounting


Display system
– useable as compact HMI logic relay
– fully graphic, backlit display module
– 12 digital inputs
– 4 digital relay outputs
– optionally with 4 transistor outputs
– 256 rungs
– 4 contacts as n/o or n/c contacts in series plus 1 coil per rung
– optionally with 4 analog inputs (not 100-240 V AC version)
– networking-compatible via CL-NET
– front panel mounting
– expansion for local

Remote display
– Remote display up to a distance of 5 m
– Illustration of text and status displays
– Remote adjustment via keypad
– Front panel mounting

Software
– 16 timing relays 0.01-99:59 h
– 16 counting relays for up-, down counting
– 8 weekly timer, 8 annual timers
– 16 analog value comparators
– 16 freely editable display texts
– 32 markers or auxiliary relays


Logic relays
System overview

Logic relays

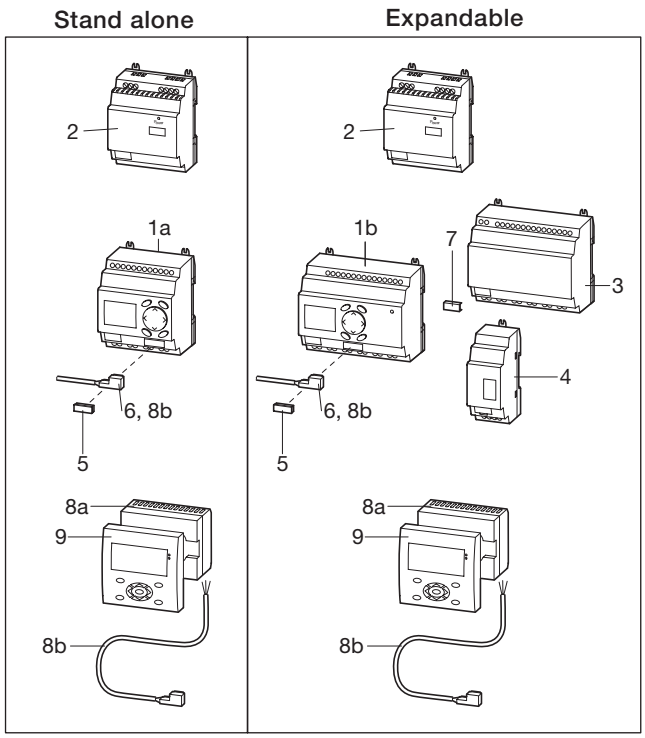

1a Logic relay CL-LS..
1b Expandable logic relay CL-LM..
2 Power supply CP-D...
3 I/O expansion CL-LER.., CL-LET.. for logic relays CL-LM..
4 Coupler unit CL-LEC.. for remote expansion of logic relays CL-LM..
5 Memory module CL-LAS.MD003 for logic relays CL-LS.., CL-LM..
6 Connecting cable CL-LAS.TK001, CL-LAS.TK002 to connect PC
7 CL-LINK plug CL-LAS.TK011
to connect expansion to logic relays CL-LM..
8a Remote display connection module CL-LDC.S..
8b Connecting cable CL-LAD.TK007
to connect a remote displays to a logic relay
9 Display module CL-LDD..


Expansion of logic relays*

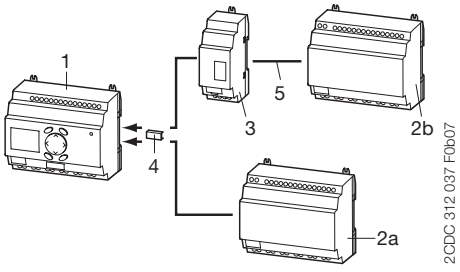

1 Logic relay CL-LM..
2 I/O expansion CL-LER.., CL-LET..
2a local expansion
2b remote expansion
3 Coupler unit CL-LEC.. for remote expansion of logic relays CL-LM..
4 CL-LINK plug CL-LAS.TK011 for expansion of logic relays CL-LM..
5 up to 30 m


* max. 1 expansion per logic relay

Display system → Compact HMI logic relay

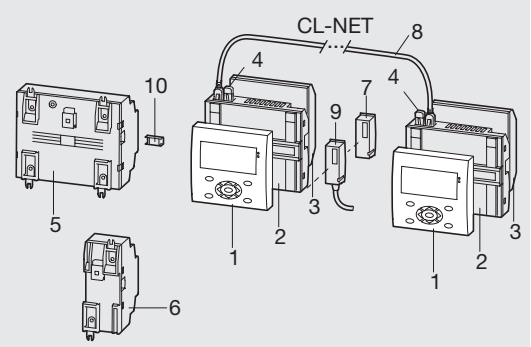


1 Display module CL-LDD..
2 Display base module CL-LDC.LN..
3 Display I/O module CL-LDR.., CL-LDT..
4 Termination resistor CL-LAD.TK009
5 I/O expansion CL-LER.., CL-LET..
6 Coupler unit CL-LEC.. for remote expansion
7 Memory module CL-LAD.MD004 for display base module
8 Connecting cable CL-LAD.TK002, CL-LAD.TK003, CL-LAD.TK004
9 Connecting cable CL-LAD.TK001, CL-LAD.TK011 to connect PC
10 CL-LINK plug CL-LAS.TK011 for expansion of logic relays CL-LM..
e.g. door of switchgear cabinet

Stand alone with I/O module



1 Display CL-LDD..
2 Remote display connection module CL-LDC.S.. incl. connecting cable
3 Display base module CL-LDC.L..

Communication via CL-NET



1 Display CL-LDD..
2 Display base module CL-LDC.LN.. for CL-NET
3 Display I/O module CL-LDR.., CL-LDT..
4 Connecting cable CL-LAD.TK002, CL-LAD.TK003, CL-LAD.TK004
5 Termination resistor CL-LAD.TK009

Logic relays
Approvals and marks

■ **existing**
□ **pending**

Approvals		Logic relays					Expansions				Display system					Accessories	
		CL-LSR	CL-LST	CL-LMR	CL-LMT		CL-LER	CL-LET	CL-LEC		CL-LDD	CL-LDC	CL-LDR	CL-LDT		CL-LAS	CL-LAD
UL	UL	■	■	■	■		■	■	■		■	■	■	■		■ [1]	■ [2]
CSA	CAN/CSA C22.2 No.14	■	■	■	■		■	■	■		■	■	■	■		■ [1]	■ [2]
CSA	CAN/CSA C22.2 No.213 (hazardous locations)	■	■	■	■		■	■	■		■	■	■	■		■ [1]	■ [2]
GL	GL	■	■	■	■						■	■ [3]	■ [4]	■			
EAC	EAC	□	□	□	□		□	□	□		□	□	□	□		□	□
Lloyds	Lloyds Register	■	■	■	■						■	■ [3]	■ [4]	■			
Marks																	
CE	CE	■	■	■	■		■	■	■		■	■	■	■		■	■
C-Tick	C-Tick	□	□	□	□		□	□	□		□	□	□	□		□	□

[1] not for: CL-LAS-PS002, CL-LAS.TD001, CL-LAS.FD001, CL-LAS.TK002, CL-LAS.TK011
[2] not for: CL-LAD.TK006, CL-LAD.TK011, CL-LAD.FD002
[3] not for: CL-LDC.SDC2, CL-LDC.SAC2, CL-LDC.LAC2, CL-LDC.LNAC2
[4] not for: CL-LDR.16AC2

Logic relays
Ordering details - Stand alone logic relays



CL-LSR



CL-LST

Ordering details - Logic relays stand alone

Rated operational voltage	Display + Keypad	Timer	Input / Output	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24 V AC	■	■	8 inputs / 4 relay outputs	CL-LSR.C12AC1	1SVR440712R0300		0.20 (0.44)
		■		CL-LSR.CX12AC1	1SVR440712R0200		
100-240 V AC	■			CL-LSR.12AC2	1SVR440713R0100		
	■	■		CL-LSR.C12AC2	1SVR440713R0300		
		■		CL-LSR.CX12AC2	1SVR440713R0200		
12 V DC	■	■		CL-LSR.C12DC1	1SVR440710R0300		
		■		CL-LSR.CX12DC1	1SVR440710R0200		
24 V DC	■			CL-LSR.12DC2	1SVR440711R0100		
	■	■		CL-LSR.C12DC2	1SVR440711R0300		
		■		CL-LSR.CX12DC2	1SVR440711R0200		
24 V DC	■	■	8 inputs / 4 transistor outputs	CL-LST.C12DC2	1SVR440711R1300		
		■		CL-LST.CX12DC2	1SVR440711R1200		



CL-LDD.K

Ordering details - Display modules

Rated operational voltage	Description	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
-	Graphic display 132 x 64 pixel	CL-LDD.XK	1SVR440839R4500		0.14 (0.30)
-	Graphic display 132 x 64 pixel, with keypad	CL-LDD.K	1SVR440839R4400		0.13 (0.29)
24 V DC	Module to displace the display from the logic relay, incl. connecting cable CL-LAD. TK007, 5m, lenght adaptable	CL-LDC.SDC2	1SVR440841R0000		0.16 (0.36)
100-240 V AC		CL-LDC.SAC2	1SVR440843R0000		0.16 (0.36)




CL-LDC.S..

Logic relays
Ordering details - Expandable logic relays



CL-LMR



CL-LER



CL-LEC

Ordering details - Logic relays expandable

Rated operational voltage	Display + Keypad	Timer	Input / Output	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
24 V AC	■	■	12 inputs / 6 relay outputs	CL-LMR.C18AC1	1SVR440722R0300		0.36 (0.79)
		■		CL-LMR.CX18AC1	1SVR440722R0200		
100-240 V AC	■	■		CL-LMR.C18AC2	1SVR440723R0300		
		■		CL-LMR.CX18AC2	1SVR440723R0200		
12 V DC	■	■		CL-LMR.C18DC1	1SVR440720R0300		
		■		CL-LMR.CX18DC1	1SVR440720R0200		
24 V DC	■	■		CL-LMR.C18DC2	1SVR440721R0300		
		■		CL-LMR.CX18DC2	1SVR440721R0200		
24 V DC	■	■	12 inputs, 8 transistor outputs	CL-LMT.C20DC2	1SVR440721R1300		0.36 (0.79)
		■		CL-LMT.CX20DC2	1SVR440721R1200		

Ordering details - Expansions

Rated operational voltage	Description	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
-	2 relay outputs	CL-LER.2O	1SVR440709R5000		0.07 (0.15)
100-240 V AC	12 inputs, 6 relay outputs	CL-LER.18AC2	1SVR440723R0000		0.26 (0.57)
24 V DC		CL-LER.18DC2	1SVR440721R0000		0.22 (0.49)
24 V DC	12 inputs, 8 transistor outputs	CL-LET.20DC2	1SVR440721R1000		0.21 (0.46)
-	Coupler unit for remote expansion with a distance of up to 30 m	CL-LEC.CI000	1SVR440709R0000		0.07 (0.15)

Logic relays
Ordering details



2CDC 311 012 F0007

CL-LAS.PS002



2CDC 311 014 F0007

CL-LAS.TK001



2CDC 311 013 F0007

CL-LAS.MD003

Ordering details - CL-LA...

Description	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
Software for programming and control of CL range devices. Installation CD-ROM for Microsoft WindowsTM.	CL-LAS.PS002	1SVR440799R8000		0.10 (0.21)
Memory module for logic relays Memory size: 32 kB	CL-LAS.MD003	1SVR440799R7000		0.02 (0.04
Cable with serial interface to connect PC and logic relay. Length: 2 m	CL-LAS.TK001	1SVR440799R6000		0.10 (0.22)
Cable with USB interface to connect PC and logic relay. Length: 2 m	CL-LAS.TK002	1SVR440799R6100		0.06 (0.13)
Cable for point-to-point connection of remote-display connection module and logic relay, length: 5m, adaptable	CL-LAD.TK007	1SVR440899R6600		0.20 (0.44)
Fixing brackets for screw mounting of logic relay, expansion, display base module	CL-LAS.FD001	1SVR440799R5000		0.01 (0.01)
Spare plug (CL-LINK) for connection of logic relay to expansion	CL-LAS.TK011	1SVR440799R5100		0.10 (0.22)
Primary switch mode power supplies, Rated input voltage: 100-240 V AC Rated output voltage/current: 24 V DC / 0.42 A	CP-D 24/0.421)	1SVR427041R0000		0.06 (0.13)
Primary switch mode power supplies, Rated input voltage: 100-240 V AC Rated output voltage/current: 24 V DC / 1.3 A	CP-D 24/1.32)	1SVR427043R0100		0.19 (0.41)

[1] replaces CL-LAS.SD001, technical data see chapter “Primary switch mode power supplies”
[2] replaces CL-LAS.SD002, technical data see chapter “Primary switch mode power supplies”

Logic relays
Ordering details - Display systems



2CDC 311 028 F0006


CL-LDD.K


2CDC 311 031 F0006

CL-LDC.LN..

Ordering details - Display systems

Rated operational voltage	Description	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
-	Display module Graphic display 132 x 64 pixel	CL-LDD.XK	1SVR440839R4500		0.14 (0.30)
-	Display module Graphic display 132 x 64 pixel, with keypad	CL-LDD.K	1SVR440839R4400		0.13 (0.29)
24 V DC	Display base module CPU / power supply	CL-LDC.LDC2	1SVR440821R0000		0.16 (0.36)
100-240 V AC		CL-LDC.LAC2	1SVR440823R0000		
24 V DC	Display base module CPU / power supply, networking-compatible (CL-NET)	CL-LDC.LNDC2	1SVR440821R1000		0.17 (0.38)
100-240 V AC		CL-LDC.LNAC2	1SVR440823R1000		
100-240 V AC	Display I/O module 12 inputs, 4 relay outputs	CL-LDR.16AC2	1SVR440853R0000		0.17 (0.38)
24 V DC		CL-LDR.16DC2	1SVR440851R0000		
24 V DC	Display I/O module 12 inputs, 4 relay outputs, 1 analog output	CL-LDR.17DC2	1SVR440851R2000		0.17 (0.38)
24 V DC	Display I/O module 12 inputs, 4 transistor outputs	CL-LDT.16DC2	1SVR440851R1000		0.14 (0.30)
24 V DC	Display I/O module 12 inputs, 4 transistor outputs, 1 analog output	CL-LDT.17DC2	1SVR440851R3000		0.14 (0.30)

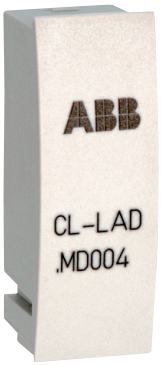

2CDC 311 018 F0007

CL-LAD.MD004



2CDC 311 019 F0007

CL-LAD.TK001


2CDC 311 020 F0006

CL-LAD.TK002

Ordering details - CL-LAD...

Description	Type	Order code	Price 1 pce	Weight (1 pce) kg (lb)
Memory module for display base modules Memory size: 256 kB	CL-LAD.MD004	1SVR440899R7000		0.02 (0.03)
Cable with serial interface to connect PC and display base module	CL-LAD.TK001	1SVR440899R6000		0.11 (0.23)
Cable with USB interface to connect PC and display base module	CL-LAD.TK011	1SVR440899R6700		
Network cable (CL-NET) to connect 2 display base modules Length: 0.3 m	CL-LAD.TK002	1SVR440899R6100		0.05 (0.12)
Network cable (CL-NET) to connect 2 display base modules Length: 0.8 m	CL-LAD.TK003	1SVR440899R6200		0.07 (0.14)
Network cable (CL-NET) to connect 2 display base modules Length: 1.5 m	CL-LAD.TK004	1SVR440899R6300		0.08 (0.18)
Cable for point-to-point connection of remote display connection modules and display base module, length adaptable, Length: 5 m	CL-LAD.TK005	1SVR440899R6400		0.20 (0.44)
Cable for point-to-point connection of 2 display base modules, length adaptable. Length: 5 m	CL-LAD.TK006	1SVR440899R6500		0.12 (0.26)
Termination resistor, content: 2 pieces	CL-LAD.TK009	1SVR440899R6900		0.01 (0.02)
Protective cover, transparent, for harsh environmental conditions and application in the food industry	CL-LAD.FD001	1SVR440899R1000		0.03 (0.07)
Protective cover, transparent and sealable	CL-LAD.FD011	1SVR440899R2000		0.03 (0.07)
Assembly tool for mounting of display modules	CL-LAD.FD002	1SVR440899R3000		

Logic relays
Technical data

Data at T_a = 25 °C and rated values, if nothing else indicated.

Type		CL-LSR.C...12DC1	CL-LSR....12DC2 CL-LST.C...12DC2	CL-LSR.C...12AC1	CL-LSR...12AC2
Input circuit - supply circuit					
Rated operational voltage U_e		12 V DC	24 V DC	24 V AC	100-240 V AC
Rated operational voltage tolerance		-15...+30 %	-15...+20 %	-15...+10 %	
Operational voltage range		10.2-15.6 V DC	20.4-28.8 V DC	20.4-26.4 V AC	85-264 V AC
Rated frequency		0 Hz		50/60 Hz	
Rated frequency tolerance		-		±5 %	
Residual ripple		≤ 5 %		-	
Input current	at 12 V DC	typ. 140 mA	-	-	-
	at 24 V DC	-	typ. 80 mA	-	-
	at 24 V AC	-	-	typ. 200 mA	-
	at 115/120 V AC (60 Hz)	-	-	-	typ. 40 mA
	at 230/240 V AC (50 Hz)	-	-	-	typ. 20 mA
Power failure buffering (IEC/EN 61131-2)		10 ms		20 ms	
Power dissipation	at 12 V DC	typ. 2 W	-	-	-
	at 24 V DC	-	typ. 2 W	-	-
	at 24 V AC	-	-	typ 5 VA	-
	at 115/120 V AC	-	-	-	typ. 5 VA
	at 230/240 V AC	-	-	-	typ. 5 VA

Type		CL-LMR.C...18DC1	CL-LMR.C...18DC2 CL-LMT.C...20DC2	CL-LMR.C...18AC1	CL-LMR.C...18AC2
Input circuit - supply circuit					
Rated operational voltage U_e		12 V DC	24 V DC	24 V AC	100-240 V AC
Rated operational voltage tolerance		-15...+30 %	-15...+20 %	-15...+10 %	
Operational voltage range		10.2-15.6 V DC	20.4-28.8 V DC	20.4-26.4 V AC	85-264 V AC
Rated frequency		0 Hz		50/60 Hz	
Rated frequency tolerance		-		±5 %	
Residual ripple		≤ 5 %		-	
Input current	at 12 V DC	typ. 200 mA	-	-	-
	at 24 V DC	-	typ. 140 mA	-	-
	at 24 V AC	-	-	typ. 300 mA	-
	at 115/120 V AC (60 Hz)	-	-	-	typ. 70 mA
	at 230/240 V AC (50 Hz)	-	-	-	typ. 35 mA
Power failure buffering (IEC/EN 61131-2)		10 ms		20 ms	
Power dissipation	at 12 V DC	typ. 3.5 W	-	-	-
	at 24 V DC	-	typ. 3.5 W	-	-
	at 24 V AC	-	-	typ. 7 VA	-
	at 115/120 V AC	-	-	-	typ. 10 VA
	at 230/240 V AC	-	-	-	typ. 10 VA

Type		CL-LER.18DC2 CL-LET.20DC2	CL-LER.18AC2		
Input circuit - supply circuit					
Rated operational voltage U_e		24 V DC	100-240 V AC		
Rated operational voltage tolerance		-15...+20 %	-15...+10 %		
Operational voltage range		20.4-28.8 V DC	85-264 V AC		
Rated frequency		0 Hz	50/60 Hz		
Rated frequency tolerance		-	±5 %		
Residual ripple		≤ 5 %	-		
Input current	at 24 V DC	typ. 140 mA	-		
	at 115/120 V AC (60 Hz)	-	typ. 70 mA		
	at 230/240 V AC (50 Hz)	-	typ. 35 mA		
Power failure buffering (IEC/EN 61131-2)		10 ms	20 ms		
Power dissipation	at 24 V DC	typ. 3.4 W	-		
	at 115/120 V AC	-	typ. 10 VA		
	at 230/240 V AC	-	typ. 10 VA		

Logic relays
Technical data

Data at T_a = 25 °C and rated values, if nothing else indicated.

Type		CL-LSR.C...12DC1	CL-LSR....12DC2 CL-LST.C...12DC2	CL-LSR.C...12AC1	CL-LSR.C...12AC2
Input circuit - Digital inputs		**12 V DC**	**24 V DC**	**24 V AC**	**115 / 230 V AC**
Number		8			
Inputs can be used as analog inputs		2 (I7, I8)			-
Indication of operational states		LCD-Display (if existing)			
Electrical isolation	from voltage supply	no			
	between digital inputs	no			
	from the outputs	yes			
Rated operational voltage U_e		12 V DC	24 V DC	24 V AC	
	U_e on „0“ signal	4 V DC (I1-I8)	< 5 V DC (I1-I8)	0-6 V AC (sinusoidal)	0-40 V AC (sinusoidal)
	U_e on „1“ signal	8 V DC (I1-I8)	> 15 V DC (I1-I6), > 8 V DC (I7, I8)	> 9.5 V DC, 14-26.4 V AC (sinusoidal) (I1-I6), > 7 V AC (sinusoidal) (I7,I8)	79-264 V AC (sinusoidal)
Rated frequency		-		50-60 Hz	
Input current on „1“ signal		3.3 mA (at 12 V DC, I1-I6), 1.1 mA (at 12 V DC, I7, I8)	3.3 mA (at 24 V DC, I6-I7), 2.2 mA (at 24 V DC, I7, I8)	4 mA (at 24 V AC, 50 Hz, I1-I6), 2 mA (at 24 V AC, 50 Hz, I7,I8), 2 mA (at 24 V DC, I7, I8)	6x0.25 mA (at 115 V AC, 60 Hz, I1-I6), 6x0.5 mA (at 230 V AC, 50 Hz, I1-I6) 2x4 mA (at 115 V AC, 60 Hz, I7, I8), 2x6 mA (at 230 V AC, 50 Hz, I7, I8)
Time delay from „0“ to „1“	debounce ON	20 ms		80 ms (at 50 Hz), 66 2/3 ms (at 60 Hz)	
	debounce OFF	typ. 0.3 ms (I1-I6), typ. 0.35 ms (I7, I8)	typ. 0,25 ms (I1-I8)	20 ms (at 50 Hz), 16 2/3 ms (at 60 Hz)	
Time delay from „1“ to „0“	debounce ON	20 ms		80 ms (at 50 Hz), 66 2/3 ms (at 60 Hz)	80 ms (at 50 Hz, I1-I6), 66 2/3 ms (at 60 Hz, I1-I6) 160 ms (at 50 Hz, I7, I8), 150 ms (at 60 Hz, I7, I8)
	debounce OFF	typ. 0.3 ms (I1-I6), typ. 0.15 ms (I7, I8)	-	20 ms (at 50 Hz), 16 2/3 ms (at 60 Hz)	20 ms (at 50 Hz, I1-I6), 16 2/3 ms (at 60 Hz, I1-I6) 100 ms (at 50 Hz, I7. I8), 100 ms (at 60 Hz, I7, I8)
Cable length (unshielded)		100 m		-	-
Maximum cable length per input		-		40 m	40 m (I1-I6), 100 m (I7, I8)
Frequency counter	Number	2 (I3, I4)		-	-
	counting frequency	< 1 kHz		-	-
	pulse shape	square-wave		-	-
	pulse / pause ratio	1:1		-	-
Rapid counter inputs	Number	2 (I1, I2)		-	-
	counting frequency	< 1 kHz		-	-
	pulse shape	square-wave		-	-
	pulse / pause ratio	1:1		-	-
Cable length (shielded)		< 20 m		-	-
Input circuit - Analog inputs					
Number		2 (I7, I8)			-
Electrical isolation	from voltage supply	no			-
	from the digital inputs	no			-
	from the outputs	yes			-
	from PC interface, memory module, CL-NET, CL-LINK	no			-
Input type		DC voltage			-
Signal range		0-10 V DC			-
Resolution	analog	0.01 V			-
	digital	0.01 V; 10 Bit (value 1-1023)			-
Input impedance		11.2 kΩ			-
Accuracy of the actual value	two CL devices	±3 %			-
	within one device	±2 %, ±0.12 V			-
Conversion time analog/digital	Input delay ON	20 ms			-
	Input delay OFF	each cycle			-
Input current		< 1 mA			-
Cable length (shielded)		< 30 m			-

Logic relays
Technical data

Data at T_a = 25 °C and rated values, if nothing else indicated.

Type		CL-LMR.C...18DC1	CL-LMR.C...18DC2 CL-LMT.C...20DC2	CL-LMR.C...18AC1	CL-LMR.C...18AC2
Input circuit - Digital inputs		**12 V DC**	**24 V DC**	**24 V AC**	**115 / 230 V AC**
Number		12			
Inputs can be used as analog inputs		4 (I7, I8, I11, I12)			-
Indication of operational states		LCD-Display (if existing)			
Electrical isolation	from voltage supply	no			
	between digital inputs	no			
	from the outputs	yes			
	from PC interface, memory module, CL-NET, CL-LINK	no			yes
Rated operational voltage U_e		12 V DC	24 V DC	24 V AC	
	U_e on „0“ signal	4 V DC (I1-I12)	< 5 V DC (I1-I12, R1-R12)	0-6 V AC (sinusoidal)	0-40 V AC (sinusoidal)
	U_e on „1“ signal	8 V DC (I1-I12)	> 15 V DC (I1-I6, I9, I10) > 8 V DC (I7, I8, I11, I12)	> 9.5 V DC, 14-26.4 V AC (sinusoidal) (I1-I6, I9, I10) > 7 V AC (sinusoidal) (I7,I8; I11, I12)	79-264 V AC (sinusoidal)
Rated frequency		-		50-60 Hz	
Input current on „1“ signal		3.3 mA (at 12 V DC, I1-I6, I9-I12), 1.1 mA (at 12 V DC, I7, I8)	3.3 mA (at 24 V DC, I1-I6, I9, I10), 2.2 mA (at 24 V DC, I7, I8, I11, I12)	4 mA (at 24 V AC, 50 Hz, I1-I6, I9, I10), 2 mA (at 24 V AC, 50 Hz, I7, I8, I11, I12), 2 mA (at 24 V DC, I7, I8, I11, I12)	6x0.25 mA (at 115 V AC, 60 Hz, I1-I6), 6x0.5 mA (at 230 V AC, 50 Hz, I1-I6) 2x4 mA (at 115 V AC, 60 Hz, I7, I8), 2x6 mA (at 230 V AC, 50 Hz, I7, I8), 4x0.25 mA (at 115 V AC, 60 Hz, I9-I12), 4x0.5 mA (at 230 V AC, 50 Hz, I9-I12)
Time delay from „0“ to „1“	debounce ON	20 ms		80 ms (at 50 Hz), 66 2/3 ms (at 60 Hz)	
	debounce OFF	typ. 0.3 ms (I1-I6, I9, I10), typ. 0.35 ms (I7, I8, I11, I12)	typ. 0.25 ms	20 ms (at 50 Hz), 16 2/3 ms (at 60 Hz)	
Time delay from „1“ to „0“	debounce ON	20 ms		80 ms (at 50 Hz), 66 2/3 ms (at 60 Hz)	
	debounce OFF	typ. 0.4 ms (I1-I6, I9, I10), typ. 0.35 ms (I7, I8, I11, I12)	-	20 ms (at 50 Hz), 16 2/3 ms (at 60 Hz)	
Cable length (unshielded)		100 m			
Maximum cable length per input				max. 40 m, typ. 40 m (I9, I10)	typ. 40 m (I1-I6, I9-I12), typ. 100 m (I7, I8)
Frequency counter	number	2 (I3, I4)		-	-
	counting frequency	< 1 kHz		-	-
	pulse shape	square-wave		-	-
	pulse / pause ratio	1:1		-	-
Rapid counter inputs	number	2 (I1, I2)		-	-
	counting frequency	< 1 kHz		-	-
	pulse shape	square-wave		-	-
	pulse / pause ratio	1:1		-	-
Cable length (shielded)		< 20 m		-	-
Input circuit - Analog inputs					
Number		4 (I7, I8, I11, I12)			-
Electrical isolation	from voltage supply	no			-
	from the digital inputs	no			-
	from the outputs	yes			-
	from PC interface, memory module, CL-NET, CL-LINK	no			-
Input type		DC voltage			-
Signal range		0-10 V DC			-
Resolution	analog	0.01 V			-
	digital	0.01 V; 10 Bit (value 1-1023)			-
Input impedance		11.2 kΩ			-
Accuracy of the actual value	two CL devices	±3 %			-
	within one device	±2 %, ±0.12 V			-
Conversion time analog/digital	Input delay ON	20 ms			-
	Input delay OFF	each cycle			-
Input current		< 1 mA			-
Cable length (shielded)		< 30 m			-

Logic relays
Technical data

Data at T_a = 25 °C and rated values, if nothing else indicated.

Type		CL-LER.18DC2, CL-LET.20DC2	CL-LER.18AC2
Input circuit - Digital inputs		**24 V DC**	**115 / 230 V AC**
Number		12	
Inputs can be used as analog inputs		-	
Indication of operational states		-	
Electrical isolation	from voltage supply	no	
	between digital inputs	no	
	from the outputs	yes	
	from PC interface, memory module, CL-NET, CL-LINK	no	
Rated operational voltage U_e		24 V DC	
	U_e on „0“ signal	< 5 V DC (I1-I12, R1-R12)	0-40 V AC (sinusoidal)
	U_e on „1“ signal	-	79-264 V AC (sinusoidal)
Rated frequency		-	50-60 Hz
Input current on „1“ signal		3.3 mA (at 24 V DC, R1-R12)	12x0.25 mA (at 115 V AC, 60 Hz, R1-R12), 12x0.5 mA (at 230 V AC, 50 Hz, R1-R12)
Time delay from „0“ to „1“	debounce ON	20 ms	80 ms (at 50 Hz, I1-I12, R1-R12), 66 2/3 ms (at 60 Hz, I1-I12, R1-R12)
	debounce OFF	typ. 0.25 ms (R1-R12)	20 ms (at 50 Hz, I1-I12, R1-R12), 16 2/3 ms (at 60 Hz, I1-I12, R1-R12)
Time delay from „1“ to „0“	debounce ON	20 ms	80 ms (at 50 Hz, I1-I12, R1-R12), 66 2/3 ms (at 60 Hz, I1-I12, R1-R12)
	debounce OFF	-	20 ms (at 50 Hz, I1-I12, R1-R12), 16 2/3 ms (at 60 Hz, I1-I12, R1-R12)
Cable length (unshielded)		100 m	-
Maximum cable length per input		-	typ. 40 m (I1-I6, I9-I12, R1-R12), typ. 100 m (I7, I8)

Logic relays
Technical data

Data at T_a = 25 °C and rated values, if nothing else indicated.

Type		CL-LSR...	CL-LMR... CL-LER...	CL-LER.2O
Output circuit - Relay outputs				
Number		4	6	2
Outputs in groups of		1		2
Parallel switching of outputs to increase capacity		not permissible		
Fusing of the output relay		circuit-breaker B16 or fuse 8 A (slow-acting)		
Electrical isolation	from voltage supply	yes		
	from the inputs	yes		
	from PC interface, memory module, CL-NET, CL-LINK	no		
	protective separation	300 V AC		
	basic isolation	600 V AC		
Mechanical lifetime		10x106 switching cycles		
Rung	conventional thermal current (10 A UL)	8 A		
	recommended for load 12 V AC/DC	> 500 mA		
	short-circuit proof cos φ = 1; characteristic B16 at 600 A	16 A		
	short-circuit proof cos φ = 0,5 up to 0,7; characteristic B16 at 900 A	16 A		
	Rated impulse withstand voltage U_{imp} contact-coil	6 kV		
	Rated operational voltage U_e	250 V AC		
Rated insulation voltage U_i		250 V AC		
Protective separation (EN 50178)	between coil and contact	300 V AC		
	between two contacts	300V AC		
Making capacity	AC-15, 250 V AC, 3 A (600 ops./h)	300.000 switching cycles		
	DC13, L/R ≤ 150 ms, 24 V DC, 1 A (500 ops./h)	200.000 switching cycles		
Breaking capacity	AC-15, 250 V AC, 3 A (600 ops./h)	300.000 switching cycles		
	DC13, L/R ≤ 150 ms, 24 V DC, 1 A (500 ops./h)	200.000 switching cycles		
Incandesent lamp load	1000 W at 230/240 V AC	25.000 switching cycles		
	500 W at 115/120 V AC	25.000 switching cycles		
Fluorescent lamp load	10 x 58 W at 230/240 V AC with electrical control gear	25.000 switching cycles		
	10 x 58 W at 230/240 V AC uncompensated	25.000 switching cycles		
	1 x 58 W at 230/240 V AC conventional compensated	25.000 switching cycles		
Switching frequency	mechanical operations	$10x10^6$		
	switching frequency	10 Hz		
	resistive load / lamp load	2 Hz		
	inductive load	0.5 Hz		
UL/CSA				
Continuous current at 240 V		10 A AC		
Continuous current at 24 V		8 A DC		
AC	Utilization catagory (Control Circuit Rating Codes)	B 300 Light Pilot Duty		
	max. rated operational voltage	300 V AC		
	max. continuous thermal current cos φ = 1 at B 300	5 A		
	max. making / breaking apparent power (Make/Break) cos φ ≠ 1 at B 300	3600/360 VA		
DC	Utilization catagory (Control Circuit Rating Codes)	R 300 Light Pilot Duty		
	max. rated operational voltage	300 V DC		
	max. continuous thermal current at R 300	1 A		
	max. making / breaking apparent power (Make/Break) at R 300	28/28 VA		

Logic relays
Technical data

Data at T_a = 25 °C and rated values, if nothing else indicated.

Type		CL-LST...	CL-LMT...	CL-LET...
Output circuit - Transistor outputs				
Number		4	8	
Rated operational voltage U_e		24 V DC		
Operational voltage range		20.4-28.8 V DC		
Residual ripple		≤ 5 %		
Supply current	on „0“ signal	typ. 9 mA / max. 16 mA	typ. 18 mA / max. 32 mA	
	on „1“ signal	typ. 12 mA / max. 22 mA	typ. 24 mA / max. 44 mA	
Reverse voltage protection		yes (Attention: If supply voltage is reversed, applying voltage at the outputs, causes a short circuit.)		
Electrical isolation	from voltage supply	yes		
	from the inputs	yes		
	from PC interface, memory module, CL-NET, CL-LINK	-		
Rated operational current I_e on „1“ signal DC		max. 0.5 A		
Lamp load without R_v		5 W		
Residual current on „0“ signal per channel		< 0.1 mA		
Max. output voltage	on „0“ signal at external load < 10 MΩ	2.5 V		
	on „1“ signal at Ie = 0.5 A	U = Ue - 1 V		
Short-circuit protection		yes, thermal (analysis results from diagnosis input I16, I15; R15, R16)		
Short-circuit tripping current for R_a ≤ 10 mΩ		0.7 A ≤ I_e ≤ 2 A per output		
Total short-circuit current		8 A	16 A	
Peak short-circuit current		16 A	32 A	
Thermal tripping		yes		
Max. switching frequency with constant resistive load R_L < 100 kΩ (depending on active channels and their load)		40.000 switching cycles/h		
Parallel connection of outputs	with resistive load, inductive load with external suppressor, combination within one group	group 1: Q1-Q4	group 1: Q1-Q4, group 2: Q5-Q8	group 1: S1-S4, group 2: S5-S8
	number of outputs	max. 4		
	max. total current	2 A (Attention! Outputs must be actuated simultaneously and for the same length of time.)		
Indication of operational states of the outputs		LCD-Display (if existing)		
Inductive load[1] without external suppressor				
$T_{0.95}$ = 1 ms, R = 48 Ω, L = 16 mH	utilization factor	0.25 g		
	duty time	100 %		
	max. switching frequency f = 0,5 Hz (max. duty time = 50 %)	1500 switching cycles		
DC13, $T_{0.95}$ = 72 ms, R = 48 Ω, L = 1.15 H	utilization factor	0.25 g		
	duty time	100 %		
	max. switching frequency f = 0,5 Hz (max. duty time = 50 %)	1500 switching cycles		
$T_{0.95}$ = 15 ms, R = 48 Ω, L = 0.24 H	utilization factor	0.25 g		
	duty time	100 %		
	max. switching frequency f = 0,5 Hz (max. duty time = 50 %)	1500 switching cycles		
Inductive load[1] with external suppressor				
	demand factor	1 g		
	duty time	100 %		
	max. switching frequency max. duty time	depends on suppressor		

1) For inductive loading, without external suppression of the transistor outputs, the following applies:
$T_{0.95}$ = time in ms, until 95 % of the steady-state current is achieved. $T_{0.95}$ 3 × $T_{0.65}$ = 3 × L/R.


Data transfer rate in the CL-NET network: bus lengths of 40 m and over only attainable with cables with additional cross-section and connection adapter.

Logic relays
Technical data

Data at T_a = 25 °C and rated values, if nothing else indicated.

Type		CL-LSR..., CL-LST...	CL-LMR... CL-LMT.. CL-LET.., CL-LER.18..	CL-LER.2O CL-LEC.CI000
General data				
Dimensions (W x H x D)		71.5 mm x 90 mm x 58 mm (2.81 inch x 3.54 inch x 2.28 inch)	107.5 mm x 90 mm x 58 mm (4.23 inch x 3.54 inch x 2.28 inch)	35.5 mm x 90 mm x 58 mm (1.40 inch x 3.54 inch x 2.28 inch)
Weight		0.2 kg (0.44 lb)	0.3 kg (0.66 lb)	0.07 kg (0.15 lb)
Mounting		DIN rail (IEC/EN 60715), 35 mm or screw mounting with fixing brackets CL-LAS.FD001 (accessories)		
Mounting position		horizontal / vertical		
Electrical connection				
Wire size	rigid	0.2-4 mm² (22–12 AWG)		
	fine-strand with wire end ferrule	0.2-2.5 mm² (22–12 AWG)		
Max. tightening torque		0.6 Nm		
Environmental data				
Ambient temperature range	operation	-25...+55 °C, cold acc. to IEC 60068-2-1, heat acc. to IEC 60068-2-2		
	storage	-40...+70 °C		
LCD-Display (clearly legible)		0...+55 °C		
Condensation		avoid condensation with suitable methods		
Humidity, no condensation (IEC/EN 60068-2-30)		5-95 %		
Air pressure (operation)		795-1080 hPa		
Degree of protection (IEC/EN 60529)		IP20		
Vibration (IEC/EN 60068-2-6)		10-57 Hz (constant amplitude 0.15 mm), 57-150 Hz (constant acceleration 2 g)		
Shock resistance (half-sine 15 g / 11 ms) (IEC/EN 60068-2-27)		18 Shocks		
Drop (IEC/EN 60068-2-31) height of fall		50 mm		
Free fall, packaged (IEC/EN 60068-2-32)		1 m		
Insulation data				
Overvoltage category		II		
Pollution degree (DIN EN 60947)		2		
Rating of air and creepage distances		EN 50178, UL 508, CSA C22.2, No. 142		
Insulation resistance		EN 50178		
Standards				
Standards and directives		EN 55011, EN 55022, IEC/EN 61000-4, IEC 60068-2-6, IEC 60068-2-27		
Electromagnetic compatibility				
Interference immunity				
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (air discharge 8 kV, contact discharge 6 kV)		
electromag. field (HF radiation resistance)	IEC/EN 61000-4-3	10 V/m		
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (supply cable 2 kV, signal lines 2 kV)		
powerful impulses (Surge)	IEC/EN 61000-4-5	supply cable symmetrical (AC) 2 kV, Level 2 (supply cable symmetrical (DC) 0.5 kV)		
HF line emission	IEC/EN 61000-4-6	10 V		
Interference suppression (EN 55011, EN 55022)		class B		
Real time clock				
Back-up time		see diagram		-
Accuracy		typ. ±5 (±0.5 h/year)		-
Repeat accuracy of the time relay				
Accuracy (from value)		±1		-
Resolution	range „S“	10 ms		-
	range „M:S“	1 s		-
	range „H:M“	1 min		-
Retention behaviour				
Write cycles of retention memory (minimum)		1.000.000 (10^6)		-

Technical diagram
Back-up time of the real time clock

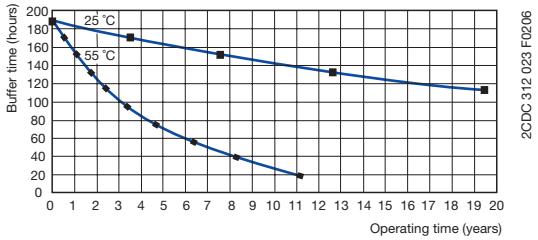

Logic relays
Technical data

Data at T_a = 25 °C and rated values, if nothing else indicated.

Type		CL-LDD...
Input circuit - Supply circuit		
Power failure buffering (IEC/EN 61131-2)		10 ms
General data		
Dimensions (W x H x D)		with keypad: 86.5 x 86.5 x 21.5 mm (3.41 x 3.41 x 0.85 inch) without keypad: 86.5 x 86.5 x 20 mm (3.41 x 3.41 x 0.79 inch)
Weight		0.13 kg (0.29 lb)
Mounting		2 x 22.5 mm, with 2 retainers screwed
Mounting position		horizontal / vertical
Environmental data		
Ambient temperature range	operation	-25...+55 °C (cold acc. to IEC 60068-2-1, heat acc. to IEC 60068-2-2)
	storage	-40...+70 °C
LCD-Display (clearly legible)		-5...+50 °C, -10...0 °C (with backlit / continuous operation)
Condensation		avoid condensation with suitable methods
Humidity, no condensation (IEC/EN 60068-2-30)		5-95 %
Air pressure (operation)		795-1080 hPa
Degree of protection (IEC/EN 60529)		IP65
Vibration (IEC/EN 60068-2-6)		10-57 Hz (constant amplitude 0.15 mm), 57-150 Hz (constant acceleration 2 g)
Shock resistance (half-sine 15 g / 11 ms) (IEC/EN 60068-2-27)		18 Shocks
Drop (IEC/EN 60068-2-31) height of fall		50 mm
Free fall, packaged (IEC/EN 60068-2-32)		1 m
Insulation data		
Pollution degree (DIN EN 60947)		3
Rating of air and creepage distances		EN 50178, UL 508, CSA 22.2, No 142
Insulation resistance		EN 50178
Standards		
Standards and directives		EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, IEC 60068-2-6, IEC 60068-2-27
Electromagnetic compatibility		
Interference immunity		
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (air discharge 8 kV, contact discharge 6 kV)
electromag. field (HF radiation resistance)	IEC/EN 61000-4-3	10 V/m
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (supply cable 2 kV, signal lines 2 kV)
powerful impulses (Surge)	IEC/EN 61000-4-5	Level 3 (supply cable symmetrical 2 kV, CL-LDC.L...AC2)
		Level 2 (0.5 kV supply cable symmetrical, CL-LDC.L...AC2)
HF line emission	IEC/EN 61000-4-6	10 V
Interference suppression (EN 55011, EN 55022)		class B

Logic relays
Technical data

Data at T_a = 25 °C and rated values, if nothing else indicated.

Type		CL-LDC.SDC2	CL-LDC.SAC2	CL-LDC.LDC2	CL-LCD.LAC2	CL-LDC.LNDC2	CL-LDC.LNAC2
Input circuit - Supply circuit							
Rated operational voltage U_e		24 V DC	100-240 V AC	24 V DC	100-240 V AC	24 V DC	100-240 V AC
Rated operational voltage tolerance		-15...+20 %	-15...+10 %	-15...+20 %	-15...+10 %	-15...+20 %	-15...+10 %
Operational voltage range		20.4-28.8 V DC	85-264 V AC	20.4-28.8 V DC	85-264 V AC	20.4-28.8 V DC	85-264 V AC
Frequency		0 Hz	50/60 Hz	0 Hz	50/60 Hz	0 Hz	50/60 Hz
Frequency tolerance		-	± 5 %	-	± 5 %	-	± 5 %
Residual ripple		≤ 5 %	-	≤ 5 %	-	≤ 5 %	-
Input current	at 24 V DC	typ. 185 mA	-	typ. 200 mA	-	typ. 200 mA	-
	at 115/120 V AC (60 Hz)	-	typ. 90 mA	-	typ. 90 mA	-	typ. 90 mA
	at 230/240 V AC (50 Hz)	-	typ. 60 mA	-	typ. 60 mA	-	typ. 60 mA
Power failure buffering (IEC/EN 61131-2)		10 ms					
Power dissipation	at 24 V DC	1.5 W	-	3.4 W	-	3.4 W	-
	at 115/120 V AC	-	typ. 11 VA	-	typ. 11 VA	-	typ. 11 VA
	at 230/240 V AC	-	typ. 15 VA	-	typ. 15 VA	-	typ. 15 VA
Network - point-to-point connection							
Number of stations		1		-			
Data transfer rate	CL-LS..., CL-LM...	9.6 kBaud		-			
	CL-LDD	19.2 kBaud		-			
Distance		max. 5 m		-			
Electrical isolation	to voltage supply	yes		-			
	to connected device	yes		-			
Termination system		spring-type terminal		-			
Network - CL-NET							
Number of stations		max. 1		-		max. 8	
Data transfer rate	6 m	-				1000 kBit/s	
	25 m	-				500 kBit/s	
	40 m	-				250 kBit/s	
	125 m	-				125 kBit/s	
	300 m	-				50 kBit/s	
	700 m	-				20 kBit/s	
	1000 m	-				10 kBit/s	
Electrical isolation	to voltage supply	-				yes	
	to inputs	-				yes	
	to outputs	-				yes	
	to PC interface, memory module, CL-NET, CL-LINK	-				yes	
Bus terminator (first and last station)		-				yes	
Termination system		-				RJ45, 8 pole	
General data							
Dimensions (W x H x D)		75 x 58 x 36.2 mm (2.95 x 2.28 x 1.43 inch)		107.5 x 90 x 30 mm (4.23 x 3.54 x 1.18 inch)			
Weight		0.164 kg (0.36 lb)		0.145 kg (0.32 lb)			
Mounting		plugged onto CL-LDD		plugged onto CL-LDD or on DIN rail (IEC/EN 60715)			
Mounting position							
Electrical connection - Supply circuit							
Wire size	fine-strand with wire end ferrule	0.2 mm² / 2.5 mm² (24-12 AWG)					
	rigid	0.2 mm² / 4 mm² (24-12 AWG)					
Electrical connection - Data cable							
Wire size	fine-strand with wire end ferrule	0.08 mm² / 1.5 mm² (28-12 AWG)		-		0.2 mm² / 2.5 mm² (24-12 AWG)	
	rigid	0.08 mm² / 2.5 mm² (28-12 AWG)		-		0.2 mm² / 4 mm² (24-12 AWG)	
Environmental data							
Ambient temperature range	operation	-25...+55 °C (cold acc. to IEC 60068-2-1, heat acc. to IEC 60068-2-2)					
	storage	-40...+70 °C					
Condensation		avoid condensation with suitable methods					
Humidity, no condensation (IEC/EN 60068-2-30)		5-95 %					
Air pressure (operation)		795-1080 hPa					
Degree of protection (IEC/EN 60529)		IP20					
Vibration (IEC/EN 60068-2-6)		10-57 Hz (constant amplitude 0.15 mm), 57-150 Hz (constant acceleration 2 g)					


Logic relays
Technical data

Data at T_a = 25 °C and rated values, if nothing else indicated.

Type		CL-LDC. SDC2	CL-LDC. SAC2	CL-LDC. LDC2	CL-LCD. LAC2	CL-LDC. LNDC2	CL-LDC. LNAC2
Shock (half-sine 15 g / 11 ms) (IEC/EN 60068-2-27)		18 Shocks					
Drop (IEC/EN 60068-2-31) height of fall		50 mm					
Free fall, packaged (IEC/EN 60068-2-32)		1 m					
Insulation data							
Degree of protection (DIN EN 60947)		2					
Rating of air and creepage distances		EN 50178, UL 508, CSA 22.2, No 142					
Isolation resistance		EN 50178					
Standards							
Standards and directives		EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, IEC 60068-2-6, IEC 60068-2-27					
Electromagnetical compatibility							
Interference immunity							
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (air discharge 8 kV, contact discharge 6 kV)					
electromag. field (HF radiation resistance)	IEC/EN 61000-4-3	10 V/m					
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (supply cable 2 kV, signal lines 2 kV)					
powerful impulses (Surge)	IEC/EN 61000-4-5	Level 3 (supply cable symmetrical 2 kV, CL-LDC.L...AC2)					
		Level 2 (1 kV supply cable symmetrical)		Level 2 (0.5 kV supply cable symmetrical, CL-LDC.L...AC2)			
HF line emission	IEC/EN 61000-4-6	10 V					
Interference suppression (EN 55011, EN 55022)		class B					
Real time clock							
Back-up time		-		see diagram			
Accuracy		-		typ. ± 5 s/day (± 0,5 h/year)			
Repeat accuracy of the time relay							
Accuracy (from value)		-		± 0.02 %			
Resolution	range „S“	-		5 ms			
	range „M:S“	-		1 s			
	range „H:M“	-		1 min			
Retention behaviour							
Write cycles of retention memory (minimum)		-		10^{10} (read/ write cycles)			

6

Technical diagram
Back-up time of the real time clock

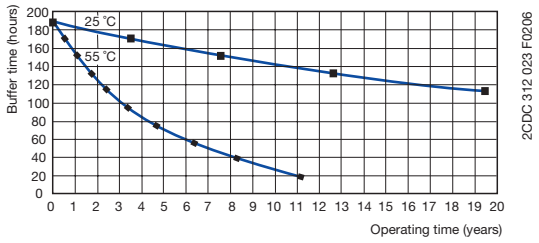

Logic relays
Technical data

Data at T_a = 25 °C and rated values, if nothing else indicated.

Type			CL-LD...16DC2	CL-LD...17DC2	CL-LDR.16AC2
Input circuit - Digital inputs			24 V DC		115/230 V
Number			12		
Inputs can be used as analog inputs			4 (I7, I8, I11, I12)		-
Indication of operational states			-		LCD-Display (if existing)
Electrical isolation	from supply voltage		no		
	from digital inputs		no		
	from the outputs		yes		
	from PC interface, memory module, CL-NET, CL-LINK		yes		
Rated operational voltage U_e			24 V DC		-
	U_e on „0“ signal		< 5 V DC (I1-I6, I9, I10), < 8 V DC (I7, I8, I11, I12)		0-40 V AC (sinusoidal)
	U_e on „1“ signal		> 15 V DC (I1-I6, I9, I10), > 8 V DC (I7, I8, I11, I12)		79-264 V AC (sinusoidal)
Rated frequency			0 Hz		50-60 Hz
Input current on „1“ signal			3.3 mA (at 24 V DC, I1-I6, I9, I10), 2.2 mA (at 24 V DC, I7, I8, I11, I12)		12x0.2 mA (at 115 V AC, 60 Hz, I1-I12), 12x0.5 mA (at 230 V AC, 50 Hz, I1-I12)
Time delay from „0“ to „1“	debounce ON		20 ms		10 ms (at 50 Hz), 100 ms (at 60 Hz)
	debounce OFF		typ. 0.1 ms (I1-I4), typ. 0.25 ms (I5-I12)		10 ms (at 50 Hz), 100 ms (at 60 Hz)
Time delay from „1“ to „0“	debounce ON		20 ms		10 ms (at 50 Hz), 100 ms (at 60 Hz)
	debounce OFF		typ. 0.1 ms (I1-I4), typ. 0.4 ms (I5, I6, I9, I10), typ. 0.2 ms (I7, I8, I11, I12)		10 ms (at 50 Hz), 100 ms (at 60 Hz)
Cable length (unshielded)			100 m		-
Maximum cable length per input			-		typ. 60 m
Frequency counter	number		4 (I1, I2, I3, I4)		-
	counting frequency		< 3 kHz		-
	pulse shape		square-wave		-
	pulse / pause ratio		1:1		-
Incremental counter	number		2 (I1 + I2, I3 + I4)		-
	counting frequency		< 3 kHz		-
	pulse shape		square-wave		-
	signal offset		90°		-
	pulse / pause ratio		1:1		-
Rapid counter inputs	number		4 (I1, I2, I3, I4)		-
	counting frequency		< 3 kHz		-
	pulse shape		square-wave		-
	pulse / pause ratio		1:1		-
Cable length (shielded)			< 20 m		-
Input circuit - Analog inputs					
Number			4 (I7, I8, I11, I12)		-
Electrical isolation	to voltage supply		no		-
	to digital inputs		no		-
	to outputs		yes		-
	to PC interface, memory modul, CL-NET, CL-LINK		yes		-
Input type			DC voltage		-
Signal range			0-10 V DC		-
Resolution	analog		0.01 V		-
	digital		0.01 V; 10 Bit (value 0-1023)		-
Input impedance			11.2 kΩ		-
Accuracy of the actual value	two CL-LD... devices		± 3 %		-
	within one device		± 2 %		-
Conversion time analog/digital			each cycle		-
Input current			< 1 mA		-
Cable length (shielded)			< 30 m		-

Logic relays
Technical data

Data at T_a = 25 °C and rated values, if nothing else indicated.

Type			CL-LD...16DC2	CL-LD...17DC2	CL-LDR.16AC2
Output circuit - Analog outputs					
Number			-	1	-
Electrical separation		from voltage supply	-	no	-
		from the digital inputs	-	no	-
		from the digital outputs	-	yes	-
		from PC interface, memory module, CL-NET, CL-LINK	-	yes	-
Output type			-	DC voltage	-
Signal range			-	0-10 V DC	-
Max. output current			-	0.01 A	-
Burden resistance			-	1 kΩ	-
Overload and short-circuit protection			-	yes	-
Resolution		analog	-	0.01 V DC	-
		digital	-	10 Bit, (value: 0-1023)	-
Setting time			-	100 ms	-
Accuracy		-25...+55 °C	-	2 %	-
		25 °C	-	1 %	-
Conversion time			-	each CPU cycle	-
General data					
Dimensions (W x H x D)			CL-LDR: 89 x 90 x 44 mm (3.5 x 3.54 x 1.73 inch) CL-LDT (build-in): 89 x 90 x 25 mm (3.5 x 3.54 x 0.98 inch)		89 x 90 x 44 mm (3.5 x 3.54 x 1.73 inch)
Weight			CL-LDR: 0.15 kg (0.33 lb) / CL-LDT: 014 kg (0.31 lb)		0.15 kg (0.33 lb)
Mounting			snap-on power supply unit		
Mounting position			horizontal / vertical		
Electrical connection					
Wire size		fine-strand with wire end ferrule	0.2 mm² / 2.5 mm² (24-12 AWG)		
		rigid	0.2 mm² / 4 mm² (24-12 AWG)		
Electrical connection - Data cable					
Wire size		fine-strand with wire end ferrule	0.08 mm² / 1.5 mm² (28-12 AWG)		
		rigid	0.08 mm² / 2.5 mm² (28-12 AWG)		
Environmental data					
Ambient temperature range		operation	-25...+55 °C (cold acc. to IEC 60068-2-1, heat acc. to IEC 60068-2-2)		
		storage	-40...+70 °C		
Condensation			avoid condensation with suitable methods		
Humidity, no condensation (IEC/EN 60068-2-30)			5-95 %		
Atmospheric pressure (operation)			795-1080 hPa		
Degree of protection (IEC/EN 60529)			IP20		
Vibration (IEC/EN 60068-2-6)			10-57 Hz (constant amplitude 0.15 mm), 57-150 Hz (constant acceleration 2 g)		
Shock (half-sine 15 g / 11 ms) (IEC/EN 60068-2-27)			18 Shocks		
Drop (IEC/EN 60068-2-31) height of fall			50 mm		
Free fall, packaged (IEC/EN 60068-2-32)			1 m		
Insulation data					
Pollution degree			2		
Rating of air and creepage distances			EN 50178, UL 508, CSA C22.2, No. 142		
Isolation resistance			EN 50178		
Standards					
Standards and directives			EN 61000-6-1/-2/-3/-4, IEC/EN 61000-4, IEC 60068-2-6, IEC 60068-2-27		
Electromagnetic compatibility					
electrostatic discharge (ESD)	IEC/EN 61000-4-2		Level 3 (air discharge 8 kV, contact discharge 6 kV)		
electromag. field (HF radiation res.)	IEC/EN 61000-4-3		10 V/m		
fast transients (Burst)	IEC/EN 61000-4-4		Level 3 (supply cable 2 kV, signal cable 2 kV)		
powerful impulses (Surge)	IEC/EN 61000-4-5		2 kV (supply cable symmetrical), Level 2 (0.5 kV supply cable symmetrical)		
HF line emission	IEC/EN 61000-4-6		10 V		
Interference suppression (EN 55011, EN 55022)			class B		

Logic relays
Technical data

Data at T_a = 25 °C and rated values, if nothing else indicated.

Type		CL-LDR...
Output circuit - Relay outputs		
Number		4
Outputs in groups of		-
Parallel switching of outputs to increase capacity		not permissible
Fusing of the output relay		circuit-breaker B16 or fuse 8 A (slow-acting)
Electrical isolation	from voltage supply	yes
	from the inputs	yes
	from PC interface, memory module, CL-NET, CL-LINK	yes
	protective separation	300 V AC
	Basic isolation	600 V AC
Mechanical lifetime		$10x10^6$ switching cycles
Rung	conventional thermal current (10 A UL)	8 A
	recommended load 12 V AC/DC	> 500 mA
	short-circuit proof cos φ = 1; characteristic B16 at 600 A	16 A
	short-circuit proof cos φ = 0.5 up to 0.7; characteristic B16 at 900 A	16 A
	Rated impulse withstand voltage U_{imp} contact-coil	6 kV
	Rated operational voltage U_e	250 V AC
Rated insulation voltage U_i		250 V AC
Protective separation (EN 50178)	between coil and contact	300 V AC
	between two contacts	300V AC
Making capacity	AC-15, 250 V AC, 3 A (600 ops./h)	300.000 switching cycles
	DC13, L/R ≤ 150 ms, 24 V DC, 1 A (500 ops./h)	200.000 switching cycles
Breaking capacity	AC-15, 250 V AC, 3 A (600 ops./h)	300.000 switching cycles
	DC13, L/R ≤ 150 ms, 24 V DC, 1 A (500 ops/h)	200.000 switching cycles
Incandesent lamp load	1000 W at 230/240 V AC	25.000 switching cycles
	500 W at 115/120 V AC	25.000 switching cycles
Fluorescent lamp load	10 x 58 W at 230/240 V AC with electrical control gear	25.000 switching cycles
	10 x 58 W at 230/240 V AC uncompensated	25.000 switching cycles
	1 x 58 W at 230/240 V AC conventional compensated	25.000 switching cycles
Switching frequency	mechanical operations	$10x10^6$
	switching frequency	10 Hz
	resistive load / lamp load	2 Hz
	inductive load	0.5 Hz
UL/CSA		
Continuous current at 240 V		10 A AC
Continuous current at 24 V		8 A DC
AC	Utilization category (Control Circuit Rating Codes)	B 300 Light Pilot Duty
	max. rated operational voltage	300 V AC
	max. continuous thermal current cos j = 1 at B 300	5 A
	max. making / breaking apparent power (Make/Break) cos φ ≠ 1 at B 300	3600/360 VA
DC	Utilization category (Control Circuit Rating Codes)	R 300 Light Pilot Duty
	max. rated operational voltage	300 V DC
	max. continuous thermal current at R 300	1 A
	max. making / breaking apparent power (Make/Break) at R 300	28/28 VA

Logic relays
Technical data

Data at T_a = 25 °C and rated values, if nothing else indicated.

Type		CL-LDT...
Output circuit - Transistor outputs		
Number		4
Rated operational voltage U_e		24 V DC
Operational voltage range		20.4-28.8 V DC
Residual ripple		-
Supply current	on „0“ signal	typ. 18 mA / max. 32 mA
	on „1“ signal	typ. 24 mA / max. 44 mA
Reverse voltage protection		yes (Attention: If supply voltage is reversed, applying voltage at the outputs, causes a short circuit.)
Electrical isolation	from voltage supply	yes
	from the inputs	yes
	from PC interface, memory module, CL-NET, CL-LINK	yes
Rated operational current I_e on„1“ signal DC		max. 0.5 A
Lamp load without R_v		5 W (Q1-Q4)
Residual current on „0“ signal per channel		< 0.1 mA
Max. output voltage	on „0“ signal at external load < 10 MΩ	2.5 V
	on „1“ signal at I_e = 0.5 A	$U = U_e$ - 1 V
Short-circuit protection		thermal (Q1-Q4), (analysis results from diagnosis input I16)
Short-circuit tripping current for $R_a \leq$ 10 mΩ		0.7 A ≤ I_e ≤ 2 A per output
Total short-circuit current		8 A
Peak short-circuit current		16 A
Thermal tripping		yes
Max. switching frequency with constant resistive load R_L < 100 kΩ (depending on active channels and their load)		40.000 switching cycles/h
Parallel connection of outputs	with resistive load, inductive load with external suppressor, combination within one group	group 1: Q1-Q4
	number of outputs	max. 4
	max. total current	2 A (Attention! Outputs must be actuated simultaneously and for the same length of time.)
Indication of operational states of the outputs		LCD-Display (if existing)
Inductive load1) without external suppressor		
$T_{0.95}$ = 1 ms, R = 48 Ω, L = 16 mH	utilization factor	0.25 g
	duty time	100 %
	max. switching frequency f = 0,5 Hz (max. duty time = 50 %)	1500 switching cycles
DC13, $T_{0.95}$ = 72 ms, R = 48 Ω, L = 1.15 H	utilization factor	0.25 g
	duty time	100 %
	max. switching frequency f = 0,5 Hz (max. duty time = 50 %)	1500 switching cycles
$T_{0.95}$ = 15 ms, R = 48 Ω, L = 0.24 H	utilization factor	0.25 g
	duty time	100 %
	max. switching frequency f = 0,5 Hz (max. duty time = 50 %)	1500 switching cycles
Inductive load[1)] with external suppressor		
	demand factor	1 g
	duty time	100 %
	max. switching frequency max. duty time	depends on suppressor

[1)] For inductive loading, without external suppression of the transistor outputs, the following applies:
$T_{0.95}$ = time in ms, until 95 % of the steady-state current is achieved. $T_{0.95}$ 3 × $T_{0.65}$ = 3 × L/R.


Data transfer rate in the CL-NET network: bus lengths of 40 m and over only attainable with cables with additional cross-section and connection adapter.

Logic relays
Dimensional drawings


Dimensional drawings

dimensions in mm


CL-LSR, CL-LST

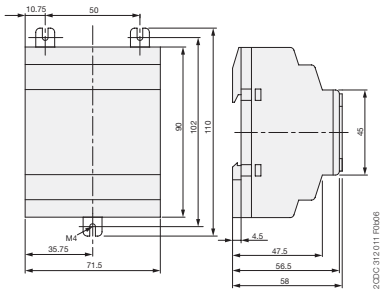


CL-LMR, CL-LMT

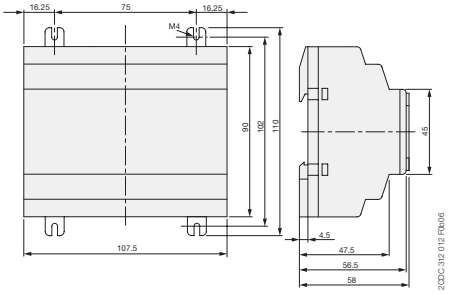


CL-LER.2O




CL-LDD

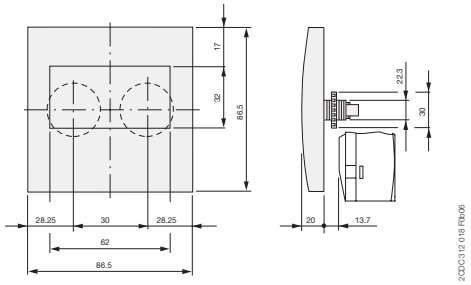


CL-LDD.K + CL-LDC.L.. + (CL-LDR or CL-LDT)

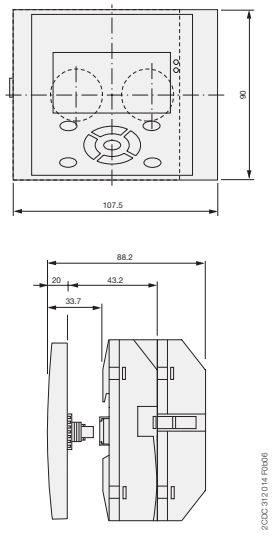

CL-LDC.S..

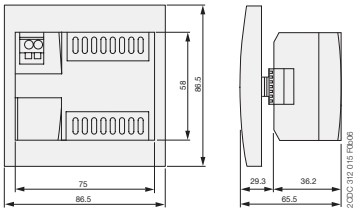

CL-LDR, CL-LDT



6

Index
Alphanumerical

Type	Page
Numbers	
A	
ADP.01	1/40
ADP.01	1/40
ADP.01	2/130
ADP.01	4/22
ADP.02	2/130
B	
BADH V0	5/47
BADL V0	5/47
BAM2 V0	5/47
BJ 612-10	5/36
BJ 612-10	5/47
BJ 612-20	5/36
BJ 612-20	5/47
C	
C512-24	2/104
C512-D	2/104
C512-E	2/104
C512-W	2/104
C513-D	2/104
C513-E	2/104
C513-W	2/104
CC-E I/I	4/8
CC-E I/I	4/8
CC-E I/I	4/8
CC-E I/I	4/8
CC-E I/I	4/8
CC-E I/I	4/8
CC-E I/I	4/8
CC-E I/I	4/8
CC-E I/I-1	4/8
CC-E I/I-2	4/8
CC-E I/V	4/8
CC-E I/V	4/8
CC-E IAC/I	4/11
CC-E IAC/I	4/11
CC-E IAC/I	4/11
CC-E IAC/I	4/11
CC-E IAC/ILPO	4/11
CC-E IAC/V	4/11
CC-E IAC/V	4/11
CC-E IDC/I	4/11
CC-E IDC/I	4/11
CC-E IDC/I	4/11
CC-E IDC/I	4/11
CC-E IDC/V	4/11
CC-E IDC/V	4/11
CC-E RTD/I	4/9
CC-E RTD/I	4/9
CC-E RTD/I	4/9
CC-E RTD/I	4/9
CC-E RTD/I	4/9
CC-E RTD/I	4/9
CC-E RTD/I	4/9
CC-E RTD/I	4/9
CC-E RTD/I	4/9
CC-E RTD/I	4/9
CC-E RTD/I	4/9
CC-E RTD/I	4/9
CC-E RTD/I	4/9
CC-E RTD/I	4/9
CC-E RTD/V	4/9
CC-E RTD/V	4/9
CC-E RTD/V	4/9
CC-E RTD/V	4/9
CC-E RTD/V	4/9
CC-E RTD/V	4/9
CC-E RTD/V	4/9
CC-E TC/I	4/10
CC-E TC/I	4/10
CC-E TC/I	4/10
CC-E TC/I	4/10
CC-E TC/I	4/10
CC-E TC/I	4/10
CC-E TC/I	4/10
CC-E TC/I	4/10
CC-E TC/I	4/10
CC-E TC/V	4/10
CC-E TC/V	4/10
CC-E TC/V	4/10
CC-E TC/V	4/10
CC-E V/I	4/8
CC-E V/I	4/8
CC-E V/I	4/8
CC-E V/I	4/8
CC-E V/V	4/8
CC-E V/V	4/8
CC-E V/V	4/8
CC-E V/V	4/8
CC-E V/V	4/8
CC-E V/V	4/8
CC-E/I	4/11
CC-E/I	4/11
CC-E/RTD	4/9
CC-E/RTD	4/9
CC-E/STD	4/8
CC-E/STD	4/8
CC-E/TC	4/10
CC-E/TC	4/10
CC-U/I	4/21
CC-U/I	4/21
CC-U/RTD	4/21
CC-U/RTD	4/21
CC-U/RTDR	4/21
CC-U/RTDR	4/21
CC-U/STD	4/21
CC-U/STD	4/21
CC-U/STDR	4/21
CC-U/STDR	4/21
CC-U/TC	4/21
CC-U/TC	4/21
CC-U/TCR	4/21
CC-U/TCR	4/21
CC-U/V	4/21
CC-U/V	4/21
CL-LAD.FD001	6/9
CL-LAD.FD002	6/9
CL-LAD.FD011	6/9
CL-LAD.MD004	6/9
CL-LAD.TK001	6/9
CL-LAD.TK002	6/9
CL-LAD.TK003	6/9
CL-LAD.TK004	6/9
CL-LAD.TK005	6/9
CL-LAD.TK006	6/9
CL-LAD.TK007	6/8
CL-LAD.TK009	6/9
CL-LAD.TK011	6/9
CL-LAS.FD001	6/8
CL-LAS.MD003	6/8
CL-LAS.PS002	6/8
CL-LAS.TK001	6/8
CL-LAS.TK002	6/8
CL-LAS.TK011	6/8
CL-LDC.LAC2	6/9
CL-LDC.LDC2	6/9
CL-LDC.LNAC2	6/9
CL-LDC.LNDC2	6/9
CL-LDC.SAC2	6/6
CL-LDC.SDC2	6/6
CL-LDD.K	6/6
CL-LDD.K	6/9
CL-LDD.XK	6/6
CL-LDD.XK	6/9
CL-LDR.16AC2	6/9
CL-LDR.16DC2	6/9
CL-LDR.17DC2	6/9
CL-LDT.16DC2	6/9
CL-LDT.17DC2	6/9
CL-LEC.CI000	6/7
CL-LER.18AC2	6/7
CL-LER.18DC2	6/7
CL-LER.2O	6/7
CL-LET.20DC2	6/7
CL-LMR.C18AC1	6/7
CL-LMR.C18AC2	6/7
CL-LMR.C18DC1	6/7
CL-LMR.C18DC2	6/7
CL-LMR.CX18AC1	6/7
CL-LMR.CX18AC2	6/7
CL-LMR.CX18DC1	6/7
CL-LMR.CX18DC2	6/7
CL-LMT.C20DC2	6/7
CL-LMT.CX20DC2	6/7
CL-LSR.12AC2	6/6
CL-LSR.12DC2	6/6
CL-LSR.C12AC1	6/6
CL-LSR.C12AC2	6/6
CL-LSR.C12DC1	6/6
CL-LSR.C12DC2	6/6
CL-LSR.CX12AC1	6/6
CL-LSR.CX12AC2	6/6
CL-LSR.CX12DC1	6/6
CL-LSR.CX12DC2	6/6
CL-LST.C12DC2	6/6
CL-LST.CX12DC2	6/6
CM-AH-3	2/116
CM-CT 100/1	2/131
CM-CT 100/5	2/131
CM-CT 150/1	2/131
CM-CT 150/5	2/131
CM-CT 200/1	2/131
CM-CT 200/5	2/131
CM-CT 300/1	2/131
CM-CT 300/5	2/131
CM-CT 400/1	2/131
CM-CT 400/5	2/131
CM-CT 50/1	2/131
CM-CT 50/5	2/131
CM-CT 500/1	2/131
CM-CT 500/5	2/131
CM-CT 600/1	2/131
CM-CT 600/5	2/131
CM-CT 75/1	2/131
CM-CT 75/5	2/131
CM-CT A	2/131
CM-EFS.2P	2/16
CM-EFS.2S	2/16
CM-ENE MAX	2/115
CM-ENE MAX	2/115

Index
Alphanumerical

Type	Page
CM-ENE MAX	2/115
CM-ENE MIN	2/115
CM-ENE MIN	2/115
CM-ENE MIN	2/115
CM-ENN	2/115
CM-ENN	2/115
CM-ENN	2/115
CM-ENN	2/115
CM-ENS	2/115
CM-ENS	2/115
CM-ENS	2/115
CM-ENS	2/115
CM-ENS UP/DOWN	2/115
CM-ENS UP/DOWN	2/115
CM-ENS UP/DOWN	2/115
CM-ESS.1P	2/16
CM-ESS.1P	2/16
CM-ESS.1P	2/16
CM-ESS.1S	2/16
CM-ESS.1S	2/16
CM-ESS.1S	2/16
CM-ESS.2P	2/16
CM-ESS.2P	2/16
CM-ESS.2P	2/16
CM-ESS.2S	2/16
CM-ESS.2S	2/16
CM-ESS.2S	2/16
CM-ESS.MP	2/16
CM-ESS.MS	2/16
CM-GM-1	2/116
CM-HE	2/116
CM-IVN.P	2/66
CM-IVN.S	2/66
CM-IWN.1P	2/66
CM-IWN.1S	2/66
CM-IWN.4P	2/66
CM-IWN.4S	2/66
CM-IWN.5P	2/66
CM-IWN.5S	2/66
CM-IWN.6P	2/66
CM-IWN.6S	2/66
CM-IWS.1P	2/66
CM-IWS.1S	2/66
CM-IWS.2P	2/66
CM-IWS.2S	2/66
CM-KH-3	2/116
CM-LWN	2/76
CM-LWN	2/76
CM-LWN	2/76
CM-LWN	2/76
CM-LWN	2/76
CM-LWN	2/76
CM-LWN	2/76
CM-MPN.52P	2/34
CM-MPN.52S	2/34
CM-MPN.62P	2/34
CM-MPN.62S	2/34
CM-MPN.72P	2/34
CM-MPN.72S	2/34
CM-MPS.11P	2/34
CM-MPS.11S	2/34
CM-MPS.21P	2/34
CM-MPS.21S	2/34
CM-MPS.23P	2/34
CM-MPS.23S	2/34
CM-MPS.31P	2/34
CM-MPS.31S	2/34
CM-MPS.41P	2/34
CM-MPS.41S	2/34
CM-MPS.43P	2/34
CM-MPS.43S	2/34
CM-MSE	2/90
CM-MSE	2/90
CM-MSE	2/90
CM-MSS.11P	2/90
CM-MSS.11S	2/90
CM-MSS.12P	2/90
CM-MSS.12S	2/90
CM-MSS.13P	2/90
CM-MSS.13S	2/90
CM-MSS.21P	2/90
CM-MSS.21S	2/90
CM-MSS.22P	2/90
CM-MSS.22S	2/90
CM-MSS.23P	2/90
CM-MSS.23S	2/90
CM-MSS.31P	2/90
CM-MSS.31S	2/90
CM-MSS.32P	2/90
CM-MSS.32S	2/90
CM-MSS.33P	2/90
CM-MSS.33S	2/90
CM-MSS.41P	2/90
CM-MSS.41S	2/90
CM-MSS.51P	2/90
CM-MSS.51S	2/90
CM-PAS.31P	2/33
CM-PAS.31S	2/33
CM-PAS.41P	2/33
CM-PAS.41S	2/33
CM-PBE	2/33
CM-PBE	2/33
CM-PFE	2/33
CM-PFS.P	2/33
CM-PFS.S	2/33
CM-PSS.31P	2/33
CM-PSS.31S	2/33
CM-PSS.41P	2/33
CM-PSS.41S	2/33
CM-PVE	2/33
CM-PVE	2/33
CM-PVS.31P	2/33
CM-PVS.31S	2/33
CM-PVS.41P	2/33
CM-PVS.41S	2/33
CM-PVS.81P	2/33
CM-PVS.81S	2/33
CM-SE-1000	2/116
CM-SE-300	2/116
CM-SE-600	2/116
CM-SFS.21P	2/15
CM-SFS.21S	2/15
CM-SFS.22S	2/15
CM-SRS.11P	2/15
CM-SRS.11P	2/15
CM-SRS.11P	2/15
CM-SRS.11S	2/15
CM-SRS.11S	2/15
CM-SRS.11S	2/15
CM-SRS.12S	2/15
CM-SRS.12S	2/15
CM-SRS.12S	2/15
CM-SRS.21P	2/15
CM-SRS.21P	2/15
CM-SRS.21P	2/15
CM-SRS.21S	2/15
CM-SRS.21S	2/15
CM-SRS.21S	2/15
CM-SRS.22S	2/15
CM-SRS.22S	2/15
CM-SRS.22S	2/15
CM-SRS.M1P	2/15
CM-SRS.M1S	2/15
CM-SRS.M2S	2/15
CM-TCS.11P	2/104
CM-TCS.11S	2/104
CM-TCS.12P	2/104
CM-TCS.12S	2/104
CM-TCS.13P	2/104
CM-TCS.13S	2/104
CM-TCS.21P	2/104
CM-TCS.21S	2/104
CM-TCS.22P	2/104
CM-TCS.22S	2/104
CM-TCS.23P	2/104
CM-TCS.23S	2/104
CM-UFD.M22	2/54
CM-UFD.M31	2/54
CM-UFD.M33	2/54
COV.01	1/40
COV.01	2/130
COV.01	4/22
COV.02	2/130
COV.11	1/40
COV.11	2/130
COV.12	2/130
CP-A CM	3/51
CP-A RU	3/51
CP-ASI/2.8	3/60
CP-ASI/4.0	3/60
CP-ASI/4.0 DC/DC	3/60
CP-ASI/8.0	3/60
CP-B 24/10.0	3/68
CP-B 24/20.0	3/68
CP-B 24/3.0	3/68
CP-B EXT.2	3/68
CP-C 24/10.0	3/45
CP-C 24/20.0	3/45
CP-C 24/5.0	3/45
CP-C MM	3/45
CP-D 12/0.83	3/10
CP-D 12/2.1	3/10
CP-D 24/0.42	3/10
CP-D 24/0.42	6/8
CP-D 24/1.3	3/10
CP-D 24/1.3	6/8
CP-D 24/2.5	3/10
CP-D 24/4.2	3/10
CP-D RU	3/51
CP-E 12/10.0	3/20
CP-E 12/2.5	3/20
CP-E 24/0.75	3/20
CP-E 24/1.25	3/20
CP-E 24/10.0	3/20
CP-E 24/2.5	3/20
CP-E 24/20.0	3/20
CP-E 24/5.0	3/20
CP-E 48/0.62	3/20
CP-E 48/1.25	3/20
CP-E 48/10.0	3/20
CP-E 48/5.0	3/20

Index
Alphanumerical

Type	Page
CP-E 5/3.0	3/20
CP-RUD	3/51
CP-S 24/10.0	3/45
CP-S 24/20.0	3/45
CP-S 24/5.0	3/45
CP-T 24/10.0	3/34
CP-T 24/20.0	3/34
CP-T 24/40.0	3/34
CP-T 24/5.0	3/34
CP-T 48/10.0	3/34
CP-T 48/20.0	3/34
CP-T 48/5.0	3/34
CR-M012DC2	5/10
CR-M012DC2L	5/11
CR-M012DC3	5/10
CR-M012DC3L	5/11
CR-M012DC4	5/10
CR-M012DC4L	5/11
CR-M012DC4LDG	5/11
CR-M012DC4LG	5/11
CR-M024AC2	5/10
CR-M024AC2L	5/11
CR-M024AC3	5/10
CR-M024AC3L	5/11
CR-M024AC4	5/10
CR-M024AC4G	5/11
CR-M024AC4L	5/11
CR-M024AC4LG	5/11
CR-M024DC2	5/10
CR-M024DC2L	5/11
CR-M024DC3	5/10
CR-M024DC3L	5/11
CR-M024DC4	5/10
CR-M024DC4G	5/11
CR-M024DC4L	5/11
CR-M024DC4LD	5/11
CR-M024DC4LDG	5/11
CR-M024DC4LG	5/11
CR-M048AC2	5/10
CR-M048AC2L	5/11
CR-M048AC3	5/10
CR-M048AC3L	5/11
CR-M048AC4	5/10
CR-M048AC4L	5/11
CR-M048AC4LG	5/11
CR-M048DC2	5/10
CR-M048DC2L	5/11
CR-M048DC3	5/10
CR-M048DC3L	5/11
CR-M048DC4	5/10
CR-M048DC4L	5/11
CR-M048DC4LG	5/11
CR-M060AC3	5/10
CR-M060DC2	5/10
CR-M060DC2L	5/11
CR-M060DC3	5/10
CR-M060DC3L	5/11
CR-M060DC4	5/10
CR-M060DC4L	5/11
CR-M060DC4LG	5/11
CR-M110AC2	5/10
CR-M110AC2L	5/11
CR-M110AC3	5/10
CR-M110AC3L	5/11
CR-M110AC4	5/10
CR-M110AC4G	5/11
CR-M110AC4L	5/11
CR-M110AC4LG	5/11
CR-M110DC2	5/10
CR-M110DC2L	5/11
CR-M110DC3	5/10
CR-M110DC3L	5/11
CR-M110DC4	5/10
CR-M110DC4L	5/11
CR-M110DC4LG	5/11
CR-M120AC2	5/10
CR-M120AC2L	5/11
CR-M120AC3	5/10
CR-M120AC3L	5/11
CR-M120AC4	5/10
CR-M120AC4L	5/11
CR-M120AC4LG	5/11
CR-M125DC2	5/10
CR-M125DC2L	5/11
CR-M125DC3	5/10
CR-M125DC3L	5/11
CR-M125DC4	5/10
CR-M125DC4L	5/11
CR-M125DC4LG	5/11
CR-M220DC2	5/10
CR-M220DC2L	5/11
CR-M220DC3	5/10
CR-M220DC3L	5/11
CR-M220DC4	5/10
CR-M220DC4L	5/11
CR-M220DC4LG	5/11
CR-M230AC2	5/10
CR-M230AC2L	5/11
CR-M230AC3	5/10
CR-M230AC3L	5/11
CR-M230AC4	5/10
CR-M230AC4G	5/11
CR-M230AC4L	5/11
CR-M230AC4LG	5/11
CR-M2LC	5/11
CR-M2LS	5/11
CR-M2SF	5/11
CR-M2SS	5/11
CR-M3LS	5/11
CR-M3SS	5/11
CR-M4LC	5/11
CR-M4LS	5/11
CR-M4SF	5/11
CR-M4SS	5/11
CR-MH	5/11
CR-MH1	5/11
CR-MJ	5/11
CR-MM	5/11
CR-P/M 22	5/12
CR-P/M 42	5/12
CR-P/M 42B	5/12
CR-P/M 42BV	5/12
CR-P/M 42C	5/12
CR-P/M 42CV	5/12
CR-P/M 42V	5/12
CR-P/M 52B	5/12
CR-P/M 52C	5/12
CR-P/M 52D	5/12
CR-P/M 62	5/12
CR-P/M 62C	5/12
CR-P/M 62CV	5/12
CR-P/M 62D	5/12
CR-P/M 62DV	5/12
CR-P/M 62E	5/12
CR-P/M 62EV	5/12
CR-P/M 62V	5/12
CR-P/M 72	5/12
CR-P/M 72A	5/12
CR-P/M 82	5/12
CR-P/M 92	5/12
CR-P/M 92C	5/12
CR-P/M 92CV	5/12
CR-P/M 92V	5/12
CR-P012DC1	5/9
CR-P012DC2	5/9
CR-P024AC1	5/9
CR-P024AC2	5/9
CR-P024AC2G	5/9
CR-P024DC1	5/9
CR-P024DC2	5/9
CR-P024DC2	5/9
CR-P048AC1	5/9
CR-P048AC2	5/9
CR-P048DC1	5/9
CR-P048DC2	5/9
CR-P110AC1	5/9
CR-P110AC2	5/9
CR-P110AC2G	5/9
CR-P110DC1	5/9
CR-P110DC2	5/9
CR-P120AC1	5/9
CR-P120AC2	5/9
CR-P230AC1	5/9
CR-P230AC2	5/9
CR-P230AC2G	5/9
CR-PH	5/9
CR-PJ	5/9
CR-PLC	5/9
CR-PLS	5/9
CR-PLSx	5/9
CR-PM	5/9
CR-PSS	5/9
CR-S005VDC1R	5/8
CR-S005VDC1RG	5/8
CR-S006/024VDC1SS	5/8
CR-S006/024VDC1SZ	5/8
CR-S012/024VADC1SS	5/8
CR-S012/024VADC1SZ	5/8
CR-S012VDC1R	5/8
CR-S012VDC1RG	5/8
CR-S024VADC1CRGS	5/8
CR-S024VADC1CRGZ	5/8
CR-S024VADC1CRS	5/8
CR-S024VADC1CRZ	5/8
CR-S024VDC1R	5/8
CR-S024VDC1RG	5/8
CR-S048/060VADC1SS	5/8
CR-S048/060VADC1SZ	5/8
CR-S048VDC1R	5/8
CR-S048VDC1RG	5/8
CR-S060VDC1R	5/8
CR-S060VDC1RG	5/8
CR-S110/125VADC1SS	5/8
CR-S110/125VADC1SZ	5/8
CR-S110VADC1CRGS	5/8
CR-S110VADC1CRGZ	5/8
CR-S110VADC1CRS	5/8
CR-S110VADC1CRZ	5/8
CR-S220/240VADC1SS	5/8
CR-S220/240VADC1SZ	5/8
CR-S230VADC1CRGS	5/8
CR-S230VADC1CRGZ	5/8
CR-S230VADC1CRS	5/8
CR-S230VADC1CRZ	5/8

Index
Alphanumerical

Type	Page
CR-SJB20-BLACK	5/8
CR-SJB20-BLUE	5/8
CR-SJB20-RED	5/8
CR-SM	5/8
CR-SSEP	5/8
CR-U 21	5/14
CR-U 41	5/14
CR-U 41B	5/14
CR-U 41BV	5/14
CR-U 41C	5/14
CR-U 41CV	5/14
CR-U 41V	5/14
CR-U 51B	5/14
CR-U 51C	5/14
CR-U 51D	5/14
CR-U 61	5/14
CR-U 61C	5/14
CR-U 61CV	5/14
CR-U 61D	5/14
CR-U 61DV	5/14
CR-U 61E	5/14
CR-U 61EV	5/14
CR-U 61V	5/14
CR-U 71	5/14
CR-U 71A	5/14
CR-U 81	5/14
CR-U 91	5/14
CR-U 91C	5/14
CR-U 91CV	5/14
CR-U 91V	5/14
CR-U T	5/14
CR-U012DC2	5/13
CR-U012DC2L	5/13
CR-U012DC3	5/13
CR-U012DC3L	5/13
CR-U024AC2	5/13
CR-U024AC2L	5/13
CR-U024AC3	5/13
CR-U024AC3L	5/13
CR-U024DC2	5/13
CR-U024DC2L	5/13
CR-U024DC3	5/13
CR-U024DC3L	5/13
CR-U048AC2	5/13
CR-U048AC2L	5/13
CR-U048AC3	5/13
CR-U048AC3L	5/13
CR-U048DC2	5/13
CR-U048DC2L	5/13
CR-U048DC3	5/13
CR-U048DC3L	5/13
CR-U060AC3	5/13
CR-U110AC2	5/13
CR-U110AC2L	5/13
CR-U110AC3	5/13
CR-U110AC3L	5/13
CR-U110DC2	5/13
CR-U110DC2L	5/13
CR-U110DC3	5/13
CR-U110DC3L	5/13
CR-U120AC2	5/13
CR-U120AC2L	5/13
CR-U120AC3	5/13
CR-U120AC3L	5/13
CR-U125DC3	5/13
CR-U220DC2	5/13
CR-U220DC2L	5/13
CR-U220DC3	5/13
CR-U220DC3L	5/13
CR-U230AC2	5/13
CR-U230AC2L	5/13
CR-U230AC3	5/13
CR-U230AC3L	5/13
CR-U2S	5/13
CR-U2SM	5/13
CR-U3E	5/13
CR-U3S	5/13
CR-U3SM	5/13
CR-UH	5/13
CT- MXS.22S	1/37
CT-AHD.12	1/8
CT-AHD.22	1/8
CT-AHE	1/20
CT-AHE	1/20
CT-AHE	1/20
CT-AHE	1/20
CT-AHE	1/20
CT-AHE	1/20
CT-AHE	1/20
CT-AHE	1/20
CT-AHE	1/20
CT-AHS.22P	1/38
CT-AHS.22S	1/38
CT-AKE	1/21
CT-AKE	1/21
CT-AKE	1/21
CT-APS.12P	1/38
CT-APS.12S	1/38
CT-APS.21P	1/38
CT-APS.21S	1/38
CT-APS.22P	1/38
CT-APS.22S	1/38
CT-ARE	1/20
CT-ARE	1/20
CT-ARE	1/20
CT-ARE	1/20
CT-ARS.11P	1/38
CT-ARS.11S	1/38
CT-ARS.21P	1/38
CT-ARS.21S	1/38
CT-AWE	1/20
CT-AWE	1/20
CT-AWE	1/20
CT-AWE	1/21
CT-AWE	1/21
CT-AWE	1/21
CT-AWE	1/21
CT-AWE	1/21
CT-AWE	1/21
CT-AWE	1/21
CT-AWE	1/21
CT-EBD.12	1/8
CT-EBE	1/21
CT-EBE	1/21
CT-EKE	1/21
CT-EKE	1/21
CT-EKE	1/21
CT-ERD.12	1/8
CT-ERD.22	1/8
CT-ERE	1/20
CT-ERE	1/20
CT-ERE	1/20
CT-ERE	1/20
CT-ERE	1/20
CT-ERE	1/20
CT-ERE	1/20
CT-ERE	1/20
CT-ERS.12P	1/38
CT-ERS.12S	1/38
CT-ERS.21P	1/38
CT-ERS.21S	1/38
CT-ERS.22P	1/38
CT-ERS.22S	1/38
CT-MBS.22P	1/37
CT-MBS.22S	1/37
CT-MFD.12	1/8
CT-MFD.21	1/8
CT-MFE	1/20
CT-MFS.21	1/37
CT-MFS.21P	1/37
CT-MKE	1/21
CT-MVS.12P	1/37
CT-MVS.12S	1/37
CT-MVS.21P	1/37
CT-MVS.21S	1/37
CT-MVS.22P	1/37
CT-MVS.22S	1/37
CT-MVS.23P	1/37
CT-MVS.23S	1/37
CT-MXS.22P	1/37
CT-SAD.22	1/8
CT-SDD.22	1/8
CT-SDE	1/21
CT-SDE	1/21
CT-SDE	1/21
CT-SDS.22P	1/38
CT-SDS.22S	1/38
CT-SDS.23P	1/38
CT-SDS.23S	1/38
CT-TGD.12	1/8
CT-TGD.22	1/8
CT-VWD.12	1/8
CT-VWE	1/20
CT-VWE	1/20
CT-VWE	1/20
CT-VWE	1/20
CT-VWE	1/20
CT-VWE	1/20
CT-WBS.22P	1/37
CT-WBS.22S	1/37
CT-YDE	1/21
CT-YDE	1/21
CT-YDE	1/21
CT-YDE	1/21
CT-YDE	1/21
CT-YDE	1/21
E	
EPD24-TB-101-0.5A	3/75
EPD24-TB-101-10A	3/75
EPD24-TB-101-12A	3/75
EPD24-TB-101-1A	3/75
EPD24-TB-101-2A	3/75
EPD24-TB-101-3A	3/75
EPD24-TB-101-4A	3/75
EPD24-TB-101-6A	3/75
EPD24-TB-101-8A	3/75
EPD-BB500	3/75
EPD-SB21	3/75
F	
FC2	5/47

Index
Alphanumerical

Type	Page
I	
ILPH BdC /RS 422 - 485 (24 V DC power supply)	4/37
ILPH RS 232 (24 V DC power supply)	4/37
ILPH RS 232 / FO-S (24...42 V AC/DC power supply)	4/37
ILPH RS 232 / RS 232 (115-230 V AC power supply)	4/37
ILPH RS 232 / RS 232 (24-48 V DC power supply)	4/37
ILPH RS 232 / RS 422-485	4/37
ILPH RS 232 / RS 422-485	4/37
ILPH RS 232 / RS 422-485 (115-230 V AC power supply)	4/37
ILPH RS 232 / RS 422-485 (24-48 V DC power supply)	4/37
ILPH RS 232-RS 485 / Ethernet	4/37
ILPH RS 422 - 485 / RS 422 - 485 (24 V DC power supply)	4/37
ILPH RS 485 / FO-S (24...42 V AC/DC power supply)	4/37
K	
KA1-8029	1/39
KA1-8030	1/39
M	
MA16-1060	1/39
MAR.01	1/40
MAR.01	1/40
MAR.01	2/130
MAR.01	4/22
MAR.02	1/40
MAR.02	2/130
MAR.12	1/40
MAR.12	2/130
MT-150B	1/39
MT-250B	1/39
MT-350B	1/39
O	
OBIC 0100-115-230VAC/DC	5/47
OBIC 0100-24VDC	5/47
OBIC 0100-48-60VAC/DC	5/47
OBIC 0100-5-12VDC	5/47
OBOA 1000-115VAC/DC	5/47
OBOA 1000-230VAC/DC	5/47
OBOA 1000-24VDC	5/47
OBOA 1000-48-60VAC/DC	5/47
OBOA 2000-24VDC	5/47
OBOC 1000-115VAC/DC	5/47
OBOC 1000-230VAC/DC	5/47
OBOC 1000-24VDC	5/47
OBOC 1000-48-60VAC/DC	5/47
OBOC 1000-5-12VDC	5/47
OBOC 1500-24VAC/DC	5/47
OBOC 5000-115VAC/DC	5/47
OBOC 5000-230VAC/DC	5/47
OBOC 5000-24VDC	5/47
OBRIC 0100-115-230VAC/DC	5/47
OBRIC 0100-24VDC	5/47
OBRIC 0100-48-60VAC/DC	5/47
OBRIC 0100-5-12VDC	5/47
OBROA 1000-115VAC/DC	5/47
OBROA 1000-230VAC/DC	5/47
OBROA 1000-24VDC	5/47
OBROA 1000-48-60VAC/DC	5/47
OBROA 2000-24VDC	5/47
OBROC 1000-115VAC/DC	5/47
OBROC 1000-230VAC/DC	5/47
OBROC 1000-24VDC	5/47
OBROC 1000-48-60VAC/DC	5/47
OBROC 1000-5-12VDC	5/47
OBROC 1500-24VAC/DC	5/47
OBROC 5000-115VAC/DC	5/47
OBROC 5000-230VAC/DC	5/47
OBROC 5000-24VDC	5/47
R	
RB101AR-24VAC/DC	5/35
RB111A-115VAC/DC	5/35
RB111A-230VAC/DC	5/35
RB111A-24VAC/DC	5/35
RB111AR-24VAC/DC	5/35
RB121-12VDC	5/36
RB121-12VDC	5/36
RB121-24VDC	5/36
RB121-5VDC	5/36
RB121-5VDC	5/35
RB121A-115VAC/DC	5/36
RB121A-115VAC/DC	5/35
RB121A-230VAC/DC	5/36
RB121A-230VAC/DC	5/35
RB121A-24VAC/DC	5/36
RB121A-24VAC/DC	5/35
RB121A-48-60VAC/DC	5/36
RB121A-48-60VAC/DC	5/35
RB121A-60-230VUC	5/36
RB121AR-115VAC/DC	5/36
RB121AR-230VAC/DC	5/36
RB121-AU-12VDC	5/35
RB121-AU-24VDC	5/35
RB122A-115VAC/DC	5/36
RB122A-230VAC/DC	5/36
RB122A-24VAC/DC	5/36
RB122A-48-60VAC/DC	5/36
RBR101AR-24VAC/DC	5/35
RBR111A-24VAC/DC	5/35
RBR111AR-24VAC/DC	5/35
RBR121-12VDC	5/36
RBR121-12VDC	5/36
RBR121-24VDC	5/36
RBR121-5VDC	5/36
RBR121-5VDC	5/35
RBR121A-115VAC/DC	5/36
RBR121A-115VAC/DC	5/35
RBR121A-230VAC/DC	5/36
RBR121A-230VAC/DC	5/35
RBR121A-24VAC/DC	5/36
RBR121A-24VAC/DC	5/35
RBR121A-48-60VUC	5/36
RBR121A-48-60VUC	5/35
RBR121A-60-230VUC	5/36
RBR121AR-115VAC/DC	5/36
RBR121AR-230VAC/DC	5/36
RBR121-AU-12VDC	5/35
RBR121-AU-24VDC	5/35
RBR122A-115VAC/DC	5/36
RBR122A-230VAC/DC	5/36
RBR122A-24VAC/DC	5/36
RBR122A-48-60VUC	5/36
S	
SC 612	5/36
SC 612	5/47
SK 615 562-87	1/39
SK 615 562-88	1/39

Index
Numerical

Order code	Type	Page
1SAR		
1SAR700100R0005	C512-24	2/104
1SAR700100R0010	C512-W	2/104
1SAR700110R0010	C513-W	2/104
1SFA		
1SFA611410R1506	MT-150B	1/39
1SFA611410R2506	MT-250B	1/39
1SFA611410R3506	MT-350B	1/39
1SFA611940R1060	MA16-1060	1/39
1SFA616920R8029	KA1-8029	1/39
1SFA616920R8030	KA1-8030	1/39
1SNA		
1SNA116900R2700	BADH V0	5/47
1SNA206754R0000	BJ 612-20	5/36
1SNA206754R0000	BJ 612-20	5/47
1SNA290474R0200	SC 612	5/36
1SNA290474R0200	SC 612	5/47
1SNA290488R0100	BJ 612-10	5/36
1SNA290488R0100	BJ 612-10	5/47
1SNA399903R0200	BADL V0	5/47
1SNA399967R0100	BAM2 V0	5/47
1SNA645001R0300	RB121A-24VAC/DC	5/36
1SNA645002R0400	RB121A-48-60VAC/DC	5/36
1SNA645003R0500	RB121A-115VAC/DC	5/36
1SNA645004R0400	RB121A-230VAC/DC	5/36
1SNA645005R0700	RB121A-24VAC/DC	5/35
1SNA645006R0000	RB121A-48-60VAC/DC	5/35
1SNA645007R0100	RB121A-115VAC/DC	5/35
1SNA645008R1200	RB121A-230VAC/DC	5/35
1SNA645011R2400	RB121AR-230VAC/DC	5/36
1SNA645012R2500	RB122A-24VAC/DC	5/36
1SNA645013R2600	RB122A-230VAC/DC	5/36
1SNA645014R2700	RB111A-24VAC/DC	5/35
1SNA645016R2100	RB111A-115VAC/DC	5/35
1SNA645017R2200	RB111A-230VAC/DC	5/35
1SNA645018R0300	RB111AR-24VAC/DC	5/35
1SNA645019R0400	RB101AR-24VAC/DC	5/35
1SNA645020R0100	RB121A-60-230VUC	5/36
1SNA645021R2600	OBIC 0100-24VDC	5/47
1SNA645022R2700	OBIC 0100-115-230VAC/DC	5/47
1SNA645024R2100	OBOC 5000-24VDC	5/47
1SNA645025R2200	OBOC 1500-24VAC/DC	5/47
1SNA645026R2300	OBOC 1000-230VAC/DC	5/47
1SNA645027R2400	OBOA 1000-24VDC	5/47
1SNA645028R0500	OBOA 1000-230VAC/DC	5/47
1SNA645029R0600	OBOA 2000-24VDC	5/47
1SNA645034R2300	RB121-5VDC	5/36
1SNA645035R2400	RB121-12VDC	5/36
1SNA645036R2500	RB121-5VDC	5/35
1SNA645040R1500	RB122A-48-60VAC/DC	5/36
1SNA645041R0200	RB122A-115VAC/DC	5/36
1SNA645046R0700	RB121AR-115VAC/DC	5/36
1SNA645047R0000	OBIC 0100-5-12VDC	5/47
1SNA645049R1200	OBIC 0100-48-60VAC/DC	5/47
1SNA645050R1700	OBOC 1000-5-12VDC	5/47
1SNA645051R0400	OBOC 1000-24VDC	5/47
1SNA645053R0600	OBOC 1000-48-60VAC/DC	5/47
1SNA645054R0700	OBOC 1000-115VAC/DC	5/47
1SNA645058R1300	OBOC 5000-115VAC/DC	5/47
1SNA645059R1400	OBOC 5000-230VAC/DC	5/47
1SNA645061R0600	OBOA 1000-48-60VAC/DC	5/47
1SNA645062R0700	OBOA 1000-115VAC/DC	5/47
1SNA645071R0000	RB121-24VDC	5/36
1SNA645072R0000	RB121-AU-24VDC	5/35
1SNA645073R0000	RB121-12VDC	5/36
1SNA645075R0000	RB121-AU-12VDC	5/35
1SNA645501R0500	RBR121A-24VAC/DC	5/36
1SNA645502R0600	RBR121A-48-60VUC	5/36
1SNA645503R0700	RBR121A-115VAC/DC	5/36
1SNA645504R0000	RBR121A-230VAC/DC	5/36
1SNA645505R0100	RBR121A-24VAC/DC	5/35
1SNA645506R0200	RBR121A-48-60VUC	5/35
1SNA645507R0300	RBR121A-115VAC/DC	5/35
1SNA645508R1400	RBR121A-230VAC/DC	5/35
1SNA645511R2600	RBR121AR-230VAC/DC	5/36
1SNA645512R2700	RBR122A-24VAC/DC	5/36
1SNA645513R2000	RBR122A-230VAC/DC	5/36
1SNA645514R2100	RBR111A-24VAC/DC	5/35
1SNA645518R0500	RBR111AR-24VAC/DC	5/35
1SNA645519R0600	RBR101AR-24VAC/DC	5/35
1SNA645520R0300	RBR121A-60-230VUC	5/36
1SNA645521R2000	OBRIC 0100-24VDC	5/47
1SNA645522R2100	OBRIC 0100-115-230VAC/DC	5/47
1SNA645524R2300	OBROC 5000-24VDC	5/47
1SNA645525R2400	OBROC 1500-24VAC/DC	5/47
1SNA645526R2500	OBROC 1000-230VAC/DC	5/47
1SNA645527R2600	OBROA 1000-24VDC	5/47
1SNA645528R0700	OBROA 1000-230VAC/DC	5/47
1SNA645529R0000	OBROA 2000-24VDC	5/47
1SNA645531R2200	FC2	5/47
1SNA645534R2500	RBR121-5VDC	5/36
1SNA645535R2600	RBR121-12VDC	5/36
1SNA645536R2700	RBR121-5VDC	5/35
1SNA645540R1700	RBR122A-48-60VUC	5/36
1SNA645541R0400	RBR122A-115VAC/DC	5/36
1SNA645546R0100	RBR121AR-115VAC/DC	5/36
1SNA645547R0200	OBRIC 0100-5-12VDC	5/47
1SNA645549R1400	OBRIC 0100-48-60VAC/DC	5/47
1SNA645550R1100	OBROC 1000-5-12VDC	5/47
1SNA645551R0600	OBROC 1000-24VDC	5/47
1SNA645553R0000	OBROC 1000-48-60VAC/DC	5/47
1SNA645554R0100	OBROC 1000-115VAC/DC	5/47
1SNA645558R1500	OBROC 5000-115VAC/DC	5/47
1SNA645559R1600	OBROC 5000-230VAC/DC	5/47
1SNA645561R0000	OBROA 1000-48-60VAC/DC	5/47
1SNA645562R0100	OBROA 1000-115VAC/DC	5/47
1SNA645571R0000	RBR121-24VDC	5/36
1SNA645572R0000	RBR121-AU-24VDC	5/35
1SNA645573R0000	RBR121-12VDC	5/36
1SNA645575R0000	RBR121-AU-12VDC	5/35
1SNA684202R0100	ILPH RS 232 (24 V DC power supply)	4/37
1SNA684212R2200	ILPH RS 422 - 485 / RS 422 - 485 (24 V DC power supply)	4/37
1SNA684231R2500	ILPH RS 232 / RS 422-485	4/37
1SNA684232R2600	ILPH BdC /RS 422 - 485 (24 V DC power supply)	4/37
1SNA684233R2700	ILPH RS 232 / RS 422-485	4/37
1SNA684234R0200	ILPH RS 232 / RS 232 (115-230 V AC power supply)	4/37
1SNA684234R2000	ILPH RS 232 / RS 232 (24-48 V DC power supply)	4/37
1SNA684236R2200	ILPH RS 232 / FO-S (24...42 V AC/DC power supply)	4/37
1SNA684246R0400	ILPH RS 485 / FO-S (24...42 V AC/DC power supply)	4/37
1SNA684252R0200	ILPH RS 232-RS 485 / Ethernet	4/37
1SNA684333R2300	ILPH RS 232 / RS 422-485 (24-48 V DC power supply)	4/37
1SNA684334R2400	ILPH RS 232 / RS 422-485 (115-230 V AC power supply)	4/37
1SNB041391R0610	CR-SM	5/8
1SVR		
1SVR010200R1600	CC-E I/I-1	4/8
1SVR010201R0300	CC-E I/I-2	4/8
1SVR010203R0500	CC-E IAC/ILPO	4/11
1SVR011700R0000	CC-E/STD	4/8
1SVR011701R2500	CC-E/RTD	4/9
1SVR011702R2600	CC-E/TC	4/10
1SVR011703R2700	CC-E/I	4/11
1SVR011705R2100	CC-E/STD	4/8
1SVR011706R2200	CC-E/RTD	4/9
1SVR011707R2300	CC-E/TC	4/10
1SVR011708R0400	CC-E/I	4/11
1SVR011710R2100	CC-E V/V	4/8
1SVR011711R1600	CC-E V/I	4/8
1SVR011712R1700	CC-E V/I	4/8
1SVR011713R1000	CC-E I/V	4/8
1SVR011714R1100	CC-E I/I	4/8
1SVR011715R1200	CC-E I/I	4/8
1SVR011716R1300	CC-E I/V	4/8
1SVR011717R1400	CC-E I/I	4/8
1SVR011718R2500	CC-E I/I	4/8

Index
Numerical

Order code	Type	Page
1SVR011719R2600	CC-E V/V	4/8
1SVR011720R2300	CC-E V/V	4/8
1SVR011721R1000	CC-E V/I	4/8
1SVR011722R1100	CC-E V/I	4/8
1SVR011723R1200	CC-E V/V	4/8
1SVR011724R1300	CC-E I/I	4/8
1SVR011725R1400	CC-E I/I	4/8
1SVR011726R1500	CC-E V/V	4/8
1SVR011727R1600	CC-E I/I	4/8
1SVR011728R2700	CC-E I/I	4/8
1SVR011729R2000	CC-E V/V	4/8
1SVR011730R2500	CC-E RTD/V	4/9
1SVR011731R1200	CC-E RTD/I	4/9
1SVR011732R1300	CC-E RTD/I	4/9
1SVR011733R1400	CC-E RTD/V	4/9
1SVR011734R1500	CC-E RTD/I	4/9
1SVR011735R1600	CC-E RTD/I	4/9
1SVR011736R1700	CC-E RTD/V	4/9
1SVR011737R1000	CC-E RTD/I	4/9
1SVR011738R2100	CC-E RTD/I	4/9
1SVR011739R2200	CC-E RTD/V	4/9
1SVR011740R0700	CC-E RTD/I	4/9
1SVR011741R2400	CC-E RTD/I	4/9
1SVR011750R0100	CC-E TC/V	4/10
1SVR011751R2600	CC-E TC/I	4/10
1SVR011752R2700	CC-E TC/I	4/10
1SVR011753R2000	CC-E TC/V	4/10
1SVR011754R2100	CC-E TC/I	4/10
1SVR011755R2200	CC-E TC/I	4/10
1SVR011760R0300	CC-E TC/V	4/10
1SVR011761R2000	CC-E TC/I	4/10
1SVR011762R2100	CC-E TC/I	4/10
1SVR011763R2200	CC-E TC/V	4/10
1SVR011764R2300	CC-E TC/I	4/10
1SVR011765R2400	CC-E TC/I	4/10
1SVR011770R0500	CC-E IAC/V	4/11
1SVR011771R2200	CC-E IAC/I	4/11
1SVR011772R2300	CC-E IAC/I	4/11
1SVR011773R2400	CC-E IDC/V	4/11
1SVR011774R2500	CC-E IDC/I	4/11
1SVR011775R2600	CC-E IDC/I	4/11
1SVR011780R1100	CC-E IAC/V	4/11
1SVR011781R0600	CC-E IAC/I	4/11
1SVR011782R0700	CC-E IAC/I	4/11
1SVR011783R0000	CC-E IDC/V	4/11
1SVR011784R0100	CC-E IDC/I	4/11
1SVR011785R1100	CC-E IDC/I	4/11
1SVR011788R2400	CC-E RTD/V	4/9
1SVR011789R2500	CC-E RTD/I	4/9
1SVR011790R2200	CC-E RTD/I	4/9
1SVR011791R1700	CC-E RTD/V	4/9
1SVR011792R1000	CC-E RTD/I	4/9
1SVR011793R1100	CC-E RTD/I	4/9
1SVR011794R1200	CC-E RTD/V	4/9
1SVR011795R1300	CC-E RTD/I	4/9
1SVR011796R1400	CC-E RTD/I	4/9
1SVR011797R1500	CC-E RTD/V	4/9
1SVR011798R2600	CC-E RTD/I	4/9
1SVR011799R2700	CC-E RTD/I	4/9
1SVR040000R1700	CC-U/STD	4/21
1SVR040001R0400	CC-U/STD	4/21
1SVR040002R0500	CC-U/RTD	4/21
1SVR040003R0600	CC-U/RTD	4/21
1SVR040004R0700	CC-U/TC	4/21
1SVR040005R0000	CC-U/TC	4/21
1SVR040006R0100	CC-U/I	4/21
1SVR040007R0200	CC-U/I	4/21
1SVR040008R1300	CC-U/V	4/21
1SVR040009R1400	CC-U/V	4/21
1SVR040010R0000	CC-U/STDR	4/21
1SVR040011R2500	CC-U/STDR	4/21
1SVR040012R2600	CC-U/RTDR	4/21
1SVR040013R2700	CC-U/RTDR	4/21
1SVR040014R2000	CC-U/TCR	4/21
1SVR040015R2100	CC-U/TCR	4/21
1SVR366017R0100	MAR.01	1/40
1SVR366017R0100	MAR.01	1/40
1SVR366017R0100	MAR.01	2/130
1SVR366017R0100	MAR.01	4/22
1SVR402902R0000	CM-HE	2/116
1SVR405501R1010	CR-S005VDC1R	5/8
1SVR405501R1020	CR-S005VDC1RG	5/8
1SVR405501R2010	CR-S012VDC1R	5/8
1SVR405501R2020	CR-S012VDC1RG	5/8
1SVR405501R3010	CR-S024VDC1R	5/8
1SVR405501R3020	CR-S024VDC1RG	5/8
1SVR405501R4010	CR-S048VDC1R	5/8
1SVR405501R4020	CR-S048VDC1RG	5/8
1SVR405501R5010	CR-S060VDC1R	5/8
1SVR405501R5020	CR-S060VDC1RG	5/8
1SVR405521R1100	CR-S006/024VDC1SS	5/8
1SVR405521R1200	CR-S006/024VDC1SZ	5/8
1SVR405521R3100	CR-S012/024VADC1SS	5/8
1SVR405521R3200	CR-S012/024VADC1SZ	5/8
1SVR405521R5100	CR-S048/060VADC1SS	5/8
1SVR405521R5200	CR-S048/060VADC1SZ	5/8
1SVR405521R6100	CR-S110/125VADC1SS	5/8
1SVR405521R6200	CR-S110/125VADC1SZ	5/8
1SVR405521R7100	CR-S220/240VADC1SS	5/8
1SVR405521R7200	CR-S220/240VADC1SZ	5/8
1SVR405541R3110	CR-S024VADC1CRS	5/8
1SVR405541R3120	CR-S024VADC1CRGS	5/8
1SVR405541R3210	CR-S024VADC1CRZ	5/8
1SVR405541R3220	CR-S024VADC1CRGZ	5/8
1SVR405541R6110	CR-S110VADC1CRS	5/8
1SVR405541R6120	CR-S110VADC1CRGS	5/8
1SVR405541R6210	CR-S110VADC1CRZ	5/8
1SVR405541R6220	CR-S110VADC1CRGZ	5/8
1SVR405541R7110	CR-S230VADC1CRS	5/8
1SVR405541R7120	CR-S230VADC1CRGS	5/8
1SVR405541R7210	CR-S230VADC1CRZ	5/8
1SVR405541R7220	CR-S230VADC1CRGZ	5/8
1SVR405598R0700	CR-SJB20-BLUE	5/8
1SVR405598R0800	CR-SJB20-RED	5/8
1SVR405598R0900	CR-SJB20-BLACK	5/8
1SVR405599R0000	CR-SSEP	5/8
1SVR405600R0000	CR-P024AC1	5/9
1SVR405600R1000	CR-P024DC1	5/9
1SVR405600R2000	CR-P120AC1	5/9
1SVR405600R3000	CR-P230AC1	5/9
1SVR405600R4000	CR-P012DC1	5/9
1SVR405600R5000	CR-P048AC1	5/9
1SVR405600R6000	CR-P048DC1	5/9
1SVR405600R7000	CR-P110AC1	5/9
1SVR405600R8000	CR-P110DC1	5/9
1SVR405601R0000	CR-P024AC2	5/9
1SVR405601R1000	CR-P024DC2	5/9
1SVR405601R2000	CR-P120AC2	5/9
1SVR405601R3000	CR-P230AC2	5/9
1SVR405601R4000	CR-P012DC2	5/9
1SVR405601R5000	CR-P048AC2	5/9
1SVR405601R6000	CR-P048DC2	5/9
1SVR405601R7000	CR-P110AC2	5/9
1SVR405601R8000	CR-P110DC2	5/9
1SVR405606R0000	CR-P024AC2G	5/9
1SVR405606R1000	CR-P024DC2	5/9
1SVR405606R3000	CR-P230AC2G	5/9
1SVR405606R7000	CR-P110AC2G	5/9
1SVR405611R0000	CR-M024AC2	5/10
1SVR405611R0100	CR-M024AC2L	5/11
1SVR405611R1000	CR-M024DC2	5/10
1SVR405611R1100	CR-M024DC2L	5/11
1SVR405611R2000	CR-M120AC2	5/10
1SVR405611R2100	CR-M120AC2L	5/11
1SVR405611R3000	CR-M230AC2	5/10
1SVR405611R3100	CR-M230AC2L	5/11
1SVR405611R4000	CR-M012DC2	5/10
1SVR405611R4100	CR-M012DC2L	5/11
1SVR405611R4200	CR-M060DC2	5/10
1SVR405611R4300	CR-M060DC2L	5/11
1SVR405611R5000	CR-M048AC2	5/10
1SVR405611R5100	CR-M048AC2L	5/11
1SVR405611R6000	CR-M048DC2	5/10

Index
Numerical

Order code	Type	Page
1SVR405611R6100	CR-M048DC2L	5/11
1SVR405611R7000	CR-M110AC2	5/10
1SVR405611R7100	CR-M110AC2L	5/11
1SVR405611R8000	CR-M110DC2	5/10
1SVR405611R8100	CR-M110DC2L	5/11
1SVR405611R8200	CR-M125DC2	5/10
1SVR405611R8300	CR-M125DC2L	5/11
1SVR405611R9000	CR-M220DC2	5/10
1SVR405611R9100	CR-M220DC2L	5/11
1SVR405612R0000	CR-M024AC3	5/10
1SVR405612R0100	CR-M024AC3L	5/11
1SVR405612R1000	CR-M024DC3	5/10
1SVR405612R1100	CR-M024DC3L	5/11
1SVR405612R2000	CR-M120AC3	5/10
1SVR405612R2100	CR-M120AC3L	5/11
1SVR405612R3000	CR-M230AC3	5/10
1SVR405612R3100	CR-M230AC3L	5/11
1SVR405612R4000	CR-M012DC3	5/10
1SVR405612R4100	CR-M012DC3L	5/11
1SVR405612R4200	CR-M060DC3	5/10
1SVR405612R4300	CR-M060DC3L	5/11
1SVR405612R5000	CR-M048AC3	5/10
1SVR405612R5100	CR-M048AC3L	5/11
1SVR405612R5200	CR-M060AC3	5/10
1SVR405612R6000	CR-M048DC3	5/10
1SVR405612R6100	CR-M048DC3L	5/11
1SVR405612R7000	CR-M110AC3	5/10
1SVR405612R7100	CR-M110AC3L	5/11
1SVR405612R8000	CR-M110DC3	5/10
1SVR405612R8100	CR-M110DC3L	5/11
1SVR405612R8200	CR-M125DC3	5/10
1SVR405612R8300	CR-M125DC3L	5/11
1SVR405612R9000	CR-M220DC3	5/10
1SVR405612R9100	CR-M220DC3L	5/11
1SVR405613R0000	CR-M024AC4	5/10
1SVR405613R0100	CR-M024AC4L	5/11
1SVR405613R1000	CR-M024DC4	5/10
1SVR405613R1100	CR-M024DC4L	5/11
1SVR405613R2000	CR-M120AC4	5/10
1SVR405613R2100	CR-M120AC4L	5/11
1SVR405613R3000	CR-M230AC4	5/10
1SVR405613R3100	CR-M230AC4L	5/11
1SVR405613R4000	CR-M012DC4	5/10
1SVR405613R4100	CR-M012DC4L	5/11
1SVR405613R4200	CR-M060DC4	5/10
1SVR405613R4300	CR-M060DC4L	5/11
1SVR405613R5000	CR-M048AC4	5/10
1SVR405613R5100	CR-M048AC4L	5/11
1SVR405613R6000	CR-M048DC4	5/10
1SVR405613R6100	CR-M048DC4L	5/11
1SVR405613R7000	CR-M110AC4	5/10
1SVR405613R7100	CR-M110AC4L	5/11
1SVR405613R8000	CR-M110DC4	5/10
1SVR405613R8100	CR-M110DC4L	5/11
1SVR405613R8200	CR-M125DC4	5/10
1SVR405613R8300	CR-M125DC4L	5/11
1SVR405613R9000	CR-M220DC4	5/10
1SVR405613R9100	CR-M220DC4L	5/11
1SVR405614R1100	CR-M024DC4LD	5/11
1SVR405618R0000	CR-M024AC4G	5/11
1SVR405618R0100	CR-M024AC4LG	5/11
1SVR405618R1000	CR-M024DC4G	5/11
1SVR405618R1100	CR-M024DC4LG	5/11
1SVR405618R1400	CR-M024DC4LDG	5/11
1SVR405618R2100	CR-M120AC4LG	5/11
1SVR405618R3000	CR-M230AC4G	5/11
1SVR405618R3100	CR-M230AC4LG	5/11
1SVR405618R4100	CR-M012DC4LG	5/11
1SVR405618R4300	CR-M060DC4LG	5/11
1SVR405618R4400	CR-M012DC4LDG	5/11
1SVR405618R5100	CR-M048AC4LG	5/11
1SVR405618R6100	CR-M048DC4LG	5/11
1SVR405618R7000	CR-M110AC4G	5/11
1SVR405618R7100	CR-M110AC4LG	5/11
1SVR405618R8100	CR-M110DC4LG	5/11
1SVR405618R8300	CR-M125DC4LG	5/11
1SVR405618R9100	CR-M220DC4LG	5/11
1SVR405621R0000	CR-U024AC2	5/13
1SVR405621R0100	CR-U024AC2L	5/13
1SVR405621R1000	CR-U024DC2	5/13
1SVR405621R1100	CR-U024DC2L	5/13
1SVR405621R2000	CR-U120AC2	5/13
1SVR405621R2100	CR-U120AC2L	5/13
1SVR405621R3000	CR-U230AC2	5/13
1SVR405621R3100	CR-U230AC2L	5/13
1SVR405621R4000	CR-U012DC2	5/13
1SVR405621R4100	CR-U012DC2L	5/13
1SVR405621R5000	CR-U048AC2	5/13
1SVR405621R5100	CR-U048AC2L	5/13
1SVR405621R6000	CR-U048DC2	5/13
1SVR405621R6100	CR-U048DC2L	5/13
1SVR405621R7000	CR-U110AC2	5/13
1SVR405621R7100	CR-U110AC2L	5/13
1SVR405621R8000	CR-U110DC2	5/13
1SVR405621R8100	CR-U110DC2L	5/13
1SVR405621R9000	CR-U220DC2	5/13
1SVR405621R9100	CR-U220DC2L	5/13
1SVR405622R0000	CR-U024AC3	5/13
1SVR405622R0100	CR-U024AC3L	5/13
1SVR405622R1000	CR-U024DC3	5/13
1SVR405622R1100	CR-U024DC3L	5/13
1SVR405622R2000	CR-U120AC3	5/13
1SVR405622R2100	CR-U120AC3L	5/13
1SVR405622R3000	CR-U230AC3	5/13
1SVR405622R3100	CR-U230AC3L	5/13
1SVR405622R4000	CR-U012DC3	5/13
1SVR405622R4100	CR-U012DC3L	5/13
1SVR405622R5000	CR-U048AC3	5/13
1SVR405622R5100	CR-U048AC3L	5/13
1SVR405622R5200	CR-U060AC3	5/13
1SVR405622R6000	CR-U048DC3	5/13
1SVR405622R6100	CR-U048DC3L	5/13
1SVR405622R7000	CR-U110AC3	5/13
1SVR405622R7100	CR-U110AC3L	5/13
1SVR405622R8000	CR-U110DC3	5/13
1SVR405622R8100	CR-U110DC3L	5/13
1SVR405622R8200	CR-U125DC3	5/13
1SVR405622R9000	CR-U220DC3	5/13
1SVR405622R9100	CR-U220DC3L	5/13
1SVR405650R0000	CR-PLS	5/9
1SVR405650R0100	CR-PLSx	5/9
1SVR405650R0200	CR-PLC	5/9
1SVR405650R1000	CR-PSS	5/9
1SVR405651R0000	CR-P/M 22	5/12
1SVR405651R1000	CR-M2SS	5/11
1SVR405651R1100	CR-M2LS	5/11
1SVR405651R1200	CR-M2LC	5/11
1SVR405651R1300	CR-M2SF	5/11
1SVR405651R2000	CR-M3SS	5/11
1SVR405651R2100	CR-M3LS	5/11
1SVR405651R3000	CR-M4SS	5/11
1SVR405651R3100	CR-M4LS	5/11
1SVR405651R3200	CR-M4LC	5/11
1SVR405651R3300	CR-M4SF	5/11
1SVR405652R0000	CR-P/M 42	5/12
1SVR405652R1000	CR-P/M 42V	5/12
1SVR405652R4000	CR-P/M 42B	5/12
1SVR405652R4100	CR-P/M 42BV	5/12
1SVR405652R9000	CR-P/M 42C	5/12
1SVR405652R9100	CR-P/M 42CV	5/12
1SVR405653R0000	CR-P/M 52B	5/12
1SVR405653R1000	CR-P/M 52C	5/12
1SVR405653R4000	CR-P/M 52D	5/12
1SVR405654R0000	CR-P/M 62	5/12
1SVR405654R0100	CR-P/M 92	5/12
1SVR405654R1000	CR-P/M 62V	5/12
1SVR405654R1100	CR-P/M 92V	5/12
1SVR405654R4000	CR-P/M 62E	5/12
1SVR405654R4100	CR-P/M 62EV	5/12
1SVR405655R0000	CR-P/M 62C	5/12
1SVR405655R0100	CR-P/M 92C	5/12
1SVR405655R1000	CR-P/M 62CV	5/12
1SVR405655R1100	CR-P/M 92CV	5/12

Index
Numerical

Order code	Type	Page
1SVR405655R4000	CR-P/M 62D	5/12
1SVR405655R4100	CR-P/M 62DV	5/12
1SVR405656R0000	CR-P/M 72	5/12
1SVR405656R1000	CR-P/M 72A	5/12
1SVR405656R2000	CR-P/M 82	5/12
1SVR405658R0000	CR-PM	5/9
1SVR405658R1000	CR-MM	5/11
1SVR405658R5000	CR-PJ	5/9
1SVR405658R6000	CR-MJ	5/11
1SVR405659R0000	CR-PH	5/9
1SVR405659R1000	CR-MH	5/11
1SVR405659R1100	CR-MH1	5/11
1SVR405660R0000	CR-U3S	5/13
1SVR405660R0100	CR-U3E	5/13
1SVR405660R1100	CR-U3SM	5/13
1SVR405661R0000	CR-U 21	5/14
1SVR405662R0000	CR-U 41	5/14
1SVR405662R1000	CR-U 41V	5/14
1SVR405662R4000	CR-U 41B	5/14
1SVR405662R4100	CR-U 41BV	5/14
1SVR405662R9000	CR-U 41C	5/14
1SVR405662R9100	CR-U 41CV	5/14
1SVR405663R0000	CR-U 51B	5/14
1SVR405663R1000	CR-U 51C	5/14
1SVR405663R4000	CR-U 51D	5/14
1SVR405664R0000	CR-U 61	5/14
1SVR405664R0100	CR-U 91	5/14
1SVR405664R1000	CR-U 61V	5/14
1SVR405664R1100	CR-U 91V	5/14
1SVR405664R4000	CR-U 61E	5/14
1SVR405664R4100	CR-U 61EV	5/14
1SVR405665R0000	CR-U 61C	5/14
1SVR405665R0100	CR-U 91C	5/14
1SVR405665R1000	CR-U 61CV	5/14
1SVR405665R1100	CR-U 91CV	5/14
1SVR405665R4000	CR-U 61D	5/14
1SVR405665R4100	CR-U 61DV	5/14
1SVR405666R0000	CR-U 71	5/14
1SVR405666R1000	CR-U 71A	5/14
1SVR405666R2000	CR-U 81	5/14
1SVR405667R0000	CR-U T	5/14
1SVR405669R0000	CR-UH	5/13
1SVR405670R0000	CR-U2S	5/13
1SVR405670R1100	CR-U2SM	5/13
1SVR423418R9000	CP-RUD	3/51
1SVR427014R0000	CP-S 24/5.0	3/45
1SVR427015R0100	CP-S 24/10.0	3/45
1SVR427016R0100	CP-S 24/20.0	3/45
1SVR427024R0000	CP-C 24/5.0	3/45
1SVR427025R0000	CP-C 24/10.0	3/45
1SVR427026R0000	CP-C 24/20.0	3/45
1SVR427030R0000	CP-E 24/0.75	3/20
1SVR427030R2000	CP-E 48/0.62	3/20
1SVR427031R0000	CP-E 24/1.25	3/20
1SVR427031R2000	CP-E 48/1.25	3/20
1SVR427032R0000	CP-E 24/2.5	3/20
1SVR427032R1000	CP-E 12/2.5	3/20
1SVR427033R3000	CP-E 5/3.0	3/20
1SVR427034R0000	CP-E 24/5.0	3/20
1SVR427034R2000	CP-E 48/5.0	3/20
1SVR427035R0000	CP-E 24/10.0	3/20
1SVR427035R1000	CP-E 12/10.0	3/20
1SVR427035R2000	CP-E 48/10.0	3/20
1SVR427036R0000	CP-E 24/20.0	3/20
1SVR427041R0000	CP-D 24/0.42	3/10
1SVR427041R0000	CP-D 24/0.42	6/8
1SVR427041R1000	CP-D 12/0.83	3/10
1SVR427043R0100	CP-D 24/1.3	3/10
1SVR427043R0100	CP-D 24/1.3	6/8
1SVR427043R1200	CP-D 12/2.1	3/10
1SVR427044R0200	CP-D 24/2.5	3/10
1SVR427045R0400	CP-D 24/4.2	3/10
1SVR427049R0000	CP-D RU	3/51
1SVR427054R0000	CP-T 24/5.0	3/34
1SVR427054R2000	CP-T 48/5.0	3/34
1SVR427055R0000	CP-T 24/10.0	3/34
1SVR427055R2000	CP-T 48/10.0	3/34
1SVR427056R0000	CP-T 24/20.0	3/34
1SVR427056R2000	CP-T 48/20.0	3/34
1SVR427057R0000	CP-T 24/40.0	3/34
1SVR427060R0300	CP-B 24/3.0	3/68
1SVR427060R1000	CP-B 24/10.0	3/68
1SVR427060R2000	CP-B 24/20.0	3/68
1SVR427065R0000	CP-B EXT.2	3/68
1SVR427071R0000	CP-A RU	3/51
1SVR427075R0000	CP-A CM	3/51
1SVR427081R0000	CP-C MM	3/45
1SVR427090R0280	CP-ASI/2.8	3/60
1SVR427090R0400	CP-ASI/4.0	3/60
1SVR427090R0800	CP-ASI/8.0	3/60
1SVR427095R0400	CP-ASI/4.0 DC/DC	3/60
1SVR430005R0100	COV.01	1/40
1SVR430005R0100	COV.01	2/130
1SVR430005R0100	COV.01	4/22
1SVR430029R0100	ADP.01	1/40
1SVR430029R0100	ADP.01	1/40
1SVR430029R0100	ADP.01	2/130
1SVR430029R0100	ADP.01	4/22
1SVR430043R0000	MAR.02	1/40
1SVR430043R0000	MAR.02	2/130
1SVR430851R0100	CM-ENS	2/115
1SVR430851R0200	CM-ENS UP/DOWN	2/115
1SVR430851R1100	CM-ENS	2/115
1SVR430851R1200	CM-ENS UP/DOWN	2/115
1SVR430851R1300	CM-ENS	2/115
1SVR430851R9100	CM-ENS	2/115
1SVR430851R9200	CM-ENS UP/DOWN	2/115
1SVR440005R0100	COV.02	2/130
1SVR440029R0100	ADP.02	2/130
1SVR440709R0000	CL-LEC.CI000	6/7
1SVR440709R5000	CL-LER.2O	6/7
1SVR440710R0200	CL-LSR.CX12DC1	6/6
1SVR440710R0300	CL-LSR.C12DC1	6/6
1SVR440711R0100	CL-LSR.12DC2	6/6
1SVR440711R0200	CL-LSR.CX12DC2	6/6
1SVR440711R0300	CL-LSR.C12DC2	6/6
1SVR440711R1200	CL-LST.CX12DC2	6/6
1SVR440711R1300	CL-LST.C12DC2	6/6
1SVR440712R0200	CL-LSR.CX12AC1	6/6
1SVR440712R0300	CL-LSR.C12AC1	6/6
1SVR440713R0100	CL-LSR.12AC2	6/6
1SVR440713R0200	CL-LSR.CX12AC2	6/6
1SVR440713R0300	CL-LSR.C12AC2	6/6
1SVR440720R0200	CL-LMR.CX18DC1	6/7
1SVR440720R0300	CL-LMR.C18DC1	6/7
1SVR440721R0000	CL-LER.18DC2	6/7
1SVR440721R0200	CL-LMR.CX18DC2	6/7
1SVR440721R0300	CL-LMR.C18DC2	6/7
1SVR440721R1000	CL-LET.20DC2	6/7
1SVR440721R1200	CL-LMT.CX20DC2	6/7
1SVR440721R1300	CL-LMT.C20DC2	6/7
1SVR440722R0200	CL-LMR.CX18AC1	6/7
1SVR440722R0300	CL-LMR.C18AC1	6/7
1SVR440723R0000	CL-LER.18AC2	6/7
1SVR440723R0200	CL-LMR.CX18AC2	6/7
1SVR440723R0300	CL-LMR.C18AC2	6/7
1SVR440799R5000	CL-LAS.FD001	6/8
1SVR440799R5100	CL-LAS.TK011	6/8
1SVR440799R6000	CL-LAS.TK001	6/8
1SVR440799R6100	CL-LAS.TK002	6/8
1SVR440799R7000	CL-LAS.MD003	6/8
1SVR440799R8000	CL-LAS.PS002	6/8
1SVR440821R0000	CL-LDC.LDC2	6/9
1SVR440821R1000	CL-LDC.LNDC2	6/9
1SVR440823R0000	CL-LDC.LAC2	6/9
1SVR440823R1000	CL-LDC.LNAC2	6/9
1SVR440839R4400	CL-LDD.K	6/6
1SVR440839R4400	CL-LDD.K	6/9
1SVR440839R4500	CL-LDD.XK	6/6
1SVR440839R4500	CL-LDD.XK	6/9
1SVR440841R0000	CL-LDC.SDC2	6/6
1SVR440843R0000	CL-LDC.SAC2	6/6
1SVR440851R0000	CL-LDR.16DC2	6/9

Index
Numerical

Order code	Type	Page
1SVR440851R1000	CL-LDT.16DC2	6/9
1SVR440851R2000	CL-LDR.17DC2	6/9
1SVR440851R3000	CL-LDT.17DC2	6/9
1SVR440853R0000	CL-LDR.16AC2	6/9
1SVR440899R1000	CL-LAD.FD001	6/9
1SVR440899R2000	CL-LAD.FD011	6/9
1SVR440899R3000	CL-LAD.FD002	6/9
1SVR440899R6000	CL-LAD.TK001	6/9
1SVR440899R6100	CL-LAD.TK002	6/9
1SVR440899R6200	CL-LAD.TK003	6/9
1SVR440899R6300	CL-LAD.TK004	6/9
1SVR440899R6400	CL-LAD.TK005	6/9
1SVR440899R6500	CL-LAD.TK006	6/9
1SVR440899R6600	CL-LAD.TK007	6/8
1SVR440899R6700	CL-LAD.TK011	6/9
1SVR440899R6900	CL-LAD.TK009	6/9
1SVR440899R7000	CL-LAD.MD004	6/9
1SVR450050R0000	CM-ENN	2/115
1SVR450051R0000	CM-ENN	2/115
1SVR450055R0000	CM-ENN	2/115
1SVR450056R0000	CM-SE-300	2/116
1SVR450056R0100	CM-SE-600	2/116
1SVR450056R0200	CM-SE-1000	2/116
1SVR450056R6000	CM-KH-3	2/116
1SVR450056R7000	CM-AH-3	2/116
1SVR450056R8000	CM-GM-1	2/116
1SVR450059R0000	CM-ENN	2/115
1SVR450116R1000	CM-CT 50/1	2/131
1SVR450116R1100	CM-CT 75/1	2/131
1SVR450116R1200	CM-CT 100/1	2/131
1SVR450116R1300	CM-CT 150/1	2/131
1SVR450116R1400	CM-CT 200/1	2/131
1SVR450116R5000	CM-CT 50/5	2/131
1SVR450116R5100	CM-CT 75/5	2/131
1SVR450116R5200	CM-CT 100/5	2/131
1SVR450116R5300	CM-CT 150/5	2/131
1SVR450116R5400	CM-CT 200/5	2/131
1SVR450117R1100	CM-CT 300/1	2/131
1SVR450117R1200	CM-CT 400/1	2/131
1SVR450117R1300	CM-CT 500/1	2/131
1SVR450117R1400	CM-CT 600/1	2/131
1SVR450117R5100	CM-CT 300/5	2/131
1SVR450117R5200	CM-CT 400/5	2/131
1SVR450117R5300	CM-CT 500/5	2/131
1SVR450117R5400	CM-CT 600/5	2/131
1SVR450118R1000	CM-CT A	2/131
1SVR450330R0000	CM-LWN	2/76
1SVR450330R0100	CM-LWN	2/76
1SVR450331R0000	CM-LWN	2/76
1SVR450331R0100	CM-LWN	2/76
1SVR450332R0000	CM-LWN	2/76
1SVR450332R0100	CM-LWN	2/76
1SVR450334R0000	CM-LWN	2/76
1SVR450334R0100	CM-LWN	2/76
1SVR450335R0000	CM-LWN	2/76
1SVR450335R0100	CM-LWN	2/76
1SVR500020R0000	CT-MFD.12	1/8
1SVR500020R1100	CT-MFD.21	1/8
1SVR500100R0000	CT-ERD.12	1/8
1SVR500100R0100	CT-ERD.22	1/8
1SVR500110R0000	CT-AHD.12	1/8
1SVR500110R0100	CT-AHD.22	1/8
1SVR500130R0000	CT-VWD.12	1/8
1SVR500150R0000	CT-EBD.12	1/8
1SVR500160R0000	CT-TGD.12	1/8
1SVR500160R0100	CT-TGD.22	1/8
1SVR500210R0100	CT-SAD.22	1/8
1SVR500211R0100	CT-SDD.22	1/8
1SVR510730R0300	CM-UFD.M22	2/54
1SVR510730R0300	CM-UFD.M31	2/54
1SVR550019R0000	CT-MKE	1/21
1SVR550029R8100	CT-MFE	1/20
1SVR550100R1100	CT-ERE	1/20
1SVR550100R2100	CT-ERE	1/20
1SVR550100R4100	CT-ERE	1/20
1SVR550100R5100	CT-ERE	1/20
1SVR550107R1100	CT-ERE	1/20
1SVR550107R2100	CT-ERE	1/20
1SVR550107R4100	CT-ERE	1/20
1SVR550107R5100	CT-ERE	1/20
1SVR550110R1100	CT-AHE	1/20
1SVR550110R2100	CT-AHE	1/20
1SVR550110R4100	CT-AHE	1/20
1SVR550111R1100	CT-AHE	1/20
1SVR550111R2100	CT-AHE	1/20
1SVR550111R4100	CT-AHE	1/20
1SVR550118R1100	CT-AHE	1/20
1SVR550118R2100	CT-AHE	1/20
1SVR550118R4100	CT-AHE	1/20
1SVR550120R1100	CT-ARE	1/20
1SVR550120R4100	CT-ARE	1/20
1SVR550127R1100	CT-ARE	1/20
1SVR550127R4100	CT-ARE	1/20
1SVR550130R1100	CT-VWE	1/20
1SVR550130R2100	CT-VWE	1/20
1SVR550130R4100	CT-VWE	1/20
1SVR550137R1100	CT-VWE	1/20
1SVR550137R2100	CT-VWE	1/20
1SVR550137R4100	CT-VWE	1/20
1SVR550140R1100	CT-AWE	1/21
1SVR550140R2100	CT-AWE	1/21
1SVR550140R4100	CT-AWE	1/21
1SVR550141R1100	CT-AWE	1/21
1SVR550141R2100	CT-AWE	1/21
1SVR550141R4100	CT-AWE	1/21
1SVR550148R1100	CT-AWE	1/21
1SVR550148R2100	CT-AWE	1/21
1SVR550148R4100	CT-AWE	1/21
1SVR550150R3100	CT-AWE	1/20
1SVR550151R3100	CT-AWE	1/20
1SVR550158R3100	CT-AWE	1/20
1SVR550160R1100	CT-EBE	1/21
1SVR550167R1100	CT-EBE	1/21
1SVR550200R1100	CT-YDE	1/21
1SVR550200R2100	CT-YDE	1/21
1SVR550200R4100	CT-YDE	1/21
1SVR550207R1100	CT-YDE	1/21
1SVR550207R2100	CT-YDE	1/21
1SVR550207R4100	CT-YDE	1/21
1SVR550210R4100	CT-SDE	1/21
1SVR550212R4100	CT-SDE	1/21
1SVR550217R4100	CT-SDE	1/21
1SVR550509R1000	CT-EKE	1/21
1SVR550509R2000	CT-EKE	1/21
1SVR550509R4000	CT-EKE	1/21
1SVR550519R1000	CT-AKE	1/21
1SVR550519R2000	CT-AKE	1/21
1SVR550519R4000	CT-AKE	1/21
1SVR550800R9300	CM-MSE	2/90
1SVR550801R9300	CM-MSE	2/90
1SVR550805R9300	CM-MSE	2/90
1SVR550824R9100	CM-PFE	2/33
1SVR550850R9400	CM-ENE MAX	2/115
1SVR550850R9500	CM-ENE MIN	2/115
1SVR550851R9400	CM-ENE MAX	2/115
1SVR550851R9500	CM-ENE MIN	2/115
1SVR550855R9400	CM-ENE MAX	2/115
1SVR550855R9500	CM-ENE MIN	2/115
1SVR550870R9400	CM-PVE	2/33
1SVR550871R9500	CM-PVE	2/33
1SVR550881R9400	CM-PBE	2/33
1SVR550882R9500	CM-PBE	2/33
1SVR560730R3400	CM-UFD.M33	2/54
1SVR700101R0100	C512-D	2/104
1SVR700102R0100	C512-E	2/104
1SVR700111R0100	C513-D	2/104
1SVR700112R0100	C513-E	2/104
1SVR730005R0100	COV.11	1/40
1SVR730005R0100	COV.11	2/130
1SVR730006R0000	MAR.12	1/40
1SVR730006R0000	MAR.12	2/130
1SVR730010R0200	CT-MFS.21	1/37
1SVR730010R3200	CT-MBS.22S	1/37

Index
Numerical

Order code	Type	Page
1SVR730020R0200	CT-MVS.21S	1/37
1SVR730020R3100	CT-MVS.12S	1/37
1SVR730020R3300	CT-MVS.22S	1/37
1SVR730021R2300	CT-MVS.23S	1/37
1SVR730030R3300	CT- MXS.22S	1/37
1SVR730040R3300	CT-WBS.22S	1/37
1SVR730100R0300	CT-ERS.21S	1/38
1SVR730100R3100	CT-ERS.12S	1/38
1SVR730100R3300	CT-ERS.22S	1/38
1SVR730110R3300	CT-AHS.22S	1/38
1SVR730120R3100	CT-ARS.11S	1/38
1SVR730120R3300	CT-ARS.21S	1/38
1SVR730180R0300	CT-APS.21S	1/38
1SVR730180R3100	CT-APS.12S	1/38
1SVR730180R3300	CT-APS.22S	1/38
1SVR730210R3300	CT-SDS.22S	1/38
1SVR730211R2300	CT-SDS.23S	1/38
1SVR730660R0100	CM-IWS.1S	2/66
1SVR730670R0200	CM-IWS.2S	2/66
1SVR730700R0100	CM-MSS.12S	2/90
1SVR730700R0200	CM-MSS.22S	2/90
1SVR730700R2100	CM-MSS.13S	2/90
1SVR730700R2200	CM-MSS.23S	2/90
1SVR730712R0200	CM-MSS.32S	2/90
1SVR730712R1200	CM-MSS.41S	2/90
1SVR730712R1300	CM-MSS.51S	2/90
1SVR730712R1400	CM-MSS.31S	2/90
1SVR730712R2200	CM-MSS.33S	2/90
1SVR730720R1400	CM-MSS.11S	2/90
1SVR730722R1400	CM-MSS.21S	2/90
1SVR730740R0100	CM-TCS.11S	2/104
1SVR730740R0200	CM-TCS.12S	2/104
1SVR730740R0300	CM-TCS.13S	2/104
1SVR730740R9100	CM-TCS.21S	2/104
1SVR730740R9200	CM-TCS.22S	2/104
1SVR730740R9300	CM-TCS.23S	2/104
1SVR730750R0400	CM-EFS.2S	2/16
1SVR730760R0400	CM-SFS.21S	2/15
1SVR730760R0500	CM-SFS.22S	2/15
1SVR730774R1300	CM-PAS.31S	2/33
1SVR730774R3300	CM-PAS.41S	2/33
1SVR730784R2300	CM-PSS.31S	2/33
1SVR730784R3300	CM-PSS.41S	2/33
1SVR730794R1300	CM-PVS.31S	2/33
1SVR730794R2300	CM-PVS.81S	2/33
1SVR730794R3300	CM-PVS.41S	2/33
1SVR730824R9300	CM-PFS.S	2/33
1SVR730830R0300	CM-ESS.1S	2/16
1SVR730830R0400	CM-ESS.2S	2/16
1SVR730830R0500	CM-ESS.MS	2/16
1SVR730831R0300	CM-ESS.1S	2/16
1SVR730831R0400	CM-ESS.2S	2/16
1SVR730831R1300	CM-ESS.1S	2/16
1SVR730831R1400	CM-ESS.2S	2/16
1SVR730840R0200	CM-SRS.11S	2/15
1SVR730840R0300	CM-SRS.12S	2/15
1SVR730840R0400	CM-SRS.21S	2/15
1SVR730840R0500	CM-SRS.22S	2/15
1SVR730840R0600	CM-SRS.M1S	2/15
1SVR730840R0700	CM-SRS.M2S	2/15
1SVR730841R0200	CM-SRS.11S	2/15
1SVR730841R0300	CM-SRS.12S	2/15
1SVR730841R0400	CM-SRS.21S	2/15
1SVR730841R0500	CM-SRS.22S	2/15
1SVR730841R1200	CM-SRS.11S	2/15
1SVR730841R1300	CM-SRS.12S	2/15
1SVR730841R1400	CM-SRS.21S	2/15
1SVR730841R1500	CM-SRS.22S	2/15
1SVR730884R1300	CM-MPS.31S	2/34
1SVR730884R3300	CM-MPS.41S	2/34
1SVR730884R4300	CM-MPS.43S	2/34
1SVR730885R1300	CM-MPS.11S	2/34
1SVR730885R3300	CM-MPS.21S	2/34
1SVR730885R4300	CM-MPS.23S	2/34
1SVR740010R0200	CT-MFS.21P	1/37
1SVR740010R3200	CT-MBS.22P	1/37
1SVR740020R0200	CT-MVS.21P	1/37
1SVR740020R3100	CT-MVS.12P	1/37
1SVR740020R3300	CT-MVS.22P	1/37
1SVR740021R2300	CT-MVS.23P	1/37
1SVR740030R3300	CT-MXS.22P	1/37
1SVR740040R3300	CT-WBS.22P	1/37
1SVR740100R0300	CT-ERS.21P	1/38
1SVR740100R3100	CT-ERS.12P	1/38
1SVR740100R3300	CT-ERS.22P	1/38
1SVR740110R3300	CT-AHS.22P	1/38
1SVR740120R3100	CT-ARS.11P	1/38
1SVR740120R3300	CT-ARS.21P	1/38
1SVR740180R0300	CT-APS.21P	1/38
1SVR740180R3100	CT-APS.12P	1/38
1SVR740180R3300	CT-APS.22P	1/38
1SVR740210R3300	CT-SDS.22P	1/38
1SVR740211R2300	CT-SDS.23P	1/38
1SVR740660R0100	CM-IWS.1P	2/66
1SVR740670R0200	CM-IWS.2P	2/66
1SVR740700R0100	CM-MSS.12P	2/90
1SVR740700R0200	CM-MSS.22P	2/90
1SVR740700R2100	CM-MSS.13P	2/90
1SVR740700R2200	CM-MSS.23P	2/90
1SVR740712R0200	CM-MSS.32P	2/90
1SVR740712R1200	CM-MSS.41P	2/90
1SVR740712R1300	CM-MSS.51P	2/90
1SVR740712R1400	CM-MSS.31P	2/90
1SVR740712R2200	CM-MSS.33P	2/90
1SVR740720R1400	CM-MSS.11P	2/90
1SVR740722R1400	CM-MSS.21P	2/90
1SVR740740R0100	CM-TCS.11P	2/104
1SVR740740R0200	CM-TCS.12P	2/104
1SVR740740R0300	CM-TCS.13P	2/104
1SVR740740R9100	CM-TCS.21P	2/104
1SVR740740R9200	CM-TCS.22P	2/104
1SVR740740R9300	CM-TCS.23P	2/104
1SVR740750R0400	CM-EFS.2P	2/16
1SVR740760R0400	CM-SFS.21P	2/15
1SVR740774R1300	CM-PAS.31P	2/33
1SVR740774R3300	CM-PAS.41P	2/33
1SVR740784R2300	CM-PSS.31P	2/33
1SVR740784R3300	CM-PSS.41P	2/33
1SVR740794R1300	CM-PVS.31P	2/33
1SVR740794R2300	CM-PVS.81P	2/33
1SVR740794R3300	CM-PVS.41P	2/33
1SVR740824R9300	CM-PFS.P	2/33
1SVR740830R0300	CM-ESS.1P	2/16
1SVR740830R0400	CM-ESS.2P	2/16
1SVR740830R0500	CM-ESS.MP	2/16
1SVR740831R0300	CM-ESS.1P	2/16
1SVR740831R0400	CM-ESS.2P	2/16
1SVR740831R1300	CM-ESS.1P	2/16
1SVR740831R1400	CM-ESS.2P	2/16
1SVR740840R0200	CM-SRS.11P	2/15
1SVR740840R0400	CM-SRS.21P	2/15
1SVR740840R0600	CM-SRS.M1P	2/15
1SVR740841R0200	CM-SRS.11P	2/15
1SVR740841R0400	CM-SRS.21P	2/15
1SVR740841R1200	CM-SRS.11P	2/15
1SVR740841R1400	CM-SRS.21P	2/15
1SVR740884R1300	CM-MPS.31P	2/34
1SVR740884R3300	CM-MPS.41P	2/34
1SVR740884R4300	CM-MPS.43P	2/34
1SVR740885R1300	CM-MPS.11P	2/34
1SVR740885R3300	CM-MPS.21P	2/34
1SVR740885R4300	CM-MPS.23P	2/34
1SVR750005R0100	COV.12	2/130
1SVR750487R8300	CM-MPN.52S	2/34
1SVR750488R8300	CM-MPN.62S	2/34
1SVR750489R8300	CM-MPN.72S	2/34
1SVR750660R0200	CM-IWN.1S	2/66
1SVR750660R0300	CM-IWN.4S	2/66
1SVR750660R0400	CM-IWN.5S	2/66
1SVR750660R0500	CM-IWN.6S	2/66
1SVR750669R9400	CM-IVN.S	2/66
1SVR760487R8300	CM-MPN.52P	2/34
1SVR760488R8300	CM-MPN.62P	2/34

Index
Numerical

Order code	Type	Page
1SVR760489R8300	CM-MPN.72P	2/34
1SVR760660R0200	CM-IWN.1P	2/66
1SVR760660R0300	CM-IWN.4P	2/66
1SVR760660R0400	CM-IWN.5P	2/66
1SVR760660R0500	CM-IWN.6P	2/66
1SVR760669R9400	CM-IVN.P	2/66
2CDE		
2CDE601101R2001	EPD24-TB-101-1A	3/75
2CDE601101R2002	EPD24-TB-101-2A	3/75
2CDE601101R2003	EPD24-TB-101-3A	3/75
2CDE601101R2004	EPD24-TB-101-4A	3/75
2CDE601101R2006	EPD24-TB-101-6A	3/75
2CDE601101R2008	EPD24-TB-101-8A	3/75
2CDE601101R2010	EPD24-TB-101-10A	3/75
2CDE601101R2012	EPD24-TB-101-12A	3/75
2CDE601101R2905	EPD24-TB-101-0.5A	3/75
2CDE605100R0500	EPD-BB500	3/75
2CDE605200R0021	EPD-SB21	3/75
GJD		
GJD6155620R0087	SK 615 562-87	1/39
GJD6155620R0088	SK 615 562-88	1/39

Contact us

ABB STOTZ-KONTAKT GmbH
You can find the address of your local sales organisation on the ABB homepage:

www.abb.com/contacts
> Low Voltage Products and Systems

Find out more about Electronic Products and Relays on:
http://new.abb.com/low-voltage/products/epr

Note: We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.

Copyright © 2015 ABB
All rights reserved

DE ABB 2CDC 110 004 C0210 Rev A printed in Federal Republic of Germany (03/2015)

Power and productivity for a better world™