


## ENGLISH

### BT803 User Manual

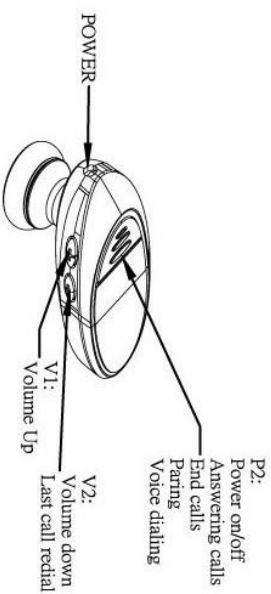

#### Turning On/Off Headset

1. To turn on the Headset  
Press down on the **P2** button for 2 or 3 seconds till the B-LED flashes (You may hearing two high tones from loudspeaker), then release, it indicates the standby mode by linking B-LED.
2. To turn off the Headset  
Press down on the **P2** button for 2 seconds till the R-LED flashes, afterwards both R&B-LED are off (You may hearing two low tones from loudspeaker), now it goes to power off mode.
3. The red indicator of Headset will flash slowly when battery low.

#### Pairing Headset

You are required to pair the Headset with your mobile phone or other devices before using it.

**Step 1:** Ensure the headset is off, then press down the **P2** button till the pairing mode (both B&R-LED are flashing alternatively), then release, it takes about 6 seconds.

**Step 2:** Initiate pairing process of your mobile phone. Refer to the manual of mobile phone for detail process. You will see a new item "BT Headset" added in your Bluetooth device list after searching process.

**Step 3:** You will be asked to enter pin-code to complete pairing, enter 1234

and confirm it. (Note: The 1234 is default pin-code pre-stored in Headset.)

The red indicator of Headset will turn off and the blue indicator will flash slowly after pairing completed successfully.

Once the pairing is complete, The R-LED will turn off and B-LED will begin blinking (standby mode).

If no finished pairing within 2 minutes, the Headset will go into standby mode, this pairing task is unavailable. You may need to restart the above mentioned 'step1 to 3' procedure.

#### Making Calls

You are able to use the Headset to make calls when it is paired successfully with your mobile phone.

1. Using voice dialing (please check your mobile phone instruction manual to see if this function is enabled) – Press **P2** button, waiting for a beep and say the name (pre-stored in the mobile phone) of the person you want to call. Press **P2** button again to cancel voice dialing.

2. Using phone keys – Dial the number on the mobile phone as you usually do. Once the call has been set up, the voice will be transmitted to Headset automatically.

3. Last call Redial – Press and hold **V (+)** button for 3 seconds to redial the last number you called.

PS: It doesn't support under Headset profile.

#### Answering/Ending Calls

When the Headset has been paired with your mobile phone, and it is working in standby mode if mobile phone rings, you may hearing a musical tone from loudspeaker, at the same time the B-LED will flash quickly.

1. Press **P2** button to answer the call.
2. End calls by pressing **P2** button while talking.

#### Adjust volume

Adjust Headset volume by pressing **V (+)** button for volume up and pressing or **V (-)** button for volume down.

#### Mute Function

Press **V1+V2** at the same time for 5 seconds until you hear a "beep" sound, then press it again to disable the mute function.

#### Low Battery

When the red indicator starts to flash, it indicates that the headset is running low on battery. Charge the headset for 2 hours until the red indicator turns off.

**CAUTION:** Do not use the Bluetooth headset while charging.

### Federal Communications Commission (FCC) Statement

15.21

You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.105(f)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or televisions reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### Operation is subject to the following two conditions:

- 1) this device may not cause interference and
- 2) this device must accept any interference, including interference that may cause undesired operation of the device.

#### FCC RF Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for safe RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.