


Register your product *Universal remote control*
and get support at
www.philips.com/welcome SRP 3004/10



EN User manual

PHILIPS

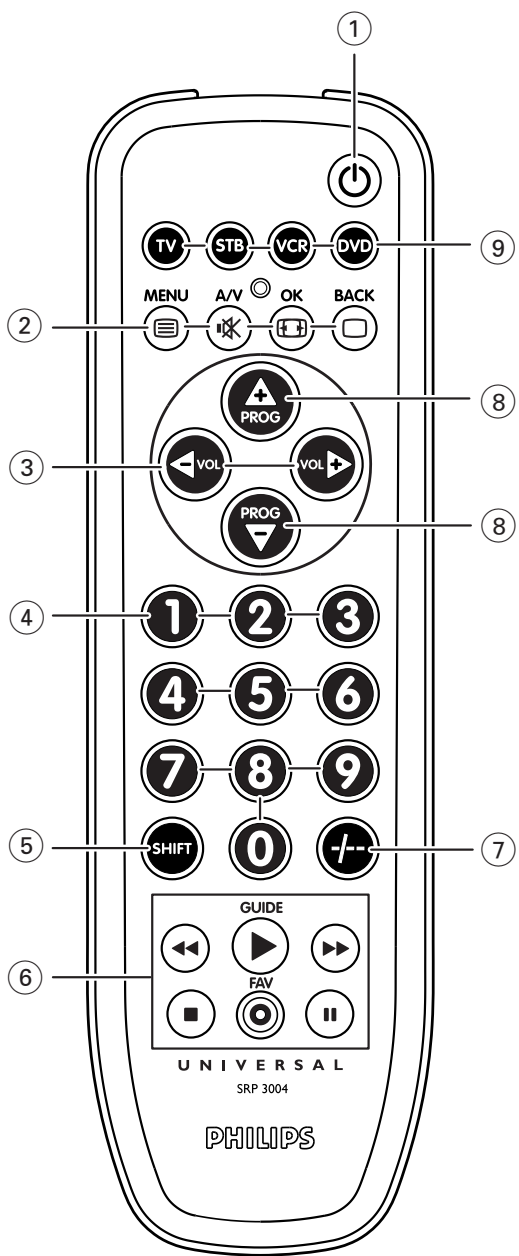

Contents

1. Introduction	3
2. Installing the remote control	3-6
Inserting the batteries	3
Testing the universal remote control	3-4
Setting the remote control for TV	4-6
3. Keys and functions	6-8
4. Need help?	8
Code list of all brands / equipment	9-24
Equipment list	25
Helpline	25
Information to the Consumer	26

1. Introduction

Congratulations on your purchase of the Philips SRP 3004 universal remote control. After setting up the remote control you can operate up to 4 different devices with it.


The remote control's patented Quick & Easy setup allows easy setup for TV, STB (set-top boxes for cable box, satellite receiver; Digital Video Broadcasting Terrestrial device - DVB-T), DVD player/recorder and VCR.

Simply follow the instructions in chapter 'Setting up the remote control for TV' to easily set up the remote control for your devices.

2. Installing the remote control

Inserting the batteries

- 1 Press the cover inwards and slide it in the direction of the arrow.
- 2 Place two AAA type batteries into the battery compartment, as shown.
- 3 Slide the cover back and click it firmly into place.



Testing the universal remote control

It is advised to test whether your device(s) already respond(s) to the SRP 3004 before setting it up (see 'Setting up the remote control for TV').

The example below (TV) instructs you how to do this. You can repeat the same steps for other devices (STB (set-top boxes for cable box, satellite receiver; Digital Video Broadcasting Terrestrial device - DVB-T), DVD player/recorder and VCR) which you want to operate using the SRP 3004.

Example of TV:

1 Turn your TV on manually or use the original remote control.
Tune to channel 1.

2 Press the **TV** key to select TV.
Press the key until it lights up.

- If the key does not light up, check whether the batteries are properly inserted (see 'Inserting the batteries').



3 Check whether the keys you need for operating your TV are working. For an overview of the keys and their functions see '3. Keys and functions'.

- If the TV responds as it should to all of the key commands the SRP 3004 is ready for use.



• **If the device does not respond at all or not to all of the key commands, follow the instructions under 'Setting the remote control for TV', or for online setup go to: www.philips.com/lurc.**

In the Philips Universal Remote Control Help Center, follow the on-screen instructions. In step 1 'Find your remote', select SRP 3004 as your remote control.

Setting the remote control for TV

This is only necessary if your device does not respond to the SRP 3004. If that is the case, the SRP 3004 does not recognize the brand and/or model of your device and you need to program the remote control to do so.

The example below (TV) instructs you how to do this. You can repeat the same steps for other devices (STB (set-top boxes for cable box, satellite receiver; Digital Video Broadcasting Terrestrial device - DVB-T), DVD player/recorder and VCR) which you want to operate using the SRP 3004.


Example of TV:

1 Turn on the TV manually or use the original remote control.
Tune in to channel 1.

2 Select TV: keep the **TV** key pressed for 5 seconds until it blinks twice and then remains lit.



3 Look up the brand of your TV in the code list at the back of this manual. A four-figure code is shown for each brand. Note this code.



Then enter the code noted in step 3, using the digit keys.

- The **TV** key will now blink twice and then remains lit.

If the key blinks twice fast, the code has not been entered properly or the wrong code has been entered. Start again from step 2.

4 Press and hold the **TV** key and immediately release it when the TV switches off (standby).

This may take up to 30 seconds.


5 Turn on the TV and check if you can operate all functions on your TV with the SRP 3004.

- If the TV responds to all of the key commands, the SRP 3004 is ready for use.

- If a key does not function (properly), try repairing the key. For this, see 'Repairing a key'.

6 Press the **TV** key twice to exit setup mode and save your settings.

- When no key is pressed for 2 minutes or more the remote control will exit setup mode automatically.



- **If the device does not respond at all or not to all of the key commands or if you cannot find the code for your brand, keep keys **1** and **3** pressed simultaneously for 5 seconds until the **TV** key blinks twice. Then release these two keys and continue with step 4. The remote control will now search the full database for a code that works with your TV. Full database search may take up to 15 minutes.**

Setting the remote control for other devices (STB (set-top boxes for cable box, satellite receiver, Digital Video Broadcasting Terrestrial device - DVB-T) DVD player/recorder and VCR).

- 1** Make sure the device is turned on, fully operational and able to respond to remote control commands. E.g. insert a video cassette in the VCR or a disc in the DVD player/recorder.
- 2** Then follow steps 2 to 6 of 'Setting the remote control for TV'.



Repairing a key

If a device does not respond properly to a key command you can have the remote control search for the key function in its database.

During initial setup

- 1 Make sure the receiving device is able to respond. E.g. when you try to repair the Play button for your DVD player, make sure to insert a DVD in the DVD player otherwise the Play button is not able to function.
 - 2 Press the key that does not function, *keep it pressed* and *immediately* release it when the device responds. Repeat this for every key that does not function.
- If the key still does not function (properly), try pressing it again for a longer period of time.

After initial setup

- 1 Make sure the receiving device is able to respond. E.g. when you try to repair the Play button for your DVD player, make sure to insert a DVD in the DVD player otherwise the Play button is not able to function.
 - 2 Select the device you wish to operate (e.g. DVD). Keep the device key (DVD) pressed until it blinks twice and then remains lit.
- 
- 3 Keep keys 4 and 6 pressed simultaneously for 3 seconds.
 - 4 Press the key that does not function, *keep it pressed* and *immediately* release it when the device responds.
- 
- If the key still does not function (properly), try pressing it again for a longer period of time.

3. Keys and functions

The illustration on page 2 gives an overview of all keys and their functions.

- ① **Standby** Switches TV, STB (set-top boxes for cable box, satellite receiver, Digital Video Broadcasting Terrestrial device - DVB-T), DVD player/recorder or VCR on or off.
- ② **MENU /** DVD:
 - switches the disc menu on and off.
 - pressed together with SHIFT ⑤: enters the system menu.
 TV:
 - switches teletext on/off.
 - pressed together with SHIFT ⑤: opens the TV menu.
 VCR: pressed together with SHIFT ⑤: opens the VCR menu.

STB:

- opens set-top box menu, Box office, List.
- pressed together with SHIFT ⑤: switches teletext on/off.

A/V / mutes the sound of the TV.
 - pressed together with SHIFT ⑤: selects external Audio/Video inputs.

OK / TV:

- selects wide screen TV (16:9).
- pressed together with SHIFT ⑤: confirms your selection.

 DVD: pressed together with SHIFT ⑤: selects Play mode.

BACK / - jumps back one level in the menu or turns off the menu.
 - switches text TV off.
 DVD: pressed together with SHIFT ⑤: opens Showview

③ **-VOL +** - adjusts the TV volume.
 - pressed together with SHIFT ⑤: cursor left, right in a menu.

④ **Digit keys** direct choice of channels and tracks.
 Pressed together with SHIFT ⑤:

1 TV: Info, Display.
 DVD/STB: Info, Display, Title.

2 TV/VCR/DVD/STB: exits menu.

4 TV/DVD/STB: selects Subtitle.

5 TV: selects previous picture.
 DVD: Recall.
 STB: Last.

6 TV/VCR/DVD/STB: Sleep.

7 STB: *.

8 STB: #.

⑤ **SHIFT** for extra functions. When pressed at the same time as a second key, the second key will get another function. Only functions featured on the original remote control are available.

⑥ **◀** TV: red fasttext key.
 STB: Red, C.
 VCR/DVD/STB: searches fast backwards.

▶ / GUIDE VCR/DVD: starts playback.
 DVD: pressed together with SHIFT ⑤: selects Electronic Program Guide.
 STB: selects Electronic Program Guide.
 Pressed together with SHIFT ⑤: starts playback.

▶▶ TV: blue fasttext key.
 STB: Blue, B. Pressed together with SHIFT ⑤: searches fast forward.
 VCR/DVD: searches fast forward.

Asuka.....	0227	Best.....	0364
ATACOM.....	0228	Best Buy.....	0365
Atlanta.....	0232	Bestar.....	0368
Atlantic.....	0233	Bestar-Daewoo.....	0369
ATLM.....	4151	Bestavision.....	0370
Atori.....	0237	Beston.....	4152
Auchan.....	0240	Big Brother.....	0375
Audiosonic.....	0264	Binatone.....	0378
AudioTon.....	0266	Birmingham Cable	
Auna.....	0272	Communications.....	0382
Aurora.....	0274	Black Panther Line.....	4196
Ausind.....	0276	Black Star.....	0386
Austar.....	0277	Blackbird.....	0387
Autovox.....	0280	Blacktron.....	3526
Avalon.....	0286	Blackway.....	0388
Avious.....	0291	Blaupunkt.....	0390
AVM.....	0294	Blue Sky.....	0395
Awa.....	0296	Blue Star.....	0396
Axiel.....	0297	Boca.....	0399
Axil.....	0298	Boghe.....	0400
Axis.....	0300	Bondstec.....	0403
Ayomi.....	3525	Boom.....	0404
		Boots.....	0405
		BOSE.....	0407
		Bosston.....	0409
		Boston.....	0410
		BPL.....	0413
		Brain Wave.....	3692
		Brainwave.....	0415
		Brandt.....	0416
		Brinkmann.....	0423
		Brionvega.....	0424
		Britannia.....	0425
		British Telecom.....	0427
		Broadcast.....	0428
		Broco.....	0431
		Bruns.....	0435
		BSkyB.....	0436
		BSR.....	0437
		BT.....	0438
		BT Cable.....	3995
		BT Satellite.....	3693
		BT Vision.....	3742
		BTC.....	0439
		Bubu Sat.....	0440
		Bush.....	0445
		BVV.....	0447

B

B & K.....	0304
Baihehua.....	4091
Baihua.....	4092
Baile.....	0310
Baird.....	0311
Bang & Olufsen.....	0314
BaoHuaShi.....	0316
Baosheng.....	0318
Barcom.....	0320
BARON.....	3959
Basic Line.....	0325
Bastide.....	0327
Baur.....	0331
Baze.....	0334
Bazin.....	0335
BBK.....	0337
BBT.....	0338
BeauSAT.....	0341
BEC.....	0342
Beijing.....	0345
Beko.....	0346
Belgacom TV.....	0349
Bell Atlantic.....	0351
Bellagio.....	0354
Belson.....	0355
Benjamin.....	0358
Benq.....	0359
Beon.....	0361

C

Cable Innovations.....	0453	Chunlan.....	4097
Cabletime.....	0457	Chunsun.....	0549
Caihong.....	0462	Churchill.....	0550
Cailing.....	0463	Cimline.....	0552
Caixing.....	4093	Cinetec.....	0560
Cambridge.....	0469	CineVision.....	0562
Cambridge Audio.....	0470	Citizen.....	0567
Cameron.....	4032	City.....	0569
Camundosat.....	0474	CityCom.....	0570
Canal Digital.....	0476	Clarivox.....	0576
Canal Satellite.....	0477	Classic.....	0580
Canal+.....	0478	Clatronic.....	0581
Capsonic.....	0486	Clemens Kamphus.....	0587
Carad.....	0488	Clyde.....	0588
Caravell.....	4153	Clyde Cablevision.....	3694
Carena.....	0489	CMS.....	0590
Carrefour.....	0492	CMS Hightec.....	0591
Cascade.....	0496	CNT.....	0594
Casio.....	0499	Coby.....	0597
CAT.....	0500	Colombia.....	0599
Catha.....	4094	Columbia.....	0604
Cathay.....	0501	COLUMBUS.....	0605
Caton.....	4095	Comag.....	0606
Catron.....	0502	Comcrypt.....	0610
CCE.....	0504	Commander.....	0613
CCI.....	0505	CommLink.....	0616
Celestial.....	0511	Comtech.....	3776
cello.....	0514	Concorde.....	0626
CellularVision.....	0515	Condor.....	0627
Centrex.....	0516	Conia.....	0628
Centrum.....	0519	Conic.....	0629
Centurion.....	0520	Connect TV.....	3384
Century.....	0521	Connexions.....	0631
CGE.....	0523	Conrad.....	0633
CGV.....	0524	Conrad Electronic.....	3695
Changcheng.....	0526	Conrowa.....	0634
Changfei.....	0527	Contec.....	0635
Changfeng.....	0528	Continental Edison.....	0637
Changhai.....	0529	Cosat.....	0645
Changhong.....	0530	Coship.....	0646
Channel Master.....	0531	Cosmel.....	0647
Chaparral.....	0533	Crosley.....	0655
Chengdu.....	0535	Crown.....	0658
CHEROKEE.....	0536	Crypto.....	0660
Chesley.....	0537	Cryptovision.....	0661
Chess.....	0538	CS Electronics.....	0663
Chili.....	0540	CTC.....	0664
Chimei.....	3563	CTC Clatronic.....	3527
Chuangjia.....	4096	C-Tech.....	0449
Chunfeng.....	0546	CVG.....	3996
Chung Hsin.....	0547	CyberHome.....	0672
		Cybermaxx.....	3696

Cybertron.....	0675	Dilog	0788	Electricord	0886	F	
Cyrus	0679	Ding Tian	4156	ELECTRO TECH	3531	Fagor Life.....	4102
D		DiPro	0792	Electrohome.....	0890	Fast.....	0988
Daehan.....	0689	Discoverer	0796	Electron.....	0891	Fastweb	0989
Daenyx.....	0690	Discovery	0797	Electus.....	0894	Feilang	0990
Daeryung.....	0691	Diseqc.....	3698	Elekta.....	0895	Feilu	0991
Daewoo.....	0692	Diskxpress	0802	Elektra.....	0896	Feiyan.....	0992
Dainichi.....	0694	Distratel.....	0804	ELG.....	0900	Feiyue	0993
Dalton.....	0696	Distrisat.....	0805	Elin.....	0902	Fenmenti.....	4103
Dansai.....	0699	Ditristrad	3699	Elite.....	0903	Fenner.....	0994
Dansat.....	0700	Dixi	0807	Elman.....	0907	Ferguson.....	0996
Dantax.....	0702	DK Digital	0808	Elsat.....	0908	Fidelity.....	0998
Datsura.....	0703	Dmtech.....	0813	Elsay.....	0909	Filmnet.....	0999
Dawa.....	0707	DNR.....	0815	Elta	0910	Filmnet Cablecrypt.....	3701
Daytek.....	0708	DNT	0816	Emanon.....	0913	Filmnet Comcrypt.....	3702
Dayton.....	0709	Dong Woo.....	0819	Emerson.....	0917	Filsai	1000
Daytron.....	0710	DongBao	4098	Emme Esse.....	0919	Finepass	1002
Dayu.....	0711	DongDa.....	0820	Emperor.....	0921	Finlandia	1003
D-Box.....	0682	Donghai.....	0821	Engel	0929	Finlux.....	1004
DCS.....	4154	DongHua.....	4099	Enzer	0934	FinnSat.....	1005
DDC.....	0714	Donglin.....	4100	Ep Sat.....	0935	Fintec.....	1006
De Graaf.....	0716	Drake.....	0825	Epson.....	0937	Firstline.....	1008
DEC.....	0717	Drean.....	0832	Erastar.....	0940	Fisher	1009
Decca.....	0718	DSE.....	0833	Erres.....	0942	Flair Mate.....	1010
Decsat.....	0719	DStv	0835	ESC.....	0945	Flint.....	1014
Deitron.....	0722	DTS.....	0837	Etron	0949	FNR.....	1016
Delega.....	3697	Dual.....	0838	Etzuko	4203	Formenti.....	1023
Demo.....	0729	Dual-Tec.....	3528	EURIEULT	0950	Formenti-Phoenix.....	1024
Denca.....	4083	Dumont	0840	Euro1.....	0951	Fortec Star.....	1026
Denko.....	0730	Dune.....	0841	Eurocrypt.....	0952	Fortress.....	1027
Denon.....	0731	Duongjie.....	4101	Eurodec.....	0953	Foxtel.....	1029
Denver.....	0733	Dux.....	0843	Eurofeel.....	0954	Fraha.....	1030
Denzel.....	0734	D-Vision.....	0684	Euroline.....	0955	Fracarro.....	1032
Desay.....	0737	DVX.....	0847	Euroman.....	0956	France Satellite/TV.....	3703
Desmet.....	0738	Dynasat	0852	Europa	0957	France Telecom.....	1033
Dew.....	0742	DynaStar.....	0853	European.....	0958	Free	4157
DGStation.....	0744	Dynatron	0855	Europhon.....	0959	Freebox.....	1036
Diamant.....	0746	E		Europlus.....	0960	Freecom.....	1037
Diamond.....	0747	Eastern.....	0859	Eurosat.....	0962	Freesat	1038
Digatron.....	0751	Easy Home.....	3700	Eurosky.....	0963	Friac.....	1040
Digenius.....	0752	Echostar	0866	Eurospace.....	0964	Frontech.....	1042
Digi1.....	3388	Eclipse.....	0867	Eurostar.....	0965	FTE.....	1043
Digitality.....	0755	E-Dem	3624	Euskaltel	0966	FTEmaximal	1044
Digiline.....	0759	EIF.....	0873	Eutelsat	0967	Fuba.....	1045
DigiO2.....	3389	Einhell.....	0875	Eutra.....	0968	Fugionkyo.....	1046
Digipro.....	0762	Elap	0877	Exator.....	0974	Fujitsu	1052
DigiQuest.....	0763	Elbe	0880	Expert.....	0976	Fujitsu General.....	1053
DigitAll World.....	0775	Elbe-Sharp	3529	Exquisit.....	0978	Funai.....	1056
Digitor.....	0781	Elcatech.....	0882			FUTEC.....	3960
Digiturk.....	0783	Elcit	0883				
Dihe.....	4155	Electa.....	3530				

G	H		
Galaxi.....1068	H&B.....3635	Huabaojamo.....4162	ITS.....1405
Galaxis.....1069	Haaz.....1172	Huafa.....1287	ITT.....1406
Galaxisat.....1070	Haensel & Gretel.....1173	Huanghaimei.....1288	ITT Nokia.....1407
Gangtai.....4104	Haier.....1175	Huanghe.....1289	ITV.....1408
Ganxin.....1072	HaiHong.....1176	Huanglong.....1290	
Gardiner.....1073	Haile.....4106	Huangshan.....1291	J
GBC.....1078	Haitai.....4159	Huanyu.....1292	Janeil.....1414
GC Electronics.....1080	Haiyan.....1177	Huaqiang.....1293	Jazztel.....1419
GE.....1081	Halifax.....1179	Huari.....1294	JEC.....1426
Geant Casino.....1082	Hampton.....1183	Huijiaban.....4108	Jerrold.....1431
GEC.....1083	Hanseatic.....1190	Humax.....1298	Jeutech.....1433
Gecco.....1084	Hantarex.....1192	Huodateji.....1302	Jiahua.....1435
Geloso.....1087	Hantor.....1193	Huth.....1305	JiaLiCai.....1436
General.....1090	Hanuri.....1194	Hygashi.....1308	Jian Sheng.....4112
General Instrument.....1093	Haoji.....4160	Hyper.....1309	Jieke.....4163
General Technic.....1095	Harting und Helling.....1201	HyperVision.....1311	Jinfeng.....1438
Genexxa.....1097	Harwood.....1204	Hypson.....1312	Jingewangpai.....4164
Gensat.....1100	Hase & Igel.....1205	Hyundai.....1315	Jingwei.....4165
Geotrack.....1102	Hauppauge.....1206		Jinhai.....1439
Gericom.....1103	HCM.....1210	I	Jinlipu.....4113
Gewang.....4158	HE@D.....1213	Iberia.....1320	Jinque.....1440
Giant.....1113	Heliocom.....1218	ICE.....1324	Jinta.....1441
Giec.....1115	Helium.....1220	ICeS.....1325	Jinwang.....4166
Global Solutions.....1120	Hema.....1222	ID Digital.....1329	Jinxing.....1442
Global Sphere.....1121	Hemmermann.....1223	Imex.....1344	Jinxiangban.....4114
Globo.....1122	Hifivox.....1233	Impego.....4207	Jiuzhou.....1443
GMI.....1124	Higashi.....1234	Imperial.....1346	Johansson.....1449
Go Video.....1126	Highline.....1236	Imperial Crown.....1347	JOK.....1451
Goldbox.....3704	Hikona.....1237	Indesit.....1349	JSR.....1459
Golden Channel.....1133	HiMAX.....1241	Indiana.....1350	Jugao.....4167
Golden Interstar.....1134	Hinari.....1243	Ingelen.....1354	Juhua.....1461
Goldhand.....1136	Hirschmann.....1246	Ingersol.....1355	JVC.....1464
GoldStar.....1140	Hisawa.....1247	Inno Hit.....1358	
Gooding.....1141	Hisense.....1249	Innovation.....1360	K
Goodmans.....1142	Hitachi.....1251	InOutTV.....1365	Kabel Deutschland.....1468
Gorenje.....1144	Hitachi Fujian.....1252	INTER.....4109	Kaige.....1470
Gould.....1145	Hitsu.....1257	Interactive.....3534	Kaisui.....1471
GPM.....1149	Hivion.....1258	Interbuy.....1376	Kamm.....1474
Gradiente.....1151	HNE.....1260	Interfunk.....1377	Kamosonic.....3535
Graetz.....1152	HNS.....1261	Internal.....1379	Kamp.....1475
Granada.....1154	Hoehel.....1262	International.....1380	Kangchong.....1476
Grandin.....1156	Home Tech Industries.....1266	Interstar.....1383	Kanghua.....1477
Great Wall.....4105	Homecast.....1268	Intertronic.....1384	Kangli.....1478
Gronic.....1160	HomeChoice.....1269	Intervision.....1386	Kangwei.....4115
Grothusen.....1161	Hongmei.....1272	Inverto.....1387	Kangyi.....1479
Grundig.....1162	Hongyan.....1274	InVideo.....1388	Kansai.....1480
Grunkel.....1164	Hornophon.....1277	IR.....4110	Kansalaisboksi.....3498
G-Sat.....1067	Hoshai.....1278	Irradio.....1396	Kaon.....1482
GVG.....1169	Hotel TV.....4107	IRTE.....1398	Kapsch.....1483
	Houston.....1280	Isukai.....1402	Karcher.....1484
	Huabao.....4161	IT.....4111	Kathrein.....1486
		ITC.....1404	Kathrein Eurostar.....3707

Kawa.....	1487	Lenco.....	1615	Majestic.....	1713	Micronik.....	1825
Kawasho.....	1489	Leng.....	3708	Malata.....	1715	Microstar.....	1827
Kendo.....	1500	Lennox.....	1616	Manata.....	1716	Microtec.....	1828
Kennedy.....	1504	Lenoir.....	1617	Mandor.....	1717	Midland.....	1831
Kenex.....	1505	Lenson.....	1620	Manesth.....	1718	Migros.....	1832
Kenwood.....	1507	Lesa.....	1622	Manhattan.....	1719	Minato.....	1835
Ketai.....	4168	Lexus.....	3649	Marann.....	1723	Minerva.....	1838
Key West.....	1509	Leyco.....	1627	Marantz.....	1724	Minoka.....	1840
KeyPlug.....	3646	LG.....	1628	Marelli.....	1729	Minowa.....	1843
KIC.....	1512	LG Alps.....	1629	Mark.....	1731	Mirror.....	1851
Kiiro.....	1513	LG/GoldStar.....	3536	Marks and Spencer.....	3585	Mitsubishi.....	1855
Kingavon.....	1519	Liesenk.....	3537	Marquant.....	1734	Mitsui.....	4173
Kingsely.....	4116	Liesenk & Tter.....	1630	Mascom.....	1738	Mitsumi.....	1856
Kingsley.....	1520	Life.....	3538	Maspro.....	1739	Mitzu.....	4174
Kiota.....	1522	Lifesat.....	1632	Master's.....	1742	Mivar.....	1857
Kiss.....	1524	Lifetec.....	1633	Masuda.....	1744	Mizuda.....	1860
Kiton.....	1525	Lihua.....	1636	MataV.....	1745	Mnet.....	1862
Klap.....	1526	Limit.....	1637	Matsui.....	1750	MoDeng.....	4120
Kneissel.....	1535	Linshuma.....	4170	Matsushita.....	1751	Mogen.....	1865
Koda.....	1539	Lion.....	1643	Max.....	1753	Monyka.....	1873
Kolin.....	1541	Liteon.....	1645	Maxdome.....	3586	Mood.....	1874
Kolon.....	1542	Lloyd's.....	1648	Maxi.....	1758	Morgan Sydney.....	3712
Kolster.....	1543	Local India TV.....	1653	Maxview.....	4172	Morgans.....	3970
Kongque.....	1545	Loewe.....	1660	MB.....	3711	Morgan's.....	1875
Konig.....	1547	Loewe Opta.....	3540	MBO.....	1765	Motion.....	1877
Konka.....	1548	LogicLab.....	3650	Mecotek.....	1776	Motorola.....	1878
Korpel.....	1552	Logik.....	1661	Mediabox.....	1779	Movie Time.....	1880
Korting.....	1554	Longjiang.....	1664	Mediamarkt.....	1781	Mr Zapp.....	3713
Kosmos.....	1557	Longzhipai.....	4171	Mediasat.....	1782	MTC.....	1889
Koyoda.....	1561	Lorenzo.....	1666	Mediator.....	1784	MTEC.....	1890
KR.....	1562	Lorraine.....	1669	Mediencom.....	1786	MTLogic.....	1892
Kreatel.....	1565	Luma.....	1674	Medion.....	1787	MuDan.....	1896
Kreiselmeier.....	1567	Lumatron.....	1676	Medison.....	1788	Multichoice.....	1900
K-SAT.....	1467	Lupus.....	1678	Mega.....	1789	Multiscan.....	1903
KTV.....	1572	Lux May.....	1680	Meile.....	1797	Multistandard.....	1904
Kuale.....	1573	Luxor.....	1683	MeiShi.....	4118	Multistar.....	1905
Kunlun.....	1578	Luxorit.....	1684	Melectronic.....	3654	Multisystem.....	4121
Kuro.....	1579	LuxSAT.....	1685	Melvox.....	1799	Multitec.....	1906
KXD.....	1581	Lyonnaise.....	3709	Memorex.....	1800	Multitech.....	1907
Kyoshu.....	1583			Memphis.....	1802	Muratto.....	1910
Kyostar.....	1584	M		Mengmei.....	4119	Murphy.....	1911
Kyoto.....	1585	M & B.....	3710	Mercury.....	1804	Musikland.....	1915
		M Technologies.....	1689	Meta.....	1808	Mustek.....	1916
L		Macab.....	1692	Metronic.....	1809	Mx Onda.....	1919
L&S Electronic.....	1588	Macom.....	1693	Metz.....	1810	Mysat.....	1923
Lafayette.....	1591	Madison.....	1698	MiCO.....	1813	Mystral.....	1925
Lasat.....	1597	Maestro.....	1700	Micro Com.....	3998		
Lawson.....	1603	Magnadyne.....	1702	Micro electronic.....	3656		
Layco.....	4117	Magnafon.....	1703	Micro Technology.....	1820		
Lecson.....	1606	Magnavox.....	1706	Micromaxx.....	1822		
Legend-V.....	4169	Magnex.....	1707	Micromedia.....	1823		
Lemon.....	1614	Magnum.....	1709	Micromega.....	1824		

N		O		Palsonic.....	2147	Profi.....	2270
NAD.....	1926	Oceanic.....	2061	Paltec.....	2148	Profile.....	2271
Naiko.....	1930	Octagon.....	2062	Panama.....	2149	Profilo.....	2272
Nakamichi.....	1932	Okana.....	4122	Panasat.....	2151	Profitronic.....	2273
Nakimura.....	1933	Okano.....	2065	Panasonic.....	2153	Proline.....	2274
Nanbao.....	1934	Okon.....	4175	Panavision.....	2154	Promax.....	2275
Nansheng.....	1935	Omni.....	2074	Panda.....	2155	Prosat.....	2278
Naonis.....	1936	Omniview.....	2076	Pansat.....	2158	Prosonic.....	2282
Napa.....	1938	ONCEAS.....	3544	Pantech.....	2159	Protech.....	2284
National Microtech.....	1943	Ondigital.....	3714	Pathe Cinema.....	2168	Protek.....	2285
Navex.....	1944	Onimax.....	2082	Pathe Marconi.....	2169	Protelcon.....	2286
NEC.....	1950	Onkyo.....	2085	Patriot.....	2170	Provision.....	2291
Neckermann.....	1951	Ono.....	2086	Pausa.....	2171	PVP Stereo Visual Matrix.....	2301
NEI.....	1952	Onwa.....	2087	peeKTON.....	2178	Pye.....	2302
Nesco.....	1960	Oopla.....	2088	Penney.....	2182	Pymi.....	2304
Neta.....	1963	Opera.....	2090	Pensonic.....	3778	Pyxis.....	2305
Netgem.....	1965	Optex.....	2093	Perdio.....	2185		
Netsat.....	1966	Optim.....	2094	Perfekt.....	2186	Q	
Network.....	1968	Optimus.....	2095	Philco.....	2192	Qingdao.....	2308
Neuf Telecom.....	3999	Optus.....	2100	Philharmonic.....	2194	Qinghuatongfang.....	4179
Neufunk.....	1970	Orange.....	3866	Phillips.....	2195	Qisheng.....	2309
Neuhaus.....	1971	Orava.....	2101	Phillips Magnavox.....	3715	Qixing.....	4180
Neusat.....	1974	Orbit.....	2103	Philon.....	2197	Quadral.....	2314
Nevir.....	1977	Orbitech.....	2104	Phoenix.....	2199	Quandra Vision.....	3546
New Tech.....	1979	Origo.....	2110	Phonola.....	2201	Quasar.....	2320
New World.....	1980	Orion.....	2111	Phonotrend.....	2202	Quelie.....	4127
Newwave.....	1981	Oritron.....	2112	Pilot.....	2207	Quelle.....	2322
Next Base.....	1983	Orline.....	2113	Pioneer.....	2212	Questa.....	2324
NextWave.....	1988	Ormond.....	2114	Pionier.....	2213	Quiero.....	3718
Nicamagic.....	1994	Orson.....	2115	Plantron.....	2219		
Nikkai.....	1998	Orsowe.....	2116	Playsonic.....	2224	R	
Nikko.....	2000	Osaki.....	2118	Pointer.....	2229	Radialva.....	2329
Noblex.....	2013	Osat.....	2119	Polestar.....	4124	Radio.....	4128
Noblisko.....	2014	Oscar.....	2120	Polsat.....	3716	Radiola.....	2330
Nogamatic.....	2016	Osio.....	2121	Polytron.....	2235	Radiomarelli.....	2331
Nokia.....	2017	Oso.....	2122	Poppy.....	2236	RADIONETTE.....	2332
Nomex.....	2018	Osume.....	2123	Portland.....	2238	RadioShack.....	2333
Noos.....	2019	Otto Versand.....	2126	Power Sound.....	4177	Radiotone.....	2334
Nordic.....	2021	Oulin.....	4123	Powerpoint.....	2241	Radix.....	2335
Nordmende.....	2022	Oxford.....	2131	Prandoni Prince.....	4125	Rainbow.....	2339
Nordvision.....	3543			Praxis.....	2243	Raite.....	2340
Normerel.....	2024			Precision.....	2244	Rank.....	2345
Northcoast.....	2026	P		Predki.....	2245	RBM.....	2350
Nova.....	2031	P&B.....	2132	Preisner.....	2246	RCA.....	2351
Novaplex.....	2034	Pace.....	2134	Prelude.....	2247	REC.....	2357
Novatronic.....	2035	Pacific.....	2135	Premiere.....	3666	Recor.....	2359
Novis.....	2036	Packsat.....	2139	Priesner.....	3717	Rectiligne.....	2362
Now.....	2038	Pael.....	2140	Prima.....	2253	Rediffusion.....	2364
NTC.....	2045	Pai Gao.....	4176	Primas.....	4178	Redpoint.....	2365
NTL.....	2047	Pal.....	2143	Prinz.....	2260	Redstar.....	2366
Numericable.....	3949	Palcom.....	2144	Profekt.....	4126	Reflex.....	2368
NU-TEC.....	2048	Palladium.....	2145	Profex.....	2269	Regency.....	2371
		Palsat.....	2146				

Reoc.....	2379	SatConn.....	2478	Shumaling.....	4181	Sonorol.....	2676
Revox.....	2383	Satec.....	2479	Shuyuan.....	4135	Sontec.....	2677
Revoy.....	2384	Satel.....	2480	Siam.....	2572	Sontech.....	3435
Rex.....	2385	Satelco.....	2481	Siarem.....	2573	Sony.....	2679
RFT.....	2386	Satford.....	2483	Sicatel.....	3780	Sound & Vision.....	2680
Rhapsody.....	2387	Satline.....	2484	Siemens.....	2574	Soundmaster.....	2685
Rimax.....	2391	Satmaster.....	2485	Sierra.....	2576	Soundmax.....	2687
Risheng.....	4129	Satplus.....	2486	Siesta.....	2577	Soundwave.....	2689
Rizhi.....	4130	Satstar.....	2488	Sigma.....	2577	Sowa.....	2691
R-Line.....	2327	Saville.....	2491	Sigmathek.....	2580	Spectra.....	2697
Roadstar.....	2398	SBR.....	2492	Silva.....	2591	SR.....	2704
Robotron.....	2401	ScanMagic.....	2496	Silva Schneider.....	2592	Srypton.....	4138
Roch.....	2402	Schacke.....	3720	Silver.....	2594	Standard.....	2713
Rockdale.....	2403	Schaub Lorenz.....	2500	SilverCrest.....	2595	Star Cluster.....	3724
Ronin.....	2412	Schneider.....	2501	Simz.....	3505	Star Clusters.....	2717
Rover.....	2415	Schwaiger.....	2502	Singer.....	2599	Star Trak.....	2720
Rowa.....	2416	Scientific Atlanta.....	2503	SingTel.....	3516	Star View.....	3598
Rowsonic.....	2417	Scientific Labs.....	2504	Sinudyne.....	2601	Starcom.....	2722
Royal.....	2419	Scott.....	2508	Skantic.....	2605	Stargate.....	2723
Royal Lux.....	2420	SCS.....	2510	Skantin.....	2606	Starland.....	2726
RTF.....	3548	Seam.....	2513	Skardin.....	2607	Starlite.....	2728
Ruefach.....	2422	Sedeae Electronique.....	2518	Skinsat.....	3722	Starmedia.....	2730
Ruyi.....	2425	Seeltech.....	2519	SKR.....	2608	Starring.....	2733
S		Seemann.....	2521	SKT.....	2609	Start Trak.....	3725
Saba.....	2429	SEG.....	2522	Sky.....	2610	Stellar One.....	2738
Sabaki.....	2430	SEI.....	2524	Sky Digital.....	3723	Stenway.....	2739
Sabre.....	2431	SEI-Sinudyne.....	2525	Sky New Zealand.....	3595	Stern.....	2741
saccs.....	2432	Seleco.....	2528	Sky Television.....	2613	Strato.....	2745
Sagem.....	2434	Sencora.....	2531	SkyCable.....	2617	Strong.....	2748
Saige.....	2435	Sentra.....	2534	Skymaster.....	2621	STVI.....	2751
Saisho.....	2437	Sentron.....	4216	Skymax.....	2622	Stylandia.....	2752
Saivod.....	2439	Septimo.....	2536	SkySat.....	2625	Sumida.....	2756
Sakura.....	2441	Serino.....	2539	Skyvision.....	2630	Sunkai.....	2762
Salora.....	2443	Servi Sat.....	3721	Skyworth.....	2631	Sunny Sound.....	2765
Sambers.....	2445	Setec.....	2543	SL.....	2632	Sunsat.....	2767
Sampo.....	2446	Seye.....	4131	Slim Art.....	2636	Sunstar.....	2768
Samsung.....	2448	Shancha.....	2546	SM Electronic.....	2639	Sunstech.....	2769
Samurai.....	2451	Shangguangdian.....	4132	Smart.....	2642	Suntronic.....	2770
Sandra.....	2454	Shanghai.....	2547	Sogera.....	2649	Sunwood.....	2772
Sanjian.....	2455	Shanshui.....	4133	Sogo.....	2650	Super Sat.....	2775
Sansui.....	2458	Shaofeng.....	2549	Solavox.....	2654	SuperTrack.....	2776
Sanwa.....	2461	Sharp.....	2550	Sonaecom.....	3597	SuperGuide.....	2780
Sanyo.....	2462	Shencai.....	2553	Sonashi.....	2661	Superla.....	2782
Sanyuan.....	2464	Sheng Chia.....	2554	Sonawa.....	2663	Supermax.....	2783
Sast.....	2468	Shengli.....	4134	Songba.....	2665	Supersonic.....	2787
SAT.....	2470	Shenyang.....	2555	Songdian.....	4136	SuperTech.....	2789
Sat Cruiser.....	2472	Sherwood.....	2557	SongRi.....	4137	Supervision.....	2791
Sat Partner.....	2473	Shinco.....	2560	Sonico.....	4182	Supra.....	2792
Sat Team.....	2474	Shintom.....	2563	Soniko.....	2669	Susumu.....	2797
Satbox.....	2476	Shintoshi.....	2564	Sonitron.....	2671	Sutron.....	2798
Satcom.....	2477	Shivaki.....	2567	Sonneclair.....	2673	Sva.....	2800
		Shorai.....	2569	Sonoko.....	2675	Swisstec.....	2806

Sydney.....	2808	Telefonica.....	2913	Top Suxess.....	3013	V	
Symphonic.....	2810	Telefunken.....	2914	Topfield.....	3014	Vantage.....	3492
Synn.....	2813	Telefusion.....	2915	Torx.....	3020	Variosat.....	3134
Sysline.....	2815	Telegazi.....	2917	Toshiba.....	3021	Vector.....	3136
Systec.....	2816	Telegent.....	2918	Towada.....	3028	Vega.....	3138
Sytong.....	2820	Teleka.....	2919	Towika.....	4224	Vegavox.....	4145
S-ZWO.....	2427	Telemaster.....	2922	Toyoda.....	3030	Ventana.....	3142
T		Telexmax.....	2923	TPS.....	3032	Vestel.....	3148
T.D.E. Systems.....	2822	Telemeister.....	2924	Trakton.....	3036	Vexa.....	3149
Tactus.....	2825	Telenet.....	2925	Trans Continens.....	3037	Via Digital.....	3729
Taekwang.....	2828	Telepiu.....	2926	TRANS-continents.....	3039	Viasat.....	3153
Tai Wah.....	4139	Telesat.....	2928	Transfec.....	4143	Vibrant.....	3154
Taishan.....	2835	TELESERVICE.....	2929	Transonic.....	3041	Victor.....	3155
Taisho.....	2836	Telesonic.....	2930	Transtec.....	3042	VIDEOLOGIC.....	3165
Tandberg.....	2842	Telestar.....	2931	Tratec.....	3043	Videologique.....	3166
Tandy.....	2843	Teletech.....	2934	Triad.....	3049	Videon.....	4227
Tantec.....	2845	Teleton.....	2935	Triasat.....	3050	Videosat.....	3170
Tashiko.....	2850	Televs.....	2937	Triax.....	3051	VideoSystem.....	3172
Tatung.....	2852	Televideon.....	2938	Trident.....	3054	Videotechnic.....	3173
TBoston.....	2853	Television.....	2939	Trio.....	3056	Videoway.....	3176
TCL.....	2856	Televiso.....	2941	Tristar.....	3057	VideoWorks.....	3177
TCM.....	2857	Telewest.....	2942	Triumph.....	3058	Vidtech.....	3179
Teac.....	2860	Telewire.....	2943	TruVision.....	3061	Viewmaster.....	3182
Teachimagen.....	4140	Temco.....	2946	Tsinghua tongfang.....	3064	Viewsonic.....	3186
Tec.....	2861	Tempo.....	2949	TSM.....	3065	Viewstar.....	3187
Tech Line.....	2863	Tennessee.....	2952	Tudi.....	3068	Virgin.....	4185
Techica.....	2865	Tenosal.....	2953	Turnsat.....	3071	Visiola.....	3197
Technema.....	2866	Tensai.....	2954	TVA.....	4225	Vision.....	3198
Technics.....	2869	Tenson.....	2955	Tvonica.....	3080	Visionetics.....	3199
Technika.....	2870	Tesmet.....	3550	Twinner.....	3083	Visionic.....	3200
Techniland.....	2872	Tevion.....	2962	U		Visiopass.....	3203
TechniSat.....	2873	Texet.....	2963	UEC.....	3088	Visiosat.....	3204
Technology.....	3726	Texla.....	2964	Uher.....	3089	Visorex.....	3206
Technomate.....	2876	Thomson.....	2972	Ultravox.....	3095	Vistar.....	3207
Technosat.....	2877	Thorens.....	2973	Umax.....	3098	Viva.....	3208
Technosonic.....	2878	Thorn.....	2974	Unic.....	3098	Vivanco.....	3209
Technotrend.....	2879	Thorn-Ferguson.....	2976	Unic Line.....	3100	Vivid.....	3210
Technovision.....	4141	Tiane.....	2980	Unic Linie.....	4144	Vortec.....	3217
Technowelt.....	2881	Tiankeban.....	4142	Uniden.....	3101	Voxson.....	3220
Teco.....	2886	Tianli.....	4183	Union.....	3781	VTech.....	3222
TEDELEX.....	2889	Timeless.....	2985	Unisat.....	3104	Vtrek.....	3224
Tee-Comm.....	2890	Tioko.....	2989	United.....	3106		
Teknika.....	2895	Tiscali.....	3442	United Cable.....	3108	W	
Telanor.....	3727	TNT.....	4184	United Quick Star.....	4226	Waitec.....	3227
Telasat.....	2897	TOBO.....	2999	Unitor.....	3110	Waltham.....	3230
Tele+1.....	2900	Tocom.....	3000	Universal.....	3113	Wanbao.....	4186
Teleavia.....	2901	Tokai.....	3001	Universum.....	3115	Wanyan.....	4187
Teleciel.....	2903	Tokyo.....	3004	Univox.....	3116	Warumaia.....	3232
Telecom.....	2906	Tomashi.....	3006	Unnisat.....	3117	Watson.....	3233
Telecor.....	2910	Tongguang.....	3008			Watt Radio.....	3234
Teledirekt.....	2912	Tonna.....	3011			Wega.....	3238
		Tonsai.....	4223			Wega Color.....	4146

Wegavox	3239
Weifa	4188
Weipai	3241
Wela	3730
Welltech	3244
Weltblick	3245
Weston	3251
WeTeKom	3252
Wevasat	3253
Wewa	3254
Wharfedale	3255
White Westinghouse	3258
Windstar	3266
Winersat	3269
Wintel	3271
Wintergarten	3272
Wisi	3273
Wittenberg	3731
Woorisat	3280
World	3281
Worldsat	3283
Woxter	3286

X

Xbox	3295
Xcom Multimedia	4000
Xenon	3686
Xiahua	3299
Xiangyang	3301
Xiangyu	3302
Xianpai	4189
Xihu	3303
Xinaghai	3304
Xindai	4190
Xingfu	3305
Xinghai	3306
Xingmenban	4147
Xinrisong	3308
Xinsida	3309
Xlogic	3310
XMS	3312
Xoro	3315
Xrypton	3317
XSat	3318
Xuelian	3320

Y

Yakumo	3324
Yamada	3325
Yamaha	3326
Yamakawa	3327
Yamishi	3328
YingGe	3334
YMT	4191
Yokan	3335
Yoko	3336
Yonggu	3339
Yorx	3340
Youbishen	4192
Youlanasi	3342
Yousida	3343
Yuhang	3345
Yukai	3346
Yuxing	4193

Z

Zanussi	3349
Zaunkonig	3352
Zehnder	3353
Zenith	3356
Zhuhai	3364
Zinwell	3365
Zodiac	3366
Zwergnase	3371

Equipment list

TV

Brand	_____
Model number	_____
Code	_____

STB (set-top boxes for cable box, satellite receiver, Digital Video Broadcasting Terrestrial device - DVB-T)

Brand	_____
Model number	_____
Code	_____

VCR

Brand	_____
Model number	_____
Code	_____

DVD

Brand	_____
Model number	_____
Code	_____

☎ Helpline

Country	Phone number	Tariff
Australia	1 800 180 016	free
Canada	1 919 573 7854	pstn
Hong Kong	852 2619 9663	pstn
Ireland	01 601 1158	pstn
New Zealand	0800 658 224	free
South Africa	087 808 4456	free
United Kingdom	0800 331 6015	free
United States of America	1 800 233 8413	free



Information to the Consumer

Disposal of your old product

Your product is designed and manufactured with high quality materials and components, which can be recycled and reused.

When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the European Directive 2002/96/EC.



Please inform yourself about the local separate collection system for electrical and electronic products.

Please act according to your local rules and do not dispose of your old products with your normal household waste. The correct disposal of your old product will help prevent potential negative consequences for the environment and human health.

Battery information

Your product operates on batteries covered by the European Directive 2006/66/EC, which cannot be disposed with normal household waste. Please inform yourself about the local rules on separate collection of batteries because the correct disposal will help prevent negative consequences for the environmental and human health.

© 2010 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication there of does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Document order number: 3139 235 5249 2

November 2010

www.philips.com

RTP/4610