

CS540™

Wireless Headset System

Guide de démarrage rapide


Guía de inicio rápido

Guia de Início Rápido


QUICK START GUIDE

plantronics®


What's in the box




Base




Headset with pre-installed battery, eartip and earloop




Headband

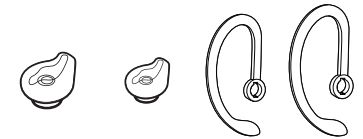

Extra eartips and earloops



Telephone interface cable



Power supply


Welcome to the CS540 wireless headset system. This quick start guide will show you how to set up your system and use its key features.

Please refer to the separate safety instructions for important product safety information prior to installing or using the product.

Step 1 Customize your headset

1 Assemble your headset

The headset comes configured for your right ear with a small eartip and medium earloop pre-installed.




NOTE Refer to the complete User Guide at [Plantronics.com/cs540](https://www.plantronics.com/cs540) for information on how to configure your headset for your left ear, install a different sized eartip and earloop, or install the headband.

2 Wearing your headset

When you wear the headset the microphone should rest as close to your cheek as possible without touching.


- Slide the headset over and behind your ear and fit the eartip into your ear.
- Place your index finger on the headset LED and gently push in towards your cheek.



Step 2 Connect and configure your phone


1 Connect the power

Connect the power supply into the power jack on the back of the base. Plug the other end into a working power outlet. The Power LED on the base will be solid white.

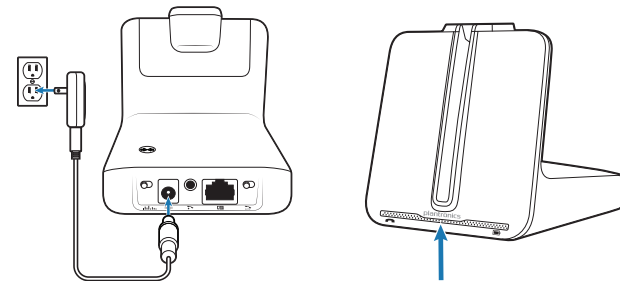

2 Charge the headset

Place the headset in the charge cradle. The charging LED on the base will flash green when charging and turn solid green when the headset is fully charged.

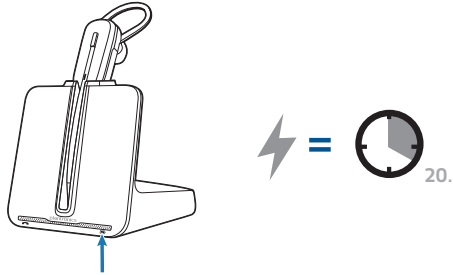


NOTE Charge for at least 20 minutes prior to the first use. A full charge takes 3 hours. This product has a replaceable battery. Use only the battery type supplied by Plantronics.

3 Connect your desk phone

- Connect one end of the telephone interface cable to the back of the base.
- Disconnect the handset coil cord from the base of the desk phone and re-connect it to the telephone cable junction box.
- Finally connect the remaining end of the telephone cable into the open handset port on the desk phone.


NOTE Your desk phone handset will continue to work; it's just hooked up differently.

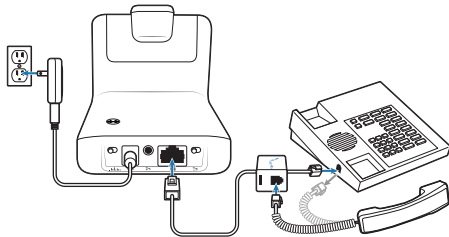

4 Configure your desk phone

- Set your desk phone's volume to mid-range.
- Pick up the desk phone handset and listen for a clear dial tone.


NOTE If you do not hear a dial tone or the dial tone is not clear, look at the bottom panel of your base and slide the configuration switch to a different letter until the dial tone is clear.



Step 3 Call

1 Call from your desk phone

- Wearing your headset, press the headset call button.




- Remove the handset from the cradle. You should hear a dial tone.


NOTE This step will be automatic if you install a lifter or Electronic Hookswitch Cable (EHS) accessory. For a complete list of accessories, visit: plantronics.com/accessories.

- Dial the number using your desk phone.
- To end the call, press the headset call button and hang up the handset.


2 Adjust the headset volume

- Fine-tune your headset volume by pressing the volume/mute button up (increase) or down (decrease), if you wear your headset on the right. If you wear it on the left, it's opposite: press down (increase) and up (decrease).




 Do not use headphones/headsets at high volumes for an extended period of time. Doing so can cause hearing loss. Always listen at moderate levels. See [plantronics.com/healthandsafety](https://www.plantronics.com/healthandsafety) for more information on headsets or hearing.

- Make general volume adjustments with the base volume dials.



3 Mute a call

To mute/unmute your headset, press the headset volume button in. When a call is muted, the call/mute LED will be solid red on the base and you will still be able to hear the caller.

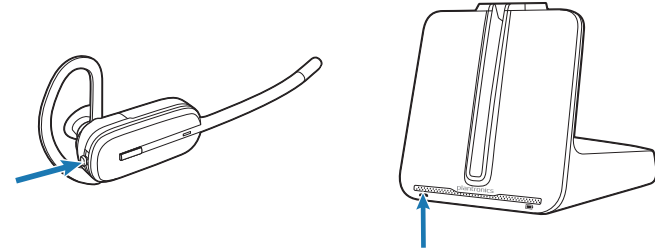

4 Automated sound test

Make a test call (toll free) to test and optimize your system. Call [866-210-2157](tel:866-210-2157).

Learn More

To learn more about system features and read troubleshooting tips, refer to the user guide online at [plantronics.com/cs540](https://www.plantronics.com/cs540). For technical support contact us at [plantronics.com/support](https://www.plantronics.com/support) or at 800-544-4660.

FCC Requirements Part 15

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on another circuit that to which the receiver is connected.
4. Consult the dealer or an experienced radio/TV technician for help.

FCC Registration Information — Part 68

This equipment complies with Part 68 of the FCC rules and the requirements adopted by ACTA. On the exterior of this equipment is a label that contains a product identifier in the format US:AAAEQ##TXXXX. If requested, this information must be provided to your telephone company.

A plug and jack used to connect this equipment to the premises wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible jack that is also compliant. See installation instructions for details.

The REN is useful to determine the quantity of devices you may connect to your telephone line. Excessive RENs on a telephone line may result in the devices not ringing in response to an incoming call. In most, but not all areas, the sum of the RENs should not exceed five (5.0). To be certain of the number of devices you may connect to your line, as determined by the REN, contact your local telephone company. For products approved after August 8, 2001, the REN for this product is part of the product identifier that has the format US:AAAEQ##TXXXX. The digits represented by ## are the REN without the decimal point. (For example, 03 represents a REN of 0.3.) For earlier producers, the REN is separately shown on the label.

If this telephone equipment causes harm to the telephone network, the telephone company will notify you in advance that temporary discontinuance of service may be required. But if advance notice isn't practical, the telephone company will notify the customer as soon as possible. Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary.

The telephone company may make changes in its facilities, equipment, operations, or procedures that could affect the proper functioning of your equipment. If they do, you will be notified in advance in order for you to make necessary modifications to maintain uninterrupted service.

If trouble is experienced with this unit, for repair or warranty information, please contact customer service at (800) 544-4660. If the equipment is causing harm to the network, the telephone company may request that you disconnect the equipment until the problem is resolved.

DO NOT DISASSEMBLE THIS EQUIPMENT: it does not contain any user-serviceable components.

We recommend the installation of an AC surge arrester in the AC outlet to which this equipment is connected. Telephone companies report that electrical surges, typically lighting transients, are very destructive to customer terminal equipment connected to AC power sources.

Exposure to RF Radiation

The internal wireless radio operates within the guidelines found in radio frequency safety standards and recommendations, which reflect the consensus of the scientific community. Independent studies have shown that the internal wireless radio is safe for use by consumers. Visit plantronics.com for more information.

In order to comply with FCC and IC RF Exposure requirements, the base must be installed and operated such that a minimum separation distance of 20 cm is maintained between the base and all persons during normal operation.

NOTE: Modifications not expressly approved by Plantronics, Inc. could void the user's authority to operate the equipment.

Industry Canada Regulatory Information

This product meets the applicable Industry Canada technical specifications/Le présent matériel est conforme aux spécifications techniques applicable d'Industrie Canada.

This Class B digital apparatus complies with Canadian ICES-003. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Plantronics, Inc.

345 Encinal

Santa Cruz, CA 95060

United States

Tel: 800-544-4660

plantronics.com/support

© 2010 Plantronics, Inc. All rights reserved. Plantronics, the logo design, CS540, and Sound Innovation are trademarks or registered trademarks of Plantronics, Inc. All other trademarks are the property of their respective owners.

Patents Pending

84725-01 (10.10)

The Plantronics logo consists of the word "plantronics" in a lowercase, sans-serif font. A thick, blue, wavy line curves underneath the text, starting from the left and ending on the right, partially overlapping the letters.