



NABCO
ENTRANCES INC
GYRO TECH

Acugard III



NABCO
ENTRANCES INC
GYRO TECH

1. Appearance





NABCO
ENTRANCES INC
GYRO TECH

2. Features

Acugard II has new infrared technology which uses a distance measuring system.

Specifically, Acugard II has been developed to provide an EASY SETUP for installer



NABCO
ENTRANCES INC
GYRO TECH

2. Features

A) Programming is just pressed and released the Reset button.

No potentiometer adjustments required.



NABCO
ENTRANCES INC
GYRO TECH

2. Features


- A) Programming is just pressed and released the Reset button.**
- B) In case of Encoder motor, Back-check cut off is required.**
- C) High detection accuracy.**

Background data is memorized using encoder signals on each door position



NABCO
ENTRANCES INC
GYRO TECH


2. Features

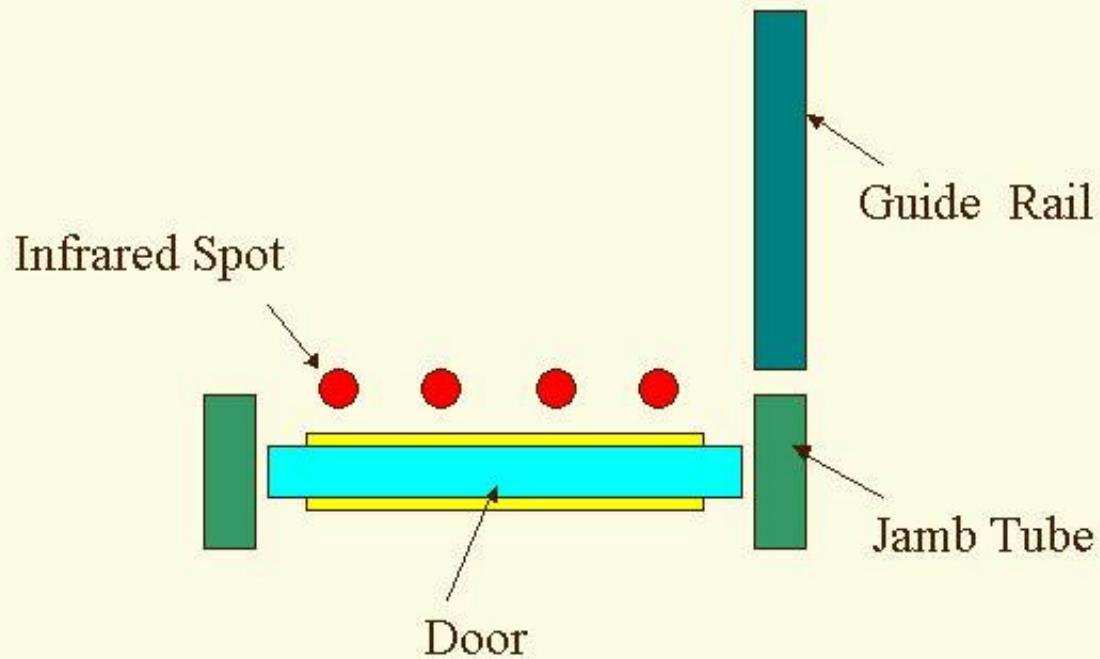




NABCO
ENTRANCES INC
GYRO TECH

2. Features

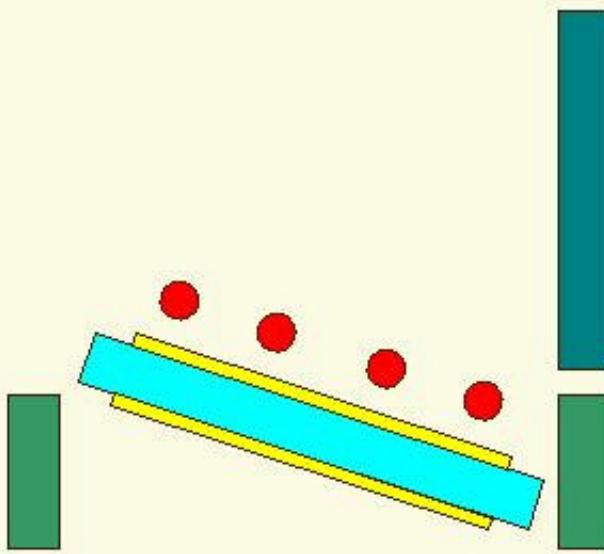


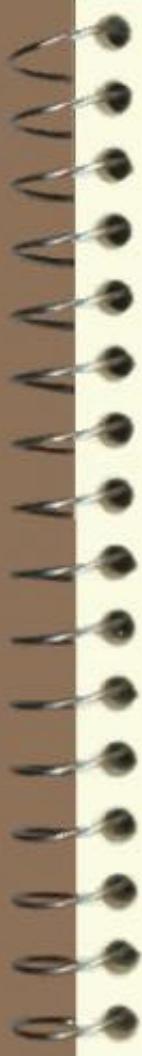

2. Features




NABCO
ENTRANCES INC
GYRO TECH

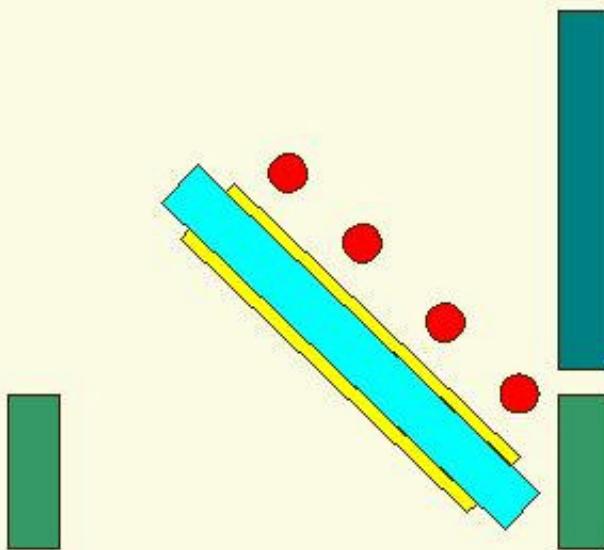



NABCO
ENTRANCES INC
GYRO TECH


2. Features

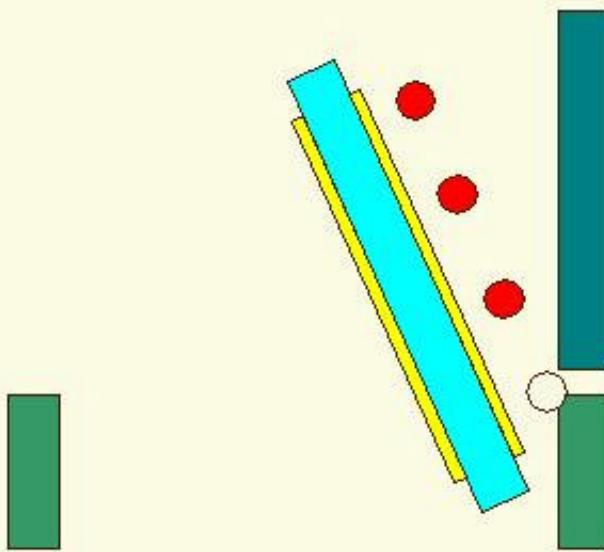



NABCO
ENTRANCES INC
GYRO TECH


2. Features

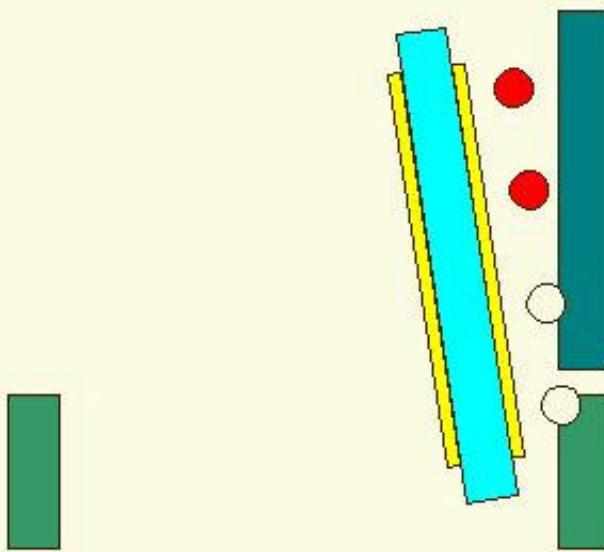



NABCO
ENTRANCES INC
GYRO TECH

2. Features

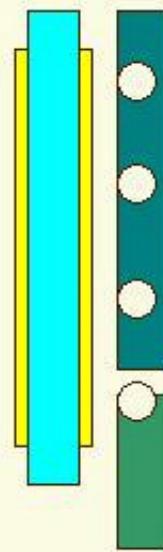



NABCO
ENTRANCES INC
GYRO TECH

2. Features

- D) You can see the sensor condition at a high luminosity LED indicator through lens.
- E) Self-diagnostic function provides.



NABCO
ENTRANCES INC
GYRO TECH


3. Sensing Area Image






NABCO
ENTRANCES INC
GYRO TECH

4. Structure

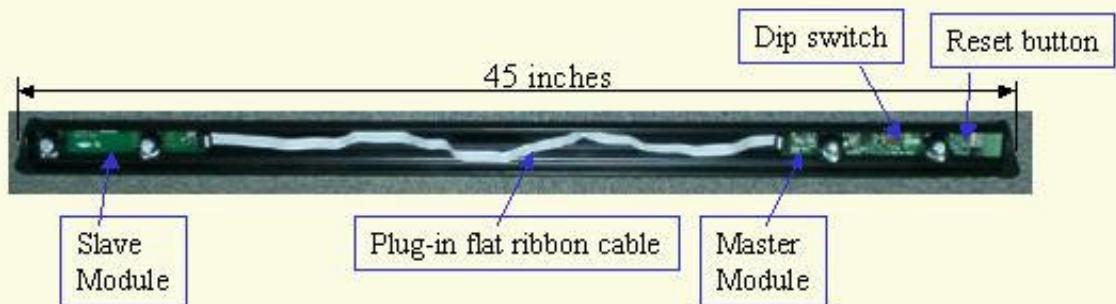

Side View

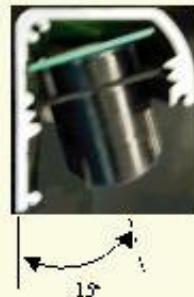



NABCO
ENTRANCES INC
GYRO TECH

5. Specifications

Products are under development. Specification may change during development.

A) Technology

New infrared technology distance measuring system.

B) Working Voltage

12V DC

(Transformer is available for analog control.)



NABCO
ENTRANCES INC
GYRO TECH

5. Specifications

Products are under development. Specification may change during development.

C) Power Consumption

< 100 mA a stick (at 12VDC)

D) Output Signal

Relay Output

Maximum Voltage: 30V AC/DC 1.0 A



NABCO
ENTRANCES INC
GYRO TECH

5. Specifications

Products are under development. Specification may change during development.

E) Operating Temperature

- 4 °F ~ 140 °F (- 20 °C ~ 60 °C)

F) Humidity

30 % ~ 90 % (Except Moisture)

G) Maximum Mounting Height

8" - 2" (2.5 m)



NABCO
ENTRANCES INC
GYRO TECH

5. Specifications

Products are under development. Specification may change during development.

H) Adjustments

- 1) Sensitivity : 4 options
- 2) Mutual Interference Prevention Mode:
4 options
- 3) Type of Motor : W/Encoder or W/O Encoder
- 4) Detection Area : “will not detect beyond 90°”
or “all area are detected”
- 5) Output hold time : 2.0 / 4.5 sec



NABCO
ENTRANCES INC
GYRO TECH

5. Specifications

Products are under development. Specification may change during development.

I) Dimensions

45" L x 2.0" D x 2.3" H (1152 mm x 50 mm x 58 mm)

