
ChargeSpot - Quick Start Guide

Review safety information in manual before installation!


Step 1/7

Mill a recessed hole that is $3\frac{1}{2}$ " in diameter from the underside of the substrate to within 1/8" of the surface.

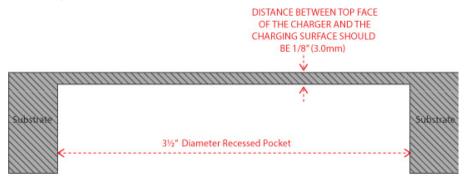

Step 2/7

Attach the three appropriate no.8 screws to the bottom of the charger as seen. Ensure that the screws are not tightly fastened to leave room for depth adjustment.

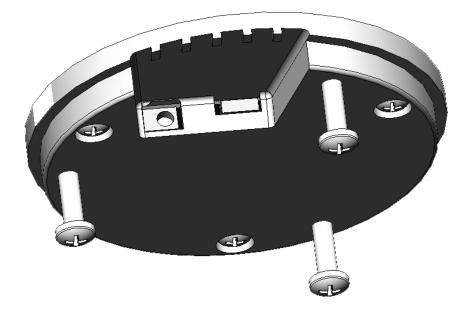


Step 3/7

With the no.8 screws attached, place the charger on top of the mounting plate so that the screws are aligned with the sockets on the mounting plate.




Step 4/7

Connect the provided power supply to the socket at the terminal point circled below.

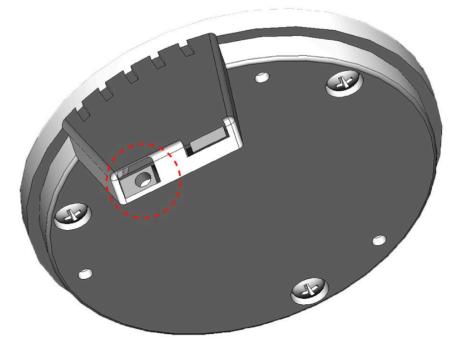


Step 5/7

From the underside of the substrate, place the charger with the attached mounting plate into the recessed hole. If the mounting plate is not flush against the underside, use a Philips head screwdriver to loosen the no.8 screws until flush. Note that the transmitter **MUST** sit flush against the underside to operate properly.

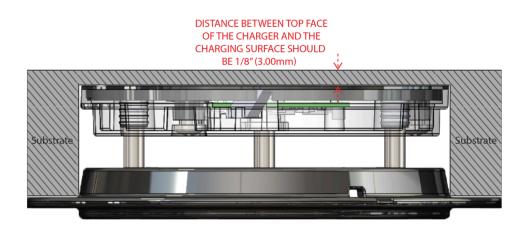

Step 6/7

Secure the mounting plate to the substrate with three no.6 screws (provided). Ensure that the screws do not penetrate the substrate surface.

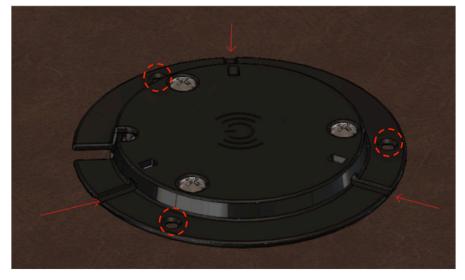

Step 7/7

Place the decal directly on top of where the charger was installed to mark the designated charging area.

Optional

Zip ties can be applied at three (3) points on the mounting plate to tether excess cable to the device (see arrows above).

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.