


## Emitter Specification

### T

Type specification

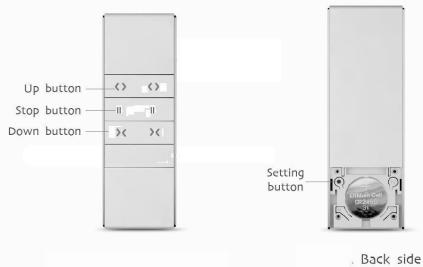

Back side

### T

Technical support

Technical specification	Function instruction
<ul style="list-style-type: none"><li>• Input voltage: 3V(CR2450)</li><li>• Transmitting frequency: 433.79MHz</li><li>• Operating temperature: -10°C—50°C</li><li>• Transmission distance: 20 meters open office, 10 meters on two walls</li></ul>	<p>DC1600 is Single channel emitter</p> <p><b>CAUTION:</b> RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS</p> <p><b>Notice:</b> transmitter do not exposed to moisture and strike, so as not to damage the internal components of the transmitter; if found emission distance obviously short or less sensitive, please change another same new battery. Please have batteries for recycling.</p>

#### FCC Certification Requirements

**Caution:** Any changes or modifications in construction of this device which are not  
expressly approved by the party responsible for compliance could void the user's authority  
to operate the equipment.  
This device complies with part 15 of the FCC Rules. Operation is subject to the following  
two conditions: (1) This device may not cause harmful interference, and  
(2) This device must accept any interference received, including interference that may  
cause undesired operation.