


Emitter Specification

Emitter Specification

T

Type specification

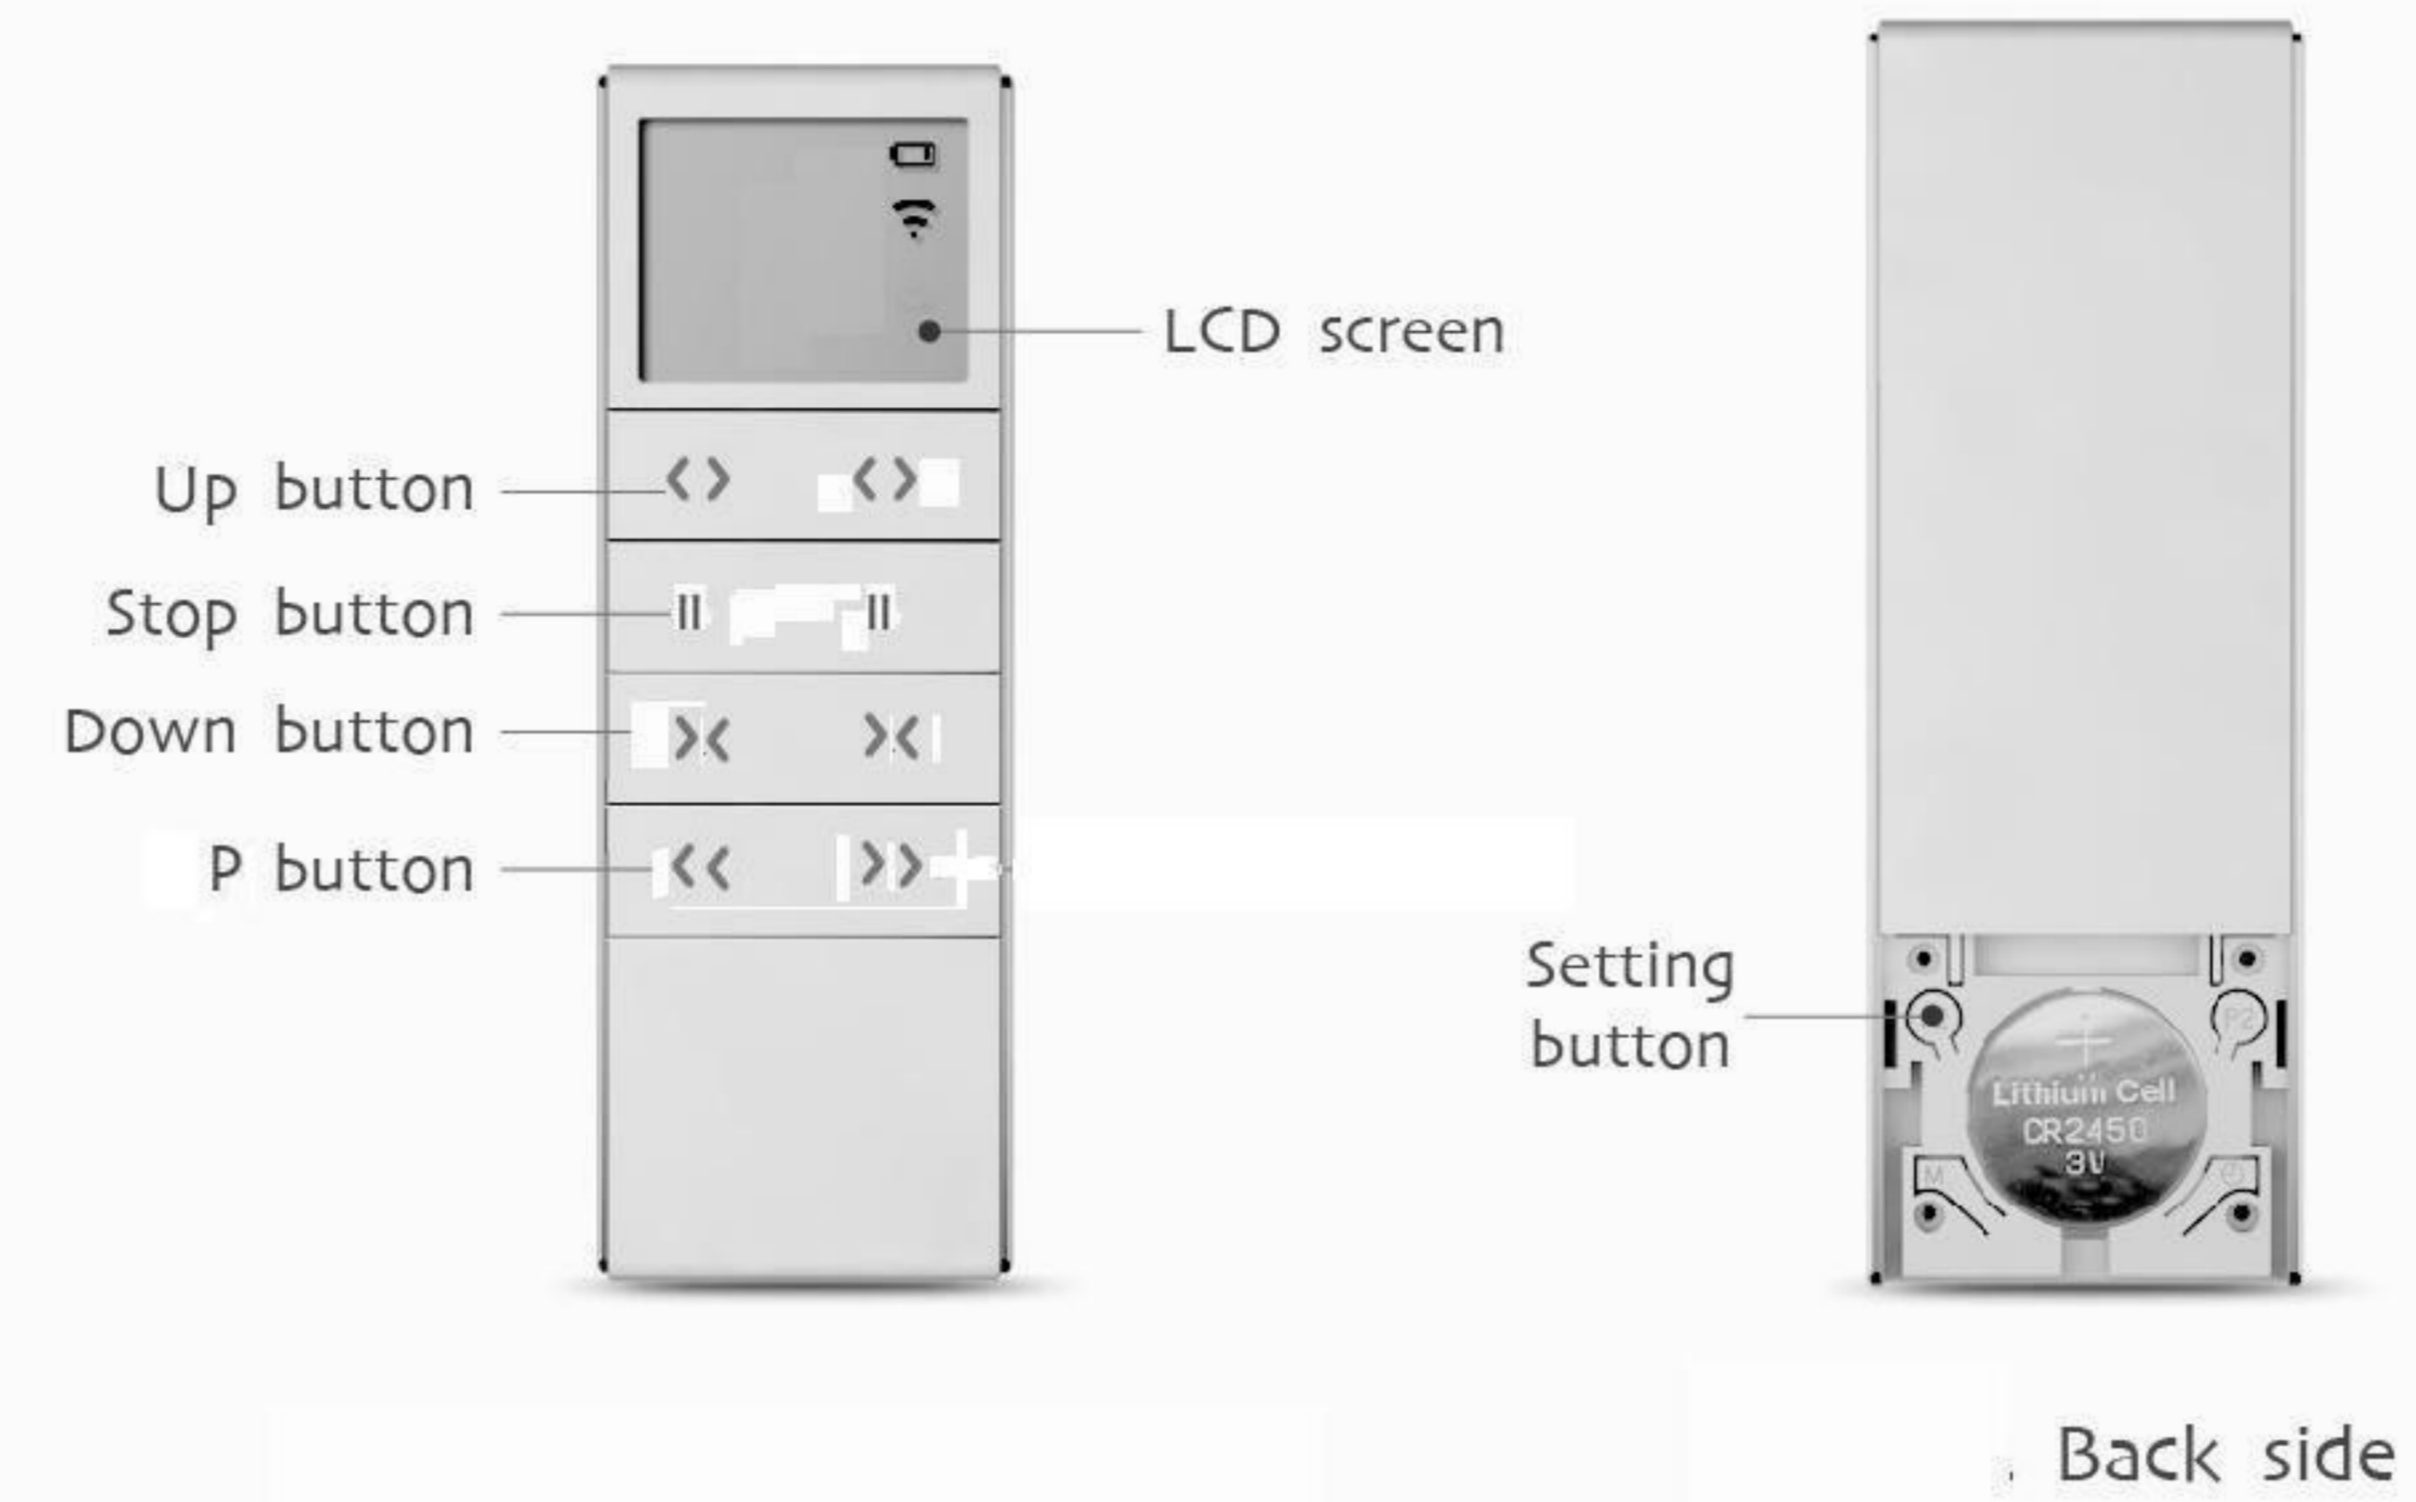

T

Technical support

Technical specification	Function instruction
<ul style="list-style-type: none"> • Input voltage: 3V(CR2450) • Transmitting frequency: 433.887MHz • Operating temperature: -10°C—50°C • Transmission distance: 20 meters open office, 10 meters on two walls 	<p>DC1602 is Single channel emitter</p> <hr/> <p>CAUTION RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS</p> <p>Notice: transmitter do not exposed to moisture and strike, so as not to affect life. When you use transmitter, if found emission distance obviously short or less sensitive, please change another same new battery. Please have batteries for recycling.</p>

FCC Certification Requirements

Caution: Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.