


**Mechanical Drawing**

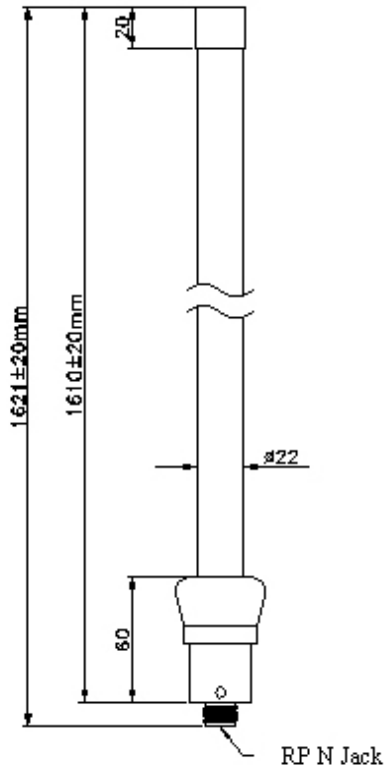

Unit: mm

**Electrical Specification**

<b>Frequency Range</b>	2.4~2.5GHz
<b>Impedance</b>	50Ω
<b>V.S.W.R.</b>	≤2.0
<b>Radiation</b>	Omni-directional
<b>Gain</b>	15dBi
<b>Polarization</b>	Vertical

**Mechanical Specification**

<b>Connector Type</b>	RP N Jack (Brass)
<b>Material</b>	Fiberglass
<b>Cable</b>	--
<b>Length</b>	1621mm
<b>Water Proof</b>	IP65
<b>Weight</b>	1000g (est.)

**Environmental Specification**

<b>Operating Temp</b>	- 20°C ~ + 70°C
<b>Storage Temp</b>	- 30°C ~ + 85°C
<b>Substance</b>	RoHS Compliant

