



HOME (/)
ABOUT (/ABOUT/)
SERVICES
FLEETS (/FLEETS/)
INSURANCE (/INSURANCE/)
CITIES (/CITIES/)
AUTOMOTIVE (/AUTOMOTIVE/)
NEWS (/NEWS/)

LOG IN ([HTTPS://MYDASHBOARD.NAUTO.COM](https://mydashboard.nauto.com))

Getting Started

Thank you for partnering with Nauto for your fleet!

Nauto is a bi-direction camera and A.I. able to view activity both inside the car, and out on the road. Our device is smart, and able to analyze and understand all sorts of driving situations. Nauto prevents accidents and save lives, by providing active feedback for risky situations including driver distraction, tailgating, and risky driving. Nauto learns and grows with you, providing coaching and feedback, improving performance and safety with every mile.

Fleet managers can use Nauto's dashboard (mydashboard.nauto.com) to get a user-friendly view of their drivers, as well as video footage for important events that occur in each fleet vehicle. Nauto also automatically tags and uploads collisions and allows for custom requests for additional video, so that the video you need is readily available.

To help you get started, we have provided these detailed instructions on how to install the Nauto device. If you have any questions, feel free to contact us at support@nauto.com (<mailto:support@nauto.com>). To learn more about Nauto, please visit www.nauto.com (<http://www.nauto.com>).

Sincerely,

The Nauto Team

Before you begin, please be sure to download Nauto Installer App on your mobile device.



(<https://play.google.com/store/apps/details?id=com.nauto.installerapp&hl=en>)

Nauto Package Contents

- A. Event Mark Button
- B. Windshield Mount
- C. Nauto Device
- D. DC/DC Converter
- E. Privacy Sticker (Optional)
- F. Fuse
- G. Wire



Note: You'll need a T4 star driver to install the Nauto device. Nauto recommends the use of a torque T4 star driver to prevent over-tightening or damage to the Nauto device.

Log in to the Nauto App

Download the Nauto Installer app from the app store.



Open the Nauto Installer App and log in with your username and password. If you have not yet set up your account, search your inbox for an account activation email sent from Nauto.

Next: Register (</register-a-device-using-the-installer-app>) a Device using the Installer App (</register>)



Nauto, Inc.	Services (/jobs)	Contact (/automotive)
Home (/)	(/jobs)	(/automotive) info@nauto.com
About (/about)	(/fleets)	(mailto:info@nauto.com) support@nauto.com
News (/news)	Insurance (/insurance)	(mailto:suuport@nauto) press@nauto.com
Jobs	(/cities)	(mailto:press@nauto.cc)

[\(/jobs\)](#)

[Automotive](#)

[\(/automotive\)](#)

[©Nauto Inc. Privacy Policy \(/privacy\)](#)




HOME (/)
ABOUT (/ABOUT/)
SERVICES
FLEETS (/FLEETS/)
INSURANCE (/INSURANCE/)
CITIES (/CITIES/)
AUTOMOTIVE (/AUTOMOTIVE/)
NEWS (/NEWS/)

LOG IN ([HTTPS://MYDASHBOARD.NAUTO.COM](https://mydashboard.nauto.com))

Pre-Install Device Setup

Step 1: Plug in the 9v cable (C) to the Nauto device, inserting the end without a clip. Be sure the block square on the 9v cable goes INSIDE the mounting walls of the Nauto device.

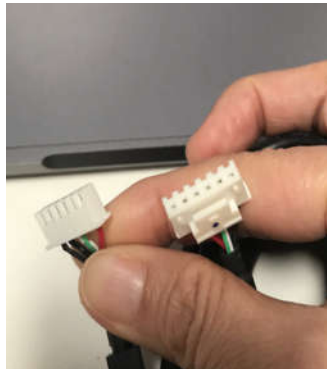

Step 2: Attach the windshield mount to the Nauto device. Line up the teeth on the mount to the receivers on the device. Once lined up, simply slide the mount forward to lock.

NOTE: If you are installing in a van, bus, or truck, you may need to use a different mounting bracket than the one in the box. If you are unsure of which bracket to use, call our customer service (888)628-8606.



Step 3: Inspect the Nauto device setup. The device should look like the following photo



Previous: Register
A Device Using
the Installer App
(/register)

Next: Device Installation (/device-
installation)



Nauto, Inc.

Home

(/)

About

(/about)

News

(/news)

Jobs

(/jobs)

Services

Fleets

(/fleets)

Insurance

(/insurance)

Cities

(/cities)

Automotive

(/automotive)

Contact

info@nauto.com

(mailto:info@nauto.com)

support@nauto.com

(mailto:suupport@nauto)

press@nauto.com

(mailto:press@nauto.cc)

©Nauto Inc. [Privacy Policy \(/privacy\)](/privacy)



HOME (/)
ABOUT (/ABOUT/)
SERVICES
FLEETS (/FLEETS/)
INSURANCE (/INSURANCE/)
CITIES (/CITIES/)
AUTOMOTIVE (/AUTOMOTIVE/)
NEWS (/NEWS/)

LOG IN ([HTTPS://MYDASHBOARD.NAUTO.COM](https://mydashboard.nauto.com))

Device Installation

Step 1: Identify the best mounting location for the Nauto device on the vehicle's windshield.


To ensure optimal performance, install the device on the driver side of the vehicle. If that is not possible, you can install on the passenger side, but try to stay close to the center as possible.


You must install the Nauto device within 10" from the center of the rear view mirror.

CAUTION:

- Outside the car, be sure the camera is below any metalization and outside the path of the windshield wiper.
- Inside the car, be sure the camera is not obstructed when the sun visor is down.

If you are unable to find a good mounting location that's within the specification above, contact your fleet manager or Nauto Customer Service.

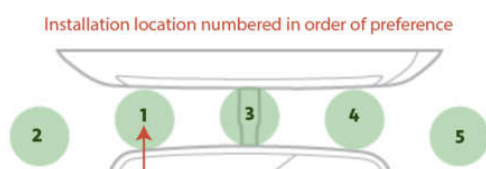


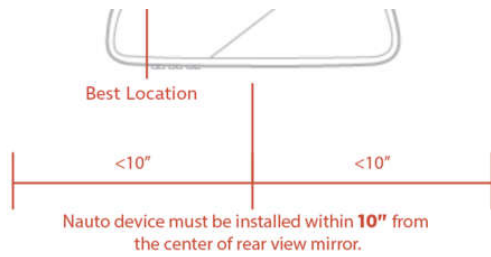

Step 2: Using a T4 Star Driver, tighten the screw on **ONLY ONE** side of the Nauto device only. This will be sufficient to lock the mount to the Nauto device. The screw you tighten will depend on where you mount it on the windshield.

- Mounted to the left of the rear view mirror, tighten the left screw.
- Mounted to the right of the rear view mirror, tighten the right screw.

CAUTION: Be sure to tighten only one screw. You may need to access the screw after mounting the device. If you tighten both screws, you may not be able to access the second screw because the rear view mirror may be in the way.

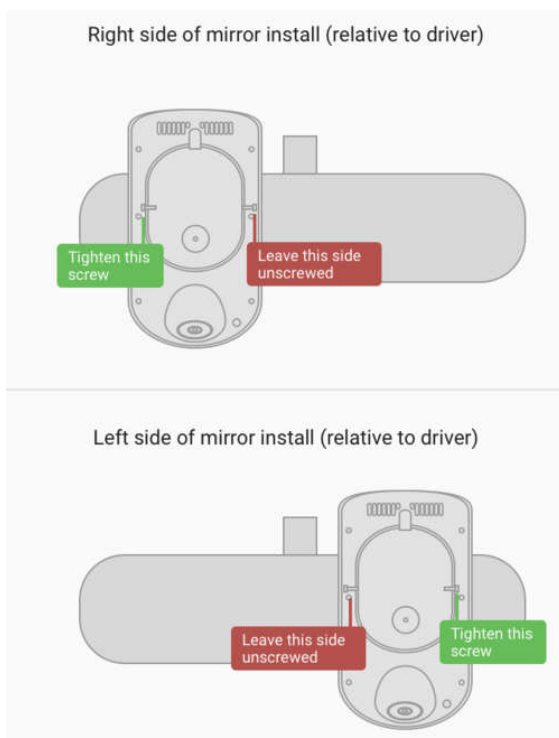


Step 3: On the Windshield Mount, use alcohol to clean the location where you intend to mount the device, remove the 3M tape cover, and attach the Nauto device directly to the windshield at the location you've selected.

NOTE: Please ensure you are satisfied with the mounting location before attaching. The 3M VHB tape is very strong and will form a tight bond once attached.



Step 4: For a visually clean installation, you can tuck the Nauto wire into the front edge of the headliner, the space between the vehicle windshield and frame.

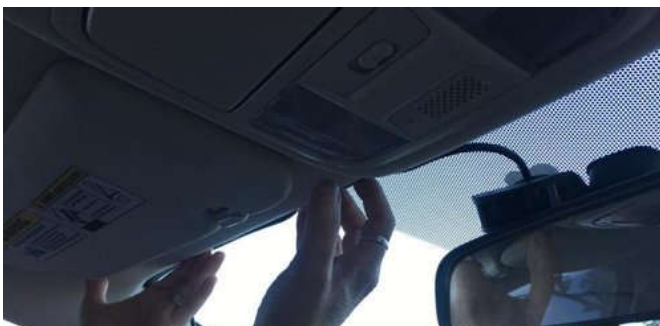





Step 5: Once you reach the A-pillar, remove the rubber door seal. Now you can open the A-pillar panel and hide the wires. Reattach the panel once the wires are tucked away across the pillar.




Step 6: Run the wires down the A-pillar frame. Making sure the wire always stays on the interior side of the A pillar. Once the wire is set, reattach the rubber door seal.

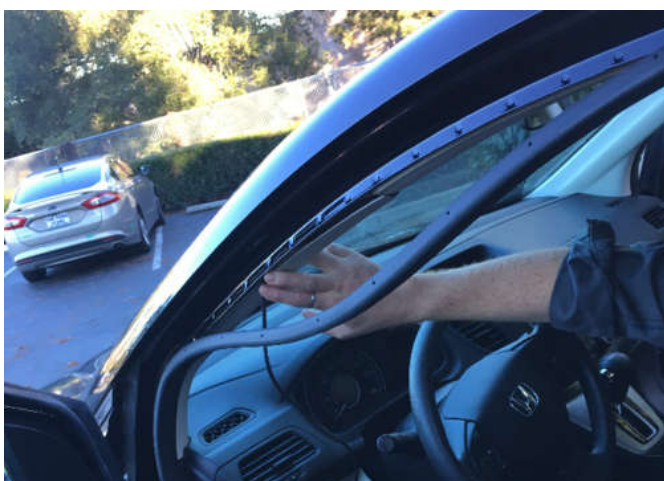

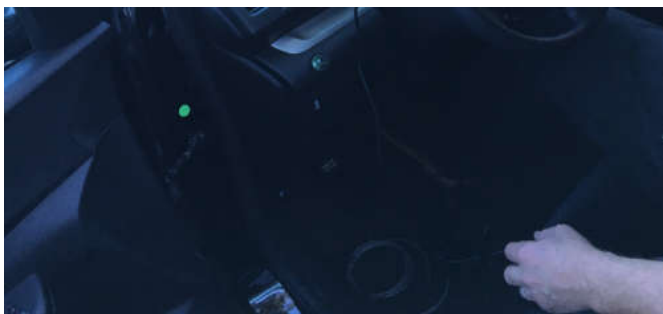

Step 7: Wire the Nauto power cable to a unswitched (constant hot) 12v source and a ground in the vehicle.

Use the wire label included with the device to label the Nauto wires.

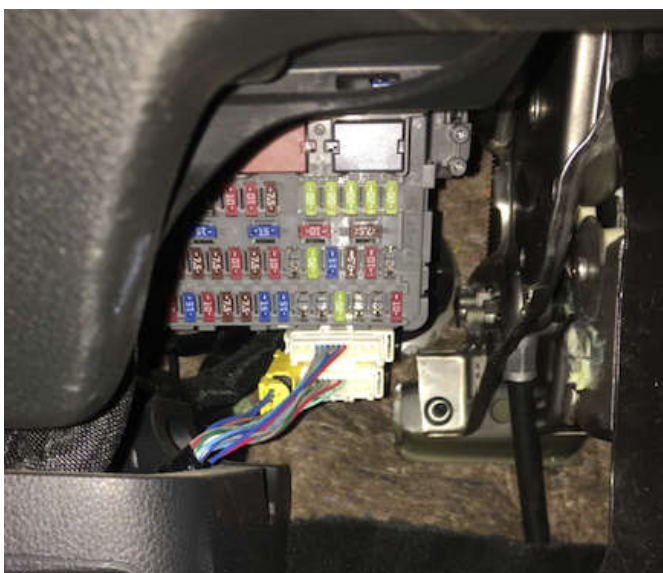

Step 8: Hide the DC/DC converter box behind panels or anywhere else in the vehicle that is out of sight.





NOTE: For the driver's safety, please ensure the DC/DC converter box or wires do not get in the way of vehicle brake or accelerator control.

Step 9: Once the device wires are connected to the 12v source and ground, the Nauto device will automatically power on. You will hear a chime and see a green LED light directly under the "Nauto Logo" on the windshield mount.



NOTE: It may take one minute or more after attaching the device to the power source before you hear the chime. You will also need to view the Nauto device from outside the windshield to see this green light.

NOTE: If you do not see the green light, check all the wiring is connections to see if they are connected properly. If the green light is still not visible, contact Nauto Customer Service.

You're all set!

To confirm a successful install, have a fleet manager or other user go to mydashboard.nauto.com (<http://mydashboard.nauto.com>) and log in to their account. The vehicle you've installed in should appear on the map as well as listed in the vehicles tab.

[Back: Pre-install Device Setup \(/preinstall-device-setup\)](#)



[Nauto, Inc.](#)

[Home](#)

[\(/\)](#)

[About](#)

[Services](#)

[Fleets](#)

[\(/fleets\)](#)

[Insurance](#)

[Contact](#)

info@nauto.com

<mailto:info@nauto.com>

support@nauto.com

[\(/about\)](#)

[News](#)

[\(/news\)](#)

[obs](#)

[\(/ obs\)](#)

[\(/insurance\)](#)

[Cities](#)

[\(/cities\)](#)

[Automotive](#)

[\(/automotive\)](#)

<mailto:suuport@nauto.com>

press@nauto.com

<mailto:press@nauto.cc>

[Nauto Inc. Privacy Policy \(/privacy\)](#)




HOME (/)
ABOUT (/ABOUT/)
SERVICES
FLEETS (/FLEETS/)
INSURANCE (/INSURANCE/)
CITIES (/CITIES/)
AUTOMOTIVE (/AUTOMOTIVE/)
NEWS (/NEWS/)


LOG IN ([HTTPS://MYDASHBOARD.NAUTO.COM](https://mydashboard.nauto.com))

Register a Device via the Installer App

1. Open the Nauto Installer App and log in with your Nauto account.
2. Select the fleet that you are currently installing in.
3. You will be prompted to enter or scan the Serial Number of the device you are installing.
4. On the next screen enter the VIN, License Plate Number, and Vehicle Name or ID. The vehicle name is likely printed clearly on the hood or door. Confirm with the fleet manager what identifier they would like you to input here.

Once the above steps are complete, you should reach the Ready for install page

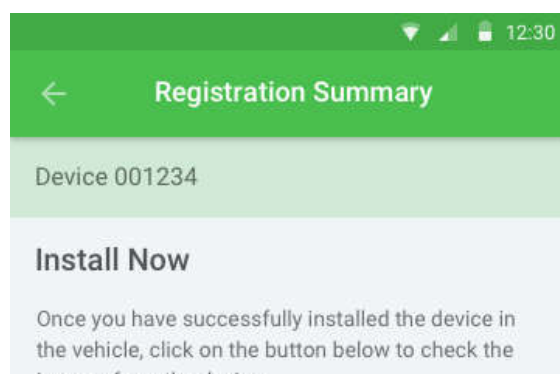

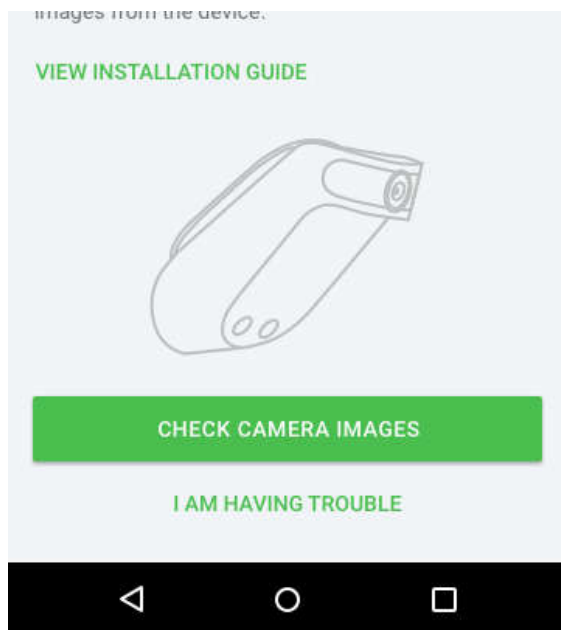

Previous: Getting Started
(/getting-started)

Next: Pre-install Device
Setup (/preinstall-device-
setup)



Nauto, Inc.

Home

(/)

About

(/about)

News

(/news)

Jobs

(/jobs)

Services

Fleets

(/fleets)

Insurance

(/insurance)

Cities

(/cities)

Automotive

(/automotive)

Contact

info@nauto.com

(mailto:info@nauto.com)

support@nauto.com

(mailto:suupport@nauto)

press@nauto.com

(mailto:press@nauto.cc)

©Nauto Inc. Privacy Policy (/privacy)