

NETGEAR®

Notification of Compliance

Regulatory Compliance Information

This document includes user requirements for operating NETGEAR products in accordance with national laws including usage of radio spectrum and operation of radio devices. Failure of the end-user to comply with the applicable requirements may result in unlawful operation and adverse action against the end-user by the applicable national regulatory authority.

The NETGEAR product firmware limits operation to only the channels allowed in a particular region or country. Therefore, all options described in this document may not be available in your version of the product.

This document applies to both Class A and Class B devices:

- Class A devices are intended to be used in a commercial or industrial environment. They are not intended to be used in a residential home or be available for general public use.
- Class B devices are intended to be used in a residential setting, and may also be used in commercial and industrial applications. Examples of Class B devices are telephones, personal computers, and residential data gateways.
- Fuses should only be installed by service personnel.
- NETGEAR recommends the use of 26 AWG or larger gauge phone line cords.

Europe – EU Declaration of Conformity

This section applies to products bearing the CE or CE! mark:



Products bearing the CE or CE! mark comply with the following EU directives:

- EMC Directive 2014/30/EU
- Low Voltage Directive 2014/35/EU
- Radio Equipment Directive 2014/53/EU (RED – from 6/13/2017)
- Ecodesign Directive 2009/125/EC
- RoHS Directive 2011/65/EU

If the product has telecommunications functionality, it also complies with the requirement of the following EU directive:

- R&TTE Directive 1999/5/EC (until 6/13/2017)

Compliance with these Directives implies conformity to harmonized European standards that are noted in the EU Declaration of Conformity. The EU CE Declaration of Conformity may be found at http://support.netgear.com/app/answers/detail/a_id/11621/.

NETGEAR products comply with the requirement of Article 10(2) as it can be operated in at least one Member State as examined.

In accordance with Article 10(10) NETGEAR products which are restricted to indoor use only bear the following pictogram on the packaging:-



The following products are certified for outdoor use:-

- WND930
- Arlo Security Cameras

Caution for installing this equipment outdoors: (Valid in all EU member states, EFTA states, and Switzerland). Be aware that outdoor installations require special attention and will only be handled by trained and qualified installation personnel. No one from the general public is permitted to install NETGEAR wireless products outdoors when external antennas, power and grounding must be installed for use. Particular attention has to be given allowed operational frequencies. Contact NETGEAR for instructions on how to contact an installer for outdoor operations if this product requires the special considerations for outdoor installations. For detailed information concerning installations in France, the user should contact the national spectrum authority in France (<http://www.arcep.fr/>)

Specific precautions for EMC

Warning: NETGEAR Class A equipment is compliant with Class A of EN 55032. In a residential environment this equipment may cause radio interference.

NETGEAR products are tested to the requirements of EN 55032 (Emissions) and EN 55024 (immunity). There are no specific precautions which must be taken in order to comply with the requirements of Directive 2014/30/EU Essential Requirements in Section 1 of Annex I.

In addition, NETGEAR wireless products are further tested to ensure spurious emissions are within the specified limits, as well as meeting the requirements for adaptivity, which mitigates against problems caused by co-location with other wireless products.

NETGEAR products are not subject to the requirements in Section 2 of Annex I of Directive 2014/30/EU for fixed installations.

The following paragraphs apply to WN2500RP:

This device is a 2.4GHz and 5GHz wideband transmission system (transceiver), intended for indoor use only in all EU member states, EFTA states, and Switzerland.

In Italy the end-user should apply for a license at the national spectrum authorities in order to obtain authorization to use the device for setting up outdoor radio links and/or for applying public access to telecommunications and/or network services.

This device may not be used for setting up outdoor radio links in France and in some areas the RF output power may be limited to 10mW EIRP in the frequency range of 2454-2483.5 MHz. For detailed information the end-user should contact the national spectrum authority in France.

The following paragraph applies to the LG2210:

External antenna requirement: Net gain (antenna + cable) of external antenna is required to be less than 1.14dBi (minimum gain of internal antenna).

The following paragraph applies to the LB2110, LB1110, LB1111:

External antenna requirement: Net gain (antenna + cable) of external antenna is required to be less than 1.5dBi (minimum gain of internal antenna).

The following paragraph applies to the FS205, FS208:

Use only power supplies listed below:

- Model number: MU03B5050070-C5, Part Number: 332-10670-01
- Model number: AD2015000007LF, Part Number: 332-10665-01

Compliance with 2014/53/EU Radio Equipment Directive (RED)

NETGEAR wireless products comply with the requirement of Article 10(2) of the RED as they can be operated in at least one Member State as examined. The product also complies with Article 10(10) as it has no restrictions on putting into service in all EU Member States, except as shown below.

Apart from the exceptions shown below, this product is for indoor use only:-

WND930, Arlo security cameras

In accordance with Article 10.8(a) and 10.8(b) of the RED, the following table provides information on the frequency bands used and the maximum RF transmit power of NETGEAR wireless products for sale in the EU:-

Wi-Fi

Frequency range (MHz)	Channels used	Max. Transmit Power (dBm/mW)
2400-2483.5	1-13	ODFM: 19.9dBm (97.7mW) CCK: 17.9dBm (61.7mW)
5150-5250	36-48	22.9dBm (195mW)
5250-5350	52-64	22.9dBm (195mW) with TPC 19.9dBm (97.7mW) non-TPC
5470-5725	100-140	29.9dBm (977mW) with TPC 26.9dBm (490mW) non-TPC

TPC: Transmit Power Control.

Cellular

Frequency (MHz)	Bands used	Max. Transmit Power (dBm/mW)
700	LTE Band 28	FDD: 23.9dBm (245mW)
800	LTE Band 20	FDD: 23.9dBm (245mW)
900	3G Band 8	WCDMA/HSDPA/HSUPA: 23.9dBm (245mW)
900	LTE Band 8	FDD: 23.9dBm (245mW)
1800	LTE Band 3	FDD: 23.9dBm (245mW)
2100	3G Band 1	WCDMA/HSDPA/HSUPA: 23.9dBm (245mW)
2100	LTE Band 1	FDD: 23.9dBm (245mW)
2300	LTE Band 40	TDD: 23.9dBm (245mW)
2600	LTE Band 7	FDD: 23.9dBm (245mW)
2600	LTE Band 38	TDD: 23.9dBm (245mW)

Warning

NETGEAR Class A products that may be utilized in domestic/residential environments may cause radio interference in which case the user may be required to take adequate measures.

This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

Prevention of hearing loss

The following statement applies to the ABD1000:-



CAUTION: Permanent hearing loss may occur if earphones or headphones are used at high volume for prolonged periods of time.

This device and earphone have been tested to comply with the Sound Pressure Level requirement laid down in the applicable EN 50332-1 and/or EN 50332-2 standards.

FCC Requirements for Operation in the United States

Information in this section applies to products bearing the FCC mark (or statement):



FCC Information to User

This NETGEAR product does not contain any user serviceable components and is to be used with approved antennas only. Any product changes or modifications will invalidate all applicable regulatory certifications and approvals.

Devices authorized under the SDoC procedure must also include a compliance information statement (in the user manual or on a separate sheet) as required by Section 2.1077. The objective of this compliance statement is to allow the FCC to associate the equipment with the party responsible for compliance with the identification, by name, address and telephone number, of the responsible party, as defined in Section 2.909. The responsible party for a Declaration of Conformity must be located within the United States.

The following statement applies to these products:

- AL1101
- C6300
- C7000BMX
- D3600
- D3610
- D6000
- D6010
- D6200V2
- D7000
- EX2700
- EX3700
- EX6100
- EX6150
- EX6200
- EX7000
- FS205v2
- FS208v2
- FS305v2
- FS308v2
- FS605v4
- FS608v4
- GS205v2
- GS208v2
- GS305
- GS308v2
- GS605v5
- GS608v4
- HMNC100
- JNR1010v2
- JR6150
- JWNR2000v5
- JWNR2010v5
- R6050
- R6200v3
- R6220
- R7500
- R7900
- R8000
- STS7000
- VEGN2200
- VMB3000
- VMC3010
- VMC3030
- WN370
- WN1000v4
- WN2500RP
- WN3000RPv2
- WN3500RP
- WNA1000Mv2
- WND930
- WNDA3100v3
- WNDR3400v3
- WNDR3700v5
- WNDR4300v2
- WNDR4500v3
- WNR2010
- WNR2020
- WNR614
- WNR618

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with FCC multi-transmitter product procedures.

The following statement applies to products where the FCC compliance statement cannot be included on the label:

- A7000
- ABB1000
- AL1101
- RBK40
- VMA4400Cv2

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The following statement applies to these products:

- Product type: LTE Camera
- Model number: VML4030
- FCC ID: PY316200352
- **Contains FCC ID: MCLT77W595**

FCC Guidelines for Human Exposure

The NETGEAR product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The equipment should be installed and operated with minimum distance of 20cm between the radiator and your body, except as stated below.

The following statement applies to this product:

- WNDR4300

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 21cm between the radiator and your body.

The following statement applies to this product:

- WAC505

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 22cm between the radiator and your body.

The following statement applies to this product:

- RBW30
- R6700v3
- WNDAP660
- WNDAP620

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 23cm between the radiator and your body.

The following statement applies to this product:

- C6250
- R7000P

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 24cm between the radiator and your body.

The following statement applies to this product:

- C6300XB3
- D7000
- R64000v2
- WAC720
- WN2000RPT
- WNDR4500
- WNR2000

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 25cm between the radiator and your body.

The following statement applies to this product:

- C7100V
- EX6400
- RBR50/RBS50 (Orbi)
- RBS50Y
- WAC730

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 26cm between the radiator and your body.

The following statement applies to this product:

- EX7000
- WNDAP360

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 27cm between the radiator and your body.

The following statement applies to this product:

- R7500
- R9000
- SRS60/SRR60
- WND930

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 28cm between the radiator and your body.

The following statement applies to this product:

- C7000v2
- D7800
- R7800
- R9000
- RBR40/RBS40

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 29cm between the radiator and your body.

The following statement applies to this product:

- C7000
- EX3700
- R6700v1/v2
- R6800
- R6900
- R7300
- R7900
- R8000
- RBR40

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 30cm between the radiator and your body.

The following statement applies to this product:

- XR700

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 31cm between the radiator and your body.

The following statement applies to this product:

- CBR40

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 32cm between the radiator and your body.

The following statement applies to this product:

- R6400v1
- R7300

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 33cm between the radiator and your body.

The following statement applies to this product:

- C6300BD

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 35cm between the radiator and your body.

The following statement applies to this product:

- C7800

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 37cm between the radiator and your body.

The following statement applies to this product:

- WNDAP350

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 41cm between the radiator and your body.

The following statement applies to this product:

- R8500

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 43cm between the radiator and your body.

The following statement applies to this product:

- WAC740

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 48cm between the radiator and your body.

The following statement applies to this product:

- AC791L
- AC797S
- AC815S
- MR1100

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device should be installed and operated with minimum distance of 10mm between the radiator and your body.

FCC Declaration of Conformity

We, NETGEAR, Inc., 350 East Plumeria Drive, San Jose, CA 95134, declare under our sole responsibility that this product complies with Part 15 Subpart B of FCC CFR47 Rules. Operation is subject to the following two conditions:

- The device may not cause harmful interference, and
- The device must accept any interference received, including interference that may cause undesired operation.

FCC Radio Frequency Interference Warnings & Instructions

Class B products

The NETGEAR product has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following methods:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an electrical outlet on a circuit different from that which the radio receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Class A products

The NETGEAR product has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful

interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC RF Radiation Exposure and SAR Statements

The information in this section applies to products that transmit data or communicate wirelessly.

SAR Statement

The information in this section applies to NETGEAR wireless products that are intended to be operated close to human body.

NETGEAR products that are intended to be operated close to the human body are tested for body-worn Specific Absorption Rate (SAR) compliance. The SAR limit set by the FCC is 1.6 W/kg.

The FCC has established detailed SAR requirements and NETGEAR products meet these requirements.

NETGEAR products comply with ANSI/IEEE C95.1-1999 and are tested in accordance with the measurement methods and procedures specified in OET Bulletin 65 Supplement C.

NETGEAR products that are installed in USB ports demonstrate SAR compliance using a typical laptop computer with a USB port. Other applications, such as handheld computers or similar devices, have not been verified and might not compliance with related RF exposure rule and such use is prohibited.

The following statement applies to these products:

- AC797S

This product meets applicable national SAR limits of 1.6W/kg. When carrying the product or using it while worn on your body, maintain a distance of 10mm from the body to ensure compliance with RF exposure requirements.

RF Exposure Information

NETGEAR products have been evaluated under FCC Bulletin OET 65C (01-01) and found to be compliant to the requirements as set forth in CFR 47 Sections, 2.1093, and 15.247 (b) (4) addressing RF exposure from radio frequency devices. NETGEAR products meet the applicable government requirements for exposure to radio frequency waves. To see the test results reporting the highest SAR level measured for this device, visit <http://www.netgear.com/about/regulatory/declarations-conformity/>

Radiation exposure: NETGEAR products comply with radiation exposure limits set forth for an uncontrolled environment and meet radio frequency (RF) exposure guidelines for wireless routers. NETGEAR products should be installed and operated keeping the product 20cm or more away from a person's body. For devices that are battery powered and may be operated closer than 20cm to you, refer to the NETGEAR website for exposure levels.

NETGEAR USB dongle transmitters are approved for use in typical laptop computers. To comply with FCC RF exposure requirements, do not use NETGEAR USB dongle transmitters in other devices or certain laptop and tablet computer configurations where the USB connectors on the host computer are unable to provide or ensure the necessary operating configurations intended for the device and its users or bystanders to satisfy RF exposure compliance requirements.

FCC Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

NETGEAR products comply with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) NETGEAR products may not cause harmful interference, and (2) NETGEAR products must accept any interference received, including interference that may cause undesired operation.

For products available in the USA market, only channel 1~11 can be operated. Selection of other channels is not possible.

The following statement applies to these products:

- D2200D

This equipment complies with Part 68 of the FCC Rules and the requirements adopted by the ACTA.

On the product label of this equipment is a label that contains, among other information, a product identified in the format US:WXXXXYYZZZZZ. If requested, this number must be provided to the telephone company.

The following statement applies to these products:

- | | | | |
|------------|--------------|------------|--------------|
| • AC779S | • EX6100 | • R6050 | • WN3000RPv2 |
| • AC815S | • EX6150 | • R6200v3 | • WN3000RPv3 |
| • C6300 | • EX6200 | • R6220 | • WN3500RP |
| • C7000BMX | • EX7000 | • R7300 | • WNDR3100v3 |
| • D2200D | • HMNC100 | • R7500 | • WNDR3400v3 |
| • D3600 | • JNR1010v2 | • R7800 | • WNA1000Mv2 |
| • D3610 | • JR6150 | • R8500 | • WNDR3700v5 |
| • D6000 | • JWNR2000v5 | • VEGN2200 | • WNDR4300v2 |
| • D6010 | • JWNR2010v5 | • VMB3000 | • WNDR4500v3 |
| • D6200V2 | • PLW1000 | • VMC3010 | • WNR1000v4 |
| • D7000 | • PLW1010 | • VMC3030 | • WNR2010 |
| • D7800 | • PLW1000v2 | • WAC120 | • WNR2020 |
| • DST6501 | • PLW1010v2 | • WN370 | • WNR614 |
| • EX2700 | • R6050 | • WN2500RP | • WNR618 |
| • EX3700 | • R6200v3 | • | • |

The device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with FCC multi-transmitter product procedures.

The following statement applies to these products:

- | | | | |
|------------|-------------|--------------|--------------|
| • C6300 | • EX6100 | • R7500v2 | • WNDAP360 |
| • C6300BD | • EX6120 | • R7800 | • WNDAP620 |
| • C6300XB3 | • EX6200 | • R7900 | • WNDAP660 |
| • C7000 | • EX7000 | • R8000 | • WNDR3700v5 |
| • C7000BMX | • HMNC100 | • R8500 | • WNDR4300v2 |
| • D3600 | • JR6150 | • STS7000 | • WNDR4500v3 |
| • D3610 | • PLW1000v2 | • WAC720 | • |
| • D6000 | • PLW1010v2 | • WAC730 | • |
| • D6010 | • R6050 | • WAC740 | • |
| • D6200V2 | • R6200v3 | • WN2500RP | • |
| • D7000 | • R6220 | • WND930 | • |
| • D7800 | • R7300 | • WNDA3100v3 | • |
| • EX3700 | • R7500 | • WNDAP350 | • |

The device operates in 5.15~5.25GHz frequency range. It is restricted in indoor environment only.

The following statements apply to this product:

- | | |
|-----------|--------------|
| • A6210 | • PLW1010 |
| • DST6501 | • WAC120 |
| • PLW1000 | • WNDR3400v3 |

The device operates in 5.15 ~ 5.25GHz / 5.47 ~5.725GHz frequency range. It is restricted in indoor environment only. The band from 5600-5650MHz will be disabled by the software during the manufacturing and cannot be changed by the end user. This device meets all the other requirements specified in Part 15E, Section 15.407 of the FCC Rules.

The following statements apply to this product:

- EX6150

The device operates in all bands of the 5GHz GHz frequency range. It is restricted in indoor environment only. The band from 5600-5650MHz will be disabled by the software during the manufacturing and cannot be changed by the end user. This device meets all the other requirements specified in Part 15E, Section 15.407 of the FCC Rules.

Non-DFS Warning

NETGEAR non-DFS products do not support operation in the 5600-5650MHz band. The firmware on the device restricts the operation in this frequency band and does not utilize the channels in this band.

NETGEAR non-DFS products will not permit operations on channels 120–132 for 11a and 11n/a, which overlap the 5600–5650MHz band.

The following statements apply to these products:

- | | | |
|-----------|-------------|--------------|
| • A6210 | • PLW1010 | • R7900 |
| • C7000 | • PLW1000v2 | • R8000 |
| • DST6501 | • PLW1010v2 | • WAC120 |
| • HMNC100 | • R7500 | • WNDR3400v3 |
| • PLW1000 | | |

NETGEAR DFS products do not support operation in the 5600-5650MHz band. The firmware on the device restricts the operation in this frequency band and does not utilize the channels in this band.

NETGEAR DFS products will not permit operations on channels 120–132 for 11a and 11n/a, which overlap the 5600–5650MHz band.

Country Code Selection Usage (WLAN devices)

The country code selection is for non-US model only and is not available to all US model. Per FCC regulation, all WiFi product marketed in US must fixed to US operation channels only.

TV Tuner (on Selected Models)

The information in this section applies to NETGEAR products incorporating a TV tuner.

Note to CATV System Installer: This reminder is provided to call the CATV system installer's attention to Section 820-93 of the National Electrical Code, which provides guidelines for proper grounding and, in particular, specifies that the Coaxial cable shield be connected to the grounding system of the building as close to the point of cable entry as possible.

Canadian Department of Communications Radio Interference Regulations

The information in this section applies to products bearing the statements:.

“This digital apparatus does not exceed the Class B limits for radio-noise emissions from digital apparatus as set out in the Radio Interference Regulations of the Canadian Department of Communications.”

“Cet appareil numérique ne dépasse pas les limites de la classe B pour les émissions radio bruit des appareils numériques, tel qu'énoncé dans le Règlement sur le brouillage radioélectrique du ministère des Communications du Canada.”

CAN ICES-3 (B)/NMB-3(B)
CAN ICES-3 (A)/NMB-3(A)

Industry Canada

NETGEAR products comply with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) NETGEAR products may not cause harmful interference, and (2) NETGEAR products must accept any interference received, including interference that may cause undesired operation.

- A6210
- ABB1000
- AC340U
- AL1101
- C7000BMX
- D6000
- D6010
- D3600
- D3610
- EX2700
- EX3700
- EX6100
- EX6150
- EX6200
- EX7000
- HMNC100
- JNR1010v2
- JR6150
- JWNR2000v5
- JWNR2010v5
- R6050
- R6200v3
- R6220
- R7500
- R8000
- VD-1104
- VMB3000
- VMC3010
- VMC3030
- WAC104
- WAC120
- WAC740
- WN3000RPv3
- WN370
- WNA1000Mv2
- WNDR3100v3
- WNDR3400v3
- WNDR3700v5
- WNDR4300v2
- WNDR4500v3
- WNR1000v4
- WNR2010
- WNR2020
- WNR614

Ce dispositif est conforme à la norme CNR d'Industrie Canada applicable aux appareils radio exempts de licence. Son fonctionnement est sujet aux deux conditions suivantes: (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

- A6210
- ABB1000
- AC340U
- AL1101
- C7000BMX
- D6000
- D6010
- D3600
- D3610
- EX2700
- EX3700
- EX6100
- EX6150
- EX6200
- EX7000
- HMNC100
- JNR1010v2
- JR6150
- JWNR2000v5
- JWNR2010v5
- R6050
- R6200v3
- R6220
- R7500
- R8000
- VD-1104
- VMB3000
- VMC3010
- VMC3030
- WAC104
- WAC120
- WAC740
- WN3000RPv3
- WN370
- WNA1000Mv2
- WNDR3100v3
- WNDR3400v3
- WNDR3700v5
- WNDR4300v2
- WNDR4500v3
- WNR1000v4
- WNR2010
- WNR2020
- WNR614
- WNR618

The following statements apply to this product:

- EX6100
- R7500
- VMB3000
- WNDA3100v3

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

This radio transmitter has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

The following statement applies to these products:

- Product type: LTE Camera
- Model number: VML4030
- ISED ID: 4054A-16200352
- **Contains ISED ID: 2878D-T77W595**

The paragraph below applies to the following NETGEAR products:-

- EX3700
- EX6150
- EX6200
- EX7000
- JNR3210
- R7000
- R7500
- WN203

The above radio transmitters with detachable antennas have been approved by Industry Canada to operate with the antenna types listed below:-

- Master Wave Technology 98619PRXS005
- Master Wave Technology 98619PRXS006
- Master Wave Technology 98241MRSX012
- Master Wave Technology 98365PRXS002
- Master Wave Technology 98370PIPF000
- Master Wave Technology 98370PIPF001
- Master Wave Technology 98364PRXS004
- Master Wave Technology 98365PRXS000
- Master Wave Technology 98365PRXS001
- Wha Yu Industrial Co Ltd C529-510542-A
- Master Wave Technology 98242MIPF020
- Master Wave Technology 98242UIPF000

The following antenna table applies to VMB3000 product:

Ant.	Brand	Serial No.	Type	Connector	Gain (dBi)				
					2412 MHz	2422 MHz	2437 MHz	2452 MHz	2462 MHz
1	NETGEAR	STAR-006-A-0001	PCB	I-PEX	3.26	3.24	3.08	2.89	2.77
2	NETGEAR	STAR-006-A-0001	PCB	I-PEX	3.11	2.96	2.73	2.56	2.54

The following antenna table applies to R7500 product:

2.4GHz Band			
Frequency	Gain (dBi)	Frequency	Gain (dBi)
2412 MHz	0.9	2452 MHz	0.9
2422 MHz	1.1	2462 MHz	0.8
2437 MHz	1.1	-	-

5GHz Band 1		5GHz Band 4	
Frequency	Gain (dBi)	Frequency	Gain (dBi)
5180 MHz	2.0	5745 MHz	3.0
5190 MHz	2.1	5755 MHz	3.0
5200 MHz	2.1	5775 MHz	2.9
5210 MHz	2.2	5785 MHz	2.9
5230 MHz	2.3	5795 MHz	3.0
5240 MHz	2.3	5825 MHz	3.0

The following antenna table applies to EX6100 product:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)		Remark
					2.4GHz	5GHz	
1	Master Wave	X6100-98242	Dipole Antenna	I-PEX	3.31	-	External
2	Foxconn	FX01H74-0G-EF	PCB Antenna	I-PEX	3.66	-	Internal
3	Master Wave	X6100-98242	Dipole Antenna	I-PEX	-	5	External

The following antenna table applies to D7800 product:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)		Remark
					2.4GHz	5GHz	
1	Master Wave	98365PRSX00x (x=3,4,5)	Dipole Antenna	RSMA	0.41	1.61	External

IMPORTANT NOTE: Radiation Exposure Statement

NETGEAR products comply with IC radiation exposure limits set forth for an uncontrolled environment. NETGEAR products should be installed and operated with minimum distance 40cm between the radiator and your body, except as stated below. To comply with RSS 102 RF exposure compliance requirements, a separation distance of at least 20 cm must be maintained between the antenna of this device and all persons.

The following statement applies to this product:

- RBR40

This product complies with IC radiation exposure limits set forth for an uncontrolled environment. NETGEAR products should be installed and operated with minimum distance 29cm between the radiator and your body.

The following statement applies to this product:

- VML4030

This product complies with IC radiation exposure limits set forth for an uncontrolled environment. NETGEAR products should be installed and operated with minimum distance 34cm between the radiator and your body.

The following statement applies to this product:

- WNDAP350

This product complies with IC radiation exposure limits set forth for an uncontrolled environment. NETGEAR products should be installed and operated with minimum distance 41cm between the radiator and your body.

The following statement applies to this product:

- EX6150
- WAC720

This product complies with IC radiation exposure limits set forth for an uncontrolled environment. NETGEAR products should be installed and operated with minimum distance 46cm between the radiator and your body.

The following statement applies to this product:

- EX3700
- EX6120
- R6260
- R6350
- R6700v3
- R6850

This product complies with IC radiation exposure limits set forth for an uncontrolled environment. NETGEAR products should be installed and operated with minimum distance 50cm between the radiator and your body.

The following statement applies to this product:

- WAC505

This product complies with IC radiation exposure limits set forth for an uncontrolled environment. NETGEAR products should be installed and operated with minimum distance 52cm between the radiator and your body.

The following statement applies to this product:

- WAC740

This product complies with IC radiation exposure limits set forth for an uncontrolled environment. NETGEAR products should be installed and operated with minimum distance 53cm between the radiator and your body.

The following statement applies to this product:

- R7000P
- RBW30

- SRR60
- SRS60

This product complies with IC radiation exposure limits set forth for an uncontrolled environment. NETGEAR products should be installed and operated with minimum distance 56cm between the radiator and your body.

The following statement applies to this product:

- RBR40
- RBS40

This product complies with IC radiation exposure limits set forth for an uncontrolled environment. NETGEAR products should be installed and operated with minimum distance 58cm between the radiator and your body.

The following statement applies to this product:

- R7300
- R8000

This product complies with IC radiation exposure limits set forth for an uncontrolled environment. NETGEAR products should be installed and operated with minimum distance 60cm between the radiator and your body.

The following statement applies to this product:

- C7000
- D7800
- R6700v2
- WAC730

This product complies with IC radiation exposure limits set forth for an uncontrolled environment. NETGEAR products should be installed and operated with minimum distance 70cm between the radiator and your body.

NETGEAR products comply with the Canada portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in its manual. Further RF exposure reduction can be achieved by keeping the product as far as possible from your body or by setting the device to a lower output power if such a function is available.

For products available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

The following statement applies to these products:

- | | | | |
|------------|--------------|--------------|--------------|
| • C7000BMX | • EX7000 | • STS7000 | • WNDR3700v5 |
| • D6000 | • HMNC100 | • VEGN2200 | • WNDR4300v2 |
| • D6010 | • JNR1010v2 | • VMB3000 | • WNDR4500v3 |
| • D3600 | • JR6150 | • VMC3010 | • WNR1000v4 |
| • D3610 | • JWNR2000v5 | • VMC3030 | • WNR2010 |
| • D6200V2 | • JWNR2010v5 | • WN370 | • WNR2020 |
| • EX2700 | • R6050 | • WN2500RP | • WNR614 |
| • EX3700 | • R6200v3 | • WN3000RPv2 | • WNR618 |
| • EX6100 | • R6220 | • WN3000RPv3 | |
| • EX6150 | • R7500 | • WNA1000Mv2 | |
| • EX6200 | • R8000 | • WNDR3400v3 | |

The device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with IC multi-transmitter product procedures.

The following statement applies to these products:

- A6210
- AC785S
- C7000BMX
- D6000
- D6010
- D3600
- D3610
- D6200V2
- D7800
- DST6501
- EX3700
- EX6100
- EX6120
- EX6150
- EX6200
- EX7000
- HMNC100
- JR6150
- PLW1000
- PLW1010
- PLW1000v2
- PLW1010v2
- R6050
- R6200v3
- R6220
- R7300
- R7500
- R8000
- R8500
- STS7000
- WAC120
- WN2500RP
- WNDR3400v3
- WNDAP350
- WNDAP360
- WNDAP620
- WNDAP660
- WNDR3700v5
- WNDR4300v2
- WNDR4500v3

The device for the band 5150-5350 MHz is only for indoor usage to reduce potential for harmful interference to co-channel mobile satellite systems.

DFS warning:

NETGEAR DFS (Dynamic Frequency Selection) products that operate in the bands 5250- 5350 MHz, 5470-5600MHz, and 5650-5725MHz:

The following statements apply to this product:

- A6210
- C6300BD
- C6300XB3
- C7000BMX
- EX6100
- HMNC100
- R7500
- R8000
- STS7500
- WAC120
- WNDR3100v3
- WNDR3400v3
- WNDR4300v2
- WNDR4500v3

The maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz to comply with the EIRP (Equivalent Isotropically Radiated Power) limit.

Users should also be advised that high-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

The following statement applies to this product:

- WAC120
- WNDA3100v3

The maximum antenna gain permitted for devices in the band 5725-5825 MHz shall comply with the EIRP (Equivalent Isotropically Radiated Power) limits specified for point-to-point and non point-to-point operation as appropriate.

SAR warning:

NETGEAR product is compliant with SAR for general population/uncontrolled exposure limits in IC RSS-102 and has been tested in accordance with the measurement methods and procedures specified in IEEE 1528. Maintain at least 20mm distance for body-worn condition.

NOTE IMPORTANTE: Déclaration d'exposition aux radiations

Produits NETGEAR sont conformes aux limites IC d'exposition aux rayonnements définies pour un environnement non contrôlé. Produits NETGEAR doivent être installés et utilisés avec distance minimum de 20cm entre le radiateur et votre corps.

La déclaration suivante s'applique à ce produit :

- R8000

Ce produit est conforme aux limites IC d'exposition aux rayonnements définies pour un environnement non contrôlé. Produits NETGEAR doivent être installés et utilisés avec un minimum de 60cm entre le radiateur et votre corps.

Produits NETGEAR sont conformes à la limite d'exposition aux RF portable Canada établies pour un environnement non contrôlé et sont sans danger pour le fonctionnement prévu comme décrit dans le manuel. Poursuite de la réduction de l'exposition aux RF peut être réalisé en gardant le produit autant que possible de votre corps ou par le réglage du dispositif à une puissance de sortie inférieure si une telle fonction est disponible

Pour les produits disponibles aux États-Unis / Canada du marché, seul le canal 1 à 11 peuvent être exploités. Sélection d'autres canaux n'est pas possible.

La déclaration suivante s'applique à ces produits:

- | | | | |
|------------|--------------|--------------|--------------|
| • C7000BMX | • EX7000 | • STS7000 | • WNDR3700v5 |
| • D6000 | • HMNC100 | • VEGN2200 | • WNDR4300v2 |
| • D6010 | • JNR1010v2 | • VMB3000 | • WNDR4500v3 |
| • D3600 | • JR6150 | • VMC3010 | • WNR1000v4 |
| • D3610 | • JWNR2000v5 | • VMC3030 | • WNR2010 |
| • D6200V2 | • JWNR2010v5 | • WN370 | • WNR2020 |
| • EX2700 | • R6050 | • WN2500RP | • WNR614 |
| • EX3700 | • R6200v3 | • WN3000RPv2 | • WNR618 |
| • EX6100 | • R6220 | • WN3000RPv3 | |
| • EX6150 | • R7500 | • WNA1000Mv2 | |
| • EX6200 | • R8000 | • WNDR3400v3 | |

Cet appareil et son antenne (s) ne doit pas être co-localisés ou fonctionnement en association avec une autre antenne ou transmetteur.

La déclaration suivante s'applique à ces produits:

- | | | | |
|------------|-----------|-------------|--------------|
| • A6210 | • EX3700 | • PLW1000v2 | • WAC120 |
| • AC785S | • EX6100 | • PLW1010v2 | • WN2500RP |
| • C7000BMX | • EX6120 | • R6050 | • WNDR3400v3 |
| • D6000 | • EX6150 | • R6200v3 | • WNDAP350 |
| • D6010 | • EX6200 | • R6220 | • WNDAP360 |
| • D3600 | • EX7000 | • R7300 | • WNDAP620 |
| • D3610 | • HMNC100 | • R7500 | • WNDAP660 |
| • D6200V2 | • JR6150 | • R8000 | • WNDR3700v5 |
| • D7800 | • PLW1000 | • R8500 | • WNDR4300v2 |
| • DST6501 | • PLW1010 | • STS7000 | • WNDR4500v3 |

Les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

DFS avertissement:

Sélection dynamique de fréquences (DFS) pour les dispositifs fonctionnant dans les bandes 5250-5350 MHz, 5470-5600 MHz et 5650-5725 MHz :

Les instructions suivantes s'appliquent à ce produit:

- | | | |
|------------|--------------|--------------|
| • A6210 | • R7500 | • WNDR4300v2 |
| • C6300BD | • R8000 | • WNDR4500v3 |
| • C6300XB3 | • STS7500 | |
| • C7000BMX | • WAC120 | |
| • EX6100 | • WNDR3100v3 | |
| • HMNC100 | • WNDR3400v3 | |

Le gain maximal d'antenne permis pour les dispositifs utilisant les bandes 5250-5350 MHz et 5470-5725 MHz doit se conformer à la limite de p.i.r.e.

De plus, les utilisateurs devraient aussi être avisés que les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5250-5350 MHz et 5650-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

Le gain d'antenne maximum autorisé pour les appareils dans la bande 5725-5825 MHz pour se conformer à la pire limites fixées pour les opérations se point- à-point et non point- à-point, le cas échéant.

La déclaration suivante s'applique à ce produit;

- WAC120

Avertissement SAR:

NETGEAR est le respect de SAR pour la population générale / limites d'exposition incontrôlée de CNR-102 et a été testé en conformité avec les méthodes et procédures de mesure spécifiées dans la norme IEEE 1528. Maintenir au moins 20mm à distance pour la condition physique-garde.

Interference Reduction Table

The table below shows the Recommended Minimum Distance between NETGEAR equipment and household appliances to reduce interference (in feet and meters).

Household Appliance	Recommended Minimum Distance (in feet and meters)
Microwave oven	30 feet / 9 meters
Baby monitor – analog	20 feet / 6 meters
Baby monitor – digital	40 feet / 12 meters
Cordless phone – analog	20 feet / 6 meters
Cordless phone – digital	30 feet / 9 meters
Bluetooth device	20 feet / 6 meters
ZigBee	20 feet / 6 meters

Mexico NOM Warning

The following statement applies to these products:-

- AVM4000C
- VML4030

La operación de este equipo está sujeta a las siguientes dos condiciones:

(1) es posible que este equipo o dispositivo no cause interferencia perjudicial y (2) este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.

USA Safety Notices

The following statement applies to this product:

- VMC3040S

This ITE is to be connected only to PoE networks without routing to the outside plant.

The following statement applies to this product:

- RR2312
- RR3312
- RR4312

This equipment is intended only for installation in a Restricted Access Location and it is only for qualified service personnel.

Japan Notices VCCI

This information in this section applies to products bearing the VCCI mark:



Class A ITE

この装置は、クラスA機器です。この装置を住宅環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI - A

Class B ITE

この装置は、クラスB機器です。この装置は、住宅環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。
取扱説明書に従って正しい取り扱いをして下さい。 VCCI - B

Japan Wireless Notice

この製品には、認証済みの無線機器を搭載しています。

Restriction of use 5GHz W52 and W53

電波法の規定により 5GHz 帯 (W52、W53) は屋内使用に限ります。

South Korea Notices

The information in this section applies to products bearing the KCC mark:



알림 : 대한민국으로 배송되는 제품인 경우

Class A : A 급 기기 (업무용 방송통신기자재)	이 기기는 업무용(A 급) 전자파적합기기로서 판매자 또는 사용자는 이 점을 주의하시기 바라며, 가정외의 지역에서 사용하는 것을 목적으로 합니다.
Class B : B 급 기기 (가정용 방송통신기자재)	이 기기는 가정용(B 급) 전자파적합기기로서 주로 가정에서 사용하는 것을 목적으로 하며, 모든 지역에서 사용할 수 있습니다.

For Wireless Equipment with 2,400~2,483.5MHz and/or 5725~5850MHz (The Radio Equipment Rule, Article 98, Item No.)

해당 무선설비가 전파혼신 가능성이 있으므로 인명안전과 관련된 서비스는 할 수 없음

(This wireless/radio equipment can't be used for services of safety in human life because it has a possibility of radio interference)

Class A caution statement

사용자안내문	이 기기는 업무용 환경에서 사용할 목적으로 적합성평가를 받은 기기로서 가정용 환경에서 사용하는 경우 전파간섭의 우려가 있습니다.
Class A: Caution Statement	In case this device is used in a domestic environment, there is a risk of radio interference because this device has registered for EMC for business use.

Taiwan WWAN Wireless Notice

The information in this section applies to products bearing the Taiwan National Communications Commission mark:



This telecom equipment has complied with NCC regulations.

第十二條→經型式認證合格之低功率射頻電機，非經許可，公司，商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條→低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

在 5.25-5.35 頻帶內操作之無線資訊傳輸設備，限於室內使用。

無線資訊傳輸設備忍受合法通信之干擾且不得干擾合法通信；如造成干擾，應立即停用，俟無干擾之虞，始得繼續使用。

無線資訊傳輸設備的製造廠商應確保頻率穩定性，如依製造廠商使用手冊上所述正常操作，發射的信號應維持於操作頻帶中。

不致造成違反低功率電波輻射性電機管理辦法之所有控制、調整及開關之使用方法

對任何可能造成違反管理辦法規定之調整予以警告，或建議由具有發射機維修專長之技術人員執行或由其直接監督及負責

對任何可能造成違反管理辦法之零件(晶體、半導體等)置換之警告

下列聲明適用於本產品：

R7500

電磁波曝露量 MPE 標準值 $1\text{mW}/\text{cm}^2$ ，送測產品實測值為： $0.783945\text{ mW}/\text{cm}^2$

WND930

本器材須經專業工程人員安裝及設定，始得設置使用，且不得直接販售給一般消費者。

「電磁波曝露量MPE標準值 $1\text{mW}/\text{cm}^2$ ，本產品使用時建議應距離人體 28 cm」

The following statement applies to Class A products:-

警告使用者：甲類資訊技術設備，於居住環境中使用，可能會造成射頻擾動，在此種情況下，使用者會被要求採取某些適當的對策。

Taiwan NCC Notice

NCC general statement:

應避免影響附近電達系統之操作

NCC MPE statement:

SRR60, SRS60:

本產品電磁波暴露量(MPE) 標準值 $1\text{mW}/\text{cm}^2$ ，送測產品實測值為 $0.524\text{ mW}/\text{cm}^2$ ，建議使用時至少距離人體 28cm

RBR20, RBS20

本產品電磁波暴露量(MPE) 標準值 $1\text{mW}/\text{cm}^2$ ，送測產品實測值為 $0.357\text{ mW}/\text{cm}^2$ ，建議使用時至少距離人體 20cm

RBS50Y

本產品電磁波暴露量(MPE) 標準值 $1\text{mW}/\text{cm}^2$ ，送測產品實測值為 $0.581\text{ mW}/\text{cm}^2$ ，建議使用時至少距離人體 27cm

Thailand Notice

The information in this section applies to products approved by the Thailand National Communications Commission:

เครื่องโทรคมนาคมและอุปกรณ์นี้ มีความสอดคล้องตามข้อกำหนดของ กทช.

China Notices

The information in this section applies to products bearing the Chinese Compulsory Certification Mark:



This device complies with the requirements in China for Safety and Quality

此为 A 级产品，在生活环境中该产品可能会造成无线电干扰，在这种情况下可能需要用户对其干扰采取切实可行的措施。

The following statement applies to products for use at altitudes >2000m:-



标识的含义解释：仅适用于海拔 2000m 以下地区安全使用。

The following statement applies to products which may be used in tropical climates:-



标识的含义解释：仅适用于非热带气候条件下安全使用

Australia and New Zealand Notices

The information in this section applies to products bearing the Australia C-Tick and A-Tick Compulsory Marks and Regulatory Compliance Mark (RCM):



This device equipment complies with the Australian and New Zealand regulatory approvals requirements.

Warning

NETGEAR Class A products that may be utilized in domestic/residential environments may cause radio interference in which case the user may be required to take adequate measures.

Germany Notices

The following warning applies to Powerline products with pass-through sockets:

Nicht hintereinander stecken.

Russia Notices

NETGEAR products which ship to the Eurasian Customs Union are assessed against the relevant requirements and are labeled with the EAC mark as shown below:-

Продукты NETGEAR, которые поставляются в Евразийский таможенный союз, оцениваются с учетом соответствующих требований и помечены знаком ЕАС, как показано ниже:-



The following warning applies to 5GHz wireless products for use outdoors in Russia:

Внимание: перед использованием точки доступа вне помещений убедитесь, что радиомодуль, работающий в диапазоне 5 ГГц, отключен!

Использование диапазона 5 ГГц вне закрытых помещений допускается только при наличии разрешения государственных органов, осуществляющих надзор в сфере использования радиочастот.

Получите разрешение на использование частот в диапазоне 5 ГГц, а также при необходимости другие документы в соответствии с действующим законодательством, перед установкой точки доступа вне помещений..

LITHIUM ION AND LITHIUM METAL BATTERY PACKAGING LABEL REQUIREMENTS

Due to concerns about products shipping with Li-Ion and Li-Metal batteries, the UN developed guidelines regarding the proper testing, packaging, and labeling of these devices.

Li-Ion and Li-Metal Batteries

Li-Ion batteries are generally rechargeable, while Li-Metal batteries are generally non-rechargeable. Both types of batteries have the potential to create a fire hazard if damaged or improperly packaged.

Labeling Requirements for Li-Ion and Li-Metal Batteries

The required labels must be present on the pallets and master carton accompanied by a document such as an airway bill or other documents that indicates the following (Lithium Battery Guidance Document 2014):

- The package contains lithium ion cells or batteries;
- The package must be handled with care and that a flammability hazard exists if the package is damaged
- Special procedures that should be followed in case the package is damaged
- Contact information

To conform to IATA's Dangerous Good Regulations, different labels apply to different Watt-hour for Li-Ion and different mass for Li-metal. The calculation for Watt-hours is:

$$\text{Nominal Voltage} \times \text{Nominal Capacity (Ah)} = \text{Watt-hours}$$


The volts and ampere can be found in the batteries data sheet.

Please see Table below for which proper label to use.

Required Labels for Battery Transportation (UN Manual of Tests and Criteria Part III Subsection 38.3)			
Li-Ion Battery Label Requirements			
Shipment of Battery	Wh (Watt-hour)	Labels	Limit Battery Weight / Package
Contained in Equipment (installed in the equipment)	Equal to or Less than 100Wh	Figure 12 or 13	PAX = 5 kg CAO = 5kg
Alone	Equal to or Less than 100Wh	Figure 12 or 13	Equal to or less than 2.7 Wh=2.5 kg OR Greater than 2.7Wh but equal to or less than 100Wh = 2 batteries
Packed separately with the Equipment (not installed in the equipment)	Equal to or Less than 100Wh	Figure 12 or 13	PAX = 5 kg CAO = 5kg
Li-Metal Battery Label Requirements			
Shipment of Battery	Mass of Lithium Metal of the battery	Labels	Limit Battery Weight / Package
Contained in Equipment (installed in the equipment)	Equal to or Less than 2g	Figure 12 or 13	PAX = 5 kg CAO = 5kg
Shipment of Battery	Mass of Lithium Metal of the battery	Labels	Limit Battery Weight / Package
Alone	Equal to or Less than 2g	Figure 12 or 13	Equal to or less than 0.3g=2.5kg OR Greater than 0.3g but equal to or less than 2g = 2 batteries
Packed separately with the Equipment (not installed in the equipment)	Equal to or Less than 2g	Figure 12 or 13	PAX = 5 kg CAO = 5kg

If Li-Ion Battery is more than 100Wh and Li-Metal has a Lithium mass of more than 2g, please consult Environmental Compliance Engineer for proper label to be used.

Label content requirement for shipping batteries:

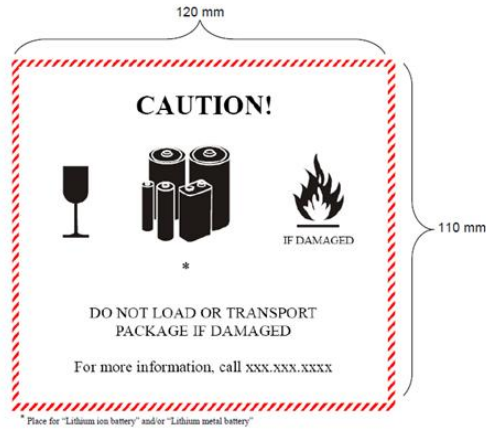

Label content for shipping smaller packages for batteries:



Exemptions for labeling

A lithium ion battery handling label is not required when a package contains not more than 2 batteries contained in the equipment. Lithium metal batteries contained in the equipment do not need any lithium battery handling label.

Product disposable warning

NETGEAR products must not be disposed of together with domestic waste. NETGEAR products must be disposed of at a location that is authorized to recycle electrical and electronic appliances. By collecting and recycling waste, you help save natural resources and make sure that the product is disposed of in an environmentally friendly and healthy way.

Tuner Cable and Battery Safety Information

Tuner Cable:

This reminder is provided to call the CATV systems installer's attention to Section 820-93 of the National Electric Code which provide grounding and , in particular, specify that the Coaxial cable shield shall be connected to the grounding system of the building, so close to the point of cable entry as practical.

Battery Caution:

RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE.

DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

Powerline Device Safety and EMC Information

Follow these safety guidelines to ensure your own personal safety and to help protect your system from potential damage:

- For national approvals (approval schemes other than CB), relevant national standards for plug, socket-outlet, and direct plug-in units (for example, US) shall also be consulted while testing and approving such products according to the national standards.
- Check the electrical current for any device plugged into the filtered AC socket. Do not exceed home and product outlet ratings and electrical requirements.
- The socket-outlet shall be installed near the equipment and be easily accessible
- Only power cords and allowed to be inserted into the filtered AC socket; no other equipment with a direct plug-in is allowed. Power cords needs to be a maximum of 1m long and a minimum of 0.75mm² of cross-sectional area.
- Do not plug devices into the Powerline Pass Thru Adapter filtered AC outlet that exceed the product ratings. The output voltage of the filtered AC outlet is the same as the power outlet that the Powerline Pass Thru Adapter is plugged into. To help avoid damaging your system, be sure that the attached devices are electrically rated to operate with the power available in your location.
- If the input AC voltage is less than 100 Vac, the device plugged into the filtered AC socket of the Powerline Pass Thru Adapter might not perform as well as expected.
- **DO NOT PLUG MAJOR HOME APPLIANCES** into the filtered AC socket or into an attached power strip. The device is not intended to be used with home appliances such as air conditioners, power tools, space heaters, fans hair dryers, ovens, or refrigerators.
- Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate.
- Do not service any product except as explained in your system documentation.
- Opening or removing covers that are marked with the triangular symbol with a lightning bolt can expose you to electrical shock. Only a trained service technician should service components inside these compartments.
- Use the product only with approved equipment.
- Allow the products to cool before removing covers or touching internal components.
- To help avoid damaging your system, be sure that the voltage selection switch (if provided) on the power supply is set o match the power available at your location:
 - 110 volts (V), 60 hertz (Hz) in most of North and South America and some Far Eastern countries such as south Korea and Taiwan
 - 100, 50 Hz in eastern Japan and 100, 60Hz in western Japan
 - 230v, 50Hz in most of Europe, the Middle East, and the Far East
- The peripheral power cables are equipped with three-prong plugs to help ensure proper grounding. Do not use adapter plugs or remove the grounding prong from a cable.
- Observe extension cable and power strip ratings. Make sure that the total ampere rating of all products plugged into the extension cable or power strip does not exceed 80 percent of the ampere ratings limit for the extension cable or power strip.
- To help protect your system from sudden, transient increases and decreases in electrical power, use a surge suppressor, line conditioner, or uninterruptible power supply (UPS).

NETGEAR Powerline products provide an alternative method to extend the network using existing electrical wiring. In case of interference issues, please follow these guidelines:-

- Plug Powerline adapters into outlets away from cell phone chargers and cordless telephone basestations
- Ensure Powerline adapters are located away from equipment with a motor (e.g. fan, vacuum cleaner, etc.)
- Ensure Powerline adapters are located away from audio devices such as radio receivers

Rack Mount Safety Instructions

This information applies to the installation of NETGEAR rack mount products

- **Ambient operating temperature.** If the switch is installed in a closed or multiunit rack assembly, the ambient operating temperature of the rack environment might be greater than the ambient temperature of the room. Therefore, consider installing the equipment in an environment compatible with the maximum rated ambient temperature.
- **Reduced airflow.** Mount the equipment into a rack so that the amount of airflow required for safe operation is not compromised.
- **Mechanical loading.** Mount the equipment into a rack so that a hazardous condition does not arise due to uneven mechanical loading.
- **Circuit overloading.** Consider the equipment's connection to the power supply circuitry and the effect that any possible overloading of circuits might have on overcurrent protection and power supply wiring. Consider equipment nameplate ratings when addressing this concern.
- **Reliable grounding.** This product requires reliable grounding to be maintained at all times. To ensure this, ground the rack itself. Pay particular attention to power supply connections other than the direct connections to the branch circuit (for example, the use of power strips).
- **Clearance.** Leave enough clearance in front of the rack (about 25 inches) to enable you to open the front door completely and in the back of the rack (about 30 inches) to allow for sufficient airflow and ease in servicing.

Wall Mount Safety Instructions

This information applies to the installation of the NETGEAR wall mount products GSS108EPP and GS408EPP:

- Power supply cord must not be attached to the building surface, nor run through walls, ceilings, floors and similar openings in the building structure.

Power Over Ethernet (PoE) Safety Instructions

This information applies to the installation of the NETGEAR PoE product GS408EPP:

- The PoE product is to be connected only to PoE networks without routing to the outside plant.

NETGEAR, Inc., 350 E. Plumeria Avenue, San Jose, CA 95134 USA



203-111725-31