
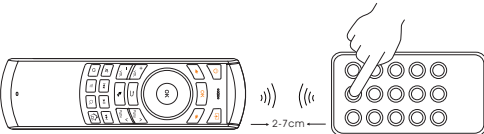


Multifunction keyboard Installation & User Manual VER 1.9 Part no : 06325207309	Overview Thank you for purchasing this mini wireless QWERTY keyboard, air mouse, IR remote combo with Audio feature. You can use it for emails,to enjoy your favorite games. It is compatible with HTPC,TV BOX running Android systems.It also supports the Sony Playstation3. Use it with your HTPC on your Sofa or browse the internet in the most comfortable fashion. This is also a universal infrared remote controller with programming feature. The remote control has a powerful ability to identify unknown format with a wide and reliable range of programming formats which means it is compatible with 99.9% TV infrared remote controls in the market. After programming, the signals can be transmitted with high precision with a wide learning range(20kHz~60kHz) and a small frequency error(± 1kHz).	Product Image  Images are for reference only	Package contents · Multifunction keyboard · USB Wireless Receiver · User Manual · USB charging cable System Requirements · HID compatible device · USB port · Windows 2000 · Windows XP · Windows Vista, Windows CE, Windows 7,Windows 8 · Linux (Debian-3.1,Redhat-9.0,Ubuntu-8.10,Fedora-7.0 tested) · Android OS (With standard USB interface) Specifications · Receiver (dongle): Nano style · Connect port: With USB2.0 above · RF mode: 2.4Ghz GFSK · Transmission distance: Up to 10 meters	· Transmission Power: Less than +4db · Power supply: Rechargeable 350mAh polymer Lithium-ion battery · Charging voltage: 4.4V ~ 5.25V · Charging current: 300mA · Sleeping Current class1: 72uA · Operation Voltage: 3.7V · Operating Current: 22mA · Product weight: 100g · Product Size: 170mm*49mm*16mm Installation Open the gift box and pick up the USB receiver. Insert the USB Receiver into an available USB port.Turn on the keyboard. The keyboard will be found automatically. No further actions are required.No further actions are required – you are now ready to use your keyboard! NOTE : USB cable can be used for battery charging.	Using Air mouse Air mouse function relies on specific some to activate. In the activation status, the mouse will follow your gestures in any direction, to help you perform the moving, clicking, dragging,etc. In any status, you can use the "Lock" button to lock and unlock the air mouse. You will enjoy more convenience and control on-screen menu easier. Audio Feature (Optional) Audio feature configuration is available for this device, including MIC, Speaker, Headphone port, etc. Particularly, users can switch the voice broadcasting mode between terminal and keyboard by Audio Switch. Under some systems, the audio feature requires manual configuration. Auto sleep and wake up feature The keyboard also has an auto sleep and wake up feature.Within three minutes, if no key is pressed, the	keyboard will automatically go into sleep mode. In sleep mode, all lights are extinguished. Users can press any key to wake up the device. Switching off the keyboard after use After use, push the switch to "OFF" position. This turns off the keyboard. The USB receiver does not need to be pulled out from the PC. You can use it directly next time. Charging the battery The device uses built-in polymer lithium-ion battery. Please use only approved data cables and chargers. Note: Fully charge the unit before initial operation. This device can be used when charging, but charging time will be extended. When the battery is low, the low-voltage light will blink to warn the user. The unit will be automatically turned off if the battery has been depleted.
---	--	--	--	--	---	--

■ How to make IR programming? 1.Long press the air mouse keyboard button that requires programming 3 seconds, LED light will blink within 3 seconds and be lighted after 3 seconds.  2. Align the original IR remote lamp with the air mouse keyboard IR lamp at a distance of 2-7cm and short press the corresponding button within 10 seconds. If the programming	is made successfully, LED light blinks 2 seconds and exits programming status. You can check whether the programming is successful. If not, please repeat the above operation.  When you open the package and begin to use the keyboard, if the blue LED can not be lighted, you can operate as follows to pair (this operation is suitable for situation where a new USB receiver requires pairing) Step1: Keep your PC on. Step2: Press the "Esc" without releasing. Step3: Power on the keyboard and release the "Esc" immediately.	Step4: Plug the USB receiver into the USB port of your PC. Wait a moment. The keyboard will be paired automatically. Then you could try if it works well. 1.Air Mouse A: Cursor Drift Problem: cursor moves out of control Possible problem: signal interference/environment problem Solution: press ESC + ESC without releasing and put the keyboard on the desk horizontally. The LED will flash fast and cursor will not move in the screen. This means the calibration is finished. You can repeat the operation if the calibration is not successful. B: Lock air mouse(enable or disable air mouse) In activation status, press to lock. You can press LOCK again to unlock. C: DPI: Press F6 + DOWN to adjust DPI.	2. Audio feature (only for the audio version) A: the audio version supports audio feature. If there is no headphone plugged in the keyboard headphone jack, only the microphone can work. When you plug in the headphone, you can press F6 + F7 to use headphone and microphone simultaneously. B: only when your device supports audio feature, the audio feature can be used. 3.Shortcut keys A F6 + (Q,W,E,R,T,Y,U,I,O,P) = 1 TO 0 B OK When air mouse is activated, it works as left mouse; when air mouse is locked, it works as ENTER Warning ·When charging finishes, pull out the charging cable. ·Never try to open or repair this product yourself. ·Keep this device away from fluids,such as water.	Maintenance ·Do not attempt to disassemble the device or replace the rechargeable battery. Doing so will void the warranty. ·The battery will discharge if it is stored for a long time without operation. operation. ·Use the specified charger. Disconnect the device when the battery is fully charged. Overcharging the battery will shorten the battery life. ·Do not expose the device in extreme heat or cold environment, which will shorten the battery life. Disposal Always dispose the used appliance at a recycling centre. Do not dispose the used appliance together with the household waste. Note: Due to the adoption of 2.4G radio waves technology to communicate, the connection can be subject to interference from obstacles, lik e walls, metals, or other	electronic devices. Please keep the keyboard and the dongle clear of obstacles. In line with the policy of continued development, the manufacturer reserves the right to amend the specifications without prior notification. The illustrations in the user manual are for reference only. Please operate according to the real design.	FCC Warning This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. -Consult the dealer or an experienced radio/TV technician for help. NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. FC CE RoHS THANKS FOR READING
---	--	--	--	--	--	--

尺寸：85*85mm
K25中性说明书
单黑7折页