



Wireless Security Solutions



Available for...	
<input checked="" type="checkbox"/>	GE
<input checked="" type="checkbox"/>	Honeywell
<input checked="" type="checkbox"/>	2GIG
<input checked="" type="checkbox"/>	DSC

RE113 GE-Compatible Carbon Monoxide Sensor

Features

- Senses Carbon Monoxide per UL2034
- Sleek design
- Cover tamper.
- Strong, reliable RF signal.
- 3-5 year battery life on 3 Panasonic LR6-AA batteries.
- Low Battery indication.

Key Instructions

1. Attach the mounting plate
Locate on ceiling, or wall in or near sleeping areas.
Some local codes have specifications on CO detectors.
Mounting plate removes counter-clockwise
2. Insert batteries making sure of polarity. Close battery door.
3. Enroll sensor in panel:
 - a) Place panel in Learn Sensor mode
 - b) Press & release the black tamper switch
Sounder will continue beeping 1 time every minute, until sensor is mounted.
4. Testing:
 - a) Place panel in Sensor Test mode.
 - b) Press & hold TEST button until you the sounder beep.
 - c) Panel will indicate the sensor is open, and alarm will sound.

NOTE: Using CO-in-a-Can will cause an actual CO alarm.

Operation

Situation	Sounder	LED	Wireless Signal to Panel	Recovery
Actual CO	Temporal 3 (Loud) every 8 seconds	RED (pulsing)	Wireless CO Alarm Signal sent to panel	Silence an actual alarm with the TEST button. Sensor will return to alarm if CO is still present.
Press & hold Test Button	2 Temporal 4 Beeps (Loud)	RED, Green, & Orange (pulsing)	Sensor Alarm signal to panel	Sensor: Release button. Panel: Clear alarm condition.
Removing Sensor from Mount	1 Beep (Loud) once every minute	Orange (steady)	Tamper/Trouble signal to be sent to panel.	Restore by remounting.
Low Battery	1 beep (loud) every 60 seconds	Yellow (pulsing)		
Hourly Check			Supervisories, every hour	

Specifications


CO Sensitivity:	(UL2034)	
	70ppm	60-120 minutes
	150ppm	10-50 minutes
	400ppm	4-15 minutes
	(EN50291)	
	50ppm	60-90 minutes
	100ppm	10-40 minutes
	150ppm	3 minutes or less

CO Sensing Technology: Electrochemical

Alarm Sound: Temporal Three
 Replacement Battery: 3 Panasonic LR6-AA
 Temperature Range: 40 to 100 F (Long Term)
 Humidity: 0 - 95% Relative Humidity
 Housing dimensions: 4.9 inch diameter, 1.4 inch high

Specifications subject to change without notice.

Pictures

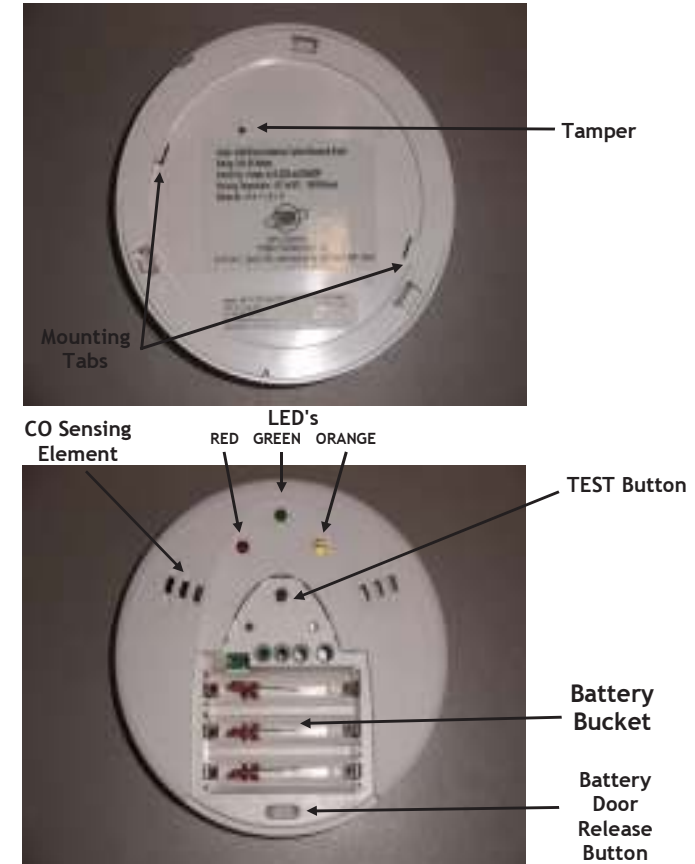

Opening Cover



1. Press Down
On
Release
Button

2. Slide
Battery
Door
Down



3. Notice
Battery
Polarity

Notices

“GE”, “Interlogix”, “Honeywell”, “2GIG”, “DSC”, “Napco” are trademarks owned by General Electric Company, UTC Fire & Security Americas Corporation, Inc., Honeywell International Inc., 2GIG Technologies Inc., Tyco Safety Products Canada LTD, Napco Security Systems respectively.

Resolution Products, Inc. products will function with one of either GE/Interlogix, Honeywell and 2GIG, DSC or Napco. However, no Resolution product is produced by, endorsed by, nor is officially associated with any of these other manufacturers. Resolution recommends verifying proper enrollment and operation, per control panel installation instructions, at installation.

Warranty

Resolution Products, Inc. will replace products that are defective in their first 5 years.

FCC Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.

FCC ID: U5X-RE113

IC Notice

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme avec d'Industrie Canada RSS standard exempts de licence. Son fonctionnement est soumis aux deux conditions suivantes:

1. Ce dispositif ne peut causer des interférences, et
2. Ce dispositif doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement du dispositif.

IC: 8310A-RE113