



Vehicle

Battery Installation

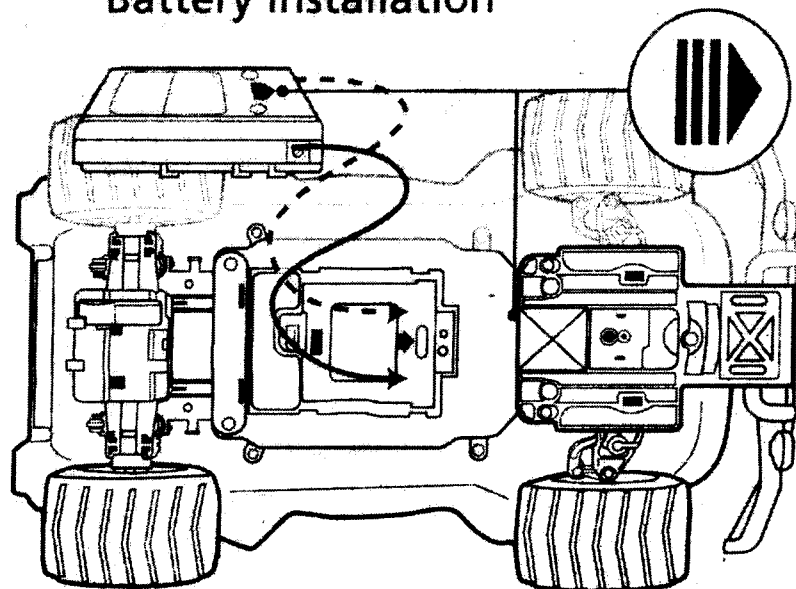


Locate and align arrow on battery pack with arrow inside battery compartment. Place battery pack in battery compartment and slide battery forward in direction of arrow. Once in place, turn locking tab to keep battery pack secure.

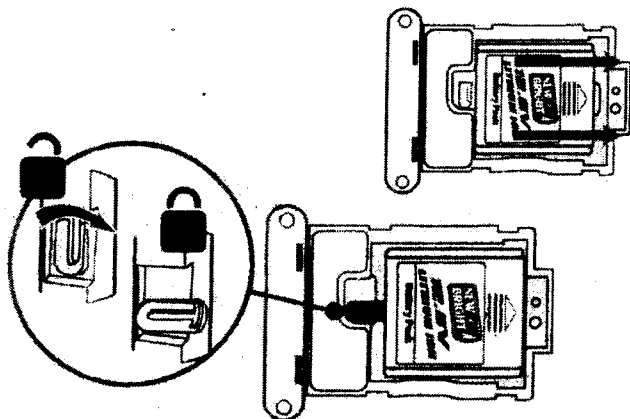

If battery pack is not completely in place locking tab will not fully turn.


Vehicle

Features and Functions



Power Button

Wheel Alignment*
(Steering Trim)

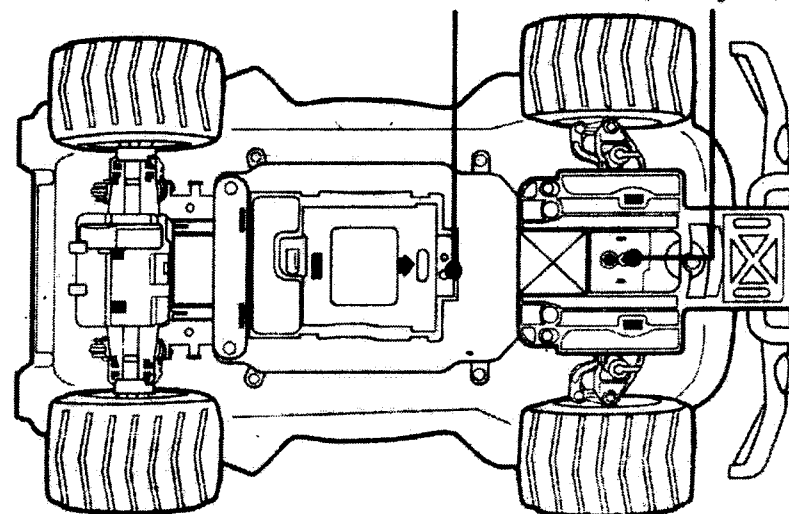


* If vehicle pulls to the left or right during forward driving the Steering Trim may need to be adjusted. The Steering Trim is located on bottom of chassis between the front wheels.


* Vehicle will Automatically shut down after 30 minutes of inactivity to save battery life.

Transmitter


Features and Functions




Left/Right Steering



Auto-Pairing Buttons

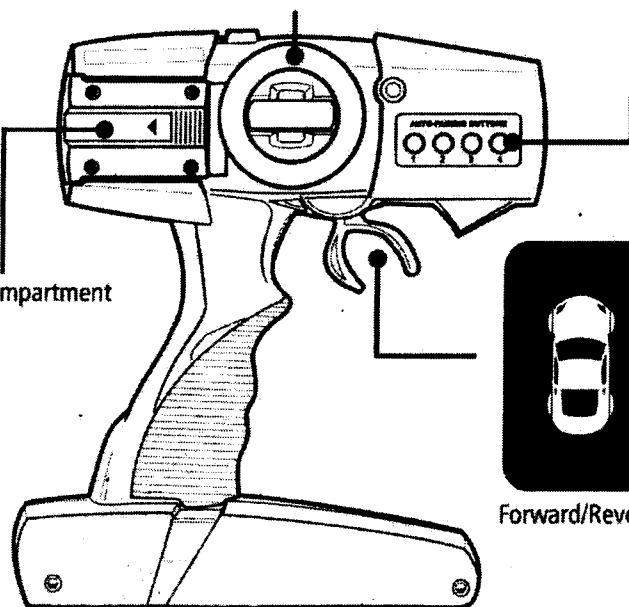

Battery Compartment



Forward/Reverse

Pairing vehicle and transmitter:


1. Locate Power Button on underside of vehicle.
2. Press button.
3. Hold transmitter within one foot of vehicle.
4. Press and hold one of the four Auto pairing buttons on the transmitter.
5. Front tires will slightly move left and right indicating the vehicle and transmitter have auto paired.

NOTE: Vehicle will Automatically shut down after 30 minutes of inactivity to save battery life.


Vehicle

Body Shell Removal

Locate the body pins on top of vehicle body.
Pull pins as shown and set aside.

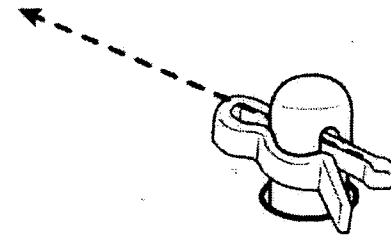


Lift and remove body shell.

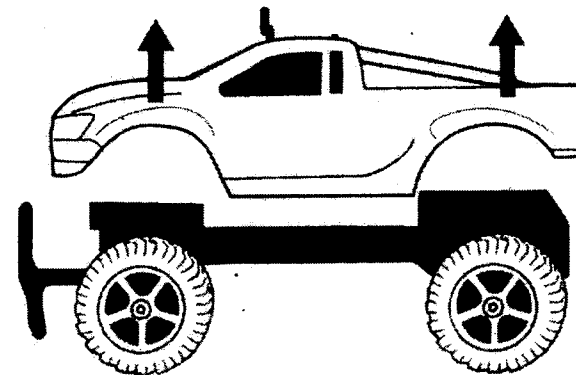

Transmitter


Battery Installation

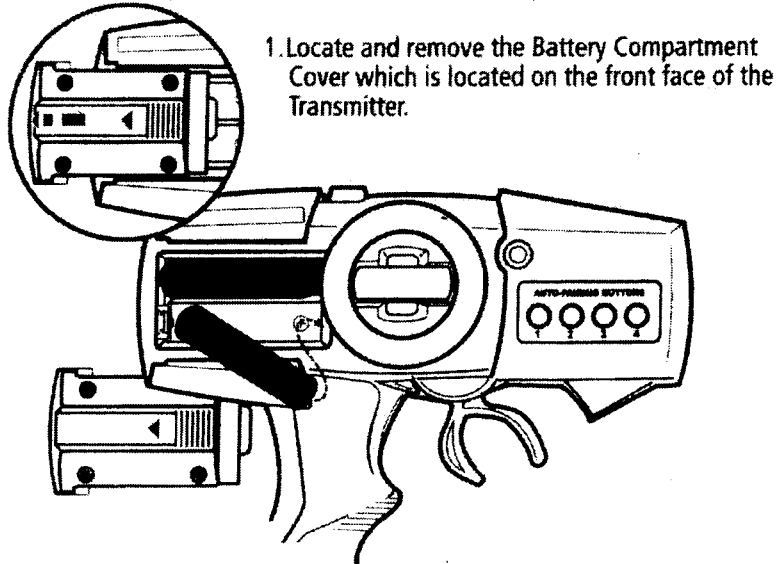

1. Locate and remove the Battery Compartment Cover which is located on the front face of the Transmitter.

2. Insert 2 "AA" size batteries.
Make certain the positive (+) and negative (-) markings on the batteries are in the same position as the positive (+) negative (-) markings inside the Battery Compartment.

3. Replace Battery Compartment Cover making certain that the Battery Compartment tab has "snapped" into the locked position.

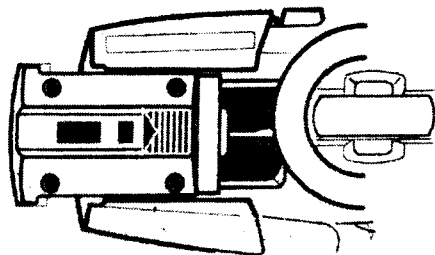

Note: When replacing Transmitter batteries:

- Do not mix old and new batteries.
- Do not mix alkaline, standard or rechargeable batteries.
- Use alkaline batteries only.

New Bright

Cautions

Do not recharge Battery Pack if it is hot or warm to the touch. Allow Battery Pack to cool before recharging. Recharging a hot or warm Battery Pack will shorten the life of the Pack.

Do not recharge a Battery Pack if it appears to be damaged or leaking.

Always unplug Charger when not in use.

Always remove Battery Pack from Battery Compartment when not in use.

Do not dispose batteries in fire. Leakage, explosion and personal injury may occur.

Dispose of Lithium Ion Battery Pack properly.

Do not attempt to disassemble Battery Pack or Charger.

Do not use Battery Charger for any use other than instructed in this booklet.

Only an adult should charge Batteries.

Do not attempt jumps or tricks with this vehicle.

Do not insert the antenna wire into electrical socket outlets.

FCC CAUTION:

The manufacturer is not responsible for radio interference caused by unauthorized frequency modification to this equipment. Such modifications could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.