



Thank you for choosing a premium New Bright product.

OWNER'S MANUAL

Please read and understand all precautions prior to use.

USA & Canada
30-Day Limited Warranty

New Bright Industries warrants to the original purchaser that this product will be free of defects in materials and workmanship for thirty (30) days from the date of purchase. In the event of such defect within the warranty period, New Bright will repair or replace the product at our sole discretion. This warranty does not cover damage resulting from unauthorized modifications, accident, misuse or abuse.

Should your item have a defect covered under this warranty, first call the toll free number listed below. Most problems can be resolved in this manner. If necessary, you will be issued a Return Authorization number (RA) and instructions on how to obtain a Product Return Form. The Product Return Form is to be used when returning a product to us (postage pre-paid and insured by the consumer).

When returning a defective product, please package the product, the Product Return Form and a copy of the dated sales receipt as proof of purchase. Be sure to mark the RA number on the Product Return Form. If the product is returned without a dated sales receipt, it will be excluded from coverage under this warranty. Please allow 4 to 6 weeks for delivery of repaired or replacement vehicles (depending on your location).

New Bright Industries' liability for defects in materials and workmanship under this warranty shall be limited to repair or replacement at our sole discretion. In no event shall we be responsible for incidental, consequential or contingent damages (except in those states that do not allow this exclusion or limitation).

Valid only in the USA & Canada.

Contact New Bright Industries Customer Service Toll Free at:
1-877-NBI-TOYS
(1-877-624-8697)
Monday through Friday, 8:00 AM to 5:00 PM Eastern Time

L837105617/JN153-13

New Bright

Table of Contents


- Section 1: Table of Contents**
- Section 2: Component Checklist**
- Section 3: Transmitter Features and Functions**
- Section 4: Battery Installation in Transmitter**
- Section 5: Vehicle Features and Functions**
- Section 6: Body Shell Removal**
- Section 7: Charging the Vehicle**
- Section 8: Auto Pairing**
- Section 9: Proper Use
Precautions and Care**
- Section 10: Trouble shooting and Support**
- Section 11: Cautions**

To
the
for


Vehicle

Component Checklist

To protect components from damage, they may be individually packaged and attached to the printed cardboard insert and out of plain sight. Please search printed cardboard insert for any items and remove all of the components listed below.

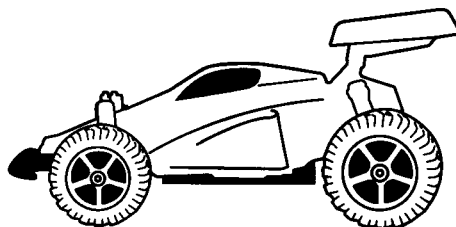


1

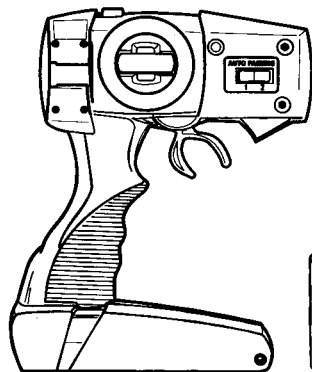


1



2



1




4

Transmitter

Features and Functions

3

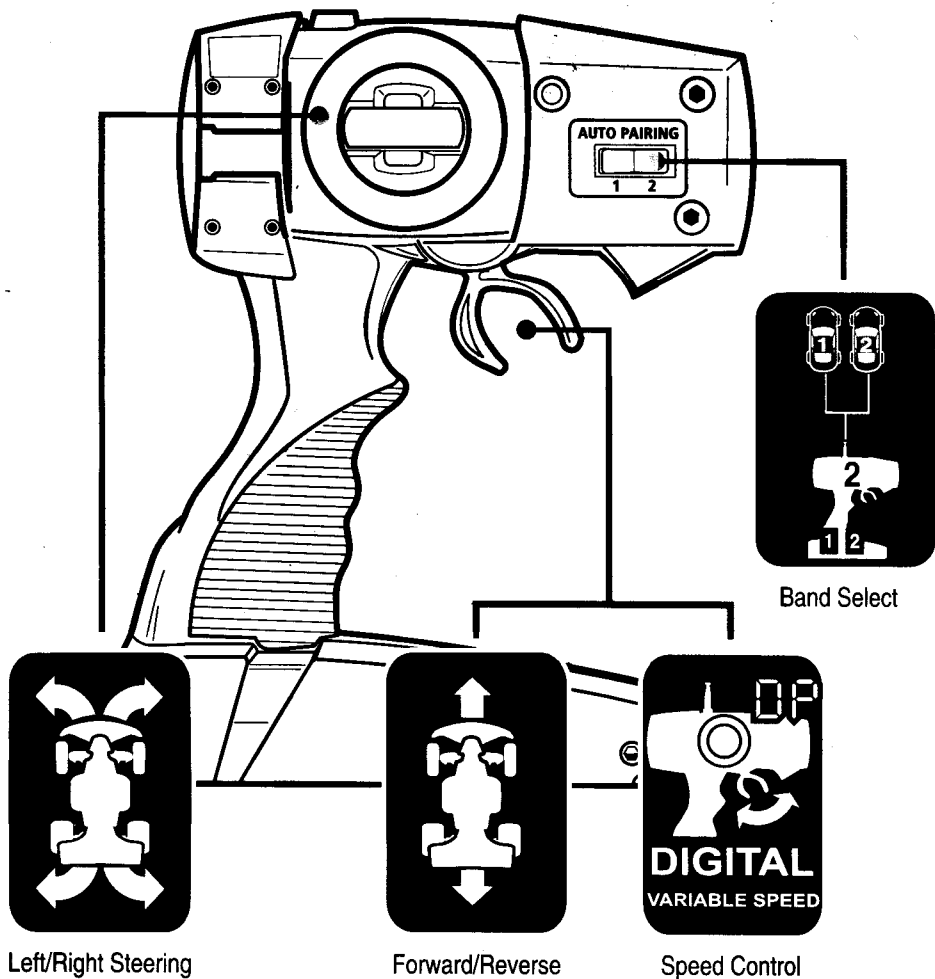


F.C.C. CAUTION:

The manufacturer is not responsible for radio interference caused by unauthorized frequency modification to this equipment. Such modifications could void the user's authority to operate the equipment.

Transmitter


Battery Installation

1. Locate and remove the Battery Compartment Cover which is located on the bottom of the Transmitter.

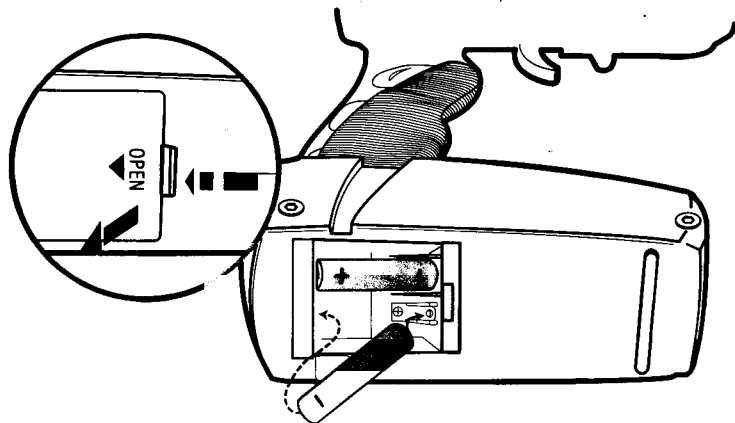

2. Insert 2 "AA" size batteries.

Make certain the positive (+) and negative (-) markings on the batteries are in the same position as the positive (+) and negative (-) markings inside the Battery Compartment.

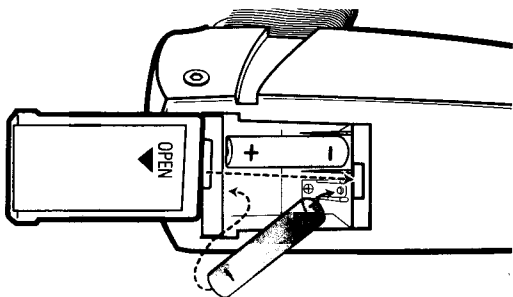

3. Replace Battery Compartment Cover making certain that the Battery Compartment tab has "snapped" into the locked position.

FOR BEST RESULTS:

1. Do not mix old and new batteries.
2. Do not mix alkaline, standard or rechargeable batteries.
3. Use alkaline batteries only.


Vehicle

Features and Functions

Power Button:

Press the Power Button (on the bottom of vehicle) until light blinks.

USB Charging Port
(see Section 7 for details)

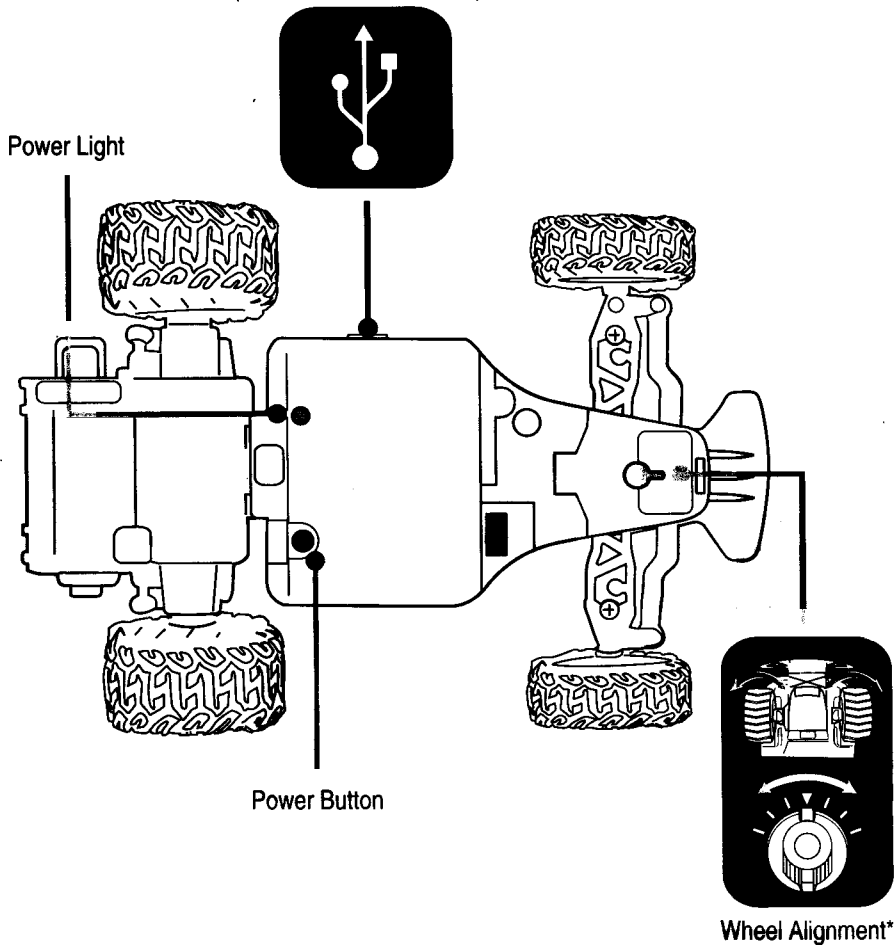


* If vehicle pulls to the left or right during forward driving the Steering Trim may need to be adjusted. The Steering Trim is located on bottom of chassis between the front wheels.

* Vehicle will Automatically shut down after 30 minutes of inactivity to save battery life.


Vehicle

Body Shell Removal

Locate the 2 body pins On top of the vehicle near the front and back.
Pull pins as shown and set aside.

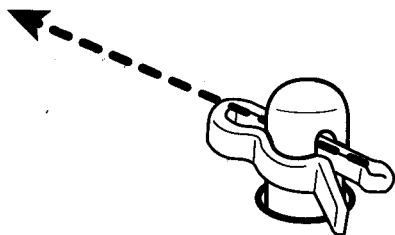


Lift and remove body shell. If vehicle has rear spoiler, it must be removed before lifting body shell.

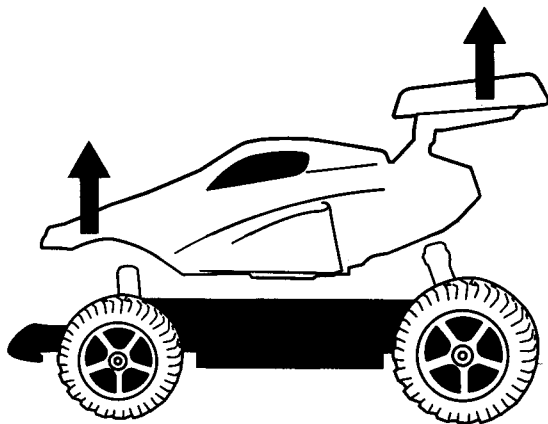


Vehicle

Charging the Vehicle


USB Charging
Port



1. Remove the vehicle body shell as shown in Section 6 and locate the USB charging port on the side of vehicle chassis.

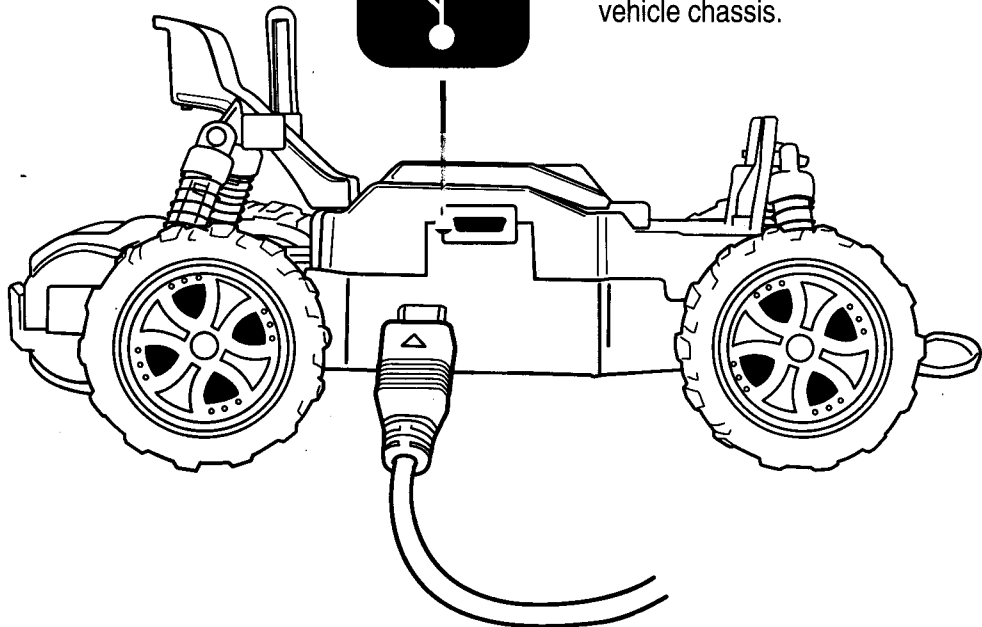

2. Insert small end of supplied USB cord into the port. The large end of the supplied cord can be plugged into any computer or USB outlet brick (not included).


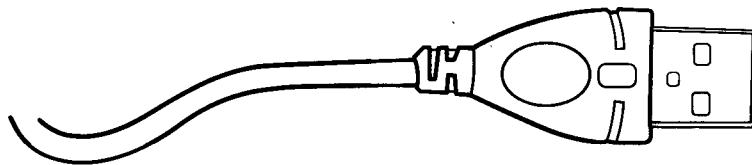


3. While charging, the LED under the car will be on. Once fully charged the LED will turn off. Charging is completed in approximately 2 hours. Remove and store cords when not in use. Replace body shell before driving.

Vehicle


Auto Pairing

3

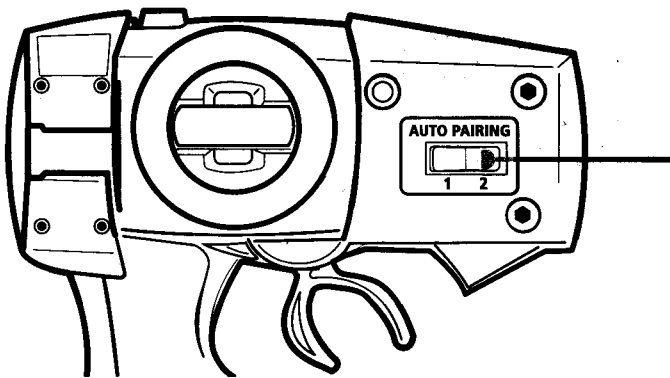

Band Select

1. Locate Auto Pairing Band Select switch on front of transmitter and select either Band 1 or 2.

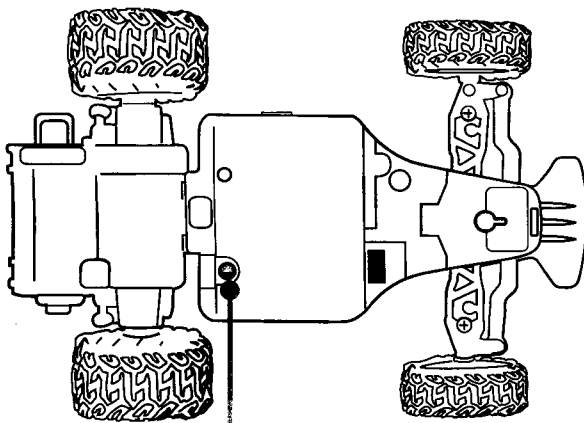



Power Button

2. Locate Power Button on underside of vehicle (shown in Section 5). Press Power button on the bottom of vehicle until light blinks.


3. Hold transmitter within one foot of vehicle. Press and hold either of the pairing buttons on the transmitter. Front tires will move slightly left and right indicating the vehicle and transmitter have auto paired.

Proper Use


Precautions and Care



Brush areas where dirt gets trapped.



Wipe body with a soft rag or cloth.



Do not use chemicals or water to clean.

Support

Trouble Shooting & Support

Problem - Vehicle does not move or moves slowly.

- Make certain there are fresh alkaline batteries in the transmitter and that they have been installed in the correct position.
- Are the positive (+) and negative (-) markings on the alkaline batteries in the same position as the positive (+) and negative (-) markings in the Transmitter Battery Compartment?
- Are the metal contact tabs touching, rusty or dirty in the transmitter?
- Has the vehicle been fully charged?
- Make certain the vehicle has been paired to a frequency band on the Transmitter.

Problem - Vehicle moves by itself or exhibits reduced range from the transmitter.

- Make certain there is no outside radio interference in your area. The best way to test this is to take the vehicle as far away from radio towers, electrical lines or tall buildings as possible to ensure no further radio interference will occur.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

New Bright

Cautions

Do not dispose batteries in fire. Leakage, explosion and personal injury may occur.

Dispose of all batteries properly.

Do not attempt jumps or tricks with this vehicle.

Do not use included USB cord for anything other than its intended purpose.

Only an adult should charge batteries.