

Geartist

Bluetooth Hi-Fi Dual Mode Transceiver

A professional audio input and output conversion solution for TV, computers, speakers, iPhone series, iPod, MP3/4 and car audio equipment.

New product With
apt-X

DESIGNED AND ASSEMBLED BY
RIITEK INTERNATIONAL LIMITED
www.riitek.com

IN LINE WITH THE POLICY OF CONTINUED DEVELOPMENT THE MANUFACTURER RESERVES THE RIGHT TO AMEND THE SPECIFICATIONS WITHOUT PRIOR NOTIFICATION. THE PICTURES AND DATA IN THE STYLEBOOK ARE CONSULT ONLY, FIT THESE FLUCTUATION, ACCORDING TO THE REAL OBJECT PLEASE.

FC CE RoHS Made In China

MODEL:RT419

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

◆ Features:

- **APT-X Decoding:** it is a Bluetooth Hi-Fi transceiver with built-in CSRAPT-X decoding technology, to realize CD audio effect for professional audio field by high quality audio converting and transmitting.
- **Bluetooth receiving:** Snitch "Mode" to "RX" and connect the audio cable to the home audio system's audio input interface, to playback the mobile phone music in the home audio system through Bluetooth.
- **Bluetooth transmitting:** snitch "Mode" to "RX" and connect the audio cable to your iPod, MP3, TV, Speaker audio output interface, to playback the music in the other speakers or earphones with Bluetooth feature.

◆ Packing contents:

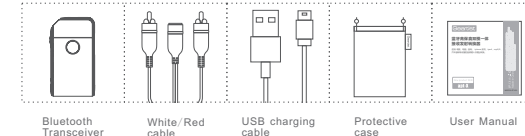


◆ Specification:

- **Product name:** Dual mode Bluetooth Transceiver
- **Main unit dimension:** 2.5*1.38*0.38in
- **Bluetooth version:** CSR Bluetooth 3.0
- **Audio decoding:** APT-X
- **Complies with/Supports:** A2DP/AVRCP/SBC/AAC/TTS
- **Dual mode audio:** TX, Bluetooth Transmitter; RX: Bluetooth Receiver
- **Transmission distance:** up to 10m
- **Input voltage:** 4.3V-5V
- **Working current:** ≦ 45mA
- **Audio cable interface:** TX/RX-3.5mm Adio Connector
- **NFC:** supported

Thanks for your purchase of our products. Geartist is dedicated to the development of digital products and fits them into the customers' digital life, to lead a digital era fashion and make the customers enjoy the latest and most convenient terminal experience. This Bluetooth audio Hi-Fi transceiver is a newly released easy-to-use and elegant Hi-Fi transmitting and receiving product, designed and developed based on "personality", supporting audio receiving, converting and transmitting. This allows you to enjoy the pleasant music anytime, anywhere.


◆ Product Interface:

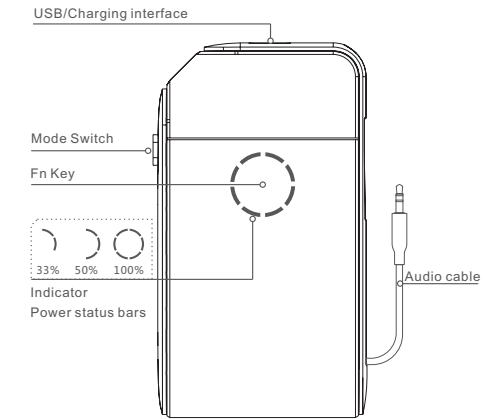

◆ Key and interface function:

OPERATION	FUNCTION
Long press Fn key 3 seconds	Power On/Off
Double click Fn key	When it is already connected with one device, another device can be added in connection.
Double click Fn key	When two devices are connected, disconnect the former paired device and enter pairing status
Mode Key TX	Bluetooth Transmitting
Mode Key RX	Bluetooth Receiving
USB/charging	The LED bar showing its current power levels in charging and all LED bars become on once fully charged.
Bluetooth device reconnection	All LED bars become lighted.
Enter pairing mode	LED bars flash clock-wisely.
Bluetooth pairing success	The corresponding LED bars representing power level become on (1/6,2/6...)
NFC	Built-in NFC sensing area

◆ Installation:

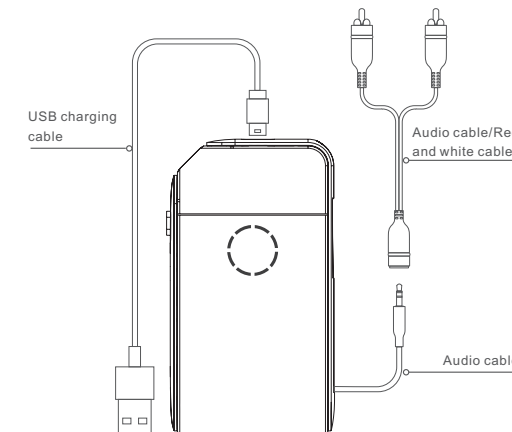

◆ Quick Start:

- Remove the product and accessories from the package**
1. Open the package and remove the transceiver main unit, white/red cable, protective case and user manual.
 2. Check whether all accessories are available. Read the user manual carefully, especially the key/interface function explanation .
 3. For any doubt, please refer to the FAQ part.
- Charging the device**
1. connect the USB charging cable Micro end to the device, and connect the other end to the computer USB interface or other chargers (output voltage is 5V)
 2. Power indication bar status: dynamically shows the current power status and all bars are turned on when fully charged.
 3. When the transceiver is charged fully, all the bars of the power indicators will be on.
- Connect the audio cable**
- 1.Receiving (RX)**
- The transceiver adopts Bluetooth to receive audio from the mobile phone, and transmits the audio to other devices through audio cable.
 - Switch "Mode" key to "RX".
 - Connect the audio cable to some device (Audio input) without Bluetooth feature, like traditional speaker, traditional car speaker, etc.

- Press the FN key 3 seconds to turn on the device.
- 2. Transmitting (TX)**
- The transceiver receives the audio by the audio cable and transmits the audio signal by Bluetooth to other Bluetooth device or speakers supporting Bluetooth.
 - Switch "Mode" to "TX".
 - Connect the audio cable to some device (Audio output) without Bluetooth feature, like traditional TV, traditional speakers, etc.
 - Press FN key 3 seconds to turn on the device.
- Bluetooth Pairing**
1. When the transceiver is turned on, it will reconnect the paired devices within 10 seconds.
 2. If it can not reconnect within 10 seconds, it enters pairing status that lasts 3 minutes.
 3. In Bluetooth TX mode, long press the earphone or speaker Bluetooth pairing key to pair.
 4. In Bluetooth RX mode, please turn on the mobile phone Bluetooth, search new devices and select to pair.
 5. When the pairing is completed, LED lights will be on and show the power level (1/6,2/6,...)
 6. The transceiver will be powered off automatically if the pairing is not finished within 3 minutes.

◆ FAQ:

- (1)How to pair two devices simultaneously?**
1. Bluetooth RX/TX mode: when it is connected to one device, double click "Fn" key. The device will enter 3-minute "Pairing mode" for the second device.
 2. If the pairing is not finished within 3 minutes, it will exit "Pairing mode" and only maintains the first connection.
- (2) How to perform New Bluetooth Pairing?**
- If you need to new pairing, please double click "Fn" key when the transceiver is on.
1. In Bluetooth TX mode, this transceiver will enter Bluetooth device search mode and connect receiving devices that are in pairing status. After pairing, LED will be on and show the power status.
 2. In Bluetooth RX mode, this transceiver will enter Bluetooth pairing mode and become available for other devices to pair. Please click "connect" and finish connection, LED will be on and show the power status.
- (3)How to use NFC?**
1. When this transceiver is in Bluetooth RX/TX mode, please confirm whether the mobile phone for pairing supports NFC.
 2. Keep the mobile phone clear of Screen lock and place the NFC sensing areas attached (the area with a NFC mark).

3. There will be a dialogue popping up in the cell phone screen and, to remind the user whether to connect. After the confirmation, Bluetooth pairing can be done and it's ready to work.

◆ Recycling

The disposal and recycling must be done per as local area or country regulation; we strive for continued research and development. Thus, we reserve the right to amend this user manual without prior notification.

◆ After-sale service

Thanks again for your purchasing of our products. We are willing to offer you the most outstanding products and service and allow you to enjoy a pleasant high technology life. Since the date of purchase, if there is quality problem caused by production defectiveness, it has a 12-month repair warranty. For any doubt, please resort to sale service.

! Warranty: This product has a 12-month warranty against manufacturing defects starting from the purchase date.

Geartist

THANKS FOR READING

FC CE RoHS Made In China