

iBT374 QSG (English)  
Size: 280 x 160 mm (folded: 140 x 160 mm)  
Color: print Black and PMS 7694C (2C + 1C) in white card  
Material: 260gsm Art Card  
Jan. 12, 2017

FRONT

iHome

Color Changing Rechargeable  
Bluetooth Speaker with Speakerphone  
Model: iBT374

## QUICK START GUIDE

### Speakerphone

- » The speaker must be on and connected with a paired Bluetooth device to receive calls.
- » When a call is received, playing music is muted to hear the ring tone. Press the **Bluetooth/Speakerphone Button** to answer call.  
For call waiting function, use phone controls on your device.
- » Press the **Bluetooth/Speakerphone Button** again to end call and resume previous function.

### Aux-In

- » To play aux audio, connect a standard audio cable (not included) to the headphone jack of your audio device and connect the other end to the aux-in jack on iBT374.
- » Press and hold the **Power Button** for 2 seconds on the unit to turn it on.
- » Power on the aux audio device and use the controls on the device to play or pause audio, and to navigate tracks. Make sure to pause any connected Bluetooth device to hear aux audio.
- » Press the **Volume Up** or **Volume Down** Buttons to adjust the system volume. You can also adjust volume on your device.

### Color Changing Modes

- » Press and hold the **Power Button** for 2 seconds to power on iBT374.
- » Press the **Color Mode Button** to cycle through these modes:  
Slow Fade   Fast Change   Favorite Color   Pulse to Music   Preset Pulsing   Off

### Waterproof Operation

- » For proper waterproof operation, make sure the waterproof cover on the right side of the unit is completely flush with the unit by pressing along the entire edge of the cover until it is completely and securely in place.



Contact Us: 1-800-288-2792

For full warranty and full instructions  
visit: [www.ihome.com/support](http://www.ihome.com/support)

iHome


Color Changing Rechargeable  
Bluetooth Speaker with Speakerphone  
Model: iBT374

## QUICK START GUIDE

CHARGE UNIT BEFORE  
USE - ABOUT 5 HOURS

In the Box » iBT374 speaker » USB charging cable » Carry Strap

- » Connect the micro-USB plug on the included charging cable to the USB Charging jack on the speaker.
- » Connect the larger USB plug to a powered USB port such as a USB AC adaptor.

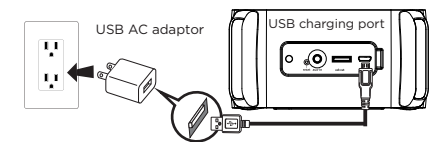

### Reviewing Battery Level

- » When unit is ON but not charging (operating on battery, micro USB cable not connected) you can review the current battery status on the Battery Status Indicator Lights (four LEDs on front of the unit) any time a button is pressed.

Battery dead (no charge) Battery low (needs charging) Battery half charged Battery good mostly charged Battery fully charged

### Bluetooth: Pairing & Playing

- » Make your device "discoverable" by turning on Bluetooth mode
- » Press and hold the **Power Button** for 2 seconds to power on iBT374

#### Pairing the First Time

- » The first time the unit is powered on it will enter auto-pairing mode

-OR-

#### Manual Pairing

- » Power on speaker
- » Press and hold the **Bluetooth/Speakerphone Button** for 2 seconds

- » Select "iHome iBT374" on your device's Bluetooth menu to complete pairing.
- » Press the **Play/Pause Button** to play and pause audio from your Bluetooth device. Navigate tracks from your device.
- » Use the **Volume Up** and **Volume Down** buttons to control iBT374 volume.

### Voice Commands

- » **NOTE:** The unit must be powered on and linked to a Bluetooth phone to use voice commands.
- » Press and hold the **Play/Pause/Voice Command Button** to access the voice command protocol associated with your device's operating system (Siri for iOS devices, "OK, Google" for Android devices, etc.)

Contact Us: 1-800-288-2792

For full warranty and full instructions  
visit: [www.ihome.com/support](http://www.ihome.com/support)

BACK

## FCC Information

FCC Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement.  
The device can be used in portable exposure condition without restriction.

This device complies with Part 15 of the FCC Rules, operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### CAN ICES-3 (B)/NMB-3(B)

#### Canada Statement

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage;
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device has been evaluated to meet general RF exposure requirement.  
The device can be used in portable exposure condition without restriction.

le dispositif a été évalué à satisfaire l'exigence générale de l'exposition aux rf.  
l'appareil peut être utilisé dans des conditions d'exposition portatif sans restriction.



Printed in China

## Internal Rechargeable Lithium-ion Battery

This device uses an internal non-replaceable rechargeable lithium-ion battery that should last the lifetime of the device. If you suspect your battery may be dead, try charging it for an extended period of time and try resetting the unit. If this fails, contact Customer Service at 1-800-288-2792.

### WARNING/DISPOSAL OF UNIT

Do NOT attempt to change the battery. Doing so will void the warranty and could cause injury and damage to your device.

To dispose of the unit, follow the instructions below:

- Never dispose of used batteries/electronics with ordinary solid wastes, since they contain toxic substances.
- Always dispose of used batteries/electronics in accordance with the prevailing community regulations.
- Many electronics retailers now recycle batteries and other electronic components at no charge.

### GENERAL BATTERY PRECAUTIONS

- Never use or charge a battery if it appears to be leaking, discolored, deformed, or in any way abnormal.
- Never disassemble the unit or attempt to remove battery as that could cause leakage of alkaline solution or other electrolytic substances.
- Avoid charging a rechargeable battery when the temperature is not within 5°C - 35°C (41° - 95° Fahrenheit).
- Never expose a battery to any liquid.
- Never expose a battery to excessive heat such as direct sunlight or fire. Never use a battery pack in an unventilated vehicle where excessive internal temperatures may be encountered.
- Always keep batteries out of the reach of infants and small children.

iBT374-011217-A