

iW23 - IS (English)

Size: 102 x 150 mm

Printing color: Black (1C + 1C)

Material: 85 gsm wood Free paper

Dec. 11, 2023

iHome

Model: iW23

POWERALET SNAP 3-in-1 Magnetic Fast Wireless Charger

PM Indicator — P 1008 — Low Backup Battery Indicator
— Alarm Indicator

TIME SET ⌚

- Press & Hold to Set Clock
- Use +/- to select 12/24 hour mode and press **time set** to confirm
- Use +/- to set the hour and press **time set** to confirm, PM Indicator will display for PM time. (There is no AM Indicator)
- Use +/- to set the minute and press **time set** to confirm

ALARM SET ⏰

- Press to Arm/Disarm Alarm
- Press & Hold to Set Alarm time
- Use +/- to set hour and press **alarm** to confirm
- Use +/- to set minute and press **alarm** to confirm
- Use +/- to set schedule (7 days, weekdays, weekends) and press **alarm** to confirm (alarm is 7 days until a date is set; See **Date Set** below)
- When alarm sounds, press **alarm** to disable and reset for the next day

SET (+/-) =

- Press to increase/decrease settings

SNOOZE/DIMMER ZZZ

- Press to Snooze Alarm
- Press & Hold to Adjust Snooze Duration (adjust 1-29 min with +/- and press Snooze to confirm)
- Press and release to dim display: Aut1, Aut2, Aut0, Hi, 3, 2, Lo, and OFF

Battery Backup Compartment*

(**remove pull tab from bottom of unit before use**)

*When Low Backup Battery icon appears

on the display, install a new CR2450 (3V) battery

DATE SET/DST (DAYLIGHT SAVINGS)

- Press & Hold to Set Date
- Use +/- to select year and press **date set** to confirm
- Use +/- to set the month and press **date set** to confirm
- Use +/- to set the day and press **date set** to confirm
- Short press will show DST status on display
- Short press toggles Auto/OFF

MAGNETIC WIRELESS CHARGING

Magnetic Charging Works With: iPhone 12 and 13 series and newer MagSafe devices and cases / AirPods with MagSafe case / plastic cases up to 2mm thick

Wireless Charging Works With: iPhone XS and iPhone 11 series / Samsung Galaxy S7 and newer wireless charging phones / Also works with wireless charging case for AirPods and other wireless charging devices



Place device face up on the charging rest. LED Status Indicators will show charging status:

Rapid blinking LED: Device is not charging (reposition device)

Slow blinking LED: Device is charging

Solid LED: Device is fully charged

WARNING: Remove phone's metal protective case before charging. Do not place magnetic or metal objects on charger during charging. Qi compatible phones with metallic looking finishes will charge normally.

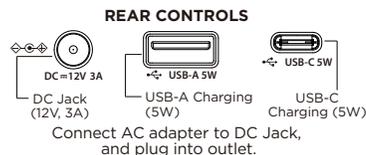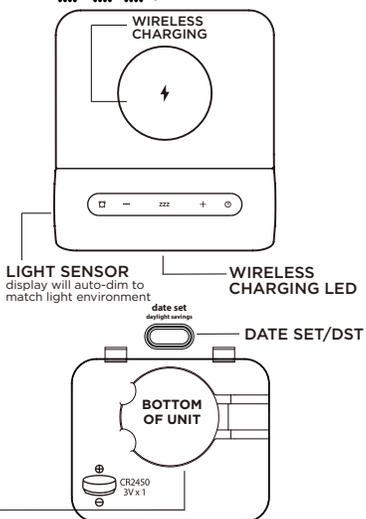

For questions and additional information, please scan the QR code or visit:
www.ihome.com/help/iw23



5.5mm **WARNING** 5.10mm

INGESTION HAZARD 2.68mm

WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as 2 hours.
- **KEEP new and used batteries OUT OF REACH OF CHILDREN.**
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.



WARNING:

- Do not ingest the battery, Chemical Burn Hazard. This product contains a coin/button cell battery. If the coin/button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.
- Keep new and used batteries away from children. If the battery compartment does not close securely, stop using the product and keep it away from children. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
- **CAUTION - RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. REPLACE ONLY WITH THE SAME OR EQUIVALENT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.**
- Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries in household trash or incinerate.
- Even used batteries may cause severe injury or death.
- Call a local poison control center for treatment information.
- Non-rechargeable batteries are not to be recharged.
- Do not force discharge, recharge, disassemble, heat above 65°C or incinerate. Doing so may result in injury due to venting, leakage of explosion resulting in chemical burns.
- Ensure the batteries are installed correctly according to polarity (+ and -).
- Do not mix old and new batteries, different brands or types of batteries, such as alkaline, carbon-zinc, or rechargeable batteries.
- Remove and immediately recycle or dispose of batteries from equipment not used for an extended period of time according to local regulations.
- Always completely secure the battery compartment. If the battery compartment does not close securely, stop using the product, remove the batteries, and keep them away from children.

IMPORTANT SAFETY INSTRUCTIONS

Please heed all warnings, read and follow all instructions and keep these instructions handy for future reference.

1. Do not use this product near water.
2. Unplug unit and clean only with damp cloth. Stronger cleaning agents, such as Benzene, thinner or similar materials can damage the surface of the unit.
3. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
4. Heat - This product should be situated away from heat sources such as radiators, heat registers, stoves or other appliances (including amplifiers) that produce heat.
5. Only use attachments/accessories specified by the manufacturer.
6. Unplug this product during lightning storms or when unused for long periods of time.
7. Damage Requiring Service - This product should be serviced by qualified service personnel when:
 - Plug has been damaged.
 - Objects have fallen into or liquid has been spilled into the enclosure.
 - The unit has been exposed to rain. The unit has been dropped or the enclosure damaged.
 - The unit exhibits a marked change in performance or does not operate normally.
8. No naked flame sources, such as lighted candles, should be placed on this product.
9. Attention should be drawn to the environmental aspects of battery disposal. Many electronics retailers now recycle batteries and other electronic components at no charge. To find a drop-off location near you, visit www.call2recycle.com
10. This product is suitable for use in tropical and/or moderate climates.

WARNING:

- To reduce the risk of fire or electric shock, do not expose this product to rain or moisture.
- Do not dispose of batteries in the household trash or fire.
- The main plug of power adaptor is used as the disconnect device, it shall remain readily operable.

FCC Information

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.

This device complies with Part 15 of the FCC Rules, operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

• Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

• NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- This equipment should be installed and operated with minimum distance 20cm (8 inches) between the radiator & your body.

ISED Information

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment.

This device contains licence-exempt transmitter(s) and/or receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

The device complies with ISED RF exposure requirements; users can obtain Canadian information on RF exposure and compliance.

This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Cet équipement est conforme aux exigences d'exposition RF (ISED), les utilisateurs peuvent obtenir des informations canadiennes sur l'exposition aux RF et la conformité. Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.

Tout changement ou modification non expressément approuvé par la partie responsable de la conformité peut annuler l'autorité de l'utilisateur à utiliser l'équipement.

CAN ICES-3 (B) / NMB-3(B), CAN RSS-216 / CNR-216



© 2023 SDI Technologies, Inc.
All rights reserved

iW23-i21123-B

Printed in China