


VISOR™ (Bluetooth Handsfree Carkit) User's Manual

1. COMPONENTS

- VISOR™ (Bluetooth handsfree Carkit)
- Li-Ion Rechargeable Battery Pack (4.2V / 1000mAh)
- User's Manual
- Data cable for updating (25pin DSUB type – 5 pin USB type)
- Cigar lighter jack (12V ~ 24V)
- 5.2V AC/DC Power Adaptor

2. Part description



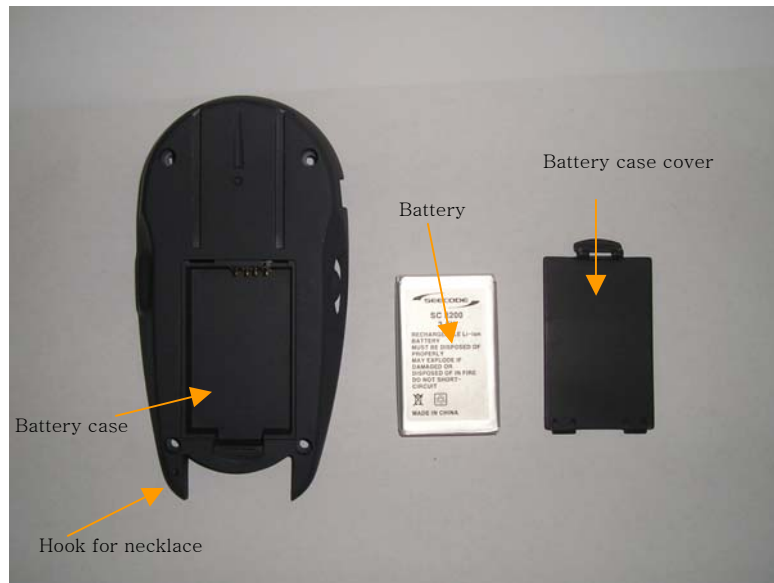

3. Cigar lighter jack & Data Cable for updating




(Cigar light jack)



(Data cable)

4. LCD Indicator.

The VISOR has 4 icons for indicating the VISOR's status.

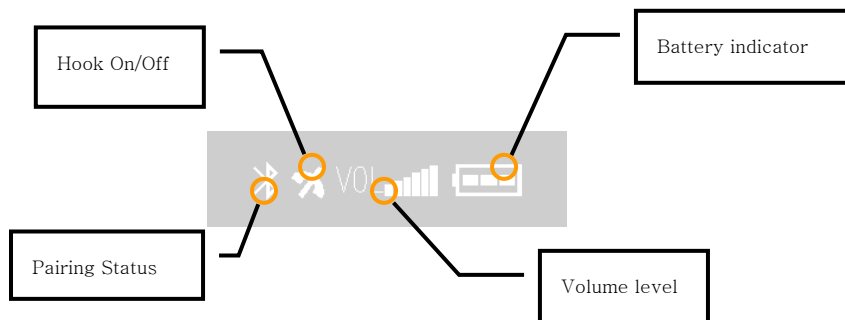



5. HOW TO USE

Power On/ Off

Press the Power On/Off Button for more than 2 seconds. You can hear a melody and the Blue LED indicator of the VISOR flashes every 3 seconds. To Power off the VISOR, press the Power On/Off Button for more than 2 seconds.

Pairing with Bluetooth mobile phone

1. Power on the VISOR, then the Visor enter into the Pairing Mode automatically. (If you did not make pairing with a Bluetooth mobile phone.)
2. Power on the VISOR, then press “#” button for more than 2 seconds. It becomes waiting status with a melody and the Blue LED indicator of the VISOR flashes every 1 second. (The “Discoverable..” message is displayed and the bluetooth mark “” flashes every 2 seconds on the LCD.)
3. From the handset, search for and register the VISOR (Refer to the Handset user manual.).
4. If the pairing is completed, you can hear a melody and “Connected” message and “” are shown on the LCD.

Making a Call

1. Turn on the power of the VISOR.
2. Press the SEND button on the VISOR.
 - A. Last number calling can be made.
 - B. As per handset, if you get the lastet calling numbers, press SEND button once more
 - C. Voice dialing can be made in case of SonyErricson handset.
3. You can dial a number using a keypad. After dialing the number, press the SEND button.

Answering a call

When ringing, press SEND button or slide button in the VISOR.

Ending a call

Press END button in the VISOR.

Adjusting the Listening Volume (5 Steps)

To adjust the listening volume

- To increase the volume, slide Volume button up.
- To decrease the volume, slide volume button down.
- You can see the change of a volume indicator of a LCD.

Charging

The VISOR comes with a rechargeable Li-Ion battery and 5.2V AC/DC Adaptor.

The battery is not fully charged when you buy the VISOR.

We recommend that you charge the VISOR for the first time. Put the VISOR into the adapter to charge it

- It takes 3 hours to fully recharge the battery
- When the charging process, battery indicator of the LCD display the charging status.

6. MAIN FUNCTIONS

- Superior noise suppression
- Excellent echo cancellation
- Super full duplex
- Simultaneously support Headset and Handsfree profile
- LCD Display
- Caller ID Display

7. SPECIFICATIONS

- Digital volume control
- Support Voice Dialing
- Support Number dial
- Battery : Li-Ion Rechargeable Battery 4.2V / 1000mAh
- Speaker : 8Ω, Max 1.5W
- 2 Microphone
- Frequency range : 2.4GHz to 2.4835GHz
- Support calling and Hanging up
- Talking Time : 6.5 hours
- Standby Time : 700 hours

CAUTION:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

CAUTION:

RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE.

DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.