


Nothing is impossible!

索爱®

索爱科技，成就梦想!

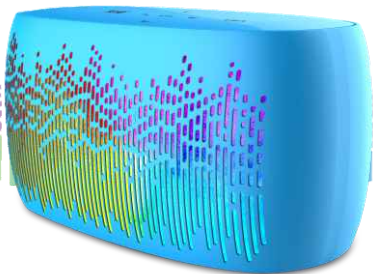

使用说明书 Manual  
BLUETOOTH SPEAKER S-52

**【Music playback】**

After a TF card is inserted into the device, music files saved in the card can be played automatically, and audio formats of MP3, WMA, WAV, APE and FLAC are supported.

**【Voice prompt】**

When the user performs operations such as start, Bluetooth connection and mode switching, the device will have the appropriate voice prompts. Volume adjustment doesn't have voice prompt. The light flashes in the adjustment process and stays on when the volume is turned to the maximum/minimum.

**【Data transmission】**

In power-off state, after connecting Micro USB data cable to USB port of the computer, the user can read the data in the inserted TF card, and perform normal operations such as copy, deletion and move.

**【Bluetooth】**

Bluetooth music mode supports stereo audio transmission function. Bluetooth call is supported, echo is eliminated, and communication is clear.

**【AUX】**


In power-on state, insert AUX audio cable, and press M key to switch to AUX mode, and PC/MP3/MP4/PSP digital devices are supported.

**【NFC function】**

With NFC technology and built-in NFC chip, it supports connecting to the mobile phone and Tablet PC with NFC function. Pair rapidly with just a touch.

SOAIY®

## Key Function Diagram



① Microphone hole or call hole

② Mode switch button

③ Pause / Play

④ Press to play previous title and hold on to decrease volume

⑤ Press to play next title and hold on to increase volume

⑥ NFC sensing area

⑦ Bluetooth answer/end button/light mode switch



① Micro5P charging interface

② Power switch

③ TF card slot

④ AUX audio input

### 1、Power on-off operation

Turn the power switch left to ON position (Fig. 1) to turn on the device, and turn right to OFF position to turn off the device.



. ig. 1

### 2、MP3 mode operation

When TF card is inserted in power on state, the device will enter MP3 mode automatically and have voice prompts; you can also press the M key in other modes to switch to MP3 mode. When the device enters MP3 mode, it will play the music files stored on TF card automatically.

Press button ④ to switch to previous track; press button ⑤ to switch to next track. (Fig. 2) Press and hold button ④ to turn down the volume; press and hold button ⑤ to turn up the volume. Press button ③ to pause / start playing, and switch tracks.



Fig. 2

#### 4. Operation of Bluetooth mode

After power is on, the device will enter Bluetooth mode, which is accompanied with a voice prompt of "Pairing Bluetooth", and the indicator flickers in red and in blue alternatively. After Bluetooth is connected successfully, there will be a prompt voice, and the indicator will turn blue (if you are prompted to enter the password, the default password is 0000).




Fig. 4

1. Bluetooth call: When the device is in Bluetooth state and there is an incoming call, press button ③ to answer the call, or press and hold button ③ to reject the call. When the call is connected, press button ③ to end the call, and press button ④ or ⑤ to adjust the volume.

2. Bluetooth playback: When the Bluetooth is connected, start the music player of the mobile phone or tablet PC, and the device can play music on the source device (you can adjust the output volume with the volume button on the phone or tablet PC).

3. Bluetooth sleep and waking: In Bluetooth pairing mode, if there is no mobile phone pairing the device in within three minutes, the Bluetooth will automatically enter sleep state. Press and hold button ⑤ to wake up the device and automatically enter Bluetooth pairing state (Fig. 4).

#### 5. Spectrum lamp mode switch

Press button ③ in power on state to switch to spectrum light flashing mode; seven modes are available.

#### 6. NFC pairing operation

In Bluetooth mode, enable NFC function of the mobile phone or tablet PC, place it close to NFC sensing area, there will be a promoting voice, and the mobile phone or tablet PC will be prompted to be connected or not. Click “OK” to pair, and place it close to NFC sensing area again to disconnect Bluetooth (after NFC is connected successfully for the first time, connection of Bluetooth will be enabled automatically next time).

#### 7. Charging of the device and cautions

Connect Micro 5P USB data cable to 5V charger or USB port of the computer to charge the device. In charging state, the indicator will be normally on. After charging is completed, the red indicator will be off and the blue one will be normally on. To extend service life of the device's battery, charge it in power-off state, and do not charge it in use. The charging time is about 8 hours.

Output power: 3W	Distortion: 0.3%
FR range: 80Hz~20KHz	Specification of battery: two18650 lithium battery/3.7V
Sensitivity: 600mV±50mV	Working voltage: USB/DC 5V
Impedance: 4Ω	Dimensions: 126*68 *65 mm
SNR: ≥70dB	Net weight: 297±5 g



AUX audio cable	1	Product compliance certificate	1
Micro USB 5P data cable	1	User' s manual/warranty card	1

## FCC Information and Copyright

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates,

uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference

to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does

cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is

encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### 15.19 Labelling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**FCC RF warning** statement: the device has been evaluated to meet general RF exposure requirement , The device can be used in portable exposure condition without restriction.

## 广州市索爱数码科技有限公司 监制

制造商：深圳市索爱无线互联科技有限公司

地 址：深圳市宝安区西乡街道富华社区航城工业区富鑫林工业园D栋四层

服务热线：4000-421-588

官方网址：www.soiaudio.com



**Supervised by Guangzhou Soaiy Digital Technology Co.,Ltd**

Manufactured by Shenzhen Soaiy Technology Co.,Ltd

ADD: 4/F, Bldg D, Fuxinlin Industrial Park, Hangcheng Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, China

**Website : www.soiaudio.com**

Email:sales@soiaudio.com