



SPECIFICATIONS

Part 1.0: General Features


- Full size slim wireless keyboard
- Totally Wireless freedom
- 2.4GHz FSK Autolink technology
- 34 two way R F channels
- Operation distance of 6~10 meters for keyboard
- 3 level power saving mode
- Auto on/off RF output design
- Nano receiver for this combo

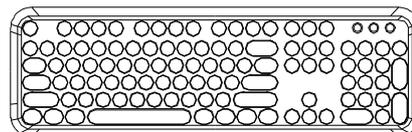

Part 2.0: Physical characteristics

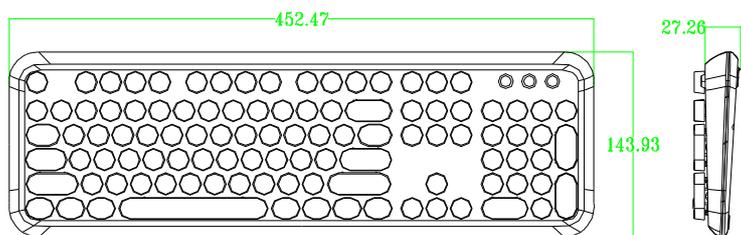

Keyboard

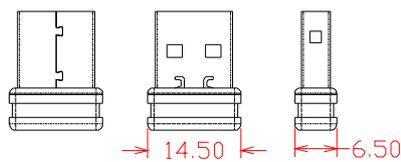

RECEIVER

Mechanical Performance

Operating force of keyboard keycaps	60 ± 15gf
-------------------------------------	-----------

Buttons

Keyboard : 104 standard keys,

Weight:

Keyboard: 717.6 ± 5 g (battery included)

Receiver: 2 ± 1 g

Multimedia Hotkeys functions:

- | | |
|----------------------|--------------------|
| FN+ESC=Media Player | FN+F7=Web home |
| FN+F1=Play/Pause | FN+F8=Search |
| FN+F2=Previous Track | FN+F9=My Favorite |
| FN+F3=Next Track | FN+F10=Email |
| FN+F4=Volume Up | FN+F11=Screen Lock |
| FN+F5=Volume Down | FN+F12=My computer |
| FN+F6=Mute | |

SK-620AG

Part 3.0: Electrical Specification

Interface : USB 1.1

Operation angle: 360 degrees
 Receiver power requirement: 5V DC from USB port
 R F frequency: 2.4 Ghz (2.408~2.474 Ghz)
 R F modulation : F S K Auto-Link
 Hopping type : FHSS (frequency hopping spread spectrum)

R F channel : 34 channels
 ID numbers: 24 bits
 R F bandwidth : 2.0mHz
 Speed of transmit: 1M bps
 R F output power : 0dBm
 Receiver of sensitive: -85dBm

Battery

Battery type: twoAAAalkaline for keyboard
 Battery consumption:

keyboard:3.0V

Keyboard:Operating Mode: ≤10 mA

Sleep Mode 1: ≤2 mA(no typing)

Part 4.0: Reliability

Keyboard Button Switch Activation: 8,000,000 cycle
 Mouse Button Switch Activation: 3,000,000 cycle
 Scroll Wheel encoder Activation: 100,000 cycle
 Operating temperature: -5 ~ 40 degrees celsius
 Operating humidity: 20% - 90%

Part 5.0 System Requirement

Windows 2000, Windows xp. Windows ME.
 Windows VISTA, Windows 7/8/10

FCC STATEMENT:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC RF Exposure

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable condition without restriction.