

DMS-100 Owner's Manual



DMS-100 Owner's Manual ©2010 Universal Remote Control, Inc.

The information in this manual is copyright protected. No part of this manual may be copied or reproduced in any form without prior written consent from Universal Remote Control, Inc.

UNIVERSAL REMOTE CONTROL, INC. SHALL NOT BE LIABLE FOR OPERATIONAL, TECHNICAL OR EDITORIAL ERRORS/OMISSIONS MADE IN THIS MANUAL.

The information in this manual may be subject to change without prior notice.

URC - Control the Experience is a registered trademark of Universal Remote Control, Inc.

All other brand or product names are trademarks or registered trademarks of their respective companies or organizations.



*Universal Remote Control, Inc.
500 Mamaroneck Avenue, Harrison, NY 10528
Phone: (914) 835-4484 Fax: (914) 835-4532*

TABLE OF CONTENTS

<u>Congratulations!</u>	2
<u>Features and Benefits</u>	3
<u>Parts Guide</u>	3
<u>Front Panel Description</u>	4
<u>System Features</u>	5
<u>Rear Panel Description</u>	6
Federal Communication Commission	
<u>Interference Statement</u>	10
<u>USA Limited Warranty Statement</u>	11
<u>Specifications</u>	13
<u>System Configuration for Internal LAN Network</u>	14
<u>Europe Certificate Of Conformity</u>	15

Congratulations!

You've purchased the finest music distribution system available today. The DMS-100 is a native to the network, CD quality digital music distribution system with an available range of keypads and remote controls that not only fully control your music but control all of your other audio video components.

The DMS-100 distributes music to your speakers and other DMS components in the system. This makes your system scalable, and easy to add additional rooms at any time in the future. All you need is a DMS amplifier connected to the network to make any room a new DMS Music Room.

The DMS-100 is designed for professional installation only. Your installer will help you select the right user interface for every room of your installation. You'll have a choice of Total Control in-wall keypads and remote controls.

If you have questions, call your installer:

Company:

Installer Name:

Contact #:

Email address:

The customer service center is also available for any questions you may have. Contact us at:

1-914-835-4484

or email us at:

techsupport@universalremote.com

Features and Benefits

- One audio input streams to other Total Control amplifiers.
- Preamp output for connection to local amplifier.
- Scalable solution; install as an additional zone with a DMS-1200 system, or install multiple DMS-100s to create customized multi-zone system.
- 50 Watts per channel amplifier for speakers.
- Can be programmed off premises via the internet and MRX-10.

Parts Guide

The DMS-100 Single Zone Amplifier includes:

1 - DMS-100 Single Zone Amplifier
1 - Ethernet Cable

1 - Power Cord
1 - Installation Manual

Front Panel Description



Power and LAN LEDs

LEDs indicate that the DMS-100 is connected to power and to the local area network.

Automatic Power Off

The DMS-100 is powered off and is in an automatic stand by state when no zones are active.

Reset Button

The front panel reset button offers the end user a quick way to reconnect the DMS-100 to the local area network.

System Features



Pristine Audio Quality

Unlike other digital music systems, the DMS system streams all music uncompressed at pure CD quality levels. You enjoy all the detail of your original source.

Room Linking

Any room can be linked with any other room to listen to the same source. This makes it easy for you to entertain by simply linking all the rooms your guests will be in and controlling the music from any remote or keypad.

Reliability

The DMS-100 is engineered first and foremost for reliability. It offers extensive internal protection against failure and is manufactured in our ISO 9000 certified factory with the utmost attention to quality control at every stage of manufacturing, from parts procurement to final assembly.

Rear Panel Description



110V-220V Power Connection


The IEC power socket enables either UL/CSA approved 110V power cords or CE approved 220V power cables to be used with the DMS-100. The internal power supply automatically switches from 110V to 240V.

Network Connection

A 10/100 LAN connection ensures that the DMS-100 will receive all network streams from other DMS or SNP sources.

IR In for 1-Way RF Remotes and Base Stations

When connected to a URC RF base station, a one-way URC remote control can be programmed to control a zone.

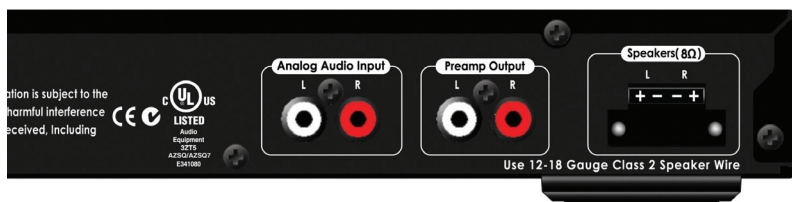

Analog Audio Input

Connect a music source to the DMS-100 to listen locally to an AV receiver.

Preamp Zone

The preamp zone enables use of external power amplifiers for a room with a need for more or less power than 50 watts per channel.

Speakers

The DMS-100 internal amplifier powers a pair of 8 ohm speakers with 50 watts per speaker. The speakers can deliver output from any DMS source.

Important Safety Instructions



CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN



CAUTION:

TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated “dangerous voltage” within the product’s enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING:

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

This unit shall be connected to a mains socket outlet with a protective grounded connection or equivalent.

CAUTION:

To completely disconnect this product from the mains, disconnect the plug from the wall socket outlet. The mains plug is used to completely interrupt the power supply to the unit and must be within easy access by the user.

CAUTION:

These servicing instructions are for use by qualified service personnel only. To reduce the risk of electric shock, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so or equivalent.

Important Safety Instructions

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. In the event of malfunction, un plug immediately.
6. Do not use this apparatus near water.
7. Clean only with dry cloth.
8. Do not block any ventilation openings.
Install in accordance with the manufacturer's instructions.
9. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus(including amplifiers) that produce heat.
10. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
11. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
12. Only use attachments/accessories specified by the manufacturer.
13. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
14. Unplug this apparatus during lightning storms or when unused for long periods of time.
15. Refer all servicing to qualified service personnel.
Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally,or has been dropped.



CAUTION:

- The ventilation should not be impeded by covering the ventilation openings with items, such as newspapers, tablecloths, curtains, etc.
- No naked flame sources, such as lighted candles, should be placed on the unit.
- Minimum distances around the apparatus for sufficient ventilation : 20centimeter
- This product is use in moderate climates.
- Do not expose the unit to dripping or splashing fluids, do not place objects filled with liquids, such as vases, on the unit.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one more of the following measures:

- ◆ Reorient or relocate the receiving antenna.
- ◆ Increase the separation between the equipment and receiver.
- ◆ Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ◆ Consult the dealer or an experienced radio/TV technician for help.

Warning!

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

Note : The manufacturer is not responsible for any Radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

FCC Caution

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment.

The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

USA Limited Warranty Statement

Your Universal Remote Control, when delivered to you in new condition, is warranted against defects in materials or workmanship as follows: **UNIVERSAL REMOTE CONTROL, INC.** warrants this product against defects in material or workmanship for a period of one (1) year and as set forth below. Universal Remote Control will, at its sole option, repair the product using new or comparable rebuilt parts, or exchange the product for a comparable new or rebuilt product. **In the event of a defect, these are your exclusive remedies.**

This Limited Warranty covers only the hardware components packaged with the Product. It does not cover technical assistance for hardware or software usage and it does not cover any software products whether or not contained in the Product; any such software is provided "AS IS" unless expressly provided for in any enclosed software Limited Warranty.

To obtain warranty service, you must deliver the product, freight prepaid, in its original packaging or packaging affording adequate protection to Universal Remote Control at the address provided in the Owner's Manual. **It is your responsibility to backup any macro programming, artwork, software or other materials that may have been programmed into your unit. It is likely that such data, software, or other materials will be lost during service and Universal Remote Control will not be responsible for any such damage or loss.** A dated purchase receipt, Bill of Sale, Installation Contract or other verifiable Proof of Purchase is required. For product support and other important information visit Universal Remote Control's website: <http://www.UniversalRemote.com> or call the Customer Service Center (914) 835-4484.

This Limited Warranty only covers product issues caused by defects in material or workmanship during ordinary consumer use. It does not cover product issues caused by any other reason, including but not limited to product issues due to commercial use, acts of God, third-party installation, misuse, limitations of technology, or modification of or to any part of the Universal Remote Control product. This Limited Warranty does not cover Universal Remote Control products sold as USED, AS IS, REFURBISHED, so-called "B STOCK" or consumables (such as batteries). This Limited Warranty is invalid if the factory-applied serial number has been altered or removed from the product. This Limited Warranty is valid only in the United States of America. **This Limited Warranty specifically excludes products sold by unauthorized resellers.**

LIMITATION OF REMEDIES

UNIVERSAL REMOTE CONTROL SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY OR CONDITION ON THIS PRODUCT. IN NO EVENT SHALL UNIVERSAL REMOTE CONTROL BE LIABLE, WHETHER IN CONTRACT OR IN TORT (INCLUDING NEGLIGENCE) FOR DAMAGES IN EXCESS OF THE PURCHASE PRICE OF THE PRODUCT, ACCESSORY OR SOFTWARE, OR FOR ANY INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES OF ANY KIND, OR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATA, SOFTWARE OR APPLICATIONS OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE ABILITY OR INABILITY TO USE THE PRODUCTS, ACCESSORIES OR SOFTWARE TO THE FULL EXTENT THESE DAMAGES MAY BE DISCLAIMED BY LAW.


EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, THERE IS NO OTHER WARRANTY EXPRESSED OR IMPLIED. UNIVERSAL REMOTE CONTROL WILL NOT BE HELD RESPONSIBLE FOR STATEMENTS MADE BY OTHERS CONCERNING THE MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ON THIS PRODUCT. Some states or jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, or allow limitations on how long an implied warranty lasts, so the above limitations or exclusions may not apply to you. This Limited Warranty gives you specific legal rights and you may have other rights which vary from state to state or jurisdiction to jurisdiction.

REV020708

Specifications

Network	One 10/100 Ethernet port (Indicator Two LED)
IR One Way & IP Two Way Control:	Yes
Indicators:	One Power Blue LED - Blink when resetting/One Network Blue LED indicator
Zones of Stereo Audio:	One (preamp and speaker output are linked)
Rated Wattage per Channel:	50 watts per channel at 8 ohms, stable to 4 ohms
Automatic Low Volume Loudness Compensation:	Installer configured for type and size of audio zone
Installer Configured EQ:	Bass Boost, Treble Boost, 5-Band parametric EQ
Input Sensitivity:	600~2200mVp-p / 10Kohm
User Adjustable Audio Controls:	Bass, Treble and Balance
Receives all SNP and DMS Generated Streams:	Yes
Inputs:	One Stereo Line input streams to all other DMS Amplifiers
Preamp Output:	Yes, configurable to Fixed Line Level Output
Power Supply:	AC100~240V, 50/60Hz
Power Consumption:	1~2A
Maximum external Dimensions:	1.7" x 17" x 8.7" (H X W X D)
Weight:	7lbs (3.2Kg)

System Configuration for Internal LAN Network

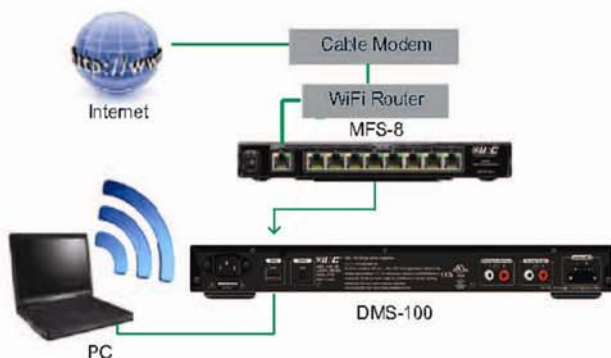

Follow the steps below to connect a DMS-100 to a LAN network.

1. Connect the Internet to the coaxial CABLE port in the rear of the cable modem.
2. Plug in a RJ-45 ethernet connector cable via the Ethernet port of the cable modem to the WAN port of the Router.
3. Connect a second RJ-45 cable to a LAN port of the Router and plug the other end to the LAN 10/100 port on the rear of the MFS-8/MFSPOE-8 network Switch.
4. Connect a third RJ-45 cable to connect the DMS-100 LAN port to one of the eight 10/100 Smart ports.
5. Plug the power supply to the DMS-100 and then plug it in to an unswitched AC outlet.
6. Connect a PC computer to the same LAN as the DMS-100 or plug an ethernet cable directly to the LAN port of the DMS-100. Now the computer can control and adjust the manufacturer's audio control program.
 - Select audio INPUT source and OUTPUT zone, MAC address etc. This function selects input source channel and INPUT gain level and data sent to audio equipment.
 - After selecting the output zone, adjust the zone limit power rate and zone power ON/OFF and source signal INPUT channel.
 - Adjust the amplifier volume level per each zone for proper sound output and maximum limitation volume level.
 - Turn on the ramp up volume level and adjust the equalizer repertory and low volume loudness control effectiveness and custom equalizer align.

Europe Certificate Of Conformity

Universal Remote Control, Inc. declares that this product complies with the requirements CE/LVD (Low Voltage Directive, 2006/95/EC).

Certificated Attestation of compliance "E8N 10 10 75224 001" is issued according to the Directive 2004/108/EC relating to electromagnetic compatibility on a voluntary basis and is in compliance with the corresponding technical standards such as EN55013, EN55020, EN55022, EN55024/A2, EN61000-3-2, EN61000-3-3 and EN60065 A/V. A copy of the full Certificate of Conformance may be obtained at "<http://www.universalremote.com>"

