







Bluetooth® Stereo headset  
BHS-801








User Guide






## Contents

English .....	1
Español .....	15
Deutsch .....	29
Français .....	43
Italiano .....	57
Nederlands .....	71
Русский .....	85
Türkçe .....	99
Ελληνικά .....	113











## General Information

Thank you for purchasing Iqua Bluetooth® Wireless Headset BHS-801. Your new device is a stylish product that enables you to communicate handsfree and comfortably with compatible mobile phones that support Bluetooth wireless technology.

### Overview of the product







- 1 Power on/off button
- 2 Indicator light
- 3 Volume up (+) button
- 4 Volume down (-) button
- 5 Call button
- 6 Earhook
- 7 Charger connector

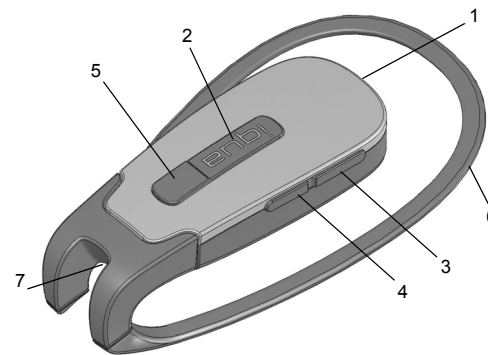




### Sales package contents

1. Headset
2. 2 earhooks (one attached to the headset)
3. Stereo earpiece set
4. Earpiece adapter
5. Wall charger with mini USB connector
6. User Guide
7. Quick Guide
8. Carrying case

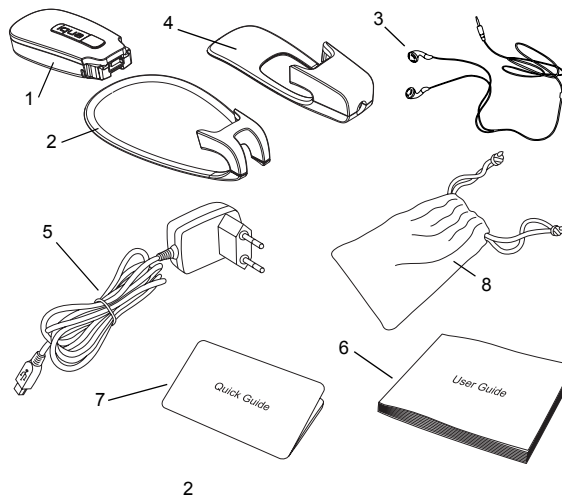






## Getting Started

### Wearing the headset

This headset is designed to comfortably fit your ear when attached to one of the optional earhooks provided in the sales package. See pictures on page 2 for reference.



1. To attach the earhook, insert the main body of the headset into the earhook ring and push until it stops.
2. Place the headset in your ear with the microphone angled at your mouth. Check that the size of the earhook fits your ear and try another earhook if necessary.
3. To remove the earhook, gently pull it away from the headset.



### Charging the battery


Before you use the headset, you must charge its battery for approximately 2 hours. Once the battery is full, it will provide up to 10 hours of talk time and up to 150 hours of standby time.


1. Connect the charger cable to the connector in the headset.
2. Connect the charger into an electric outlet. A red light will turn on.
3. When the battery is fully charged, the red light will turn off.






### Switching on and off

To switch the headset on, press and hold down the  button until you hear a beep and a green light flashes several times.

To switch the headset off, press and hold down the  button until you hear a beep and a red light flashes several times.



### Pairing the headset and your mobile phone



#### Using the headset for the first time



When the headset is powered on for the very first time, it will automatically enter pairing mode. This is indicated by red and green lights flashing alternately. Follow the steps 2 to 4 below to pair your mobile phone with the headset.

#### Using the headset later on

When the headset is powered on, it will automatically reconnect to the phone it was last connected with. If the connection fails because the phone is not found, the headset will appear not connected with green light flashing and you should finish pairing manually:



1. After the power has been switched on, press and hold down the Call button until the red and green lights start flashing alternately.
2. Complete the pairing with your phone. Please refer to the manual of your phone for details on how to search and pair. When the phone has found the headset, the phone will show **Iqua BHS-801** on its display.










3. To pair with the phone, enter the PIN code for the headset, which is **0000**. After pairing, the headset may try to connect with your phone automatically or you may have to activate the connection manually from the phone menu.
4. Once pairing has been successfully completed, you will hear a low to high tone and a green light will start flashing at a long interval. The headset is now ready for you to make and receive calls. If the pairing has not been completed, you will hear a high to low tone and the green light will start flashing at a short interval.

To cancel pairing after entering pairing mode, press and hold down the Call button until the green and red light are no longer flashing.

To reset and clear the headset's pairing list, switch the headset off and press and hold down the  and  buttons for five seconds. You will hear a beep and the red light flashes twice.

For the latest compatibility information, please visit [www.iqua.com](http://www.iqua.com).





## Call Functions

### Answering a call

When your mobile phone rings, answer the call by briefly pressing the Call button on the headset. A green light will start flashing to indicate an active call. You can also turn on the automatic answering function of your mobile phone to make the headset answer calls automatically.


### Ending a call






To end an active call, press and hold down the Call button.

### Rejecting a call


When you are receiving an incoming call that you do not want to answer, press and hold down the Call button until you hear a beep to reject the call.

### Muting and unmuting a call

To mute a call, press and hold down the  button for two seconds until you hear two beeps. To unmute the call, briefly press any of the buttons.







### Redialing the last dialed number



To place a call to the last dialed number in stand-by mode, press and hold down the Call button until you hear a beep.

### Voice dialing (when supported by the phone)

To activate the voice dialing feature of your mobile phone:

1. Press and hold down the Call button for two seconds until you hear two beeps.
2. Speak the voice tag of the person you wish to call.

Please refer to your phone's manual for details as some phone models do not support voice dialing.






### Adjusting the volume

To increase the volume, press the **+** button.

To decrease the volume, press the **-** button.

### Transferring call from the headset to your mobile phone

To transfer an ongoing call from the headset to your mobile phone, press and hold down the **+** button until you hear a beep.





### Using the stereo headset

See pictures on page 2 for reference with the following instructions 1 to 3.

1. Remove the earhook from the headset body.
2. Connect the earpiece adapter to the headset body.
3. Connect the stereo earpiece set to the adapter.
4. You can modify the length of the neck strap by sliding the wire stopper up and down. See fig 1 below.
5. Wear the neck strap around your neck and place the earpieces in your ears. See fig. 2 below.









Fig 1.

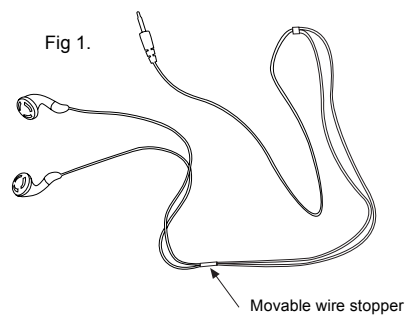



While listening using the earpiece set, you can do any of the following:



- Adjust the volume using **+** and **-** buttons.
- Mute streaming by pressing and holding down **-** button.
- Unmute streaming by pressing the **+** or **-** button.
- Answer, end or reject a call normally, as the streaming automatically stops at an incoming call and you will start hearing the call through the headset. The streaming will continue automatically after the call depending on the model of your phone. Please refer to the manual of your phone for details.



#### Light indication summary

The headset's LED can be either red or green. The different signals indicate:





- Red light flashing - low battery.
- Red light on - battery is charging.
- Red light off - charging complete.
- Red light flashing several times - power off.
- Red light flashing twice, green once - call muted.
- Green and red flashing alternately - in pairing mode.
- Green light flashing at a low interval - connection active.
- Green light flashing at a high interval - not connected.
- Green light flashing several times - power on.
- Green light flashing twice, red once - phone is ringing.
- Green light flashing fragmentally thrice within two seconds - call active.






## Product Specifications

Model:	BHS-801
Size:	62.5 mm (L) x 25 mm (W) x 13 mm (H) (with earhook 79x49x17)
Weight:	12 g (with earhook)
Talk time:	Up to 10 hours
Music playing time:	8 hours
Standby time:	Up to 150 hours
Charging time:	Within 2 hours
Supported Bluetooth profiles:	Handsfree 1.0, Headset 1.1, and A2DP 1.0
Bluetooth Compliance:	Bluetooth 1.2
Connection:	Point-to-point
Paired Devices:	Up to 8, one at a time
Battery:	Internal rechargeable battery
Operating Temperature:	-15°C to +50°C
Operating range:	Up to 10 meters
Sales Package Contents:	Headset, 2 earhooks, stereo earpiece, earpiece adapter, wall charger, carrying case, user guide, quick guide








## Power Management


This product is powered by a built-in rechargeable battery which cannot be changed. Do not attempt to replace the battery. Rechargeable battery can be charged and discharged hundreds of times, but it will eventually wear out. After a period of time that will vary depending on the use and usage conditions, you may find that the built-in battery will power your product for only a couple of hours, requiring you to charge more frequently.

Do charge your device only with the charger provided in the sales package. Unplug the charger when not in use. Do not leave the device connected to the charger for a longer period than needed, since overcharging may shorten the battery lifetime.

If left unused, a fully charged battery will discharge itself over time.

Temperature extremes may affect the ability of the battery to charge. Always try to keep the device between 15°C and 25°C (59 F and 77 F). Leaving the device in hot or cold places, such as in a closed car in summer or in winter conditions, will reduce the capacity and lifetime of the battery. A device with a hot or cold battery may not work for a while even when the battery is fully charged. Battery performance is particularly limited in temperatures well below freezing. Do not charge the battery in a humid environment.







## Care and Maintenance

- Switch off the device before putting it into your pocket or bag. Otherwise the device may answer or make a call without you knowing it.
- Do not expose the device to liquid, moisture or humidity as it is not waterproof.
- Do not use or store the device in dusty, dirty areas. Its moving parts and electronic components can be damaged.
- Do not store the device in hot areas. High temperatures can shorten the life of electronic devices, damage batteries, and warp or melt certain plastics.
- Do not store the device in cold areas. When the device returns to its normal temperature, moisture can form inside the device and damage electronic circuit boards.
- Do not drop, knock, or shake the device. Rough handling can break internal circuit boards and fine mechanics.
- Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the device.
- Use a soft, clean, dry cloth to clean any lenses.
- Do not expose your device to contact with sharp objects as this will cause scratches and damage.
- Do not stick anything inside the device as this may damage internal components.
- Do not dismantle the device or the charger as they do not contain serviceable parts and taking apart the device may expose you to dangerous voltages or other hazards.



Act according to your local rules and do not dispose of this product as part of your normal household waste. Dispose of this product in a separate collection system meant for recycling of electrical and electronic products.






### How to get service for my IQUA Product?

If you believe that you are entitled to a repair or replacement of your IQUA Product based on your statutory rights under the applicable national laws relating to the sale of consumer products or warranty given by the retailer, who has sold the IQUA Product to you, please contact your retailer.

### DECLARATION OF CONFORMITY




We (Iqua Ltd.) declare, under our sole responsibility, that the product (BHS-801) conforms with the provisions of the following Council Directive: 1999/5/EC.



CE 0523 ⓘ



FCC ID: TUFBHS-801





### Federal Communications Commission (FCC) Statement

15.21 You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b) NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause interference and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.











The Bluetooth word mark and logos are owned by Bluetooth® SIG, Inc. and any use of such marks by IQUA is licenced. Other trademarks and trade names belong to their respective owners.

Under no circumstances does IQUA assume any liability for loss of or damage to or corruption of data, for any loss of profit, loss of business, revenues, contracts, anticipated savings increased costs or expenses or for any indirect, special, incidental or consequential damages howsoever caused.

Copyright © 2006 Iqua Ltd







[www.iqua.com](http://www.iqua.com)

