



D3 functions

- Microprocessor-supported controls
- Direction and distance display up to 40m
- Search strip width up to 30m
- Several avalanche victims are shown with RED LED
- Conform with the EN standard 300 718
- Frequency: 457 kHz
- Power supply: 2 batteries AA 1,5V alkaline Lr6
- Weight: 230g

- 1 Search direction arrow
- 2 Socket for ear plug
- 3 Loudspeaker
- 4 Battery compartment
- 5 Transmitting position
- 6 Locking switch
- 7 Transmitting control light
- 8 Bayonet switch (forced ON/ OFF)
- 9 Search position
- 10 Digital display (distance indication)
- 11 Switch transmitting/ receiving
- 12 Red LED (indication for multiple buriakl scenario)

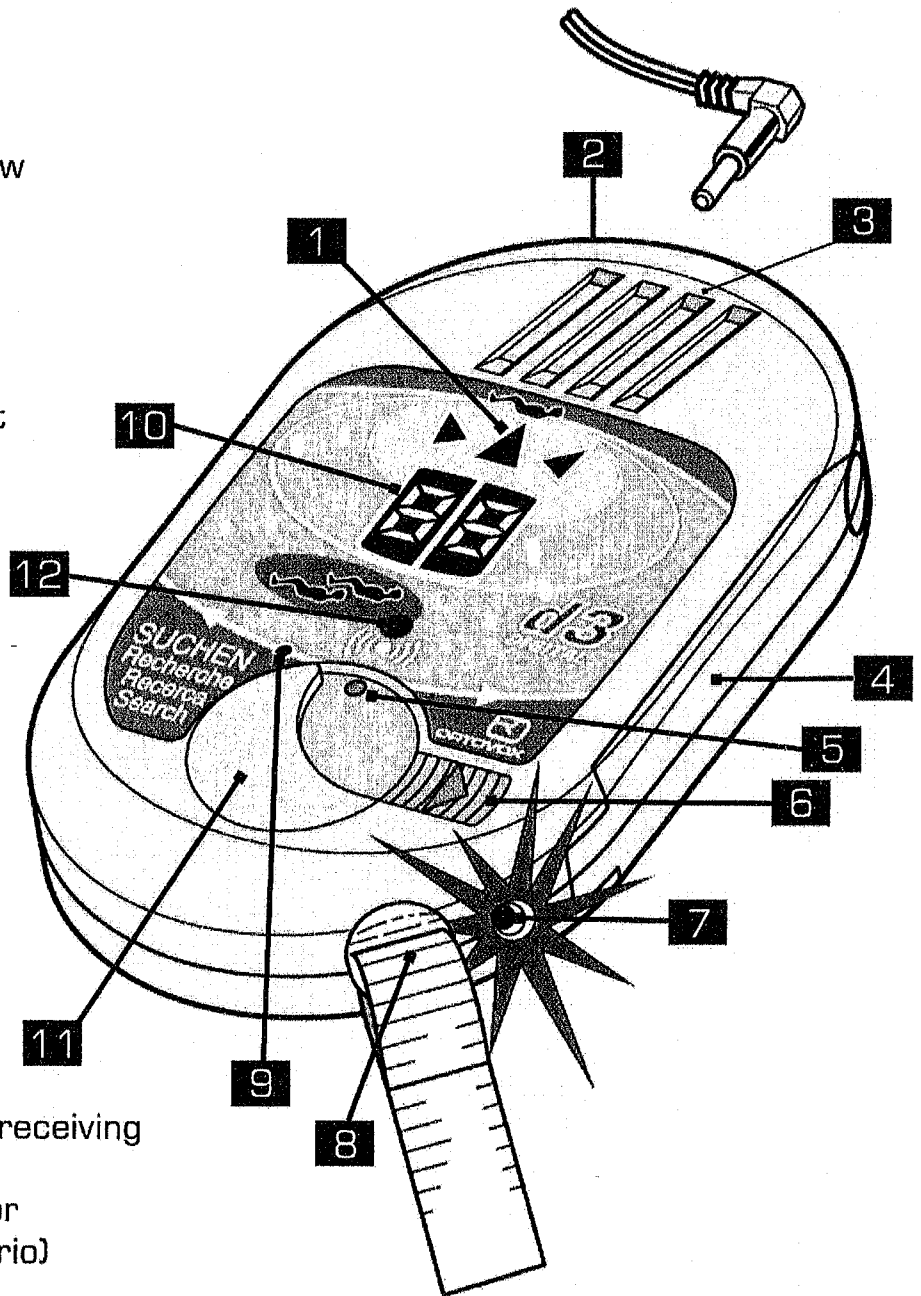

At a distance of less than 2m:
Pin point search with
digital distance indication only!

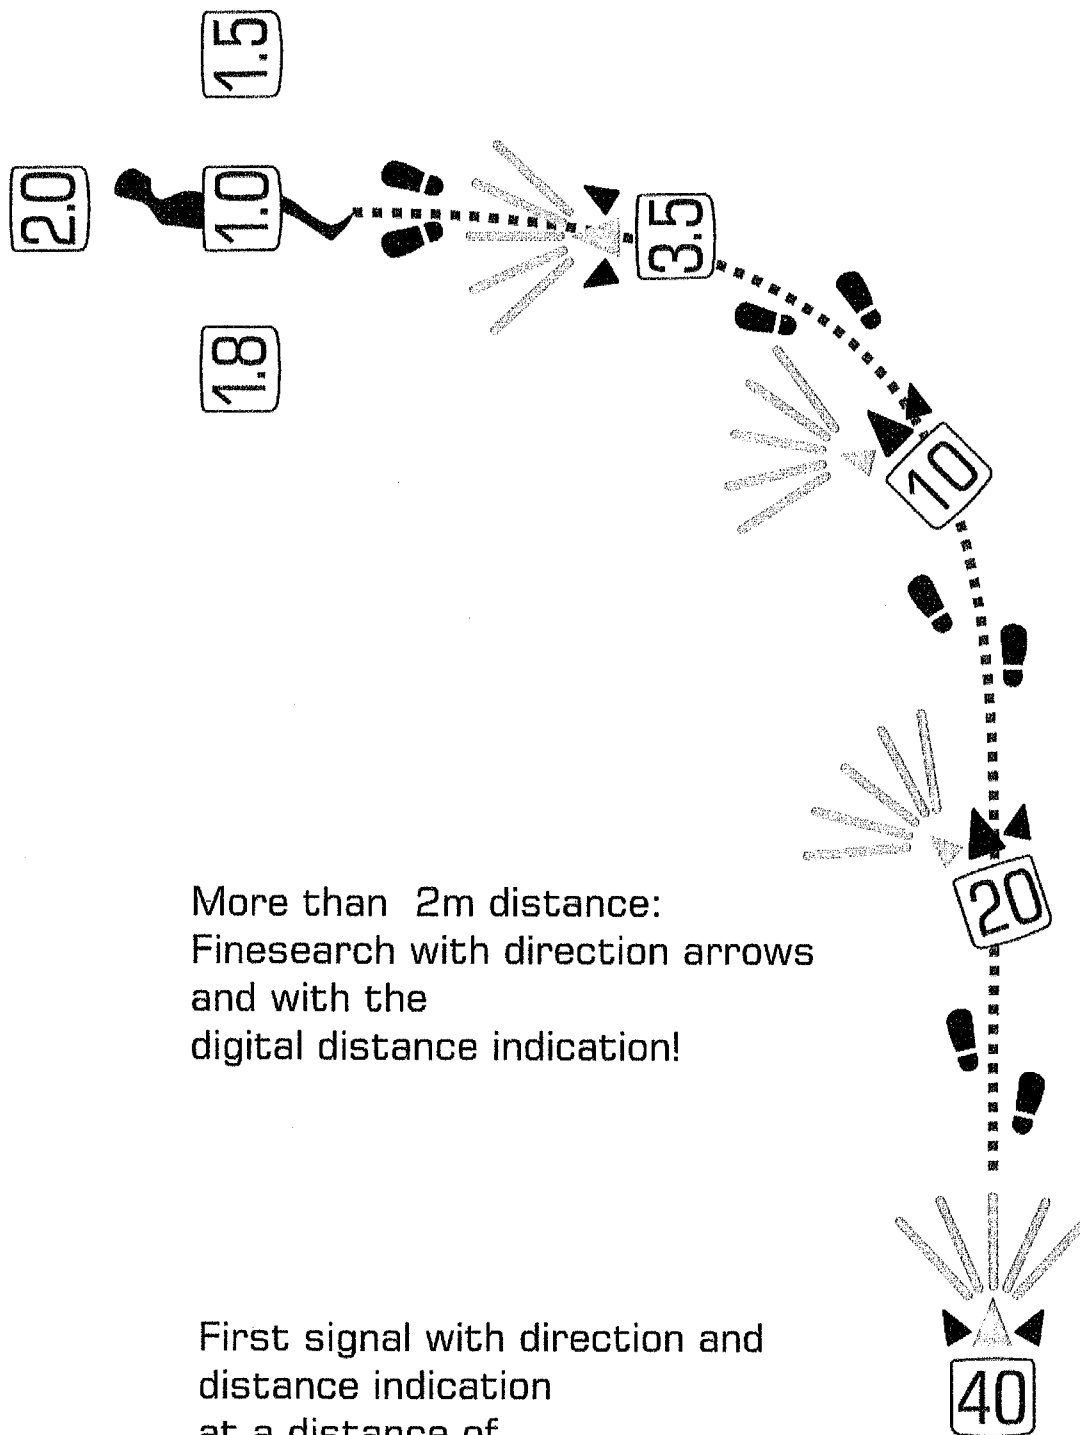

More than 2m distance:
Finersearch with direction arrows
and with the
digital distance indication!

First signal with direction
and
distance indication
at a distance of
40m!

START



FCC Compliance Information:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: Changes or modifications not expressly approved by Ortovox could void the user's authority to operate the equipment