

User Manual

ClicClock

Q50

Please read this quick start user guide carefully before using.
The illustration in this quick start user guide is for reference only, please refer to the actual product.

Product parameters

GSM:850/900/1800/1900MHz

GPRS:Class12

MHz/L1,1575.42MHz C/A code

GPS watch /GPS positioning

accuracy:5-15 meters

Base station location accuracy:

100 ~ 1000 meters

GPS channel number:22 channel

Content in Box

The watch	× 1
USB charging line	× 1
The instructions	× 1

input voltage/ electric current:5V-0.35A

1.Preparation before use

- (1)Check all the accessories if they are complete.
- (2)Choose the SIM card which match to the GSM network, you can refer to opinions of the dealer.(Power off before you insert the SIM card)
- (3)The SIM card need to open the GPRS function and call screening function.
- (4)Install the APP on the phone,you can ask the dealer if you don't know how to download it.
- (5)The bar code and QR code is used to registered users.

2.Product function

- GPS+ base station localization way
- You can control it via mobile client.
- GPRS real-time positioning, tracking, monitoring
- Phone book
- Talkback

- Health
- Footmark
- Alarm clock
- Electronic fence
- SOS for help
- Warning if watch was taken down
- Warning if low power
- Remote Power Off
- Touch to add the friends (only some models and function is optional)



Instruction of buttons

The picture is for reference only, please make adjust depends on the real watch

Button 1: Press for enter the “touch to add friend” interface. The watch(don’t have friend) can add friend by touching. Long press to start recording, then release the watch for send the message

Button 2: Long press for power on; in the main interface, long press for voice recording, release for sending the voice message to the APP; short press for hang up the incoming call.

Button 3: Short press enter the phone book, then short press for choose phone number, long press for dialing, The phone number in the phone book can make double talk with the watch . If you


have set the family number 2 in the APP, you can long press to dialing the family number3 directly.

Button 4: If the APP have setting SOS number, long press SOS button for dialing, if got no answer, the watch will call the family number one by one. When you have incoming call, short press to answer the incoming call. when you got voice message,short press for play the voice message

5.Mobile client operate instructions

5.1 APP register(Note:Please choose the right language and region before register)

Register first before login in please. Input the ID number(The registration code/ID is on the back cover of the watch) in the APP. the device name can not be empty,the family number must be real(when you lost the password, you can use this number find the password), the password can be change(6-12 letters or Numbers), The registration interface is as below: You can get your

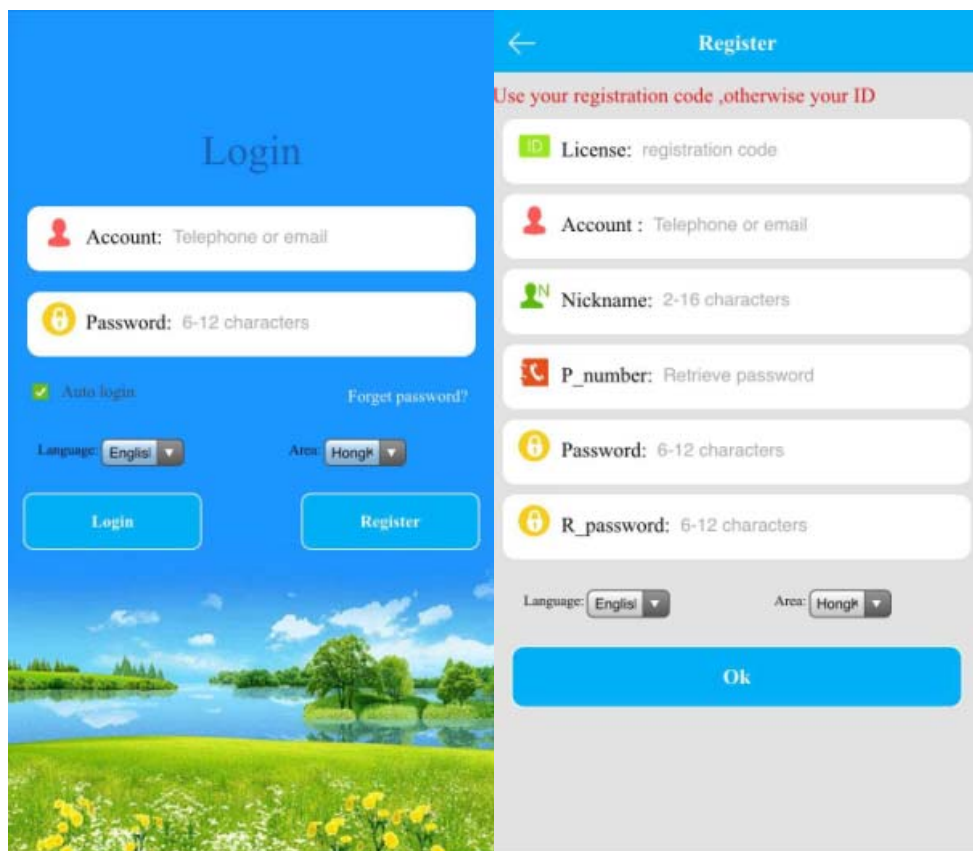

5.2 Login

APP Functional menu interface

Enter the correct account and password in the APP interface and click login, then you can enter the main interface. The picture is shown as Below.



Function description

(1)Intercom: watches and app voice dialogue.Mobile phone can also send text to watches, the text can be read in watches directly. App sends the voice: after start the recording, APP starts recording, then sent it to watch. The longest speech is for 15 seconds.Press the SOS key to play the tape.


Watch recording: Press the power button for 3 seconds to start recording, then sent the tape after loosen the watch,the longest recording is for 15 seconds.APP receive voice prompt information

(The time of receiving voice is related to network status).

(2)Map: check the position of the watch at any time

The interface of map can display the location of the watch and mobile phone APP.Click on "localization" watch then start real-time positioning for 3 minutes, upload interval is 10 seconds and restore to the default operating mode after 3 minutes.

Setting: set all the parameters of the watch.

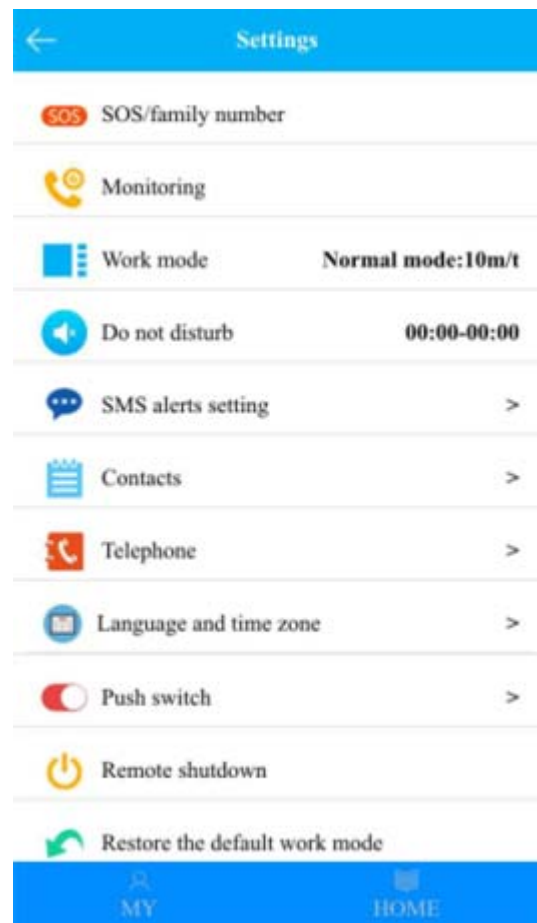

①Set SOS number: After connection with your mobile phone, you could choose 3 numbers in your phonebook to save as emergency contact persons. In emergency, you can long press the SOS key for 3 seconds to alarm. If the call is answered, it won't dial any more, or it will keep dialing until the second round finished.

②Listening: General settings for the parent number, watch dial the number be set initiatively after determine, Watch can't hear the sound of the phone, Mobile phones can listening watch.

③Don't disturb period: The three period of watches to block all calls.

④SMS alerts Settings: low power, SOS, Remove the watch . Three alarm message switch.

⑤Baby contacts: You can set a contacts list included 10 person.

⑥The phone book: The watch can be set 10 phone numbers, and these 10 phone numbers can dial the watch with each other, is a two-way conversation.

⑦Restore the default work mode: The default work mode: open the GPS 24 hours per day, upload interval of 10 minutes.

⑧Remote power off: The watch can't power off by the power off key when it is starting up and normal working.

⑨Touch to add the friends: Add or delete friends.

(4)Electronic fence: Fence minimum radius is 500 meters, it will produce the alarm of the fence when a user walk outside of the fence.

(5)Love reward: Select the number of hearts on the app and click the determine key, then the information will be sent to watch. And the screen will show love hearts and number.

(6)Watch alarm: can installed three alarm clock, alarm clock can be set according to their own requirements.

(7)Looking for watch: You can send this instruction when your watch lost, the watch will ring the bell for a minute, then you can look for your watch, and you can press any key to stop ringing the bell.

Attention: You can find the ID number in the equipment list, if this ID do not match the ID stickered on the watch, the watch will not be able to link the APP.

"Help" documentation for all functions are made more detailed instructions, you can go into the instructions carefully.

5.3 Watch alarm instructions

Once device receive any alarm, alarm notice will be sent to the client, click to the notice, the client will see the list of alarm details and view them.

6.Watch working mode functions

Three basic working mode: The normal mode, the power saving mode and the following mode. The work upload interval of three patterns are different.

Normal mode:upload interval is 600 seconds

Power saving mode:upload interval is 3600 seconds

Following mode:upload interval is 60 seconds

7.Device related instructions

7.1 SOS emergency alarm

Press the SOS button for 3 seconds, the terminal screen SOS,the terminal will into alarm state, it will dial three SOS number for two rounds.

If the call is answered,it won't dial any more,Or it will keep dialing until the second round finished.And at the same time it will send a alarm notification to the APP.

7.2 Warning for taking down the watch

The terminal strap is equipped with the sensor switch, you should wear

the watch for at least 3 minutes, then it will alarm if the strap was taken off, and terminal will send a alarm message to the center number (The default setting is off), and send a alarm notification to the APP.

7.3 Low power alarm

If the power percentage is less than 20%, it will alarm, and terminal will send a alarm message to the center number. At the same time it will send a alarm notification to the APP.

7.4 Health

7.4.1 Smart pedometer

A vibration sensor mounted on the device, when the client are doing healthy exercise, and reach a moving limit, smart pedometer application program will begin. Client could know their movement through the APP.

7.4.2 Sleep Management

Based on the upturned frequency of the device, the device can determine whether a reasonable night sleep of the client. The default detection time for 10:00 p.m. to 7:00 a.m. of the following day. Data could be viewed on the APP.

7.4.3 Physical activity

Calculating according to the steps, step and weight, and the interval and weight can be set up

7.4.4 Sports journey

According to the result of step and step distance calculation, the interval can be set up.

7.5 Talkback

Long press the button 2 to start recording, then release for send the message to the APP . When you got voice message, the watch will show voice symbol, short press the button 4 play the message, After you read all the message, the message will delete automatically. and the voice symbol will disappear.

7.6 Remote monitoring

Firstly, you need set tutelar number, and send opening voice monitoring instructions to device , then device will dial to the tutelar number, turn to auto answer state. And for one-way conversation, device can't hear voice of the other side.

7.7 Turn off

Remove SIM card then click turn off button ,APK remote control to power off.

7.8 The phone book

You can be set 10 phone numbers for the watch's phone book in APP, these Numbers can make double talk with the watch. press button 3 enter the phone book, then press button 3 for choose phone number, long press for dialing.

8. Trouble diagnoses

Device can't connect to server at the first time and the backend show off line. Please check below:

- 1) Check if you have put the SIM card correct, and the screen display is normal, please refer to the picture instruction.

- 2) If your SIM card is out of service, please check if you have open the GPRS service.
 - 3) Whether GPRS service was canceled
 - 4) Check whether the parameters of service is right from the supplier, and then set it right.
- 9.The instruction for put in the SIM card



picture1



picture2



picture3

1. Open the dust plug, you will see the SIM card slot as the picture as below:
- 2.Prepare the standard Micro-SIM card, insert the SIM card, the directionis as the picture 2



- 3.Push the SIM card into the card slot as the picture 3. And close the dust plug

10.QR code scanning entrance



Android and ios can all scan it, after entering it you could choose android or ios APP (QQ scan)

FCC Regulatory Compliance

This device has been tested and meets applicable limits for radio frequency (RF) exposure.

During testing, this device's radios are set to their highest transmission levels and placed in positions that simulate use against the head, with 10mm separation, and on the wrist, with no separation. When placing this device near your face, keep at least 10mm of separation to ensure exposure levels remain at or below the as-tested levels.

This device is also designed to meet the requirements for exposure to radio waves established by the Federal Communications Commission (USA). The SAR limit adopted by the USA is 1.6 W/kg averaged over one gram of tissue. The highest SAR value reported to the FCC for this device type complies with this limit. SAR Max. Values: 0.36 W/Kg (10g) for extremity; 0.11 W/Kg (1g) for next to mouth