



# SDC-WB40NBT User's Guide (version 1.0)

---

Summit Data Communications, Inc., 526 South Main Street Suite 805 Akron, OH 44311  
Tel: 866-434-4300 [www.summitdata.com](http://www.summitdata.com)

## Revision History

Version	Revision Date	Change Description
0.01	04/11/2011	Pre-Release Version.
0.02	04/25/2011	Pre-Release Version 0.02.
0.03	04/28/2011	Revised mechanical diagram.
0.04	05/20/2011	Added UART notes.
0.05	01/18/2012	Updated mechanical diagram. Updated Current Consumption and Tx Power numbers in Specification table. Updated Mounting information.
0.06	01/20/2012	Updated photos. Updated Current Consumption numbers for 802.11g
1.0		Initial Release Version.

# Contents

Scope ..... 4

Product Description..... 4

Block Diagram..... 5

Specifications..... 5

    Electrical Characteristics..... 10

Pin Definitions ..... 13

Mechanical Specifications ..... 18

    Mounting..... 18

Integration Guidelines..... 19

Regulatory ..... 19

    Certified Antennas..... 19

    Documentation Requirements ..... 20

        FCC..... 20

        Industry Canada..... 21

        European Union..... 23

## Scope

This document describes key hardware aspects of the Summit WB40N wireless bridge module. This document is intended to assist device manufacturers and related parties with the integration of this module into their host devices. Data in this document are drawn from a number of sources including data sheets for the Broadcom BCM4329 and Atmel AT91SAM9G20.

Because the SDC-WB40NBT is currently in pre-production, this document is preliminary and the information in this document is subject to change. Please contact Summit or visit the Summit website at [www.summitdata.com](http://www.summitdata.com) to obtain the most recent version of this document.

## Product Description

This device is an SDC-WB40NBT Wireless Bridge Module, a wireless communications subsystem that may be integrated into a variety of host devices via a number of available electronic and logical interfaces. The SDC-WB40NBT provides complete enterprise-class Wi-Fi connectivity with an integrated TCP/IP stack, full support for IEEE 802.11a/b/g/n air standards and a fully integrated security supplicant providing 802.11i/WPA2 Enterprise authentication and data encryption.

The SDC-WB40NBT has a wide variety of interfaces including Fast Ethernet, serial UART, USB, SPI and I2C. The wireless bridge may be configured, monitored and managed via a Command Line Interface over an available dedicated console port, via a web interface over a wireless or Ethernet interface, or via a remote SDK interface over wireless or Ethernet.

The SDC-WB40NBT incorporates the Summit SDC-SSD40NBT radio module and provides all the Wi-Fi capabilities of that device. The product features an ARM9 processor running at 396 MHz, 32 MB of SDRAM memory, and 64 MB of NAND flash storage. Several GPIO lines are available for data acquisition and similar applications. The platform runs an embedded Linux operating system based on the 2.6 kernel. A Software Developer's Kit with Application Programming Interfaces and software tools are available for the development of custom software applications on the device.

The SDC-WB40NBT measures 47mm long by 37 mm wide by 3 mm tall. The width can be reduced to 30 mm by removing a breakout section that is provided for configuration and test purposes. The wireless bridge physically interfaces to the host device via a 120 pin board to board connector that has a variety of mating options. The SDC-WB40NBT may be secured to the host device via available grounded mounting holes. The SDC-WB40NBT operates at temperatures between -TBD and + TDB degrees Celsius.

**Contingent on Compliance results...** SDC-WB40NBT is a fully integrated module: It has its own RF shielding and does not require shielding provided by the host device into which it is installed in order to maintain compliance with applicable regulatory standards. As such, the device may be tested in a standalone configuration via an extender card.

The SDC-WB40NBT provides two unique U.FL type antenna connectors to support dual band transmit and receive diversity. Supported host device antenna types include dipole and monopole antennas.

Regulatory operational requirements are included with this document and may be incorporated into the operating manual of any device into which the SDC-WB40NBT is installed. The SDC-WB40NBT is designed for installation into



mobile devices which typically operate at distances greater than 20 cm from the human body and portable devices which typically operate at distances less than 20 cm from the human body. See "[Documentation Requirements](#)" for more information.

## Specifications

Feature	Description																					
<b>Physical Interface</b>	Kyocera Elco Series 5046 120 Pin Connector P/N 24 5046 120 000 829+ (see Mounting Instructions for mating connector options)																					
<b>Ethernet Interface</b>	10/100 Mbps RMII (Reduced Media Independent Interface)																					
<b>Asynchronous Serial Port Interfaces</b> (3.3 V TTL interface)	<ul style="list-style-type: none"> <li>▪ Nine-wire UART DCE with full modem signaling, ring indication, and carrier detect</li> <li>▪ Four-wire UART with hardware handshaking</li> <li>▪ Two-wire UART ( console)</li> </ul>																					
<b>Synchronous Serial Port Interface</b>	<ul style="list-style-type: none"> <li>▪ Six-wire</li> </ul>																					
<b>Secure Digital I/O Interface</b>	<ul style="list-style-type: none"> <li>▪ Six Wire</li> </ul> <p><b>Note:</b> Cannot be used simultaneously with SPI interface</p>																					
<b>SPI Interface</b>	<ul style="list-style-type: none"> <li>▪ Five Wire, Master and Slave modes supported</li> </ul> <p><b>Note:</b> Cannot be used simultaneously with SDIO interface</p>																					
<b>USB Interfaces</b>	<ul style="list-style-type: none"> <li>▪ Two 12 Mbps USB Host Port</li> <li>▪ One 12 Mbps USB Device Port</li> </ul>																					
<b>Two Wire Interface</b>	<ul style="list-style-type: none"> <li>▪ Two-wire I<sup>2</sup>C (Inter-IC) or CANbus (Controller-area Network)</li> </ul>																					
<b>Debug Interface</b>	<ul style="list-style-type: none"> <li>▪ JTAG</li> </ul>																					
<b>Antenna Interface</b>	2 Hirose U.FL connectors for dual-band antenna diversity, 50 ohm																					
<b>Wi-Fi Interface</b>	Summit Data Communications SDC-SSD40NBT																					
<b>Processor Chip Set</b>	Atmel 400 MHz ARM 9, P/N AT91SAM9G20-CU																					
<b>Operating System</b>	Embedded Linux, 2.6. x kernel																					
<b>Memory</b>	32 MB SDRAM																					
<b>Storage</b>	64 MB NAND flash																					
<b>Input Voltage Requirements</b>	3.3 VDC ±5% (core)																					
<b>Current Consumption</b>	<table border="1"> <thead> <tr> <th></th> <th>Mode</th> <th>Avg. Current</th> <th>Max. Current</th> </tr> </thead> <tbody> <tr> <td rowspan="3"><b>802.11a</b></td> <td>Transmit</td> <td>369 mA (1218 mW)</td> <td>437 mA (1442 mW)</td> </tr> <tr> <td>Receive</td> <td>TBD mA (TBD mW)</td> <td>TBD mA (TBD mW)</td> </tr> <tr> <td>Standby</td> <td>TBD mA (TBD mW)</td> <td>TBD mA (TBD mW))</td> </tr> <tr> <td rowspan="2"><b>802.11b</b></td> <td>Transmit</td> <td>392 mA (1294 mW)</td> <td>417 mA (1376 mW)</td> </tr> <tr> <td>Receive</td> <td>TBD mA (TBD mW)</td> <td>TBD mA (TBD mW)</td> </tr> </tbody> </table>		Mode	Avg. Current	Max. Current	<b>802.11a</b>	Transmit	369 mA (1218 mW)	437 mA (1442 mW)	Receive	TBD mA (TBD mW)	TBD mA (TBD mW)	Standby	TBD mA (TBD mW)	TBD mA (TBD mW))	<b>802.11b</b>	Transmit	392 mA (1294 mW)	417 mA (1376 mW)	Receive	TBD mA (TBD mW)	TBD mA (TBD mW)
	Mode	Avg. Current	Max. Current																			
<b>802.11a</b>	Transmit	369 mA (1218 mW)	437 mA (1442 mW)																			
	Receive	TBD mA (TBD mW)	TBD mA (TBD mW)																			
	Standby	TBD mA (TBD mW)	TBD mA (TBD mW))																			
<b>802.11b</b>	Transmit	392 mA (1294 mW)	417 mA (1376 mW)																			
	Receive	TBD mA (TBD mW)	TBD mA (TBD mW)																			
<b>Note:</b> These current consumption measurements were taken using Linux kernel version 2.6.38.																						
<b>Note:</b> Standby refers to the radio																						



Feature	Description			
operating in PM1 powersave mode.		Standby	TBD mA (TBD mW)	TBD mA (TBD mW))
	<b>802.11g</b>	Transmit	355 mA (1294 mW)	377 mA (1244 mW)
		Receive	TBD mA (TBD mW)	TBD mA (TBD mW)
		Standby	TBD mA (TBD mW)	TBD mA (TBD mW))
	<b>802.11n (2.4 GHz)</b>	Transmit	324 mA (1069 mW)	346 mA (1142 mW)
		Receive	TBD mA (TBD mW)	TBD mA (TBD mW)
		Standby	TBD mA (TBD mW)	TBD mA (TBD mW))
	<b>802.11n (5 GHz)</b>	Transmit	359 mA (1185 mW)	411 mA (1356 mW)
		Receive	TBD mA (TBD mW)	TBD mA (TBD mW)
		Standby	TBD mA (TBD mW)	TBD mA (TBD mW))
<b>Sleep</b>	N/A	TBD	N/A	
<b>Operating Temperature</b>	-30° to 80°C (-22° to 176°F)			
<b>Operating Humidity</b>	10 to 90% (non-condensing)			
<b>Storage Temperature</b>	-30° to 85°C (-22° to 185°F)			
<b>Storage Humidity</b>	10 to 90% (non-condensing)			
<b>Maximum Electrostatic Discharge</b>	Maximum Contact Discharge (CD): 4 kV Maximum Air Discharge (AD): 8 kV			
<b>Length</b> <i>Note: Length, width, and thickness measurements include the metal shielding.</i>	47 mm (1.85")			
<b>Width</b>	With breakout section: 37 mm (1.46") Without breakout section: 30 mm (1.18")			
<b>Thickness</b>	3.0 mm (0.12")			
<b>Weight</b>	With breakout section: 7.8 g (0.275oz) Without breakout section: TBD g (TBD oz.)			
<b>Mounting</b>	Connector and Through Holes, See "Mounting" section for more information.			
<b>Wi-Fi Media</b>	Direct Sequence-Spread Spectrum (DSSS) Complementary Code Keying (CCK) Orthogonal Frequency Divisional Multiplexing (OFDM)			
<b>Wi-Fi Media Access Protocol</b>	Carrier sense multiple access with collision avoidance (CSMA/CA)			
<b>Network Architecture</b>	Infrastructure and ad hoc			
<b>Wi-Fi Standards</b>	IEEE 802.11a, 802.11b, 802.11d, 802.11e, 802.11g, 802.11h, 802.11i, 802.11n			
<b>Wi-Fi Data Rates Supported</b>	802.11a (OFDM) 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b (DSSS, CCK) 1, 2, 5.5, 11 Mbps 802.11g (OFDM) 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n (OFDM, MCS 0-7) 6.5, 7.2, 13.0, 14.4, 19.5, 21.7, 26.0, 28.9, 39.0,			

Feature	Description
	43.3, 52.0, 57.8, 58.5, 65.0, 72.2 Mbps
<b>Modulation</b>	BPSK @ 1, 6, 6.5, 7.2 and 9 Mbps QPSK @ 2, 12, 13, 14.4, 18, 19.5 and 21.7 Mbps CCK @ 5.5 and 11 Mbps 16-QAM @ 24, 26, 28.9, 36, 39 and 43.3 Mbps 64-QAM @ 48, 52, 54, 57.8, 58.5, 65, and 72.2 Mbps
<b>802.11n Spatial Streams</b>	1 (Single Input, Single Output)
<b>Regulatory Domain Support</b>	FCC (Americas, Parts of Asia, and Middle East) ETSI (Europe, Middle East, Africa, and Parts of Asia) MIC (Japan) (formerly TELEC) KC (Korea) (formerly KCC)
<b>2.4 GHz Frequency Bands</b>	<b>ETSI</b> 2.4 GHz to 2.483 GHz <b>FCC</b> 2.4 GHz to 2.483 GHz <b>MIC (Japan)</b> 2.4 GHz to 2.495 GHz <b>KC</b> 2.4 GHz to 2.483
<b>2.4 GHz Operating Channels</b>	ETSI: 13 (3 non-overlapping) FCC: 11 (3 non-overlapping) MIC (Japan): 14 (4 non-overlapping) KC: 13 (3 non-overlapping)
<b>5 GHz Frequency Bands</b>	<b>ETSI</b> 5.15 GHz to 5.35 GHz 5.47 GHz to 5.725 GHz <b>FCC</b> 5.15 GHz to 5.35 GHz 5.725 GHz to 5.825 GHz <b>MIC (Japan)</b> 5.15 GHz to 5.35 GHz <b>KC</b> 5.15 GHz to 5.25 GHz 5.725 GHz to 5.825 GHz
<b>5 GHz Operating Channels</b>	ETSI: 19 non-overlapping FCC: 23 non-overlapping MIC (Japan): 4 non-overlapping KC: 8 non-overlapping
<b>Maximum Transmit Power</b>  <i>Note: Maximum transmit power varies according to individual country regulations. All values</i>	<b>802.11a</b>  6 Mbps 18 dBm (63 mW) 54 Mbps 14 dBm (25 mW) <b>802.11b</b>

Feature	Description
<p><i>nominal, +/-2 dBm.</i></p> <p><b>Note:</b> Summit 40 series radios support a single spatial stream and 20 MHz channels only.</p>	<p>1 Mbps 17 dBm (50 mW) 11 Mbps 17 dBm (50 mW)</p> <p><b>802.11g</b> 6 Mbps 15 dBm (32 mW) 54 Mbps 13 dBm (20 mW)</p> <p><b>802.11n (2.4 GHz)</b> 6.5 Mbps (MCS0) 12 dBm (16 mW) 65 Mbps (MCS7) 11 dBm (16 mW)</p> <p><b>802.11n (5 GHz)</b> 6.5 Mbps (MCS0) 16 dBm (40 mW) 65 Mbps (MCS7) 9 dBm (8 mW)</p> <p><b>Bluetooth</b> 4 dBm (2.5 mW) (Class 2)</p>
<p><b>Typical Receiver Sensitivity</b></p> <p><b>Note:</b> All values nominal, +/-3 dBm.</p>	<p><b>802.11a:</b> 6 Mbps -88 dBm 54 Mbps -72 dBm (PER &lt;= 10%)</p> <p><b>802.11b:</b> 1 Mbps -95 dBm 11 Mbps -89 dBm (PER &lt;= 8%)</p> <p><b>802.11g:</b> 6 Mbps -90 dBm 54 Mbps -74 dBm (PER &lt;= 10%)</p> <p><b>802.11n (2.4 GHz)</b> MCS0 Mbps -90 dBm MCS7 Mbps -73 dBm</p> <p><b>802.11n (5 GHz)</b> MCS0 Mbps -88 dBm MCS7 Mbps -71 dBm</p> <p><b>Bluetooth:</b> 1 Mbps -89 dBm 2 Mbps -91 dBm 3 Mbps -85 dBm</p>



Feature	Description
<b>Security</b>	<p><b>Standards</b></p> <ul style="list-style-type: none"> <li>▪ Wireless Equivalent Privacy (WEP)</li> <li>▪ Wi-Fi Protected Access (WPA)</li> <li>▪ IEEE 802.11i (WPA2)</li> </ul> <p><b>Encryption</b></p> <ul style="list-style-type: none"> <li>▪ Wireless Equivalent Privacy (WEP, RC4 Algorithm)</li> <li>▪ Temporal Key Integrity Protocol (TKIP, RC4 Algorithm)</li> <li>▪ Advanced Encryption Standard (AES, Rijndael Algorithm)</li> </ul> <p><b>Encryption Key Provisioning</b></p> <ul style="list-style-type: none"> <li>▪ Static (40-bit and 128-bit lengths)</li> <li>▪ Pre-Shared (PSK)</li> <li>▪ Dynamic</li> </ul> <p><b>802.1X Extensible Authentication Protocol Types</b></p> <ul style="list-style-type: none"> <li>▪ EAP-FAST</li> <li>▪ EAP-TLS</li> <li>▪ EAP-TTLS</li> <li>▪ PEAP-GTC</li> <li>▪ PEAP-MSCHAPv2</li> <li>▪ PEAP-TLS</li> <li>▪ LEAP</li> </ul>
<p><b>Compliance</b></p> <p><b>Note:</b> These regulatory domain certifications are pending.</p>	<p><b>ETSI Regulatory Domain</b></p> <p>EN 300 328  EN 300 328 v1.7.1 (BT 2.1)  EN 301 489-1  EN 301 489-17  EN 301 893  EN 60950-1  EN55022:2006 Class B  EN55024:1998 +A1:2001, A2:2003  EN61000-3-2:2006  EN61000-3-3:1995 +A1:2001, A2:2005  EU 2002/95/EC (RoHS)</p> <p><b>FCC Regulatory Domain</b></p> <p>FCC 15.247 DTS – 802.11b/g (Wi-Fi) – 2.4 GHz &amp; 5.8 GHz  FCC 15.407 UNII – 802.11a (Wi-Fi) – 2.4 GHz &amp; 5.4 GHz  FCC 15.247 DSS – BT 2.1  FCC Part 15 Class B  UL 60950</p> <p><b>Industry Canada</b></p> <p>RSS-210 – 802.11a/b/g/n (Wi-Fi) – 2.4 GHz, 5.8 GHz, 5.2 GHz, and 5.4 GHz  ICES-003, Class B  CSA C22.2, No. 60950  RSS-210 – BT 2.1</p> <p><b>MIC (Japan) Regulatory Domain (formerly TELEC)</b></p> <p>Article 2 Item 19, Category WW (2.4GHz Channels 1-13)  Article 2 Item 19-2, Category GZ (2.4GHz Channel 14)  Article 2 Item 19-3 Category XW (5150-5250 W52 &amp; 5250-5350 W53)VCCI</p>

Feature	Description
	Class B Article 2-1 Item 19-2 (BT 2.1)
<b>Certifications</b>  <b>Note:</b> These certifications are pending.	<b>Wi-Fi Alliance</b> 802.11a, 802.11b, 802.11g , 802.11n WPA Enterprise WPA2 Enterprise   <b>Cisco Compatible Extensions (Version 4)</b> 
<b>Warranty</b>	<b>Limited Lifetime</b>
<i>All specifications are subject to change without notice</i>	

## Electrical Characteristics

### Absolute Maximum Ratings

Parameter	Comments	Conditions	Min.	Typ.	Max.	Unit
Input Voltage	VCC pin	With respect to ground	-0.3	-	3.6	V
	Any IO pin		-0.3	-	3.6	
DC Output Current	Any IO pin		-	-	8	mA

### Power Supply

Parameter	Comments	Conditions	Min.	Typ.	Max.	Unit
Supply Voltage	VCC		3.0	3.3	3.45	V
Voltage Ripple			-	-	100	mV
Voltage Rise Time	At power on		-	-	5	ms
Operating Current	WLAN sub-system	Continuous receive	-	200	260	mA
		IEEE PSM	10	-	-	
		Continuous transmit	-	360	450	
	CPU sub-system	Varies with system load	-	35	150	mA

### Reset Characteristics

Parameter	Comments	Conditions	Min.	Typ.	Max.	Unit
Under voltage Threshold Level	VCC to GND	VCC falling	2.59	-	2.67	V
Under voltage Threshold Hysteresis			-	55.2	*	mV

Parameter	Comments	Conditions	Min.	Typ.	Max.	Unit
Reset Delay	Power on or under voltage		0.9	1.1	1.4	s
External Reset Pulse Width	RSTN driven low by external circuitry		92	-	-	$\mu$ s
Output Current High Level RSTN	Internal reset controller drives external circuitry	$U_H = 2.0$ V	-	-	650	$\mu$ A
Input Current Low Level RSTN	Manual reset from external circuitry	Internal reset controller drives high level	2.2	-	-	mA

### I/O Pin Characteristics (including UART interfaces)

Parameter	Comments	Conditions	Min.	Typ.	Max.	Unit
Input Low Level Voltage			-	-	0.8	V
Input High Level Voltage			2.0	-	-	V
Output Low Level Voltage		$I_{OL} = 8$ mA	-	-	0.4	V
		$I_{OL} = 0$ mA	-	-	0.2	
Output High Level Voltage		$I_{OL} = 8$ mA	$V_{CC} - 0.4$	-	-	V
		$I_{OL} = 0$ mA	$V_{CC} - 0.2$	-	-	V
Output High Level Voltage LED0		$I_{OL} = 6$ mA	$V_{CC} - 0.4$	-	-	V
Input Leakage Current		Pull-up-disabled	-	-	1	$\mu$ A
Input Pull-Up Current	$V_{in} = 0$ V	$V_{CC} = 3.0$ V	8	-	-	$\mu$ A
		$V_{CC} = 3.45$ V	-	-	30	
Internal Pull-Up Value			-	200	-	kOhm

### USB Transceiver Characteristics

Parameter	Comments	Conditions	Min.	Typ.	Max.	Unit
Input Low Level Voltage			-	-	0.8	V
Input High Level Voltage			2.0	-	-	V

Parameter	Comments	Conditions	Min.	Typ.	Max.	Unit
Differential Input Sensitivity			0.2	-	-	V
Differential Input Common Mode Range			0.8	-	2.5	V
Transceiver Capacitance		To ground, each line	-	-	20	pF
High-Z State Data Line Leakage		$0V < V_{in} < 3.3V$	-5		5	$\mu A$
Recommended External Series Resistor		In each data line, 5% tolerance	-	27	-	Ohm
Low Level Output		RL = 1.425 kOhm Tied to 3.6V	-	-	0.3	V
High Level Output		RL = 1.425 kOhm Tied to GND	2.8	-	-	V
Output Signal Crossover Voltage			1.3	-	2.0	V
Transition Rise Time	Slow Speed	CL = 400 pF	75	-	300	ns
Transition Fall Time	Slow Speed	CL = 400 pF	75	-	300	ns
Rise/Fall Time Matching	Slow Speed	CL = 400 pF	80	-	120	%
Transition Rise Time	Full Speed	CL = 50 pF	4	-	20	ns
Transition Fall Time	Full Speed	CL = 50 pF	4	-	20	ns
Rise/Fall Time Matching	Full Speed	CL = 50 pF	90	-	111.111	%

## Pin Definitions

**Note:** Unused pins should be left open. All GND pin shall be connected to system ground.

**Note:** The maximum output current is 8 mA except for the following pins (which have a maximum output current of 2 mA): 3, 4, 6, 8, 14, 16, 41, 47, 72, 87, and 89.

**Note:** The SDC-WB40NBT schematic is available from the Summit website.

Section	Pin No.	Pin Name	I/O	Reference	Description	Section	Pin No.	Pin Name	I/O	Reference	Description
SPI	1	GND			Signal Ground	GPIO	2	GPIO_1/ ADC0	I/O	VCC3_3	General Purpose I/O
	3	SPI1_NPCS_1	O	VCC3_3	SPI 1 Peripheral Chip Select 1		4	GPIO_2/ ADC1	I/O	VCC3_3	General Purpose I/O
	5	SPI1_NPCS_0	O	VCC3_3	SPI 1 Peripheral Chip Select 0		6	PC22	I	VCC3_3	Reserved for input to BT device. Indicates that Bluetooth is transmitting or receiving high priority packets (i.e., SCO and LMP). Not currently supported in the firmware. Tie to GND when not in use.
	7	GND			Signal Ground		8	PC23	O	VCC3_3	Output to BT device. Indicates that the WLAN is transmitting or receiving high priority packets. Not currently supported in the firmware. Tie to GND when not in use.
	9	SPI1_MOSI	O	VCC3_3	SPI 1 Master Out/Slave In						
						UART2 (Console)	10	DRXD	I	VCC3_3	Console/Debug Serial Input
							12	DTXD	O	VCC3_3	Console/Debug Serial Output
		11	SPI1_MISO	I	VCC3_3	SPI 1 Master In/Slave Out	Boot Control				
	13	GND			Signal Ground	14		PC24/ BOOT1	I	VCC3_3	Emergency update initiation; Active low

Section	Pin No.	Pin Name	I/O	Reference	Description	Section	Pin No.	Pin Name	I/O	Reference	Description
	15	SPI1_CLK	O	VCC3_3	SPI Programming Clock		16	PC25/BOOT2	I	VCC3_3	Bootloader console redirection to UART1; Active low
Ethernet RMII	17	GND			Signal Ground	LED	18	LED0	O	VCC3_3	WLAN activity indicator IOH = 2mA max (VDDIO = 1.8V) IOH = 4mA max (VDDIO = 3.3V)
	19	EREFCK	I	VCC3_3	Ethernet Reference Clock (50 MHz max)		20	LED1	O	VCC3_3	General purpose LED1 out; Active low
	21	GND		VCC3_3	Signal Ground		22	LED2	O	VCC3_3	General purpose LED2 out; Active low
	23	ETX0	O	VCC3_3	Ethernet data output 0	Status	24	STAT0	O	VCC3_3	Status High while system in reset, bootloader or OS boot, low when OS is up
	25	ETX1	O	VCC3_3	Ethernet data output 1		26	STAT1	O	VCC3_3	Status High while system running, low while system in suspend state
	27	GND			Signal Ground	Control	28	/PWDN	I	VCC3_3	Powers down the module, active low; 4.7K pull-up resistor to VDDIO is recommended
	29	ERX0	I	VCC3_3	Ethernet data input 1		30	/RESET	I/O	VCC3_3	When the AT91 CPU is powered on, there's a routine in the bootloader that asserts a reset on the SYS_RST_L line for 100us. This resets peripheral circuitry that may also be attached to the SYS_RST_L line.
	31	ERX1	I	VCC3_3	Ethernet data input 1	Two Wire Interface	32	GND			Signal Ground
	33	GND			Signal Ground		34	TWD	I/O	VCC3_3	Two-wire Serial Data
	35	ETXEN	O	VCC3_3	Ethernet Transmit Enable		36	TWCK	I/O	VCC3_3	Two-wire Serial Clock
	37	ECRSVDV	I	VCC3_3	Ethernet Carrier Sense and Data Valid	UART1 (DCE)	38	GND			Signal Ground


Section	Pin No.	Pin Name	I/O	Reference	Description	Section	Pin No.	Pin Name	I/O	Reference	Description
	39	ERXER	I	VCC3_3	Ethernet Receive Error		40	TXD1	O	VCC3_3	Serial UART1 Transmit Data 1
	41	ERST/ ADC2	O	VCC3_3	Ethernet Reset		42	RXD1	I	VCC3_3	Serial UART1 Receive Data 1
	43	EMDC	O	VCC3_3	Ethernet Management Data Clock		44	CTS1	I	VCC3_3	UART1 Interface, clear-to-send, active low.
	45	EMDIO	I/O	VCC3_3	Ethernet Management Data Input/Output		46	RTS1	O	VCC3_3	UART1 Interface, request-to-send, active low
	47	EMIRO/ ADC3	I	VCC3_3	Ethernet Interrupt Request		UART0 (DCE)	48	GND		
Multi-media Card/ SD Card	49	GND			Signal Ground	50		CTS0	I	VCC3_3	UART0 Interface, clear-to-send, active low
	51	MCDA3	I/O	VCC3_3	SDIO Multimedia Card Slot A Data 3	52		RTS0	O	VCC3_3	UART0 Interface, request-to-send, active low
	53	MCDA2	I/O	VCC3_3	SDIO Multimedia Card Slot A Data 2	54		DSR0	I	VCC3_3	UART0 Interface, Data Set Ready
	55	GND			Signal Ground	56		DTR0	O	VCC3_3	UART0 Interface, Data Terminal Ready
	57	MCDA1	I/O	VCC3_3	SDIO Multimedia Card Slot A Data 1	58		RI0	I	VCC3_3	UART0 Ring Indicator 1
	59	MCDA0	I/O	VCC3_3	SDIO Multimedia Card Slot A Data 0	60		DCD0	I	VCC3_3	USART0 Data Carrier Detect
	61	GND			Signal Ground	62		GND			Signal Ground
	63	MCCK	O	VCC3_3	SDIO Interface Multimedia Card Clock	64		SCK0	I/O	VCC3_3	UART0 Serial Clock
	65	GND			Signal Ground	66		TXD0	O	VCC3_3	UART0 Serial Output
	67	MCCDA	I/O	VCC3_3	SDIO Multimedia Card Slot A Command	68		RXD0	I	VCC3_3	UART0 Serial Input

Section	Pin No.	Pin Name	I/O	Reference	Description	Section	Pin No.	Pin Name	I/O	Reference	Description
	69	GND			Signal Ground	<b>External Bus Interface</b>	70	GND			Signal Ground
<b>Sync. Serial Interface</b>	71	TK	I/O	VCC3_3	Transmit Clock		72	NC	-		Leave open; don't ground
	73	TD	O	VCC3_3	Serial Output		74	NC	-		Leave open; don't ground
	75	TF	I/O	VCC3_3	Transmit Frame Sync		76	GND			Signal Ground
	77	GND			Signal Ground		78	NC	-		Leave open; don't ground
	79	RK	I/O	VCC3_3	Receive Clock		80	NC	-		Leave open; don't ground
	81	RD	I	VCC3_3	Serial Input		82	GND			Signal Ground
	83	RF	I/O	VCC3_3	Receive Frame Sync		84	NC	-		Leave open; don't ground
<b>USB Device</b>	85	GND			Signal Ground		86	NC	-		Leave open; don't ground
	87	DPUCNTRL	O	VCC3_3	USB device pull-up resistor enable, active high		88	NC	-		Leave open; don't ground
	89	DBUSSENSE	I	VCC3_3	USB device bus sense signal from peripheral to host, active low		90	NC	-		Leave open; don't ground
	91	GND			Signal Ground		92	NC	-		Leave open; don't ground
	93	DDM	I/O	VCC3_3	USB device data negative		94	NC	-		Leave open; don't ground
	95	DDP	I/O	VCC3_3	USB device data positive		96	NC	-		Leave open; don't ground
<b>USB Host A</b>	97	GND			Signal Ground		98	NC	-		Leave open; don't ground
	99	HDMA	I/O	VCC3_3	USB host A data negative	100	GND			Ground	
	101	HDPA	I/O	VCC3_3	USB host A data positive	102	NC	-		Leave open; don't ground	




Section	Pin No.	Pin Name	I/O	Reference	Description	Section	Pin No.	Pin Name	I/O	Reference	Description
USB Host B	103	GND			Signal Ground		104	NC	-		Leave open; don't ground
	105	HDMB	I/O	VCC3_3	USB host B data negative		106	NC	-		Leave open; don't ground
	107	HDPB	I/O	VCC3_3	USB host B data positive		108	NC	-		Leave open; don't ground
Power Supply	109	GND			Supply Ground		110	NC	-		Leave open; don't ground
	111	GND			Supply Ground		112	NC	-		Leave open; don't ground
	113	GND			Supply Ground		Power Supply	114	GND		
	115	VCC3_3			3.3V Module Power	116		GND			Supply Ground
	117	VCC3_3			3.3V Module Power	118		VCC3_3			3.3V Module Power
	119	VCC3_3			3.3V Module Power	120		VCC3_3			3.3V Module Power

## Mechanical Specifications

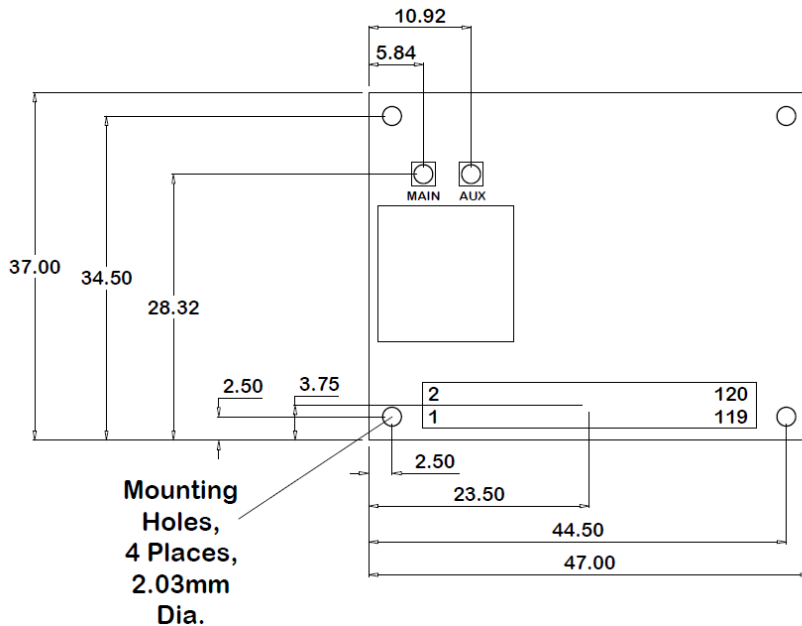

**SDC-WB40NBT Rev 5**  
**Top View**



Note: The overall thickness is approx. 4.7mm including parts on reverse side of PCB.

**Side View**

## Mounting

The WB40NBT board provides the following: 245046120600829+ CONN RECEPT 120 POS SMD 0.5MM

There are four Kyocera Elco options for mating connectors, each option providing for four different stack heights. Depending on the board to board space required the main board part number is:

Part Number	Contacts	B2B	(mm)	Newark PN
145046120630829+	120	Plug	3.0	96M9299
145046120635829+	120	Plug	3.5	96M9300
145046120640829+	120	Plug	4.0	96M9301
145046120645829+	120	Plug	4.5	03M4923

The WB40N provides four grounded mounting holes located on the corners of the module. One or more of these mounting holes may be used to secure the module to the host device with conductive screws with bushings that correspond to the selected stack height.

## Integration Guidelines

The following is a list of RF layout design guidelines and recommendation when installing a Summit module into your device.

- Do not run antenna cables directly above or directly below the module.
- If there are other radios or transmitters in the device (such as a Bluetooth radio), place the devices as far apart from each other as possible.
- Ensure that there is the maximum allowable spacing separating the antenna connectors on the Summit radio from the antenna. In addition, do not place antennas directly above or directly below the radio.
- Summit recommends the use of a double shielded cable for the connection between the radio and the antenna elements.

## Regulatory

### Certified Antennas

The SDC-WB40NBT will be tested to the regulatory standards defined in the “Certifications” section of the Specifications table above. Summit plans to conduct these tests with the following antennas:

[Cisco AIR-ANT 4941](#) (click for datasheet)

- **Form Factor:** Whip
- **Type:** Dipole
- **Maximum 2.4 GHz Gain:** 2.2 dBi
- **Tested and Certified 2.4 GHz Transmit Power:** TBD

[Radiall Larson Dipole](#) (click for datasheet)

- **Form Factor:** Whip
- **Type:** Dipole
- **Maximum 2.4 GHz Gain:** 1.6 dBi (not used during testing)
- **Maximum 5 GHz Gain:** 5 dBi
- **Tested and Certified 5 GHz Transmit Power:** TBD

[HUBER+SUHNER](#) (click for datasheet)

- **Form Factor:** Whip
- **Type:** Monopole
- **Maximum 2.4 GHz Gain:** 3dBi
- **Maximum 5 GHz Gain:** 6.5dBi
- **Tested and Certified 2.4 GHz Transmit Power:** TBD
- **Tested and Certified 5 GHz Transmit Power:** TBD

**Note:** If the formal test reports for the SDC-WB40NBT show that transmit power was decreased to less than 100% on 2.4 GHz edge channels. Summit will make these transmit power reductions in firmware for the edge channels. Integrators do not need to reduce transmit power on a channel-by-channel basis to comply with band edge regulations.

Antennas of differing types and higher gains may be integrated as well. If necessary, with the Summit Manufacturing Utility software utility, OEMs may reduce the transmit power of the SDC-WB40NBT to account for higher antenna gain. In some cases, OEMs may be able to reduce certification efforts by using antennas that are of like type and equal or lesser gain to the above listed antennas.

## Documentation Requirements

In order to ensure regulatory compliance, when integrating the SDC-WB40NBT into a host device, it is necessary to meet the documentation requirements set forth by the applicable regulatory agencies. The following sections (FCC, Industry Canada, and European Union) outline the information that may be included in the user's guide and external labels for the host devices into which the SDC-WB40NBT is integrated.

### FCC

**Note:** You must place "Contains FCC ID: TWG-SDCWB40NBT" on the host product in such a location that it can be seen by an operator at the time of purchase.

### User's Guide Requirements

As outlined in the Operational Description, the SDC-WB40NBT complies with [FCC Part 15 Rules](#) for a Modular Approval. To leverage Summit's grant, the two conditions below must be met for the host device into which the SDC-WB40NBT is integrated:

1. The antenna is installed with 20 cm maintained between the antenna and users.
2. The transmitter module is not co-located with any other transmitter or antenna that is capable of simultaneous operation.

As long as the two conditions above are met, further *transmitter* testing is typically not required. However, the OEM integrator is still responsible for testing its end-product for any additional compliance requirements required with this module installed, such as (but not limited to) digital device emissions and PC peripheral requirements.

### IMPORTANT!

In the event that the two conditions above **cannot be met** (for example certain device configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID **cannot** be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

When using Summit's FCC grant for the SDC-WB40NBT, the integrator must include specific information in the user's guide for the device into which the SDC-WB40NBT is integrated. The integrator must not provide information to the end user regarding how to install or remove this RF module in the user's manual of the device into which the SDC-

WB40NBT is integrated. The following FCC statements must be added in their entirety and without modification into a prominent place in the user's guide for the device into which the SDC-WB40NBT is integrated:

---

**“IMPORTANT NOTE:** To comply with FCC RF exposure compliance requirements, the antenna used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.”

---

#### **Federal Communication Commission Interference Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

1. Reorient or relocate the receiving antenna.
  2. Increase the separation between the equipment and receiver.
  3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  4. Consult the dealer or an experienced radio/TV technician for help.
- 

**FCC Caution:** Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

---

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

---

#### **IMPORTANT NOTE:** FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

---

### ***Industry Canada***

---

**Note:** You must place “Contains IC ID: 6616A-SDCW40NBT” on the host product in such a location that it can be seen by an operator at the time of purchase.

---

## User's Guide Requirements (for Model # SDC-WB40NBT)

### ***RF Radiation Hazard Warning***

To ensure compliance with FCC and Industry Canada RF exposure requirements, this device must be installed in a location where the antennas of the device will have a minimum distance of at least 20 cm from all persons. Using higher gain antennas and types of antennas not certified for use with this product is not allowed. The device shall not be co-located with another transmitter.

Installez l'appareil en veillant à conserver une distance d'au moins 20 cm entre les éléments rayonnants et les personnes. Cet avertissement de sécurité est conforme aux limites d'exposition définies par la norme CNR-102 relative aux fréquences radio.

### ***Maximum Antenna Gain – If the integrator configures the device such that the antenna is detectable from the host product.***

This radio transmitter (IC ID: 6616A-SDC SSD40L) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio (IC ID: 6616A-SDC SSD40L) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

## NCC

### User's Guide Requirements

The modular transmitter must be labeled with its own NCC ID number. If the NCC ID is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. The exterior label can use wording such as the following:

“Contains Transmitter Module NCC ID: CCAB08LPxxxxTx”

or

“Contains NCC ID: CCAB08LPxxxxTx”

## European Union

### User's Guide Requirements

The integrator must include specific information in the user's guide for the device into which the SDC-WB40NBT is integrated. In addition to the required FCC and IC statements outlined above, the following R&TTE statements must be added in their entirety and without modification into a prominent place in the user's guide for the device into which the SDC-WB40NBT is integrated:

This device complies with the essential requirements of the R&TTE Directive 1999/5/EC. The following test methods have been applied in order to prove presumption of conformity with the essential requirements of the R&TTE Directive 1999/5/EC:

- **EN60950-1:2001 A11:2004**  
Safety of Information Technology Equipment
- **EN 300 328 V1.7.1: (2006-10)**  
Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques; Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive
- **EN 301 489-1 V1.6.1: (2005-09)**  
Electromagnetic compatibility and Radio Spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements
- **EN 301 489-17 V1.2.1 (2002-08)**  
Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for 2,4 GHz wideband transmission systems and 5 GHz high performance RLAN equipment
- **EN 301 893 V1.5.1 (2008-12)**  
Electromagnetic compatibility and Radio spectrum Matters (ERM); Broadband Radio Access Networks (BRAN); Specific conditions for 5 GHz high performance RLAN equipment
- **EU 2002/95/EC (RoHS)**  
Declaration of Compliance – EU Directive 2003/95/EC; Reduction of Hazardous Substances (RoHS)

This device is a 2.4 GHz wideband transmission system (transceiver), intended for use in all EU member states and EFTA countries, except in France and Italy where restrictive use applies.

In Italy the end-user should apply for a license at the national spectrum authorities in order to obtain authorization to use the device for setting up outdoor radio links and/or for supplying public access to telecommunications and/or network services.

This device may not be used for setting up outdoor radio links in France and in some areas the RF output power may be limited to 10 mW EIRP in the frequency range of 2454 – 2483.5 MHz. For detailed information the end-user should contact the national spectrum authority in France.

<b>cs</b> <b>Česky [Czech]</b>	<i>[Jméno výrobce]</i> tímto prohlašuje, že tento <i>[typ zařízení]</i> je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.
<b>da</b> <b>Dansk [Danish]</b>	Undertegnede <i>[fabrikantens navn]</i> erklærer herved, at følgende udstyr <i>[udstyrets typebetegnelse]</i> overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.
<b>de</b> <b>Deutsch [German]</b>	Hiermit erkläre <i>[Name des Herstellers]</i> , dass sich das Gerät <i>[Gerätetyp]</i> in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.
<b>et</b> <b>Eesti [Estonian]</b>	Käesolevaga kinnitab <i>[tootja nimi = name of manufacturer]</i> seadme <i>[seadme tüüp = type of equipment]</i> vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.
<b>en</b> <b>English</b>	Hereby, <i>[name of manufacturer]</i> , declares that this <i>[type of equipment]</i> is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
<b>es</b> <b>Español [Spanish]</b>	Por medio de la presente <i>[nombre del fabricante]</i> declara que el <i>[clase de equipo]</i> cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.
<b>el</b> <b>Ελληνική [Greek]</b>	ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ <i>[name of manufacturer]</i> ΔΗΛΩΝΕΙ ΟΤΙ <i>[type of equipment]</i> ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/EK.
<b>fr</b> <b>Français [French]</b>	Par la présente <i>[nom du fabricant]</i> déclare que l'appareil <i>[type d'appareil]</i> est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.
<b>it</b> <b>Italiano [Italian]</b>	Con la presente <i>[nome del costruttore]</i> dichiara che questo <i>[tipo di apparecchio]</i> è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.
<b>Latviski [Latvian]</b>	Ar šo <i>[name of manufacturer / izgatavotājanosaukums]</i> deklarē, ka <i>[type of equipment / iekārtas tips]</i> atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.



<b>Lietuvių</b> <b>[Lithuanian]</b>	Šiuo <i>[manufacturer name]</i> deklaruoja, kad šis <i>[equipment type]</i> atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.
<b>[nl] Nederlands</b> <b>[Dutch]</b>	Hierbij verklaart <i>[naam van de fabrikant]</i> dat het toestel <i>[type van toestel]</i> in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.
<b>[mt] Malti</b> <b>[Maltese]</b>	Hawnhekk, <i>[isem tal-manifattur]</i> , jiddikjara li dan <i>[il-mudel tal-prodott]</i> jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-Dirrettiva 1999/5/EC.
<b>[hu] Magyar</b> <b>[Hungarian]</b>	Alulírott, <i>[gyártó neve]</i> nyilatkozom, hogy a <i>[... típus]</i> megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.
<b>[pl] Polski</b> <b>[Polish]</b>	Niniejszym <i>[nazwa producenta]</i> oświadczam, że <i>[nazwa wyrobu]</i> jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.
<b>[pt] Português</b> <b>[Portuguese]</b>	<i>[Nome do fabricante]</i> declara que este <i>[tipo de equipamento]</i> está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.
<b>[sl] Slovensko</b> <b>[Slovenian]</b>	<i>[Ime proizvajalca]</i> izjavlja, da je ta <i>[tip opreme]</i> v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.
<b>Slovensky</b> <b>[Slovak]</b>	<i>[Menovýrobcu]</i> týmto vyhlasuje, že <i>[typzariadenia]</i> spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.
<b>[fi] Suomi</b> <b>[Finnish]</b>	<i>[Valmistaja = manufacturer]</i> vakuuttaa täten että <i>[type of equipment = laitteen tyyppimerkintä]</i> tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.
<b>[sv] Svenska</b> <b>[Swedish]</b>	Härmed intygar <i>[företag]</i> att denna <i>[utrustningstyp]</i> står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.