

## Housing - HC-B 24-KMQ-H-M1PG29 - 1460328

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON B24 coupling housing, with double locking latch, height: 81.5 mm, with 1 x Pg29 screw connection, straight cable outlet



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	350.0 g
Country of origin	Germany

### Technical data

#### Dimensions

Height	82 mm
Width	43 mm
Length	120 mm
Wrench size, union nut	37 mm
External cable diameter	18 mm ... 27 mm

#### Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

#### General

Note	For contact inserts HC-B24, BB46, BBB64, D64, DD108, M
Size	B24
Housing type	Coupling housings
Locking type	With double locking latch
No. of cable outlets	1
Cable exit	straight
Screw connection	with

# Housing - HC-B 24-KMQ-H-M1PG29 - 1460328

## Technical data

### General

Type of the screw connection	1x Pg29
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Cable gland material	Nickel-plated brass
Cable seal material	NBR
Material lock	Stainless steel, handle: PA
Material grip body interlock	PA

## Classifications

### eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

### ETIM

ETIM 3.0	EC000437
ETIM 4.0	EC000437
ETIM 5.0	EC000437

### UNSPSC

UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	31261502

## Approvals

### Approvals

# Housing - HC-B 24-KMQ-H-M1PG29 - 1460328

## Approvals

Approvals

EAC

---

Ex Approvals

---

Approvals submitted


---

## Approval details

EAC
-----

## Drawings

Dimensional drawing

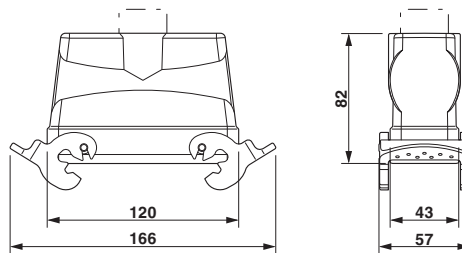

Dimensional drawing

---