





## Dimensions

Wall Mounting Plate for Single Strut Arms



Wall Mounting Plate for Double Strut Arms

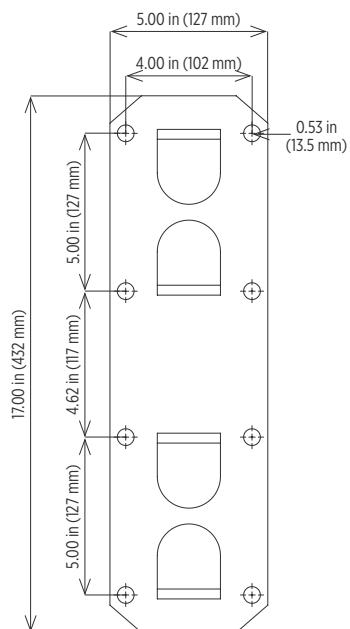

## Compliances

UL/cUL Listed to:

- UL 153 Portable Work Lights
- Suitable for Dry Locations
- Indoor (cUL)



Meets the requirements of the  
Buy American Act (BAA) and/or the  
American Recovery and Reinvestment Act (ARRA)

Built for longevity, stability and smooth operation

Durable polymer design in safety yellow for maximum visibility

Modular arms available in 24, 42 and 60 inch lengths

## Modular Head Specifications

<b>Construction</b>	High temperature polymer housing Zinc plated steel Wire Lamp Guard
<b>Hardware</b>	Zinc plated steel
<b>Socket</b>	Spring-loaded socket assembly
<b>Light source</b>	Accommodates up to 250W PAR 38/BR40 lamp Lamp not included
<b>Wiring</b>	Recessed 3-prong IEC (C-14) type plug
<b>Mounting</b>	Zinc plated harp
<b>Warranty</b>	3 years

## Modular Arm Specifications

<b>Construction</b>	1.50 inch square steel tube arms with wrist-action, zinc plated steel joint on 42 and 60 inch single strut arms Washers at all joints and bushings at bracket joints 24, 42 and 60 inch single strut arms - standard 42 and 60 inch double strut arms available
<b>Finish</b>	Safety yellow thermoset powder coat
<b>Hardware</b>	Zinc plated
<b>Wiring</b>	120V only Wear-resistant 3 conductor AC cord Male plug on light head cord plugs in to female receptacle in arm On-off rocker switch and IEC type receptacle
<b>Mounting</b>	5/16 inch (5 mm) thick zinc plated steel mounting bracket Mounting plate: 3 x 5 inch - single strut arms 5 x 17 inch - double strut arms Recommended mounting height: 5 feet 10 inches (1.78 m) from the floor - single strut arms 6 feet 9 inches (2.06 m) from the floor - double strut arms
<b>Warranty</b>	3 years

Contact factory for IES files



### Light Head




Includes a recessed 3-prong IEC (C-14) type plug which plugs directly into the receptacle of any single or double strut modular arm

### Single Strut Arms


#### 24 inch Arm Effective Reach



#### 42 inch Arm Effective Reach

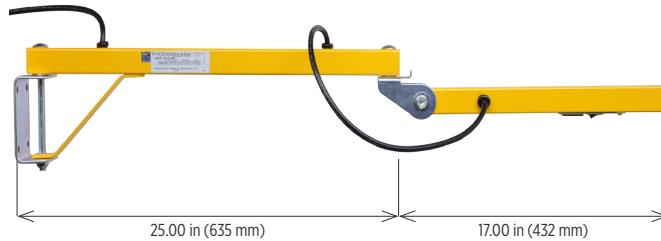


#### 60 inch Arm Effective Reach

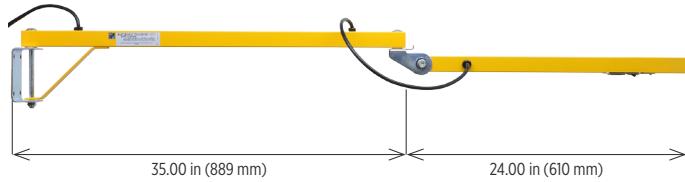


### Double Strut Arms

#### 42 inch Arm Effective Reach

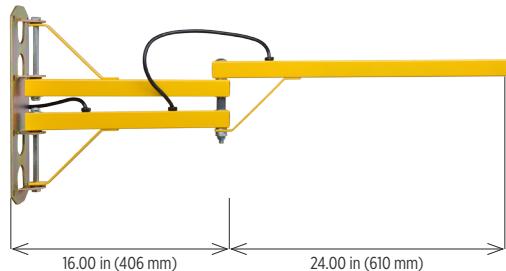

#### 60 inch Arm Effective Reach

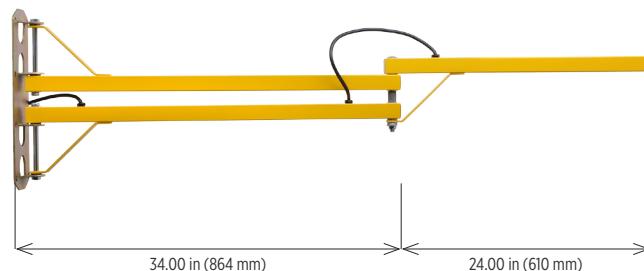

## Ordering Information

### Modular Head

Example: DL-INC-LH

Fixture	Wattage/Type	Part
DL	INC	LH

### Wattage/Type

INC Incandescent (PAR38/BR40)

### Modular Arm

Example: DL-24-ARM

Series	Length	Part	Options
DL	24 <sup>1</sup>	ARM	DS <sup>2</sup>
	42 <sup>1</sup>		
	60 <sup>1</sup>		

### Options

DS<sup>2</sup> Double strut arm

### Notes

- 1 120V standard.
- 2 Available in 42 and 60 inch lengths only. DL-FAN-18 requires 42 or 60 inch Double Strut Arm.

**Special Projects:** We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.

## Accessories (order separately)



### Wire Lamp Guard

WG-S (included with modular head, INC only)



### Polycarbonate Guard

PG-1



### Fan

DL-FAN-18



# Modular docklite®

Head and Arms for Loading Dock Lighting

**PHOENIX®**

DURABILITY **X** DESIGN™



Phoenix Products Company Inc. 8711 West Port Avenue Milwaukee, WI 53224 USA  
Phone: +1 414.973.3300 Toll Free: 800.438.1214 Fax: +1 414.973.3210 [www.phoenixlighting.com](http://www.phoenixlighting.com)

N5610208R  
05.09.16

Product design and specifications are subject to change without notice. The most current version of this specification sheet can be found on our website: [www.phoenixlighting.com](http://www.phoenixlighting.com).