

OUTDOOR BOXES

ELECTRICAL

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Box - Single gang box with lugs, 2" deep with 3 outlets, 1/2" NPT. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, closure plugs and ground screw included. Individually shrink wrapped. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518662-D	5958-0	(5320-0) gray	1/0/20	.620	4.59 EA
535915-D	5958-1	(5320-1) white	1/0/20	.620	4.49 EA
535907-D	5958-2	(5320-2) bronze	1/0/20	.620	4.49 EA

ELECTRICAL PRODUCTS


Do it® Weatherproof Electrical Box - (Model No. 5321-0) Single gang box with lugs, 2" deep with 4 outlets, 1/2" NPT. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, closure plugs and ground screw included. Individually shrinkwrapped. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528188-D	5921-0	1 Gang Gray Outdoor Box	1/0/20	1.100	5.39 EA

ELECTRICAL PRODUCTS


Do it® Weatherproof Electrical Box - (Model No. 5322-0). Single gang box with lugs, 2" deep with 5 outlets, 1/2" NPT. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, closure plugs and ground screw included. Individually shrink wrapped. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500739-C	5922-0	1 Gang Gray Outdoor Box	1/0/20	2.200	6.99 EA

ELECTRICAL PRODUCTS

Do it® Weatherproof Box Extension Adapter - (Model No. 5400-0). Single gang electrical box extension adapter, 1-1/2" deep with 6 outlets, 1/2" NPT. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations. Individually shrink wrapped. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502413-D	5900-0	Outdoor Box Extension	1/0/20	.630	9.49 EA

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Box - 4" diameter splice box with lugs, 1-1/2" deep with 5 outlets, 1/2" NPT. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, closure plugs and ground screw included. Individually shrink wrapped. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518727-D	5981-0	(5361-0) gray	1/0/16	.575	6.99 EA
535842-D	5981-1	(5361-1) white	1/0/16	.575	6.79 EA
535834-D	5981-2	(5361-2) bronze	1/0/16	.575	6.79 EA

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover - Horizontal device-mounted cover for duplex receptacle. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, closure plugs and ground screw included. Individually shrink wrapped. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518697-D	5980-0	(5180-0) gray	1/0/24	.229	3.49 EA
536032-D	5980-1	(5180-1) white	1/0/24	.229	3.49 EA
536024-D	5980-2	(5180-2) bronze	1/0/24	.229	3.49 EA

ELECTRICAL

OUTDOOR BOXES



Do it® Weatherproof Electrical Cover - Horizontal mount cover for GFI receptacles. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, closure plugs and screw included. Individually shrink wrapped. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518689-D	5971-0	(5101-0) gray	1/0/24	.225	5.99 EA
535982-D	5971-1	(5101-1) white	1/0/24	.225	5.79 EA
535974-D	5971-2	(5101-2) bronze	1/0/24	.225	5.79 EA



Do it® Weatherproof Electrical Cover - Vertical mount cover for GFI receptacles. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations; closure plugs and ground screw included. Individually shrink wrapped. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
535826-D	5983-0	(5103-0) gray	1/0/24	.229	6.39 EA
535818-D	5983-1	(5103-1) white	1/0/24	.229	6.39 EA
535796-D	5983-2	(5103-2) bronze	1/0/24	.229	6.39 EA

Cooper Wiring

Outdoor Cover - GFCI/decorator. Plastic weather protective switch cover, single gang, self-closing lid. Tough plastic construction-resistant to high-impact and sunlight. Protects against rain, snow, and ice. Nonmetallic, noncorrosive, and nonconductive. Gasket provides seals for both device openings and edges. UL listed for wet locations with cover closed. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512842-C	S2966	Waterproof Cover	1/10/50	.219	5.99 EA




Do it® Weatherproof Electrical Cover - Single gang blank cover, standard mounting. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, closure plugs and ground screw included. Individually shrink wrapped. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536016-D	5973-0	(5173-0) gray	1/0/50	.076	1.29 EA
536008-D	5973-1	(5173-1) white	1/0/50	.076	1.29 EA
535990-D	5973-2	(5173-2) bronze	1/0/50	.076	1.29 EA




Do it® Weatherproof Electrical Cover - 2 gang blank cover, standard mounting. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, closure plugs and ground screw included. Individually shrink wrapped. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
535893-D	5975-0	(5175-0) gray	1/0/25	.512	2.89 EA
535885-D	5975-1	(5175-1) white	1/0/25	.512	2.89 EA




Do it® Weatherproof Electrical Cover - Rectangular cluster cover for use with lampholders, 3 outlets. made of corrosion-resistant zinc, finished with a protective color coating. For wet locations, 2 closure plugs, gaskets, and screws included. Individually shrink wrapped. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518670-D	5989-9	(5189-0) gray	1/0/20	.250	3.59 EA
535931-D	5989-1	(5189-1) white	1/0/20	.250	3.59 EA
535923-D	5989-2	(5189-2) bronze	1/0/20	.250	3.59 EA



Do it® Weatherproof Electrical Cover - (Model No. 5193-0). Round cluster cover for use with lampholders, 1 outlet. Made of corrosion-resistant zinc, finished with a protective color coating. For wet locations, gaskets and screws included. Individually shrink wrapped. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
535729-D	5993-0	Gray Outdoor Round Cover	1/0/20	.330	2.89 EA

Some prices shown may vary due to market fluctuations, and are to be used as estimates.

OUTDOOR BOXES

ELECTRICAL PRODUCTS


Do it® Weatherproof Electrical Cover - Round cluster cover for use with lampholders, 3 outlets. Made of corrosion-resistant zinc, finished with a protective color coating. For wet locations, gaskets and screws included. Individually shrink wrapped. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518735-D	5997-0	(5197-0) gray	1/0/20	.405	3.69 EA
535737-D	5997-1	(5197-1) white	1/0/20	.405	3.59 EA
535745-D	5997-2	(5197-2) bronze	1/0/20	.405	3.59 EA

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover - (Model No. 5719-1). Round blank cover, standard mounting. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, gaskets and screws included. Individually shrink wrapped. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537497-D	5974-0	Gray Round Blank Cover	1/0/30	.083	1.79 EA

ELECTRICAL PRODUCTS

Do it® Weatherproof Lamp-holder - Standard lampholder has 180° adjustable head with positive locking, threaded for 1/2" outlet, 6" wire leads, and porcelain socket. Made of corrosion-resistant aluminum, finished with a protective color coating. Uses up to one 150W PAR 38 floodlight bulb, 120V. For wet locations. Individually shrink wrapped. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518654-D	518654	(5606-0) gray	1/0/30	.463	3.89 EA
535966-D	5936-1	(5606-1) white	1/0/30	.463	3.89 EA
535958-D	5936-2	(5606-2) bronze	1/0/30	.463	3.89 EA

ELECTRICAL

ELECTRICAL PRODUCTS

Do it® Weatherproof Lampholder - Double lampholder with cover has 180° adjustable head with positive locking, threaded for 1/2" outlet, 6" wire leads, and porcelain socket. Made of corrosion-resistant aluminum, finished with a protective color coating. Uses up to two 150W PAR 38 floodlight bulb, 120V. For wet locations. Individually shrink wrapped UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
535788-D	5995-0	(5625-0) gray	1/0/8	1.200	11.59 EA
535761-D	5995-1	(5625-1) white	1/0/8	1.200	11.59 EA
535753-D	5995-2	(5625-2) bronze	1/0/8	1.200	11.59 EA

Lamson


Outdoor Cover - Horizontal mount, single gang in-use weatherproof cover is made of UV stabilized/flame retardant nonmetallic material. Includes: 1 duplex and 1 GFI receptacle plate, 1 base, 1 box gasket and screws. Has two 1/2" diameter cord openings in the base designed for maximum cord size of 12-3 SJ. 4 corner mounting holes are provided. Cover is noncorrosive, nonconductive, paintable, tamper resistant, and securely snaps closed. Suitable for wet locations while in use. UL listed, CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
534366-C	E9UHCNRN	Clear cover, gray base	1/0/4	.513	12.49 EA
534358-C	E9UHWNRN	White cover, white base	1/0/4	.505	12.49 EA

Lamson

Outdoor Cover - Vertical mount, single gang in-use weatherproof cover is made of UV stabilized/flame retardant nonmetallic material. Includes: 1 duplex and 1 GFI receptacle plate, 1 base, 1 box gasket and screws. Has two 1/2" diameter cord openings in the base designed for maximum cord size of 12-3 SJ. 4 corner mounting holes are provided. Cover is noncorrosive, nonconductive, paintable, tamper-resistant, and securely snaps closed. Suitable for wet locations while in use. UL listed, CSA approved.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
534331-C	E9UVCRN	Clear cover, gray base	1/0/12	.417	12.49 EA
534323-C	E9UVWRN	White cover, white base	1/0/12	.443	12.49 EA

ELECTRICAL

OUTDOOR BOXES

Lamson

Outdoor Cover - Vertical mount, 2 gang in-use weatherproof cover is made of UV stabilized/flame retardant nonmetallic material. Includes: 2 duplex and 2 GFI receptacle plates, 2 switch plates, 1 base, 1 box gasket and screws. Has two 1/2" diameter cord openings in the base designed for maximum cord size of 12-3 SJ. 4 corner mounting holes are provided. Cover in noncorrosive, nonconductive, paintable, tamper resistant, and securely snaps closed. Suitable for wet locations while in use. UL listed, CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
534315-C	E9U2CRN	Clear cover, gray base	1/0/6	.905	14.99 EA
534307-C	E9U2WRN	White cover, white base	1/0/6	.948	14.99 EA



Cover - COMMERCIAL SPECIFICATION GRADE. Horizontal-mount thermoplastic weatherproof cover for use with duplex receptacles. Has 2 easy-grip self-closing independent lids with noncorrosive stainless steel springs. Mounting screws and rubber gasket included. Gray. Limited 10 year warranty. UL listed, CSA approved. Self-displaying rack pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
519464-C	6304976GY	Duplex Outdoor Cover	1/0/25	.164	3.49 EA



Outdoor Receptacle Cover - COMMERCIAL SPECIFICATION GRADE. Single gang vertical-mount thermoplastic weatherproof cover for use with duplex receptacle or combination device. Has easy-grip self-closing lid with noncorrosive stainless steel springs. Mounting screws and rubber gasket included. Gray. Limited 10 year warranty. UL listed. CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
546305-C	4978GY	Gray Outdoor Cover	1/0/50	.200	4.99 EA



Cover - COMMERCIAL SPECIFICATION GRADE. Vertical-mount thermoplastic weatherproof cover for use with single receptacle or switch. Has easy-grip self-closing lid with noncorrosive stainless steel springs. Mounting screws and rubber gasket included. Gray. Limited 10year warranty. UL listed, CSA approved. Self-displaying rack pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
519219-C	6314979GY	Single Outdoor Cover	1/0/10	.963	4.99 EA



Cover - COMMERCIAL SPECIFICATION GRADE. Vertical-mount thermoplastic weatherproof cover for use with Decora/GFI receptacles. Has easy-grip self-closing lid with noncorrosive stainless steel springs. Mounting screws and rubber gasket included. Gray. Limited 10year warranty. UL listed, CSA approved. Self-displaying rack pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514349-C	6314998GY	Gray Gfi Cover	1/0/20	.500	9.49 EA



Cover - COMMERCIAL SPECIFICATION GRADE. Horizontal-mount thermoplastic weatherproof cover for use with Decora/GFI receptacles. Has easy-grip self-closing lid with noncorrosive stainless steel springs. Mounting screws and rubber gasket included. Gray. Limited 10 year warranty. UL listed, CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514330-C	4996GY	Hz Gfi Cover	1/0/50	.230	7.99 EA

OUTDOOR BOXES

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Box - Single gang box with lugs, 2" deep with 3 outlets, 1/2" NPT. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, closure plugs and ground screw included. Carded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507614-D	5910-1	(5320-5), gray	1/0/6	.668	4.79 CD
524433-D	5910-4	(5320-6), white	1/0/6	.667	4.79 CD
524441-D	5910-6	(5320-7), bronze	1/0/6	.667	4.79 CD

ELECTRICAL PRODUCTS


Do it® Weatherproof Electrical Box - Single gang box with lugs, 2" deep with 3 outlets, 3/4" NPT. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, closure plugs and ground screw included. Carded. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502472-D	5911-1	1 Gang Gray Outdoor Box	1/0/6	.667	5.29 CD

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Box - 2 gang box with lugs, 2" deep with 5 outlets, 1/2" NPT. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, closure plugs and ground screw included. Individually shrink wrapped. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510351-D	5919-1	2 Gang Gray Outdoor Box	1/0/4	.763	10.99 CD

ELECTRICAL

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Box - 4" diameter splice box with lugs, 1-1/2" deep with 5 outlets, 1/2" NPT. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, closure plugs and ground screw included. Carded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531142-D	5912-1	(5361-5) gray	1/0/6	.667	7.29 CD
524468-D	5912-4	(5361-6) white	1/0/6	.750	7.39 CD
524476-D	5912-6	(5361-7) bronze	1/0/6	.750	7.39 CD

Lamson

Weatherproof Electrical Box Kit - Nonmetallic outlet kits come with outlet, cover and gasket, and box. Nonconductive. Easy-to-install. UV stabilized material. Marine UL listed covers and threaded boxes. Paintable. Suitable for wet locations. Grey. Boxed. 15A/125V rated outlets.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
553328-C	KE98GFCN	Verticle GFCI outlet kit	1/0/6	.542	35.99 EA
553336-C	KE98DHGN	Horizontal duplex outlet kit	1/0/6	.542	13.99 EA
553344-C	KE98GDRN	Verticle duplex outlet kit	1/0/6	.542	13.99 EA

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover and Receptacle - Horizontal device-mounted cover with duplex grounded receptacle. Cover is made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, gaskets and screws included. 15A-125V. Carded. UL listed. Gray.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527326-D	5940-1	Outdoor Cover/outlet	1/0/6	.500	5.79 CD

ELECTRICAL

COVERS/SWITCHES

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover - Horizontal device-mounted cover for duplex receptacle. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, gaskets and screws included. Carded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514090-D	5942-1	(5180-5) gray	1/0/6	.294	3.69 CD
524417-D	5942-4	(5180-6) white	1/0/6	.442	3.69 CD
524425-D	5942-6	(5180-7) bronze	1/0/6	.442	3.69 CD

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover - Horizontal mounted cover for GFI receptacles. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, gaskets and screws included. Carded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502510-D	5970-1	(5101-5) gray	1/0/6	.600	6.99 CD
524387-D	5970-4	(5101-6) white	1/0/6	.277	6.99 CD
524395-D	524395	(5101-7) bronze	1/0/6	.277	6.99 CD

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover - (5103-5). Vertical mounted cover for GFI receptacles. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, gaskets and screws included. Carded. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513121-C	5908-1	Gray Outdoor Gfi Cover	1/0/4	.406	6.99 CD

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover - (5155-5). Device-mounted vertical cover for single receptacle, 1.406" diameter. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, gaskets and screws included. Carded. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514081-D	5913-1	Gray Outdoor Rec Cover	1/0/6	.179	3.79 CD

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover - (5146-5).


Device-mounted vertical cover for duplex receptacles. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, gaskets and screws included. Carded. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513113-D	5906-1	Gray Outdoor Rec Cover	1/0/6	.271	5.29 CD

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover - (5148-5). 2 gang device-mounted vertical cover for 2 duplex receptacles. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, gaskets and screws included. Carded. Gray. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511455-C	5964-1	Gray Outdoor Switch Cover	1/0/4	.600	11.99 CD

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover With Switch/Receptacle - (5166-5). 2 gang device-mounted vertical cover with

single pole switch and duplex grounded receptacle included. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, gaskets and screws included. Switch: 10A-125V, receptacle: 15A/125V. Carded. Gray cover. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511439-D	5966-1	Gray Outdoor Combo Cover	1/0/4	.700	13.49 CD

COVERS/SWITCHES

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover With Switches -

(5125-5). 2 gang device-mounted vertical cover for 2 lever switches. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, gaskets and screws included. 1 single pole and one 3-way switch included. 10A/125V. Carded. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511447-D	5965-1	Gray Outdoor Cover/switch	1/0/4	.217	11.49 CD

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover With Switches -

Single gang device-mounted vertical cover with switch. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, gaskets and screws included. Each switch is 10A/125V. Carded. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527362-D	5915-1	(5121-5) single-pole switch	1/0/6	.250	5.79 CD
510327-D	5962-1	(5141-5) 3-way switch	1/0/6	.271	6.99 CD

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover - (5173-5). Single gang blank cover, standard mounting. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, gaskets and screws included. Carded. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527380-E	5943-1	Outdoor Blank Cover	1/0/6	.121	1.79 CD

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover - (5175-5). 2 gang blank cover, standard mounting. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations, gaskets and screws included. Carded. Gray. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510335-D	5961-1	Outdoor Blank Cover	1/0/4	.081	2.99 CD

ELECTRICAL

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover - (5186-5). Rectangular cluster cover for use with lampholders, 1 outlet. Made of corrosion-resistant zinc, finished with a protective color coating. For wet locations; 2 closure plugs, gaskets, and screws included. Carded. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527399-D	5945-1	Gray Outdoor Cover	1/0/6	.321	2.99 CD

ELECTRICAL PRODUCTS

Do it® Weatherproof Electrical Cover - (5193-5). Round cluster cover for use with lampholders, 1 outlet. Made of corrosion-resistant zinc, finished with a protective color coating. For wet locations, gaskets and screws included. Carded. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
504181-D	5947-1	Rnd Gray Outdoor Cover	1/0/6	.321	2.99 CD

ELECTRICAL PRODUCTS

Do it® Closure Plug - For threaded outlets, 1/2", 3 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502456-D	5916-1	(5269-5) gray	1/0/6	.100	1.69 CD
524557-E	5916-4	(5269-6) white	1/0/6	.100	1.79 CD
524565-E	5916-6	(5269-7) bronze	1/0/6	.100	1.79 CD

ELECTRICAL PRODUCTS

Closure Plug - For threaded outlets, 3/4", 3 per poly bag. Gray.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537500-D	5270-0	Gray Closure Plug	1/0/75	.413	2.59 EA

ELECTRICAL

ELECTRICAL

TAPE

Philips/Gemini

Do it® Splitter - Splits single coaxial lead to 2, 3, or 4 TV or FM sets. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
532542-F	532542	(CV60), (M61000), 2-way	1/6/72	.167	3.29 CD
529547-F	529547	(CV61), (M61001), 3-way	1/6/72	.183	4.29 CD
532515-F	532515	(CV62), (M61002), 4-way	1/6/72	.183	5.99 CD

Intertape Polymer Group

Do it™ Plastic Electrical Tape - General-purpose PVC electrical insulation has excellent adhesion and elongation properties. 3/4" x 60', 7 mil. thick. UL listed. 10 per pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
556408-D	556408	10pk Electrical Tape	1/0/20	1.700	6.49 PK



Vinyl Plastic Electrical Tape - 1710 vinyl electrical tape is versatile and dependable. General-purpose, indoor/outdoor use, flame retardant. 3/4" x 60' x .007" thick. Tartan™ brand. UL listed, CSA. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
542881-D	49656	3/4"x60' Plastic Tape	1/0/100	.184	.99 EA

Intertape Polymer Group


Color Electrical Tape - All-weather, pressure sensitive vinyl tape. Provides electrical and mechanical protection for jobs requiring high dielectric strength and maximum conformability. Will wrap to irregular surfaces without breaking. Flame retardant, highly resistant to acids, chemicals, and oils. 7 mil. thick. 3/4" x 60'.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528250-D	4117	Blue	1/5/50	.200	1.49 EA
528277-D	4113	Green	1/5/50	.200	1.49 EA
515183-D	4115	Gray	1/5/50	.200	1.49 EA
528234-D	4118	Red	1/5/50	.200	1.49 EA
528242-D	4114	White	1/5/50	.200	1.49 EA
528269-D	4116	Yellow	1/5/50	.200	1.49 EA



Scotch® Vinyl Plastic Electrical Tape - Resists water, oils, acids, and weather. For general applications. Comes in plastic dispenser. UL listed. 7 mil. thick. Black.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517541-D	10414	3/4" x 450", carded dispenser	1/0/24	.340	4.19 CD
517550-D	06132	3/4" x 66', plastic container	1/10/100	.290	6.99 EA



Scotch® Vinyl Plastic Electrical Tape - Super 88, 3/4" x 66'. Premium quality vinyl plastic electrical tape. Thicker than ordinary tapes. Cold and weather-resistant. Flame retardant. Use for home.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528285-D	06143	3/4"x66' Plastic Tape	1/10/100	.256	7.99 EA

Aerosols, Contact Cleaners

3M™ General Purpose Contact Cleaner 16-101

Clean and remove contaminants from electrical equipment with this alcohol based solvent. Sprays on and quickly dries. Non-corrosive and ideal for cleaning electrical connections and terminals such as contacts, relays, switches, instruments and sensors. This general-purpose cleaner removes light oils and other contaminants, then evaporates quickly without leaving residue. No CFC's.



UPC Number	Size	Case Qty	Units
00-054007-42817-6	16 oz	1	EA

3M™ Quick Drying Contact Cleaner 16-102

This aerosol contact cleaner is great where a very rapidly drying solvent is needed. It is perfect for precision cleaning jobs such as sensors, relays, motor switches, generators, electromechanical assemblies and terminals. Removes soil and other contaminants, then evaporates very quickly without leaving residue. Petroleum distillate alcohol based. No CFC's.



UPC Number	Size	Case Qty	Units
00-054007-42818-3	16 oz	1	EA

Aerosols, Insulating Sprays

Scotch® Insulating Sprays

Protects surfaces against weather, moisture, corrosion, oil, alkalis and acids. Use it over insulation on wire and cable splices. Also touch up insulation on motor windings and frames makes a great general purpose sealer.



UPC Number	ID	Size	Color	Case Qty	Units
00-054007-50342-2	1601	16 oz	Clear	1	EA
00-054007-50343-9	1602	16 oz	Red	1	EA
00-054007-50344-6	1603	16 oz	Black	1	EA

Cable Accessory Products, Insulating and Sealing Compounds

3M™ Scotchcast™ Wet-Niche Potting Kit 2135

2135 provides protection against corrosion and possible deteriorating effects of pool water by reliably encapsulating the 8 AWG ground connection in a wet-niche shell. The wet-niche forming shell is a corrosion-resistant metal housing for underwater fixtures in permanently installed pools.



UPC Number	Desc	Case Qty	Units
00-054007-69798-5	1.83 oz	1	EA

Diagnostic and Detection Products, Infrared Thermometers

3M™ IR-1100 Infrared Thermometer

The 3M™ IR-1100 Infrared Thermometer expand its measurement capabilities with the ability to store 12 data points to allow recall of the maximum, minimum, differential, average and last temperature readings. This unit can mount to a tripod and come standard with a hard plastic case, contact probe and wrist strap.



UPC Number	Case Qty	Units
00-054007-44414-5	1	EA

3M™ IR-1400 Infrared Thermometer

The 3M™ IR-1400 Infrared Thermometer expand its measurement capabilities with the ability to store 12 data points to allow recall of the maximum, minimum, differential, average and last temperature readings. This unit can mount to a tripod and come standard with a hard plastic case, contact probe and wrist strap.



UPC Number	Case Qty	Units
00-054007-44415-2	1	EA

3M™ IR-1400ISNI Infrared Thermometer

The 3M™ IR-1400ISNI Infrared Thermometer expand its measurement capabilities with the ability to store 12 data points to allow recall of the maximum, minimum, differential, average and last temperature readings. This unit can mount to a tripod and come standard with a hard plastic case, contact probe and wrist strap.



UPC Number	Case Qty	Units
00-051128-53262-1	1	EA

3M Supply House

Diagnostic and Detection Products, Infrared Thermometers, cont'd

3M™ IR-500 Infrared Thermometer

The IR-500 features single spot laser sighting, a 6:1 distance-to-spot ratio, fixed emissivity and a temperature range of 0°F (-18°C) to 500°F (260°C).



UPC Number	Case Qty	Units
00-054007-43556-3	1	EA

3M™ IR-60EXPL2NI-1 Infrared Thermometer

It stores up to 100 data points allowing for easy set-up of preventative maintenance programs. For the ultimate in data logging, the IR-60EXP2NI-1, adds the versatility of direct computer connection for data downloads or printing. This unit can mount to a tripod, where temperature data can be measured over an extended period of time and output directly to a chart recorder, printer, or PC. This 3M™ Infrared Thermometer comes standard with an RS232 cable, Windows-based software, power supply, hard plastic case, wrist strap and contact probe.



UPC Number	Case Qty	Units
00-054007-42855-8	1	EA

3M™ IR-60L2 Infrared Thermometer

This unit can mount to a tripod and come standard with a hard plastic case and wrist strap.



UPC Number	Case Qty	Units
00-054007-42840-4	1	EA

3M™ IR-750 Infrared Thermometer

This unit can mount to a tripod and come standard with a hard plastic case and wrist strap.



UPC Number	Case Qty	Units
00-054007-44412-1	1	EA

Fastening Products, Assortment Packs

3M™ Cable Tie Assortment Pack 06220

Secure wire bundles and harnesses components quickly, without slipping. Self-locking head with heavy double teeth on the one-piece lock mechanism assures the 3M reliability you've come to expect. Will meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Cable tie assortment pack contains 100 of the most commonly used ties. Contains three sizes, four lengths and two colors.




UPC Number	Case Qty	Units
00-054007-06220-2	100	EA

Fastening Products, Cable Stackers

3M™ Furring Strip Cable Stacker SIFS-1

The 3M™ Furring Strip Cable Stacker SIFS-1 is made for round or flat cable. Ease of organization and identification is provided by the SIFS-1 furring strip combined with its versatility of use-routing, fastening and supporting CATV, telephone, security and instrumentation cables.




UPC Number	Case Qty	Units
00-054007-49918-3	1	EA

Fastening Products, Cable Tie Bases

3M™ Cable Tie Base 06291

This base has adhesive backing for extra easy application and can be used with miniature, intermediate, and standard sized cable ties. It has a height of 0.31", a slot height of 0.18", a slot width of 0.20" and two entry locations.



UPC Number	Size	Color	Desc	Case Qty	Units
00-054007-06291-2	1"x2"	Ivory	ABS	1000	EA

3M™ Cable Tie Base 06293

The 3M™ Cable Tie Base 06293 has adhesive backing for extra easy application and can be used with miniature, intermediate, and standard sized cable ties.



UPC Number	Size	Color	Desc	Case Qty	Units
00-054007-06293-6	1"x1"	Ivory	ABS	1000	EA

Fastening Products, Cable Ties

3M™ Cable Tie Heavy Duty

Secure wire bundles and harnesses components quickly, without slipping. The self-locking head with heavy double teeth on the one-piece lock mechanism assures the 3M reliability you've come to expect. Will meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C).



UPC Number	ID	Size	Color	Case Qty	Units
00-054007-06206-6	06206	0.3"x8"x0.07"	Black	100	EA
00-054007-06229-5	06229	0.3"x8"x0.07"	Natural	100	EA

3M™ Intermediate Cable Tie 53225

0.14" width, 40 lb. Loop tensile, 2.2" max bundle diameter.



UPC Number	Size	Case Qty	Units
00-051128-53225-6	8"	1000	EA

3M™ Miniature Cable Tie 06200

Secure wire bundles, harnesses and components quickly, without slipping. The self-locking head with heavy double teeth on the one-piece lock mechanism assures the 3M reliability you've come to expect. Will meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C).



UPC Number	Size	Color	Case Qty	Units
00-054007-06200-4	0.1"x4"x0.04"	Black	100	EA

3M™ Weather Resistant Cable Ties - Extra Heavy Duty

Designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Molded of one-piece nylon for durability with the locking head designed with a double tooth pawl for maximum security. Accommodates bundle diameters from 1/8" to 4" and has a tensile strength of 175 lb.



UPC Number	Size	Color	Case Qty	Units
00-051128-53228-7	24"	Black	100	EA
00-051128-53227-0	24"	Natural	100	EA
00-051128-53185-3	32"	Black	100	EA
00-051128-53184-6	32"	Natural	100	EA
00-051128-53187-7	48"	Black	100	EA
00-051128-53186-0	48"	Natural	100	EA

3M™ Weather Resistant Cable Ties - Heavy Duty

Designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Molded of one-piece nylon for durability with the locking head designed with a double tooth pawl for maximum security. Accommodates bundle diameters from 1/8" to 4" and has a tensile strength of 120 lb.



UPC Number	Size	Color	Case Qty	Units
00-054007-06277-6	0.30"x15"	Black	1000	EA
00-054007-06264-6	0.30"x15"	Natural	1000	EA
00-054007-06207-3	15"	Black	100	EA
00-054007-06240-0	15"	Natural	100	EA

3M™ Weather Resistant Cable Ties - Heavy Duty Mounting

Designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Molded of one-piece nylon for durability with the locking head designed with a double tooth pawl for maximum security. Accommodates bundle diameters from 1/8" to 4" and has a tensile strength of 120 lb.



UPC Number	Size	Color	Case Qty	Units
00-054007-06243-1	15"	Natural	100	EA
00-054007-06267-7	15"	Natural	1000	EA

3M™ Weather Resistant Cable Ties - Intermediate

Designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Molded of one-piece nylon for durability with the locking head designed with a double tooth pawl for maximum security. Accommodates bundle diameters from 1/8" to 4" and has a tensile strength of 40 lb.



UPC Number	Size	Color	Case Qty	Units
00-054007-06201-1	0.14"x6"	Black	100	EA
00-054007-06225-7	0.14"x6"	Natural	100	EA
00-054007-06271-4	0.14"x6"	Black	1000	EA
00-054007-06249-3	0.14"x6"	Natural	1000	EA

3M™ Weather Resistant Cable Ties - Mini

Designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Molded of one-piece nylon for durability with the locking head designed with a double tooth pawl for maximum security. Accommodates bundle diameters from 1/8" to 4" and has a tensile strength of 18 lb.



UPC Number	Size	Color	Case Qty	Units
00-054007-06224-0	0.1"x0.04"	Natural	100	EA
00-054007-06270-7	0.1"x0.04"	Black	1000	EA
00-054007-06248-6	0.1"x0.04"	Natural	1000	EA
00-051128-53169-3	0.1"x6"	Black	100	EA
00-051128-53168-6	0.1"x6"	Natural	100	EA
00-051128-53173-0	0.1"x8"	Black	100	EA
00-051128-53172-3	0.1"x8"	Natural	100	EA

3M Supply House

Fastening Products, Cable Ties, cont'd

3M™ Weather Resistant Cable Ties - Standard

Designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Molded of one-piece nylon for durability with the locking head designed with a double tooth pawl for maximum security. Accommodates bundle diameters from 1/8" to 4" and has a tensile strength of 50 lb.

UPC Number	Size	Color	Case Qty	Units
00-054007-06202-8	0.18"x8"	Black	100	EA
00-054007-06226-4	0.18"x8"	Natural	100	EA
00-054007-06272-1	0.18"x8"	Black	1000	EA
00-054007-06250-9	0.18"x8"	Natural	1000	EA
00-054007-06203-5	0.18"x11"	Black	100	EA
00-054007-06227-1	0.18"x11"	Natural	100	EA
00-054007-06273-8	0.18"x11"	Black	1000	EA
00-054007-06251-6	0.18"x11"	Natural	1000	EA
00-054007-06204-2	0.18"x15"	Black	100	EA
00-054007-06228-8	0.19"x15"	Natural	100	EA

3M™ Weather Resistant Cable Ties - Standard Mounting

Designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Molded of one-piece nylon for durability with the locking head designed with a double tooth pawl for maximum security. Accommodates bundle diameters from 1/8" to 4" and has a tensile strength of 50 lb.

UPC Number	Size	Color	Case Qty	Units
00-054007-06205-9	0.18"x8"	Black	100	EA
00-054007-06232-5	0.18"x8"	Natural	100	EA
00-054007-06275-2	0.18"x8"	Black	1000	EA
00-054007-06256-1	0.18"x8"	Natural	1000	EA
00-054007-06258-5	0.18"x15"	Black	1000	EA
00-054007-06274-5	0.18"x15"	Black	1000	EA
00-054007-06252-3	0.19"x15"	Natural	1000	EA
00-054007-06234-9	0.19"x15"	Natural	100	EA

Heat Shrinkable Products, Thin-Wall Tubings

3M™ Heat Shrink Thin Wall Tubing EPS-300

Thin walled tubing offering the advantages of integral, dual wall construction. The tubing is made from flame retardant, flexible, polyolefin lined with an internal layer of special thermoplastic adhesive. The heat shrinkable outer wall is selectively irradiation cross-linked, while the adhesive maintains high flow and excellent adhesion characteristics. This tubing is an environmental protection sleeve and insulation. It offers superb environmental protection for electronic components, twisted pigtail and inline wire splices, crimp splices, wire bundles and wire harness breakouts in automotive, truck, fleet, marine and industrial applications. Applications specifications: MIL-I-23053/4, Class 3. A 3:1 shrink ratio polyolefin heat shrinkable tubing that is widely used in a variety of electronic and electrical applications.



UPC Number	Size	Color	Case Qty	Units
00-051135-36592-2	3/16"x48"	Black	1	PH
00-051135-36875-6	3/16"x48"	Black	1	BX
00-051135-36593-9	1/8"x6"	Black	1	PH
00-051135-36876-3	1/8"x48"	Black	1	BX
00-051135-37483-2	1/8"x48"	Black	1	BX
00-051135-36594-6	3/8"x48"	Black	1	PH
00-051135-36877-0	3/8"x48"	Black	1	BX
00-051135-36595-3	1/4"x6"	Black	1	PH
00-051135-36878-7	1/4"x48"	Black	1	BX
00-051135-36879-4	1/4"x48"	Black	1	BX
00-051135-36596-0	1/4"x6"	Black	1	PH
00-051135-36597-7	1/2"x6"	Black	1	PH
00-051135-36880-0	1/2"x48"	Black	1	BX
00-051135-36598-4	1/2"x6"	Black	1	PH
00-051135-36881-7	1/2"x48"	Black	1	BX

3M™ Heat Shrink Tubing Assortment Pack FP-301

3M™ Heat Shrink Tubing FP-301 offers an outstanding balance of electrical, physical and chemical properties for a wide variety of applications. This assortment comes with 6 each of the 5 sizes and in a case quantity of 10.



UPC Number	Size	Color	Desc	Case Qty	Units
00-051135-36612-7	3/64" to 3/16"	Black	6 each of 5 sizes	1	PH
00-051135-36618-9	3/32"x6"	Assorted	5 each of 7 colors	1	PH
00-051135-36619-6	1/8"x6"	Assorted	4 each of 7 colors	1	PH
00-051135-36620-2	3/16"x6"	Assorted	3 each of 7 colors	1	PH
00-051135-36621-9	1/4"x6"	Assorted	3 each of 7 colors	1	PH
00-051135-36622-6	3/8"x6"	Assorted	2 each of 7 colors	1	PH
00-051135-36623-3	1/2"x6"	Assorted	2 each of 7 colors	1	PH

3M Supply House

Heat Shrinkable Products, Thin-Wall Tubings, cont'd

3M™ Heat Shrink Tubing Kit — Color Assortment FP-301

3M™ FP-301 Heat Shrink Tubing offers an outstanding balance of electrical, physical and chemical properties for a wide variety of applications. Each kit contains tubing in a size 3/32, size 1/8, size 3/16, size 1/4, size 3/8, and size 1/2.



UPC Number	Size	Case Qty	Units
00-051135-37677-5	6"	1	EA

3M™ Heat Shrink Tubing Kit EPS-300

3M™ EPS-300 tubing is a thin-wall tubing offering the advantages of integral, dual wall construction. The tubing is made from flame-retardant, flexible polyolefin-lined with an internal layer of special thermoplastic adhesive. The heat shrinkable outer wall is selectively irradiation cross-linked, while the adhesive maintains high flow and excellent adhesion characteristics.



UPC Number	Case Qty	Units
00-051135-38444-2	1	KT

3M™ Heat Shrink Tubing Kit FP-301

3M™ FP-301 is a heat shrinkable flexible polyolefin tubing that offers an outstanding balance of electrical, physical and chemical properties for a wide variety of industrial and military applications. Rated for 275°F(135°C) continuous operation. FP-301 tubing is typically used as a shrink-fit electrical insulation over cable splices and terminations. It is also used for lightweight wire harness covering, wire marking, wire bundling, component packaging and fire resistant covering. FP-301 clear tubing provides excellent visibility for component packing. All FP-301 tubing is split resistant, mechanically tough, easily marked and resists cold flow.



UPC Number	Size	Color	Case Qty	Units
00-051135-38139-7	6"	Black	1	EA

Heat Shrinkable Products, Thin-Wall Tubings, cont'd

3M™ Thin-Wall Tubing FP-301 - Pieces

3M™ Heat Shrink Tubing FP-301 offers an outstanding balance of electrical, physical and chemical properties for a wide variety of industrial and military applications.



UPC Number	Size	Color	Case Qty	Units
00-051135-36488-8	3/32"x6"	Black	10	PH
00-051135-36490-1	1/8"x6"	Black	10	PH
00-051135-36492-5	3/16"x6"	Black	10	PH
00-051135-36494-9	1/4"x6"	Black	10	PH
00-051135-36496-3	3/8"x6"	Black	10	PH
00-051135-36498-7	1/2"x6"	Black	10	PH
00-051135-36500-7	1"x6"	Black	10	PH
00-051135-36502-1	1"x6"	Black	10	PH

3M™ Thin-Wall Tubing FP-301 - Sticks

3M™ Heat Shrink Tubing FP-301 offers an outstanding balance of electrical, physical and chemical properties for a wide variety of industrial and military applications.



UPC Number	Size	Color	Case Qty	Units
00-051135-36673-8	3/32"x48"	Black	1	BX
00-051135-36650-9	1/16"x48"	Black	1	BX
00-051135-36680-6	1/8"x48"	Black	1	BX
00-051135-36777-3	1/8"x48"	Black	1	BX
00-051135-36681-3	1/8"x48"	Clear	1	BX
00-051135-36687-5	3/16"x48"	Black	1	BX
00-051135-36696-7	1/4"x48"	White	1	BX
00-051135-36791-9	1/4"x48"	Black	1	BX
00-051135-36694-3	1/4"x48"	Black	1	BX
00-051135-36695-0	1/4"x48"	Clear	1	BX
00-051135-36798-8	3/8"x48"	Black	1	BX
00-051135-36701-8	3/8"x48"	Black	1	BX
00-051135-36702-5	3/8"x48"	Clear	1	BX
00-051135-36704-9	3/8"x48"	Red	1	BX
00-051135-36709-4	1/2"x48"	Black	1	BX
00-051135-36710-0	1/2"x48"	Clear	1	BX
00-051135-36716-2	1/2"x48"	Black	1	BX
00-051135-36812-1	1/2"x48"	Black	1	BX
00-051135-36720-9	1/2"x48"	Clear	1	BX
00-051135-36725-4	1"x48"	Black	1	BX
00-051135-36726-1	1"x48"	Clear	1	BX
00-051135-36731-5	1 1/2"x48"	Black	1	BX
00-051135-36732-2	1 1/2"x48"	Clear	1	BX
00-051135-36737-7	2"x48"	Black	1	BX
00-051135-36743-8	3"x48"	Black	1	BX
00-054007-08585-0	3"x48"	Black	100	FT
00-051135-36745-2	4"x48"	Black	1	BX

3M Supply House

Lubricants and Coatings, Coatings and Protectants

3M™ Scotchkote™ Electrical Coating

Brush onto vinyl tape for an extra protective layer of flexible material. Fast drying sealant resists oil, moisture and corrosion. Works great on electrical applications when a little extra protection is needed.



UPC Number	Size	Case Qty	Units
00-054007-43906-6	4 oz	1	CN
00-054007-14853-1	15 oz	1	CN

3M™ Zinc Spray 16-501

3M™ Zinc Spray 16-501 provides an effective way to inhibit rust and corrosion with 97% pure zinc.



UPC Number	Size	Case Qty	Units
00-054007-42828-2	16 oz	12	EA

Lubricants and Coatings, Lubricants

Scotch® Wire Pulling Lubricant Gel

Not only does 3M™ Wire Pulling Lubricant Gel make wire pulling jobs smoother and safer, it also wipes off the cable quickly and cleanly before terminating or splicing. The consistent gel does not liquefy, or separate with hot or cold aging. It stays thick, smooth and ready to apply. Temperature use range is 20°F to 110°F.



UPC Number	ID	Size	Case Qty	Units
00-054007-50622-5	WL-QT	1 qt	1	QT
00-054007-50623-2	WL-1	1 gal	1	GA
00-054007-50624-9	WL-5	5 gal	1	PA
00-054007-50625-6	WL-55	55 gal	1	DR

Scotch® Wire Pulling Lubricant Wax

The thick, consistent lubricant does not liquefy or separate with hot aging; it scoops and applies easily to wire and cable without runs or drips in hot temperatures; and it will not evaporate too soon after pulls. The lubricant's low friction coefficient lessens the chance of wire damage from high pulling forces, wipes off the cable quickly and cleanly and leaves less residue in the conduit to block future pulls or prevent removal. Because Wire Pulling Lubricant Wax can be immersed in water for 30 minutes with minimal weight loss, it is also the choice for wet weather applications.



UPC Number	ID	Size	Case Qty	Units
00-054007-41742-2	WLX-QT	1 qt	1	QT
00-054007-41743-9	WLX-1	1 gal	1	GA
00-054007-41744-6	WLX-5	5 gal	1	PA

3M Supply House

Tapes, Corrosion Protection Tapes

3M™ Scotchrap™ All-Weather Corrosion Protection Tape 50

This 10 mil polyvinyl chloride (PVC) tape with a high tack adhesive provides a corrosion and impact resistant seal for all-weather protection of metal piping systems above and below ground.



UPC Number	Size	Case Qty	Units
00-054007-11149-8	1"x100'	1	RL
00-054007-00014-3	1"x100'	1	RL
00-054007-11156-6	2"x100'	1	RL
00-054007-10638-8	2"x100'	1	RL
00-054007-09468-5	3"x100'	1	RL
00-054007-10646-3	4"x100'	1	RL
00-054007-15785-4	6"x100'	1	RL

3M™ Scotchrap™ All-Weather Corrosion Protection Tape 51

This 20 mil polyvinyl chloride (PVC) tape with a high tack adhesive provides a corrosion and impact resistant seal for all-weather protection of metal piping systems above and below ground.



UPC Number	Size	Case Qty	Units
00-054007-42806-0	1"x100'	1	RL
00-054007-42807-7	2"x100'	1	RL
00-054007-42808-4	4"x100'	1	RL
00-054007-42809-1	6"x100'	1	RL

3M™ Scotchrap™ Pipe Primer

A quick-drying, non-sag rubber base primer that permeates metal surface pits and irregularities, preparing the surface for tape application. Must use Scotchrap™ Pipe Primer as the base coat for all pipewrap tapes.



UPC Number	Size	Case Qty	Units
00-054007-42768-1	1 gal	1	GA

3M™ Scotchrap™ Printed All-Weather Corrosion Protection Tape 50

Printed with product name and thickness, this 10 mil polyvinyl chloride (PVC) tape with a high tack adhesive provides a corrosion and impact resistant seal for all-weather protection of metal piping systems above and below ground.



UPC Number	Size	Case Qty	Units
00-054007-00012-9	1"x100'	1	RL
00-054007-00013-6	2"x100'	1	RL
00-054007-00018-1	4"x100'	1	RL

Tapes, Corrosion Protection Tapes, cont'd

3M™ Scotchrap™ Printed All-Weather Corrosion Protection Tape 51

This 20 mil polyvinyl chloride (PVC) tape with a high tack adhesive provides a corrosion and impact resistant seal for all-weather protection of metal piping systems above and below ground.



UPC Number	Size	Case Qty	Units
00-054007-42803-9	2"x100'	1	RL
00-054007-42804-6	4"x100'	1	RL

3M™ Temflex™ Corrosion Protection Tape 1100

This 10 mil, general purpose corrosion resistant tape has good abrasion resistance. UV resistant and temperature-rated to 176°F (80°C).



UPC Number	Size	Case Qty	Units
00-054007-09061-8	2"x100'	1	RL

3M™ Temflex™ Printed Corrosion Protection Tape 1100

Printed with product name and thickness, this 10 mil, general purpose corrosion resistant tape has good abrasion resistance. UV resistant and temperature-rated to 176°F (80°C).



UPC Number	Size	Case Qty	Units
00-054007-09065-6	2"x100'	1	RL

Tapes, Insulating and Splicing Tapes

3M™ 2242 Linerless Electrical Rubber Splicing Tape

General, multi-purpose electrical rubber splicing tape. Securely splice all voltages or use for jacketing and general insulation. Terminate wires and cable ends or insulate connections. Highly conformable rubber tape provides quality moisture seal and lengthens cable life. Economical tape to create splices that last. Rated up to 194°F. 7 mil thick.



UPC Number	Size	Case Qty	Units
00-054007-06165-6	11"x15'	1	RL

Tapes, Insulating and Splicing Tapes, cont'd

3M™ Scotchfil™ Electrical Insulation Putty

Wrap and stretch this electrical insulation putty around low-voltage connections (up to 600V). Moisture seal ground wires or smooth out irregularities. Electrical grade, rubber-based, elastic putty in a tape form is self-fusing. 125 mil thick for quick insulation buildup. Overwrap with Scotch® Super 33+ for best erosion protection. Use up to 176°F.



UPC Number	Size	Case Qty	Units
00-054007-41750-7	11"x60"	1	RL

3M™ Temflex™ 2155 Rubber Splicing Tape


This is an economical low voltage rubber vinyl insulating tape that is self-fusing. 3M™ Temflex™ 2155 Rubber Splicing Tape is used for insulating wire splices, split bolt connections, and motor leads up to 600V.



UPC Number	Size	Case Qty	Units
00-054007-50348-4	11"x22'	1	RL
00-054007-50349-1	11"x22'	1	RL

Scotch® Electrical Insulating Varnished Cambric Tape 2510

This is a 7 mil, yellow, varnished coated cotton cloth without an adhesive, used as base layer for easy reentry of connections.



UPC Number	Size	Case Qty	Units
00-054007-10661-6	11"x36yds	1	RL
00-054007-41720-0	11"x60'	1	RL
00-054007-10687-6	1"x36yds	1	RL
00-054007-10703-3	11"x36yds	1	RL
00-054007-10711-8	2"x36yds	1	RL
00-054007-15751-9	36"x25yds	1	RL

Scotch® Electrical Insulating Varnished Cambric Tape 2520

This is an 8 mil, yellow, varnish coated cotton cloth with a pressure sensitive adhesive, used as base layer for easy reentry of connections.



UPC Number	Size	Case Qty	Units
00-054007-04836-7	11"x60'	1	RL
00-054007-04835-0	11"x36yds	1	RL
00-054007-04833-6	1"x36yds	1	RL
00-054007-04832-9	11"x36yds	1	RL
00-054007-04834-3	2"x36yds	1	RL

3M Supply House

Tapes, Insulating and Splicing Tapes, cont'd

Scotch® Fire-Retardant Electric Arc Proofing Tape 77

This 30 mil fire-retardant tape is designed to protect cable until limiting devices can interrupt faulted current.



UPC Number	Size	Case Qty	Units
00-054007-42007-1	1ft"x20'	1	RL
00-054007-42006-4	3"x20'	1	RL

Scotch® Linerless Rubber Splicing Tape 130C

Scotch® Linerless Rubber Splicing Tape 130C is high voltage, insulating, thermally conductive and self-bonding. Typical applications include primary electrical insulation for splicing all solid dielectric cables through 69kV.



UPC Number	Size	Case Qty	Units
00-054007-41717-0	1ft"x30'	1	RL
00-054007-41751-4	1"x10'	1	RL
00-054007-41753-8	1"x30'	1	RL
00-054007-41718-7	1ft"x30'	1	RL
00-054007-41754-5	2"x30'	1	RL

Scotch® Rubber Splicing Tape 23

This is a highly conformable, self-fusing Ethylene Propylene Rubber (EPR) base high-insulating voltage tape. Comes on an easy-release liner.



UPC Number	ID	Size	Case Qty	Units
00-054007-15025-1	2828	3/4"x30'	1	RL
00-054007-13061-1	2831	1"x20'	1	RL
00-054007-00059-4	2830	1"x30'	1	RL
00-054007-11214-3	2832	1ft"x30'	1	RL
00-054007-15033-6	2834	2"x30'	1	RL

Scotch® Self-Fusing Silicone Rubber Electrical Tape 70

This is a high-temperature, arc-and track-resistant tape composed of self-fusing, inorganic silicone rubber with an easy-tear and easy-strip liner.




UPC Number	Size	Case Qty	Units
00-054007-15603-1	1"x30'	1	RL

Tapes, Sealing and Insulating Tapes

3M™ Scotch-Seal™ Mastic Tape 2229

3M™ Scotch-Seal™ Mastic Tape is designed for quick and easy insulating, padding and sealing of electrical connections. It is conformable, durable, tacky mastic with an easy release liner for easy applications over irregular surfaces and provides excellent moisture resistance. It features superior self-healing characteristics after being punctured or cut.



UPC Number	ID	Size	Desc	Case Qty	Units
00-054007-50335-4	2229	1"x10'		1	RL
00-054007-50336-1	2229-P	3ft"x3ft"	Printed	1	PD
00-054007-50337-8	2229-P	3ft"x6ft"	Printed	1	PD
00-054007-49702-8	2229	3ft"x10'		1	RL

Scotch® Electrical Moisture Sealant 06147 and 06149, Vinyl Mastic

Seal out moisture with all-weather moisture sealant. Tough, conformable vinyl helps you wrap difficult shapes. Self-fusing, rubber based insulating compound is an excellent moisture sealant. Outstanding UV resistance for long term durability. Available in pads or rolls for various needs. 45 mil thick sealant for connections up to 600V.



UPC Number	ID	Size	Case Qty	Units
00-054007-06147-2	06147	2.5"x10'	1	RL
00-054007-06149-6	06149	2.5"x2.5"	1	BX

Scotch® Electrical Stress Control Tape 2220

.030" thick; 17 lbs/in tensile strength; 275% elongation at break. This tape is included in some tape termination kits.



UPC Number	Size	Color	Case Qty	Units
00-054007-50426-9	1ft"x5'	Gray	1	RL
00-054007-50428-3	1ft"x15'	Gray	1	RL

Scotch® Rubber Mastic Tape 2228

This is a black 65 mil conformable self-fusing rubber electrical insulating and sealing tape.



UPC Number	Size	Case Qty	Units
00-054007-50727-7	1"x10'	1	RL
00-054007-43478-8	2"x3'	1	RL
00-054007-09656-6	2"x10'	1	RL

3M Supply House

Tapes, Sealing and Insulating Tapes, cont'd

Scotch® Vinyl Mastic

Mold these flexible vinyl mastic pads around difficult electrical connections in cars and trucks. Durable self-fusing mastic pads are backed with rubber compound and provide an all-weather moisture seal or insulation to protect connections. Precut, 125 mil thick pads protect all connections up to 600V. Easy release liner.



UPC Number	ID	Size	Case Qty	Units
00-054007-11008-8	2200	3"x4ft"	1	PD
00-054007-21296-6	2200	4ft"x6.5'	1	PD
00-054007-11222-8	2210	4"x10"	1	RL

Tapes, Special Use Tapes

3M™ General Purpose Glass Cloth Tape 3615

4.0 mil (0.10 mm) glass cloth tape with a silicone adhesive. Used for many applications requiring high-temperature resistance, high adhesion and a very strong abrasion resistant backing.



UPC Number	Size	Color	Case Qty	Units
00-021200-48233-5	ft"x60yds	White	72	RL
00-021200-48234-2	ft"x36yds	White	48	RL
00-021200-48235-9	1"x36yds	White	36	RL
00-021200-48236-6	2"x36yds	White	24	RL
00-021200-45418-9	2"x60yds	White	24	RL

3M™ Glass Cloth Electrical Tape

Insulate hot spots. Provides heat-stable insulation for switches, oven and furnace controls and motor leads. 7 mil tape with pressure sensitive adhesive. Thermosetting and heat stable to 266°F. (Class B temperatures) CSA Certified for 130°F and UL Recognized Component listing for 150°F.



UPC Number	ID	Size	Case Qty	Units
00-054007-15066-4	27	ft"x66'	1	RL
00-054007-15074-9	27	ft"x66'	1	RL

Tapes, Special Use Tapes, cont'd

3M™ Temflex™ Friction Tape 1755

Buy this versatile friction tape when you need to protect connections or bundle cables and wires. Thicker than vinyl or glass cloth tape. Splice connections with abrasion resistant cotton tape that has insulating rubber adhesive. Designed to provide protection against abrasion and cut-through.



UPC Number	Size	Case Qty	Units
00-054007-50218-0	ft"x60'	1	RL
00-054007-50216-6	ft"x82ft'	1	RL
00-054007-50217-3	1ft"x82ft'	1	RL

Scotch® Electricians Bundling Tape 2000

This is a 6 mil general purpose easy tear vinyl tape. This tape is used for general holding and bundling.



UPC Number	Size	Case Qty	Units
00-054007-43403-0	2"x50yds	1	RL

Scotch® Glass Cloth Tape 69

This is a 7 mil woven glass cloth tape with a silicone pressure sensitive adhesive. UL Recognized 180°C. Printable. Sold on a 1" core.



UPC Number	Size	Color	Desc	Case Qty	Units
00-054007-27548-0	ft"x36yds	White	Silicone Adhesive	1	RL
00-054007-10083-6	ft"x66'	White	Silicone Adhesive	1	RL
00-054007-27493-3	ft"x36yds	White	Silicone Adhesive	1	RL
00-054007-09910-9	ft"x66'	White	Silicone Adhesive	1	RL
00-054007-27494-0	1"x36yds	White	Silicone Adhesive	1	RL

Tapes, Vinyl Electrical Tapes

3M™ Tartan™ 1710 Vinyl Electrical Tape

General use vinyl electrical tape is used for protective jacketing and harnessing. Abrasive- and UV-resistant. UL Listed and CSA Certified for 176°F/4093F (80°C).



UPC Number	Size	Case Qty	Units
00-054007-49659-5	ft"x36yds	1	RL

3M Supply House

Tapes, Vinyl Electrical Tapes, cont'd

3M™ Temflex™ General Use Vinyl Electrical Tape 1700

The economical solution for less demanding indoor jobs. On a 1fi" core, this black, 7 mil economy-grade vinyl tape serves as a general purpose tape. UL listed. CSA approved.



UPC Number	Size	Case Qty	Units
00-054007-49700-4	fi"x36yds	1	RL
00-054007-69764-0	fi"x60'	1	RL
00-054007-49571-0	fi"x66'	1	RL
00-054007-43962-2	1"x66'	1	RL

Scotch® Heavy Duty Vinyl Electrical Tape 22

Scotch® Heavy Duty Vinyl Insulation Tape 22 is designed for heavy duty insulation applications that require the greater mechanical strength and abrasion resistance. UL Listed for use as electrical insulation up to 600 volts and 176°F (80°C). UL 510 flame-retardant.



UPC Number	Size	Case Qty	Units
00-054007-10059-1	1fi"x36yds	1	RL
00-054007-10042-3	1"x36yds	1	RL
00-054007-10026-3	fi"x36yds	1	RL
00-054007-10067-6	2"x36yds	1	RL
00-054007-10034-8	fi"x36yds	1	RL

Scotch® Premium Vinyl Electrical Tape Super 88

Scotch® Super 88 Premium Vinyl Electrical Tape offers better mechanical/abrasion resistance, and is thicker for quicker buildup. For professional use, this 8.5 mil tape combines the flexibility of a PVC backing with excellent electrical insulating properties to provide primary electrical insulation for splices up to 600V and protective jacketing. UL Listed and CSA Certified. Excellent resistance to UV rays, abrasion, moisture, copper corrosion, alkalis and acids. Excellent all-weather performance in cold to 0°F (-18°C) or hot to 220°F (105°C).



UPC Number	Size	Case Qty	Units
00-054007-10307-3	fi"x44'	1	RL
00-054007-06143-4	fi"x66'	1	RL
00-054007-10323-3	fi"x36yds	1	RL
00-054007-10364-6	1fi"x44'	1	RL
00-054007-10349-3	1fi"x36yds	1	RL
00-054007-10356-1	2"x36yds	1	RL
00-054007-10331-8	1"x36yds	1	RL

Tapes, Vinyl Electrical Tapes, cont'd

Scotch® Vinyl Electrical Tape 35

Identify wires, leads, splices and terminations. Abrasion and weather resistant 7 mil tape. Excellent mechanical and electrical insulation properties. Wraps smoothly and holds tightly over a wide range of temperatures. Mark safety areas. UL listed. CSA approved.



UPC Number	Size	Color	Case Qty	Units
00-054007-10240-3	fi"x20'	Blue	1	RL
00-054007-10299-1	fi"x20'	Brown	1	RL
00-054007-10281-6	fi"x20'	Gray	1	RL
00-054007-10265-6	fi"x20'	Green	1	RL
00-054007-10273-1	fi"x20'	Orange	1	RL
00-054007-10224-3	fi"x20'	Red	1	RL
00-054007-10232-8	fi"x20'	White	1	RL
00-054007-10257-1	fi"x20'	Yellow	1	RL
00-054007-10836-8	fi"x66'	Blue	1	RL
00-054007-10885-6	fi"x66'	Brown	1	RL
00-054007-00072-3	fi"x66'	Gray	1	RL
00-054007-10851-1	fi"x66'	Green	1	RL
00-054007-10869-6	fi"x66'	Orange	1	RL
00-054007-10810-8	fi"x66'	Red	1	RL
00-054007-11271-6	fi"x66'	Violet	1	RL
00-054007-10828-3	fi"x66'	White	1	RL
00-054007-10844-3	fi"x66'	Yellow	1	RL

Scotch® Vinyl Electrical Tape Super 33+

Scotch® Super 33+ Electrical Tape a black, 7 mil tape, on a 1" core, combines the flexibility of a PVC backing with excellent electrical insulating properties to provide primary electrical insulation for splices up to 600V. Abrasion-, corrosion-, and UV-resistant, it makes an excellent protective jacketing for high-voltage cables and wire harnessing. UL Listed and CSA Certified, it resists alkalis and acids, and is flame-retardant. Excellent all-weather performance in cold to 0°F (-18°C) or hot to 220°F (105°C).



UPC Number	Size	Case Qty	Units
00-054007-06130-4	fi"x20'	1	RL
00-054007-10075-1	fi"x44'	1	RL
00-054007-06132-8	fi"x66'	1	RL
00-054007-06133-5	fi"x52'	1	RL
00-054007-00053-2	fi"x36yds	1	RL
00-054007-08949-0	1"x36yds	1	RL
00-054007-50236-4	1fi"x36yds	1	RL

Tapes, Vinyl Electrical Tapes, Dispensers

Scotch® Super Vinyl Electrical Tape 33+D Dispenser Pack

A premium grade vinyl electrical insulating tape, its aggressive adhesive and elastic backing ensure easy, water-resistant conformation to irregular surfaces in low temperatures, yet will not ooze or melt in high temperatures.



UPC Number	Size	Case Qty	Units
00-054007-10216-8	1/2" x 66'	1	RL

Terminals, Block Forks

3M™ Scotchlok™ Non-Insulated Brazed Seam Block Fork Terminal

Block forks have the same strength as the standard fork, but are designed to be used in a terminal block because their sides lie flat against the barrier portion of the terminal block.

UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-23680-1	M10-10FBX	100	10	EA	12-10 AWG

**3M™ Scotchlok™ Nylon Insulated with Insulation Grip Block Fork Terminal**


Block forks have the same strength as the standard fork, but are designed to use in a terminal block because their sides lie flat against the barrier portion of the terminal block.

UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-22682-6	MNG14-8FBX	100	8	EA	16-14 AWG
00-054007-22690-1	MNG14-10FBX	100	10	EA	16-14 AWG
00-054007-02019-6	MNG10-10FBK	1000	10	EA	12-10 AWG
00-054007-23748-8	MNG10-10FBX	100	10	EA	12-10 AWG

**3M™ Scotchlok™ Vinyl Insulated Brazed Seam Block Fork Terminal**

The standard fork allows rapid connection of wire. They are usually used on free-standing studs, because of their wider tongues.

UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-21999-6	MV18-8FBX	100	8	EA	22-18 AWG
00-054007-22005-3	MV18-10FBX	100	10	EA	22-18 AWG
00-054007-01577-2	MV14-6FBX	1000	6	EA	16-14 AWG
00-054007-22641-3	MV14-6FBX	100	6	EA	16-14 AWG
00-054007-22658-1	MV14-8FBX	100	8	EA	16-14 AWG
00-054007-01579-6	MV14-10FBK	1000	10	EA	16-14 AWG
00-054007-22666-6	MV14-10FBX	100	10	EA	16-14 AWG
00-054007-23698-6	MV10-6FBX	100	6	EA	12-10 AWG
00-054007-23706-8	MV10-8FBX	100	8	EA	12-10 AWG
00-054007-23714-3	MV10-10FBX	100	10	EA	12-10 AWG



3M Supply House

Terminals, Block Forks, cont'd

3M™ Scotchlok™ Vinyl Insulated Butted Seam Block Fork Terminal

Block forks have the same strength as the standard fork, but are designed to use in a terminal block because their sides lie flat against the barrier portion of the terminal block.


UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-01218-4	MVU18-6FB/SK	1000	6	EA	22-18 AWG
00-054007-01220-7	MVU18-8FBK	1000	8	EA	22-18 AWG
00-054007-01586-4	MVU14-8FBK	1000	8	EA	16-14 AWG



Terminals, Butt Connectors

3M™ Scotchlok™ Butt Connector, Vinyl Insulated Seamless


This butt connector uses chamfered barrel ends to provide fast easy wire insertion from both ends and a built in wire stop for correct positioning. It must be crimped at ends.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-01312-9	MV18BCK	1000	EA	22-18 AWG
00-054007-22195-1	MV18BCX	100	EA	22-18 AWG
00-054007-01817-9	MV14BCK	1000	EA	1-14 AWG
00-054007-23110-3	MV14BCX	100	EA	16-14 AWG
00-054007-02078-3	MV10BCK	1000	EA	12-10 AWG
00-054007-24027-3	MV10BCX	100	EA	12-10 AWG

3M™ Scotchlok™ Non-Insulated Brazed Seam Butt Connector


This butt connector uses chamfered barrel ends to provide fast easy wire insertion from both ends and a built in wire stop for correct positioning. It must be crimped at ends.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-24167-6	M8BCX	100	EA	8 AWG

3M™ Scotchlok™ Non-Insulated Butt Connectors

High grade ETP (Electronic Touch Pitch) copper construction.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-01311-2	M18BCK	1000	EA	22-18 AWG
00-054007-23102-8	M14BCX	100	EA	16-14 AWG
00-054007-02077-6	M10BCK	1000	EA	12-10 AWG
00-054007-24019-8	M10BCX	100	EA	12-10 AWG

3M™ Scotchlok™ Nylon Insulated Butt Connectors

Nylon insulated connector used to connect two wires. 600V max. for building and 1000V max. for signs, fixtures and luminaries.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-02080-6	MN10BCK	1000	EA	12-10 AWG
00-054007-24043-3	MN10BCX	100	EA	12-10 AWG
00-054007-01821-6	MN10CEC	1000	EA	18-10 AWG
00-054007-15967-4	MNG10BCK	1000	EA	12-10 AWG
00-054007-24035-8	MNG10BCX	100	EA	12-10 AWG
00-054007-01819-3	MN14BCK	1000	EA	16-14 AWG
00-054007-23136-3	MN14BCX	100	EA	16-14 AWG
00-054007-01818-6	MNG14BCK	1000	EA	16-14 AWG
00-054007-23128-8	MNG14BCX	100	EA	16-14 AWG
00-054007-15983-4	MN18BCK	1000	EA	22-18 AWG
00-054007-22211-8	MN18BCX	100	EA	22-18 AWG
00-054007-01313-6	MNG18BCK	1000	EA	22-18 AWG
00-054007-22203-3	MNG18BCX	100	EA	22-18 AWG

3M™ Scotchlok™ Nylon Insulated Moisture Resistant with Insulation Grip Butt Connector

This butt connector uses chamfered barrel ends to provide fast easy wire insertion from both ends and a built in wire stop for correct positioning. It must be crimped at ends.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-11950-0	MNG14BCMX	100	EA	16-14 AWG
00-054007-11949-4	MNG18BCMX	100	EA	22-18 AWG

Terminals, Butt Connectors, cont'd

3M™ Scotchlok™ Seamless Butt Heat Shrink Connector

Terminals have durable, tough heat shrinkable tubing to protect connection for long term aging. UL Listed and CSA Certified.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-06300-1	MH10BCX	100	EA	12-10 AWG
00-054007-06301-8	MH10BCK	1000	EA	12-10 AWG
00-054007-06318-6	MH14BCX	100	EA	16-14 AWG
00-054007-06319-3	MH14BCK	1000	EA	16-14 AWG
00-054007-06342-1	MH18BCX	100	EA	22-18 AWG
00-054007-06343-8	MH18BCK	1000	EA	22-18 AWG

3M™ Scotchlok™ Vinyl Insulated Braze Seam Butt Connector

This butt connector uses chamfered barrel ends to provide fast easy wire insertion from both ends and a built in wire stop for correct positioning. It must be crimped at ends.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-02144-5	MV8BCK	1000	EA	8 AWG
00-054007-15678-9	MV8BCX	100	EA	8 AWG

3M™ Scotchlok™ Vinyl Insulated Butted Seam Butt Connector

This butt connector uses chamfered barrel ends to provide fast easy wire insertion from both ends and a built in wire stop for correct positioning. It must be crimped at ends.




UPC Number	ID	Case Qty	Units	Wire Range
00-054007-01315-0	MVU18BCK	1000	EA	22-18 AWG
00-054007-11920-3	MVU18BCX	100	EA	22-18 AWG
00-054007-01820-9	MVU14BCK	1000	EA	16-14 AWG
00-054007-11928-9	MVU14BCX	100	EA	16-14 AWG
00-054007-02081-3	MVU10BCK	1000	EA	12-10 AWG

Terminals, Female Disconnects

3M™ Scotchlok™ Butted Seam Female Disconnect, Fully Insulated Nylon

The disconnects are attached to mating part by tongue of female part slipping over male tab. The use of dents and rolled edges on female part provides excellent holding force while allowing easy and quick disconnect.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-02370-8	MNU18-187DFIK	1000	EA	22-18 AWG
00-054007-02286-2	MNU18-250DFIX	100	EA	22-18 AWG
00-054007-02290-9	MNU18-250DFIK	1000	EA	22-18 AWG
00-054007-02384-5	MNU14-187DFIK	1000	EA	16-14 AWG
00-054007-02291-6	MNU14-250DFIK	1000	EA	16-14 AWG
00-054007-02287-9	MNU14-250DFIX	100	EA	16-14 AWG

3M™ Scotchlok™ Fully Nylon Insulated Butted Seam Female Heat Shrink Disconnect

The disconnects are attached to mating part by tongue of female part slipping over male tab. The use of dents and rolled edges on female part provides excellent holding force while allowing easy and quick disconnect.




UPC Number	ID	Case Qty	Units	Wire Range
00-054007-06315-5	MNHU10-250DFIK	1000	EA	12-10 AWG
00-054007-06338-4	MNHU14-250DFIX	100	EA	16-14 AWG
00-054007-06339-1	MNHU14-250DFIK	1000	EA	16-14 AWG

3M Supply House

Terminals, Female Disconnects, cont'd

3M™ Scotchlok™ Nylon Fully Insulated Butted Seam Female Disconnect with Interlocking Barrel


The disconnects are attached to mating part by tongue of female part slipping over male tab. The use of dents and rolled edges on female part provides excellent holding force while allowing easy and quick disconnect.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-69575-2	MNI14-250DFIK	1000	EA	16-14 AWG
00-054007-69573-8	MNI10-250DFIK	1000	EA	12-10 AWG
00-054007-09991-8	MNI10-250DFIX	100	EA	12-10 AWG

3M™ Scotchlok™ Nylon Fully Insulated w/Ins. Grip Butted Seam Female Disconnect w/Interlocking Barrel

The disconnects are attached to mating part by tongue of female part slipping over male tab. The use of dents and rolled edges on female part provides excellent holding force while allowing easy and quick disconnect.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-69563-9	MNG110-250DFIK	1000	EA	12-10 AWG
00-054007-09986-4	MNG110-250DFX	100	EA	12-10 AWG

Terminals, Female Disconnects, cont'd

3M™ Scotchlok™ Nylon Fully Insulated with Insulation Grip Female Disconnect

The disconnects are attached to mating part by tongue of female part slipping over male tab. The use of dents and rolled edges on female part provides excellent holding force while allowing easy and quick disconnect.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-11816-9	MNG18-187DFIK	1000	EA	22-18 AWG
00-054007-11705-6	MNG18-250DFIX	100	EA	22-18 AWG
00-054007-02293-0	MNG18-250DFIK	1000	EA	22-18 AWG
00-054007-01841-4	MNG14-250DFIK	1000	EA	16-14 AWG
00-054007-11716-2	MNG14-250DFIX	100	EA	16-14 AWG

3M™ Scotchlok™ Nylon Insulated with Insulation Grip Female Disconnect

The disconnects are attached to mating part by tongue of female part slipping over male tab. The use of dents and rolled edges on female part provides excellent holding force while allowing easy and quick disconnect.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-01774-5	MNG14-250DFK	1000	EA	16-14 AWG
00-054007-22930-8	MNG14-250DFX	100	EA	16-14 AWG

3M™ Scotchlok™ T-Tap Nylon Insulated Self-Stripping Female QuickSlide Disconnect

Self-stripping T-Tap female disconnect for mid-span disconnectable tap.



UPC Number	ID	Desc	Case Qty	Units
00-054007-12312-5	951	Box	100	EA
00-054007-12313-2	951	Bulk	1000	EA
00-054007-08427-3	952	Box	100	EA
00-054007-08428-0	952	Bulk	1000	EA
00-054007-12314-9	953	Box	100	EA
00-054007-12315-6	953	Bulk	1000	EA

Terminals, Female Disconnects, cont'd

3M™ Scotchlok™ Vinyl Insulated Butted Seam Female Disconnect

The disconnects are attached to mating part by tongue of female part slipping over male tab. The use of dents and rolled edges on female part provides excellent holding force while allowing easy and quick disconnect.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-01301-3	MVU18-250DFK	1000	EA	22-18 AWG
00-054007-11820-6	MVU18-250DFX	100	EA	22-18 AWG
00-054007-01777-6	MVU14-250DFK	1000	EA	16-14 AWG
00-054007-22880-6	MVU14-250DFX	100	EA	16-14 AWG
00-054007-01776-9	MVU14-187DFK	1000	EA	16-14 AWG
00-054007-22872-1	MVU14-187DFX	100	EA	16-14 AWG

Terminals, Female Disconnects, cont'd

3M™ Scotchlok™ Vinyl Insulated Butted Seam Female Disconnect with Interlocking Barrel

The disconnects are attached to mating part by tongue of female part slipping over male tab. The use of dents and rolled edges on female part provides excellent holding force while allowing easy and quick disconnect.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-69578-3	MVI10-250DFK	1000	EA	12-10 AWG
00-054007-09998-7	MVI10-250DFX	100	EA	12-10 AWG

Terminals, Highland™ Terminals

3M™ Highland™ Block Fork Vinyl Terminals (BFV)

Highland terminals come in pre-packaged quantities in reclosable zipper bags. All are insulated with a high grade vinyl.

UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-70205-4	BFV18-6C	1	8	BG	22-18 AWG
00-054007-70206-1	BFV18-8Q	1	8	BG	22-18 AWG
00-054007-49899-5	BFV18-10C	1	10	BG	22-18 AWG
00-054007-70261-0	BFV18-6L	1	6	BG	22-18 AWG
00-054007-70262-7	BFV18-8L	1	8	BG	22-18 AWG
00-054007-70202-3	BFV14-6C	1	6	BG	16-14 AWG
00-054007-70203-0	BFV14-8C	1	8	BG	16-14 AWG
00-054007-70204-7	BFV14-10C	1	6	BG	16-14 AWG
00-054007-70258-0	BFV14-6L	1	6	BG	16-14 AWG
00-054007-70259-7	BFV14-8L	1	8	BG	16-14 AWG
00-054007-70260-3	BFV14-10L	1	10	BG	16-14 AWG
00-054007-70256-6	BFV10-8L	1	8	BG	12-10 AWG
00-054007-70257-3	BFV10-10L	1	10	BG	12-10 AWG
00-054007-70450-8	BFV10-8Q	1	8	BG	12-10 AWG
00-054007-70451-5	BFV10-10Q	1	10	BG	12-10 AWG



3M Supply House

Terminals, Highland™ Terminals, cont'd

3M™ Highland™ Female Disconnects

Attached to male disconnect by tongue slipping over male tab. Use of dents and rolled edges on female part provides excellent holding force while allowing easy and quick disconnect.

UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-70218-4	FDI18-187C	1	0.187	BG	22-18 AWG
00-054007-70219-1	FDI18-250C	1	0.250	BG	22-18 AWG
00-054007-70281-8	FDI18-250L	1	0.250	BG	22-18 AWG
00-054007-70223-8	FDV18-250C	1	0.250	BG	22-18 AWG
00-054007-70286-3	FDV18-250L	1	0.250	BG	22-18 AWG
00-054007-70217-7	FDI14-250C	1	0.250	BG	16-14 AWG
00-054007-70279-5	FDI14-250L	1	0.250	BG	16-14 AWG
00-054007-70221-4	FDV14-250C	1	0.250	BG	16-14 AWG
00-054007-70284-9	FDV14-250L	1	0.250	BG	16-14 AWG
00-054007-70277-1	FDI10-250L	1	0.250	BG	12-10 AWG
00-054007-70457-7	FDI10-250Q	1	0.250	BG	12-10 AWG
00-054007-70282-5	FDV10-250L	1	0.250	BG	12-10 AWG
00-054007-70458-4	FDV10-250Q	1	0.250	BG	12-10 AWG

**3M™ Highland™ Fully Insulated Nylon Tab**

Highland terminals come in pre-packaged quantities in reclosable zipper bags. All are insulated with a high grade nylon.

UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-70313-6	MTI18-250L	1	.250	BG	22-18 AWG
00-054007-70228-3	MTI14-250C	1	.250	BG	16-14 AWG
00-054007-70311-2	MTI14-250L	1	.250	BG	16-14 AWG

**3M™ Highland™ FV10 Standard Forks Vinyl Insulated**

Fork terminals allow rapid connection of wire, and are usually used on free-standing studs due to their wider tongues.



UPC Number	ID	Case Qty	Stud-Tab Size	Units
00-054007-70288-7	FV10-8L	1	8	BG
00-054007-70289-4	FV10-10L	1	10	BG

3M™ Highland™ Vinyl Butt Splices

Highland terminals come in pre-packaged quantities in reclosable zipper bags. All are insulated with a high grade vinyl.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-70210-8	BSV18C	1	BG	22-18 AWG
00-054007-70268-9	BSV18L	1	BG	22-18 AWG
00-054007-70209-2	BSV14C	1	BG	16-14 AWG
00-054007-70267-2	BSV14L	1	BG	16-14 AWG
00-054007-70266-5	BSV10L	1	BG	12-10 AWG
00-054007-70453-9	BSV10Q	1	BG	12-10 AWG

3M™ Highland™ Vinyl Insulated Locking Fork

The spring-like tongue locks into place around the stud even when the mount screw is not tightened. Extra force is required to remove it from the stud.



UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-70303-7	LFV18-6L	1	6	BG	22-18 AWG
00-054007-70304-4	LFV18-8L	1	8	BG	22-18 AWG
00-054007-70299-3	LFV14-6L	1	6	BG	16-14 AWG
00-054007-70300-6	LFV14-8L	1	8	BG	16-14 AWG
00-054007-70301-3	LFV14-10L	1	10	BG	16-14 AWG
00-054007-70468-3	LFV10-10Q	1	10	BG	12-10 AWG

3M Supply House

Terminals, Highland™ Terminals, cont'd

3M™ Highland™ Vinyl Insulated Ring RV Terminal

A ring is the standard style of tongue. The safest and most reliable; it cannot be removed unless mounting screw is removed.



UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-70336-5	RV18-6L	1	6	BG	22-18 AWG
00-054007-70337-2	RV18-8L	1	8	BG	22-18 AWG
00-054007-70332-7	RV14-6L	1	6	BG	16-14 AWG
00-054007-70333-4	RV14-8L	1	8	BG	16-14 AWG
00-054007-70243-6	RV14-10C	1	10	BG	16-14 AWG
00-054007-70334-1	RV14-10L	1	10	BG	16-14 AWG
00-054007-70335-8	RV14-14L	1	/	BG	16-14 AWG
00-054007-70476-8	RV10-8Q	1	8	BG	12-10 AWG
00-054007-70329-7	RV10-10L	1	10	BG	12-10 AWG
00-054007-70477-5	RV10-10Q	1	10	BG	12-10 AWG
00-054007-70330-3	RV10-14L	1	/	BG	12-10 AWG
00-054007-70478-2	RV10-14Q	1	/	BG	12-10 AWG

Terminals, Kits

3M™ Scotchlok™ Terminal Boxes (Empty)

A red metal 17 slot or 24 slot box to hold your 3M™ Scotchlok™ Terminals. BOX ONLY.



UPC Number	Size	Desc	Case Qty	Units
00-054007-11900-5	13.5"x9.5"x2"	17 Slot	1	EA

3M™ Scotchlok™ Terminal Kit STK-1

Filled with 3M's most frequently purchased low voltage termination products. Kit is constructed of durable metal with individual product compartments. While the compartments keep you organized, the rugged metal frame protects the contents even in the harshest conditions. Also includes crimping tool, Scotchcode™ Tape Dispenser and Cable Ties.



UPC Number	ID	Color	Case Qty	Units
00-051138-25348-6	STK-1	Red	1	EA

Terminals, Locking Forks

3M™ Scotchlok™ Nylon Insulated with Insulation Grip Locking Fork Terminal

The spring-like tongue locks into place around the stud even when the mount screw is not tightened. Extra force is required to remove it from the stud.

UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-11719-3	MNG14-8FLX	100	8	EA	16-14 AWG
00-054007-11720-9	MNG14-10FLX	100	10	EA	16-14 AWG



3M Supply House

Terminals, Locking Forks, cont'd

3M™ Scotchlok™ Vinyl Insulated Brazed Seam Locking Fork Terminal

The spring-like tongue locks into place around the stud even when the mount screws is not tightened.



UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-13864-8	MV18-6FLX	100	6	EA	22-18 AWG
00-054007-13872-3	MV18-8FLX	100	8	EA	22-18 AWG
00-054007-13906-5	MV14-6FLX	100	6	EA	16-14 AWG
00-054007-13914-0	MV14-8FLX	100	8	EA	16-14 AWG
00-054007-13915-7	MV14-8FLK	1000	8	EA	16-14 AWG
00-054007-13922-5	MV14-10FLX	100	10	EA	16-14 AWG
00-054007-13923-2	MV14-10FLK	1000	10	EA	16-14 AWG
00-054007-13971-3	MV10-14FLX	100	/	EA	12-10 AWG
00-054007-13955-3	MV10-8FLX	100	8	EA	12-10 AWG
00-054007-13964-5	MV10-10FLK	1000	10	EA	12-10 AWG
00-054007-13963-8	MV10-10FLX	100	10	EA	12-10 AWG

3M™ Scotchlok™ Vinyl Insulated Butted Seam Locking Fork Terminal

The spring-like tongue locks into place around the stud even when the mount screw is not tightened. Extra force is required to remove it from the stud.



UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-01361-7	MVU18-8FLK	1000	8	EA	22-18 AWG
00-054007-01872-8	MVU14-6FLK	1000	6	EA	16-14 AWG
00-054007-01873-5	MVU14-8FLK	1000	8	EA	16-14 AWG
00-054007-01874-2	MVU14-10FLK	1000	10	EA	16-14 AWG
00-054007-02116-2	MVU10-10FLK	500	10	EA	12-10 AWG

Terminals, Male Disconnects

3M™ Scotchlok™ Fully Nylon Insulated Butted Seam Male Disconnect

The disconnects are attached to mating part by tongue of female part slipping over male tab. The use of dents and rolled edges on female part provides excellent holding force while allowing easy and quick disconnect.

UPC Number	ID	Case Qty	Units	Wire Range
00-054007-02379-1	MNU18-187DMIK	1000	EA	22-18 AWG
00-054007-02289-3	MNU18-250DMIX	100	EA	22-18 AWG
00-054007-02299-2	MNU18-250DMIK	1000	EA	22-18 AWG
00-054007-02306-7	MNU14-250DMIX	100	EA	16-14 AWG
00-054007-02300-5	MNU14-250DMIK	1000	EA	16-14 AWG
00-054007-02307-4	MNU10-250DMIX	100	EA	12-10 AWG
00-054007-02301-2	MNU10-250DMIK	1000	EA	12-10 AWG

3M™ Scotchlok™ Fully Nylon Insulated with Insulation Grip Male Disconnect

The disconnects are attached to mating part by tongue of female part slipping over male tab. The use of dents and rolled edges on female part provides excellent holding force while allowing easy and quick disconnect.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-02302-9	MNG18-250DMIK	1000	EA	22-18 AWG
00-054007-11711-7	MNG18-250DMIX	100	EA	22-18 AWG
00-054007-02249-7	MNG14-250DMIK	1000	EA	16-14 AWG
00-054007-11723-0	MNG14-250DMIX	100	EA	16-14 AWG
00-054007-02303-6	MNG10-250DMIK	1000	EA	12-10 AWG
00-054007-11729-2	MNG10-250DMIX	100	EA	12-10 AWG

3M Supply House

Terminals, Male Disconnects, cont'd

3M™ Scotchlok™ Vinyl Insulated Butted Seam Male Disconnect

The disconnects are attached to mating part by tongue of female part slipping over male tab. The use of dents and rolled edges on female part provides excellent holding force while allowing easy and quick disconnect.




UPC Number	ID	Case Qty	Units	Wire Range
00-054007-22997-1	MVU14-250DMX	100	EA	16-14 AWG
00-054007-23920-8	MVU10-250DMX	100	EA	12-10 AWG

Terminals, Multi-Stud Ring Tongues

3M™ Scotchlok™ Vinyl Insulated w/Insulation Grip Multi-Stud Ring Tongue Terminal

The ring tongue is the standard style of tongue. It is the safest and most reliable, since it cannot be removed unless mounting screw is removed.




UPC Number	ID	Case Qty	Units	Wire Range
00-054007-14127-3	MVU10-610RX	100	EA	12-10 AWG

Terminals, Pin Terminals

3M™ Scotchlok™ Nylon Insulated w/Insulation Grip Pin Terminal

Attached to mating part by tongue slipping over male tab. Use of dents and rolled edges on female part provides excellent holding force while allowing easy and quick disconnect.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-49427-0	MNG14-47PX	100	EA	16-14 AWG

3M™ Scotchlok™ Vinyl Insulated Pin Terminal

Pin terminals are used for installation in compression blocks.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-49434-8	MVU18-47PX	100	EA	16-14 AWG
00-054007-49433-1	MVU14-47PX	100	EA	16-14 AWG
00-054007-49432-4	MVU10-55PX	100	EA	12-10 AWG

3M Supply House

Terminals, Ring Tongues

3M™ Scotchlok™ Non-Insulated Brazed Seam Ring Tongue Terminal

A ring is the standard style of tongue. The safest and most reliable; it cannot be removed unless mounting screw is removed.

UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-14002-3	M10-10RK	1000	10	EA	12-10 AWG
00-054007-23276-6	M10-10RX	100	10	EA	12-10 AWG
00-054007-01882-7	MU10-14R/SK	1000	/	EA	12-10 AWG
00-054007-23284-1	M10-14R/SX	100	/	EA	12-10 AWG
00-054007-02118-6	M8-10R/SK	1000	10	EA	8 AWG
00-054007-02120-9	M8-14R/SK	1000	/	EA	8 AWG
00-054007-24126-3	M8-14R/SX	100	/	EA	8 AWG
00-054007-02147-6	M6-10R/SK	1000	10	EA	6 AWG
00-054007-02155-1	M6-12R/SK	1000	fi	EA	6 AWG
00-054007-02149-0	M6-14R/SK	1000	/	EA	6 AWG
00-054007-24183-6	M6-14R/SX	100	/	EA	6 AWG
00-054007-02152-0	M6-38RK	1000	3/8	EA	6 AWG

**3M™ Scotchlok™ Nylon Insulated Brazed Seam Ring Tongue Terminal**

A ring is the standard style of tongue. The safest and most reliable; cannot be removed unless mounting screw is removed.

UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-08267-5	MN8-10R/SK	1000	10	EA	8 AWG
00-054007-08268-2	MN8-14R/SK	1000	/	EA	8 AWG
00-054007-15652-9	MN8-14R/SX	100	/	EA	8 AWG
00-054007-08270-5	MN8-38RK	1000	3/8	EA	8 AWG
00-054007-08269-9	MN8-516RK	1000	5/16	EA	8 AWG
00-054007-08272-9	MN6-10R/SK	1000	10	EA	6 AWG
00-054007-08273-6	MN6-14R/SK	1000	/	EA	6 AWG
00-054007-08275-0	MN6-38RK	1000	3/8	EA	6 AWG

**3M™ Scotchlok™ Nylon Insulated with Insulation Grip Ring Tongue Terminal**

A ring is the standard style of tongue. The safest and most reliable; cannot be removed unless mounting screw is removed.

UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-16163-9	MNG18-6R/SK	1000	6	EA	22-18 AWG
00-054007-01071-5	MNG18-10R/LK	1000	10	EA	22-18 AWG
00-054007-14150-1	MNG14-10RK,	1000	10	EA	16-14 AWG
00-054007-01437-9	MNG14-10R/LK	1000	10	EA	16-14 AWG
00-054007-22484-6	MNG14-10R/LX	100	10	EA	16-14 AWG
00-054007-01936-7	MNG10-8RK	1000	8	EA	12-10 AWG
00-054007-01937-4	MNG10-10RK	1000	10	EA	12-10 AWG
00-054007-23441-8	MNG10-10RX	100	10	EA	12-10 AWG
00-054007-01938-1	MNG10-14R/SK	1000	/	EA	12-10 AWG
00-054007-23458-6	MNG10-14R/SX	100	/	EA	12-10 AWG



3M Supply House

Terminals, Ring Tongues, cont'd

3M™ Scotchlok™ Vinyl Insulated Brazed Seam Ring Tongue Terminal

The spring-like tongue locks into place around the stud even when the mount screws is not tightened.

UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-21726-8	MV18-8R/LX	100	8	EA	22-18 AWG
00-054007-21734-3	MV18-10R/LX	100	10	EA	22-18 AWG
00-054007-22385-6	MV14-8R/LX	100	8	EA	16-14 AWG
00-054007-01421-8	MV14-10R/LK	1000	10	EA	16-14 AWG
00-054007-22393-1	MV14-10R/LX	100	10	EA	16-14 AWG
00-054007-22401-3	MV14-14R/SX	100	/	EA	16-14 AWG
00-054007-23342-8	MV10-8RX	100	8	EA	12-10 AWG
00-054007-01923-7	MV10-10RK	1000	10	EA	12-10 AWG
00-054007-23359-6	MV10-10RX	100	10	EA	12-10 AWG
00-054007-01924-4	MV10-14R/SK	1000	/	EA	12-10 AWG
00-054007-23367-1	MV10-14R/SX	100	/	EA	12-10 AWG
00-054007-23375-6	MV10-516R/SX	100	5/16	EA	12-10 AWG

**3M™ Scotchlok™ Vinyl Insulated Butted Seam Ring Tongue Terminal**

A ring is the standard style of tongue. The safest and most reliable; cannot be removed unless mounting screw is removed.

UPC Number	ID	Case Qty	Stud-Tab Size	Units	Wire Range
00-054007-01080-7	MVU18-6R/SK	1000	6	EA	22-18 AWG
00-054007-01453-9	MVU14-10R/LK	1000	10	EA	16-14 AWG
00-054007-01452-2	MVU14-10RK	1000	10	EA	16-14 AWG



Terminals, Standard Forks

3M™ Scotchlok™ Vinyl Insulated Brazed Seam Fork Terminal

The standard fork allows rapid connection of wire. They are usually used on free-standing studs, because of their wider tongues.



UPC Number	ID	Case Qty	Units	Wire Range
00-054007-22559-1	MV14-6FX	100	EA	16-14 AWG
00-054007-22567-6	MV14-8FX	100	EA	16-14 AWG
00-054007-22575-1	MV14-10FX	100	EA	16-14 AWG
00-054007-23615-3	MV10-8FX	100	EA	12-10 AWG
00-054007-23623-8	MV10-10FX	100	EA	12-10 AWG

Terminals, Tools

3M™ Crimping Tool Ratchet TR-482

A compact, high quality tool designed to perform the six most common electrical wiring functions. Made of 1.125" heat-treated carbon steel for maximum durability. It handles a variety of terminal and connector styles, insulated and non-insulated, over a range of 22-10 AWG.



UPC Number	Case Qty	Units	Wire Range
00-054007-11902-9	1	EA	22-10 AWG

3M™ Crimping Tool Ratchet TR-490

Crimps barrel and insulation grip independently on No. 22-10 AWG insulated and non-insulated terminals and connectors: nylon or vinyl insulated, butted or brazed seam.



UPC Number	Case Qty	Units	Wire Range
00-054007-70481-2	1	EA	22-10 AWG

3M Supply House

Terminals, Tools, cont'd

3M™ Crimping Tool Scissors TH-450

Made of 1.40" high strength, heat-treated carbon steel. Lightweight without sacrificing strength. It handles a variety of terminal and conductor styles, including flags, closed end connectors, crimp sleeves and standard parts, insulated and non-insulated, over a broad range of 26-6 AWG.



UPC Number	Case Qty	Units	Wire Range
00-054007-13760-3	1	EA	26-6 AWG

3M™ Scotchlok™ Crimping Tool TH-440

High carbon heat-treated steel and unique design provide a high strength/weight ratio, durability, reliability and wide range of applications. Crimps a broad range of terminals and connectors.



UPC Number	Case Qty	Units	Wire Range
00-054007-60825-7	1	PH	22-10 AWG

Wire Connectors, Crimp Sleeve Connectors

3M™ Scotchlok™ Copper Insulated Electrical Crimp Sleeve Connector S-11

3M™ Scotchlok™ Copper Insulated Electrical Crimp Sleeve Connectors S-11 make fast work of splicing 22 to 14 AWG copper conductors. Smooth flared entry makes wire insertion fast – simply twist conductors together and crimp. Insulated, closed-end crimp sleeve connectors have a rugged, yet resilient nylon insulator, use these connectors in light fixtures, appliances and other electrical OEM applications. UL Listed and CSA Certified.



UPC Number	Desc	Case Qty	Units
00-054007-16732-7	600 V	100	CONN

Wire Connectors, Crimp Sleeve Connectors, cont'd

3M™ Scotchlok™ Copper Insulated Electrical Crimp Sleeve Connector S-31

3M™ Scotchlok™ Copper Insulated Electrical Crimp Sleeve Connectors S-31 make fast work of splicing 18 to 10 AWG copper conductors. Smooth flared entry makes wire insertion fast – simply twist conductors together and crimp. Insulated, closed-end crimp sleeve connectors have a rugged, yet resilient nylon insulator, use these connectors in light fixtures, appliances and other electrical OEM applications.



UPC Number	Desc	Case Qty	Units
00-054007-16734-1	600 V	100	CONN

3M™ Scotchlok™ Copper Insulated Electrical Crimp Sleeve Connector S-60

These connectors are designed specifically for fast pigtail grounding. Their smooth flared entry makes wire insertion fast – simply twist conductors together and crimp. Connects 2#10, 2#16 AWG stranded.




UPC Number	Desc	Case Qty	Units
00-054007-16726-6	600 V	100	CONN
00-054007-16727-3	600 V	1000	CONN

Wire Connectors, IDC Connectors and Tools

3M™ Scotchlok™ Insulation Displacement Connector (IDC)

3M™ IDC's are fast and easy alternatives for connecting wires. No wire stripping is necessary. Perfect for wire harnesses and/or maintenance applications.

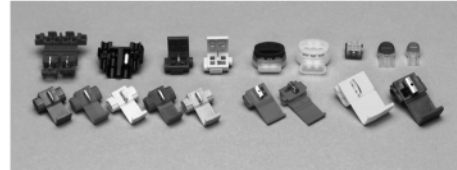

UPC Number	ID	Color	Desc	Case Qty	Units	Wire Range
00-054007-09230-8	314	Blue	Pigtail	100	CONN	22-14 AWG
00-054007-09231-5	314	Blue	Pigtail	1000	CONN	22-14 AWG
00-054007-09232-2	314U	White	Pigtail	100	CONN	22-14 AWG
00-054007-09233-9	314U	White	Pigtail	1000	CONN	22-14 AWG
00-054007-50419-1	316IR	Black	Pigtail	1	CONN	22-16 AWG
00-054007-21494-6	557	Red	Pigtail	100	CONN	22-16 AWG
00-054007-21502-8	557	Red	Pigtail	1000	CONN	22-16 AWG
00-054007-14861-6	558	Red	Run and Tap	100	CONN	22-16 AWG
00-054007-14879-1	558	Red	Run and Tap	1000	CONN	22-16 AWG
00-054007-00839-2	560	Light Blue	Double Run or Tap	100	CONN	18-16 AWG
00-054007-00840-8	560	Light Blue	Double Run or Tap	1000	CONN	18-16 AWG
00-054007-20090-1	560B	Blue	Double Run or Tap	100	CONN	18-16 AWG
00-054007-20181-6	560B	Blue	Double Run or Tap	1000	CONN	18-16 AWG
00-054007-09513-2	560N	Brown	Double Run	1000	CONN	18-16 AWG
00-054007-11032-3	562	Yellow	Double Run or Tap	100	CONN	12-10 AWG
00-054007-11040-8	562	Yellow	Double Run or Tap	1000	CONN	12-10 AWG
00-054007-06118-2	564	Beige	Double Run	1000	CONN	18-14 AWG
00-054007-14887-6	567	Brown	Run and Tap	100	CONN	18-14 AWG
00-054007-14895-1	567	Brown	Run and Tap	1000	CONN	18-14 AWG
00-054007-06134-2	804	Blue	Run and Tap	100	CONN	18-16 AWG
00-054007-50187-9	804	Blue	Run and Tap	1000	CONN	18-16 AWG
00-054007-50188-6	804	Blue	Run and Tap	1000	CONN	18-16 AWG
00-054007-06135-9	804	Blue	Run and Tap	1000	CONN	18-16 AWG
00-054007-06106-9	901	Gray	In-Line Bullet	1	CONN	18-14 AWG
00-054007-06107-6	901	Gray	In-Line Bullet	1	CONN	18-14 AWG
00-054007-06128-1	905	Red	Double Run or Tap	1	CONN	22-18 AWG
00-054007-06129-8	905	Red	Double Run or Tap	1	CONN	22-18 AWG

3M Supply House

Wire Connectors, Spring Connectors and Tools

3M™ “Performance Plus” Wire Connectors

Because of their increased wire range, just four “Performance Plus” Wire Connectors handle the work of seven standard connectors. T/R+ replaces the yellow, tan and red connectors in the majority of field applications. O/B+ replaces the orange, blue and gray wire nut style connectors, as well as 70% of the yellow wire nut and wing style connectors. R/Y+ replaces both red and yellow wing style connectors. B/G+ covers both the large blue and gray connectors. This simplifies selection of the right connector for a wide range of wiring jobs. There’s also less inventory to manage, and a better chance you’ll have the connector you need to do every job.



UPC Number	Color	Case Qty	Units
00-054007-43150-3	Blue/Gray	100	CONN
00-054007-43151-0	Blue/Gray	1000	CONN
00-054007-43153-4	Orange/Blue	1000	CONN
00-054007-43152-7	Orange/Blue	100	CONN
00-054007-43154-1	Red/Yellow	100	CONN
00-054007-43155-8	Red/Yellow	1000	CONN
00-051128-54454-9	Tan/Red	100	CONN
00-051128-54455-6	Tan/Red	1000	CONN
00-051128-54813-4	Tan/Red	1000	CONN
00-051128-55219-3	Tan/Red	1000	CONN
00-051128-54456-3	Tan/Red	1000	CONN

3M™ Electrical Spring and Grounding Connectors

The quick-spin, wing-torque design of Electrical Spring and Grounding Connectors 312, 412 and 512 is easy on your fingers. The day’s last connection will feel almost as good as the first.

Generous expansion room accommodates a wide range of solid or stranded wire. Use the 312 (yellow) connector for wire combinations from 3 #20 to 3 #12 AWG, the 412 (tan) connector for 2 #20 to 3 #10 AWG and the 512 (red) connector for 2 #18 to 5 #12 AWG. The 512G (green) is used for grounding connections.



UPC Number	ID	Color	Case Qty	Units
00-054007-08159-3	312	Yellow	100	CONN
00-054007-08160-9	312	Yellow	1000	CONN
00-051128-53952-1	312	Yellow	1000	CONN
00-051128-54451-8	412	Tan	100	CONN
00-051128-54452-5	412	Tan	1000	CONN
00-051128-54453-2	412	Tan	1000	CONN
00-054007-08161-6	512	Red	100	CONN
00-051128-53953-8	512	Red	1000	CONN
00-054007-08162-3	512	Red	1000	CONN
00-054007-49950-3	512G	Green	100	CONN
00-054007-50232-6	512G	Green	1000	CONN

Wire Connectors, Spring Connectors and Tools, cont’d

3M™ Highland™ Electrical Wire Connectors

For general wiring. Color code makes it easy (and fast) to match the right connector to the wire’s sizes. UL listed. CSA approved. Works equally well with either solid or stranded wire.



UPC Number	ID	Color	Case Qty	Units	Wire Range
00-054007-43133-6	H-29	Gray	100	CONN	22-16 AWG
00-054007-43122-0	H-30	Blue	100	CONN	20-16 AWG
00-054007-43123-7	H-30	Blue	1000	CONN	22-16 AWG
00-054007-43124-4	H-30	Blue	1000	CONN	22-16 AWG
00-054007-43117-6	H-31	Orange	100	CONN	18-14 AWG
00-054007-43118-3	H-31	Orange	1000	CONN	18-14 AWG
00-054007-43119-0	H-31	Orange	1000	CONN	18-14 AWG
00-054007-43120-6	H-31	Orange	1000	CONN	18-14 AWG
00-054007-43136-7	H-33	Yellow	100	CONN	18-12 AWG
00-054007-43138-1	H-33	Yellow	1000	CONN	18-12 AWG
00-054007-43140-4	H-35	Red	100	CONN	18-10 AWG
00-054007-43142-8	H-35	Red	1000	CONN	18-10 AWG

3M™ Scotchlok™ Electrical Spring Connectors

Insulated with a color-coded, pliable, vinyl skirt. They feature a “live spring” which assures a tight grip, even on small wire combinations. These premium grade connectors can be “backed off” to allow maintenance or modification of electrical systems.



UPC Number	Color	Desc	Case Qty	Units
00-054007-42033-0	Blue	B Electrical	100	CONN
00-054007-21346-8	Green	G Electrical	100	CONN
00-054007-70488-1	Green	G Electrical	1000	CONN
00-054007-20058-1	Red	R Electrical	100	CONN
00-054007-70489-8	Red	R Electrical	1000	CONN
00-054007-20041-3	Yellow	Y Electrical	100	CONN
00-054007-15769-4	Yellow	Y Electrical	1000	CONN

3M Supply House

Wire Connectors, Spring Connectors and Tools, cont'd

3M™ Scotchlok™ Hand Driver for Wire Connectors

Application tools for Spring Connectors. They quickly spin on the connector and position wire bundle in the box with ease. The WCD power driver uses a standard chuck.



UPC Number	ID	Desc	Case Qty	Units
00-054007-49948-0	WCD-H	Hand Driver	1	EA
00-054007-49919-0	WCD-P	Drill Driver	1	EA

Wire Marking and Identifying Products, Books

3M™ ScotchCode™ Preprinted Wire Marking Book

These handy books contain printed vinyl cloth wire and terminal markers with clearly printed letter, numbers and industry-standard legends. Including an alarm system book and a load center book.



UPC Number	ID	Desc	Case Qty	Units
00-054007-49951-0	SPB-01	45 each 0-9, 15 each L1, L2, L3, T1, T2, T3	1	EA
00-054007-49952-7	SPB-02	10 each A-Z, 0-15, +, -, ~, ~	1	EA
00-054007-49953-4	SPB-03	10 each 1-45	1	EA
00-054007-49958-9	SPB-08	6 each 1-15, 4 each 16-90, 2 each A-Z, +, -, ~, ~	1	EA
00-054007-49959-6	SPB-09	45 each of 1-3; 3 each of A-C; 30 each of L1, L2, L3 and T1, T2, T3	1	EA
00-054007-49960-2	SPB-11	15 each 1-30	1	EA
00-054007-49961-9	SPB-12	15 each A-Z, 8 each +, 6 each -, 21 each blank write on markers	1	EA
00-054007-49963-3	SPB-14	10 each 46-90	1	EA

3M™ ScotchCode™ SMP Marker Pen

This pen performs well on nonporous surfaces, has an extra-fine point with permanent, quick-drying ink and is available in black ink. It has superior UV and water resistance.



UPC Number	ID	Color	Case Qty	Units
00-054007-09963-5	SMP	Black	1	EA

Wire Marking and Identifying Products, Books, cont'd

3M™ ScotchCode™ Write On Wire Marker Book

This self-laminating, write-on marker was designed for small volume applications involving special or complex legends that are handwritten at the job site.



UPC Number	ID	Size	Desc	Case Qty	Units
00-054007-49904-6	SWB-1	0.16" to 0.31"	180 labels per book.	1	EA
00-054007-49905-3	SWB-2	0.24" to 0.31"	120 labels per book.	1	EA
00-054007-49906-0	SWB-3	0.32" to 0.58"	60 labels per book.	1	EA
00-054007-49907-7	SWB-4	0.32" to 1.55"	30 labels per book.	1	EA

Wire Marking and Identifying Products, Dispensers

3M™ ScotchCode™ Refill for Write-On Wire Marker Tape Dispenser SWD

Offer three marker sizes to fill your needs.

Each of these durable, lightweight dispensers provides a flat, stable surface for writing on the marker. Dispenser is factory loaded and re-enterable, providing clean storage for the die-cut markers. The markers are transparent vinyl tape with acrylic, self-laminating, pressure sensitive adhesive that resists flagging, dirt, oil and heat. Write on tape markers are for use on 0.09" to 0.315" O.D. wire and cable and any other marking uses from control panels to golf clubs.



UPC Number	ID	Size	Color	Case Qty	Units
00-054007-12201-2	SWD-R	6 1/2"x1.4"	Transparent	1	RL

3M Supply House

Wire Marking and Identifying Products,
Dispensers, cont'd**3M™ ScotchCode™ SDR Wire Marker
Tape Refill Roll**

The SDR Tape can be used for the following applications involving operating temperatures ranging from -40°F to 250°F (-40°C to 121°C): Marking all types of wire and cable including power, control, fiber optic, electronic, telecommunication and instrumentation; Phase identification on large or small gauge wire or cable; Identification of terminal blocks, terminal strips, and wire in panel boards or a piece of switchgear; Automotive applications on tubing, hoses and replacement parts.



UPC Number	ID	Case Qty	Units
00-054007-09369-5	SDR-0	1	RL
00-054007-09368-8	SDR-0-9	1	RL
00-054007-09370-1	SDR-1	1	RL
00-054007-09371-8	SDR-2	1	RL
00-054007-09372-5	SDR-3	1	RL
00-054007-09373-2	SDR-4	1	RL
00-054007-09374-9	SDR-5	1	RL
00-054007-09375-6	SDR-6	1	RL
00-054007-09376-3	SDR-7	1	RL
00-054007-09377-0	SDR-8	1	RL
00-054007-09378-7	SDR-9	1	RL
00-054007-09379-4	SDR-10-19	1	PH
00-054007-09380-0	SDR-20-29	1	PH
00-054007-09388-6	SDR-A	1	RL
00-054007-09389-3	SDR-B	1	RL
00-054007-09390-9	SDR-C	1	RL
00-054007-09430-2	SDR-WH	1	RL
00-054007-09431-9	SDR-YL	1	RL

**3M™ ScotchCode™ SDR-MC Wire Marker
Tape Refill Roll**

Multiple colors of wire marker rolls.



UPC Number	ID	Desc	Case Qty	Units
00-054007-09404-3	SDR-MC	Multiple colors/lnr	1	RL

**3M™ ScotchCode™ SLS Wire Marker
Write-On Dispenser, Wire O.D.**

3M™ ScotchCode™ Write-On Dispensers are handy for identifying wire and cable as well as household, automotive, plumbing and sporting equipment.




UPC Number	ID	Size	Case Qty	Units
00-054007-49653-3	SLS	0.15" to 0.49"	1	EA

3M Supply House

Wire Marking and Identifying Products,
Dispensers, cont'd**3M™ ScotchCode™ SLS-R Wire Marker
Refill Roll**

Die-cut markers resist dirt, oil, heat and moisture. Transparent overwrap with self-laminating pressure sensitive adhesive protects printing.



UPC Number	ID	Desc	Case Qty	Units
00-054007-49652-6	SLS-R	Refill for SLS dispenser.	1	RL

**3M™ ScotchCode™ SLW-R Wire Marker
Refill Roll**

Refill for SLW dispenser. 70 labels per roll. Marker is 1" x 5", with a write-on area of 1" x 0.75". Recommended for wire with an outer diameter of 0.23" to 1.32".



UPC Number	ID	Size	Case Qty	Units
00-054007-49651-9	SLW-R	1"x5"	1	EA

**3M™ ScotchCode™ STD Wire Marker
Tape Dispenser**

Used for marking binder groups, wire or cable, the tapes' high tack, acrylic adhesive resists solvents, oil and water, and adheres firmly to insulation surfaces. An end-loop hooks the dispenser easily to a tool pouch or belt.



UPC Number	ID	Case Qty	Units
00-054007-12172-5	STD	1	EA

**3M™ ScotchCode™ STD-101 3/8" Wire
Marker Tag Refill**

Applications include identifying wire, cable conduit and tubing as well as bundling wire, cable or any other objects with a circumference which can be handled with a miniature or standard width cable tie.



UPC Number	ID	Size	Case Qty	Units
00-054007-50346-0	STD-101	3/8"	1	RL

Wire Marking and Identifying Products, Dispensers, cont'd

3M™ ScotchCode™ STD-C Wire Marker Tape Dispenser

The 3M™ ScotchCode™ STD-C Wire Marker Tape Dispenser is a compact, carry-along dispenser with ten refillable compartments that hold eight-foot rolls of non-smear polyester tape. Used for marking binder groups, wire or cable, the tapes' high tack, acrylic adhesive resists solvents, oil and water, and adheres firmly to insulation surfaces. An end-loop hooks the dispenser easily to a tool pouch or belt.



UPC Number	ID	Case Qty	Units
00-054007-12175-6	STD-C	1	EA

3M™ ScotchCode™ STD-TAG Wire Marker Dispenser

The tags are available in two sizes, STD-101 and STD-102. Applications for both types of tags include identifying wire, cable conduit and tubing as well as bundling wire, cable or any other objects with a circumference which can be handled with a miniature or standard width cable tie.



UPC Number	ID	Case Qty	Units
00-054007-50345-3	STD-TAG	1	EA

3M™ ScotchCode™ STD-X Wire Marker Tape Dispenser

Used for marking binder groups, wire or cable, the tapes' high tack, acrylic adhesive resists solvents, oil and water, and adheres firmly to insulation surfaces. An end-loop hooks the dispenser easily to a tool pouch or belt.



UPC Number	ID	Case Qty	Units
00-054007-49519-2	STD-X	1	EA

Wire Marking and Identifying Products, Dispensers, cont'd

3M™ ScotchCode™ SWD Wire Marker Write-On Dispenser

Regular sized dispenser with tape and SMP marking pen. 50 labels per roll. Marker is 0.75" x 1.375", with a write-on area of 0.75" x 0.312". Recommended for wire with an outer diameter of 0.09" to 0.31".



UPC Number	ID	Case Qty	Units
00-054007-11954-8	SWD	1	EA

3M™ ScotchCode™ Wire Marking Tape Dispenser

Provides a fast, convenient system for marking wire, cable, or vacuum hoses and spark plug wires. Special end loop to hook on belt or tool pouch. Small size makes it easy to carry. Filled dispenser.



UPC Number	ID	Case Qty	Units
00-054007-49517-8	STD-CX	1	EA
00-054007-49518-5	STD-0-9X	1	EA
00-054007-12174-9	STD-0-9	1	EA

3M™ ScotchCode™ Write-On Tape Wire Marker Dispenser SLW

Offers three marker sizes to fill your needs. This lightweight dispenser provides a flat, stable surface for writing on the marker. Dispenser is factory loaded and re-enterable, providing clean storage for the die-cut markers. The markers are transparent vinyl tape with acrylic, self-laminating, pressure sensitive adhesive that resists flagging, dirt, oil and heat. Write on tape markers are for use on 0.09" to 0.315" O.D. wire and cable and any other marking uses from control panels to golf clubs. Large dispenser with tape and SMP marker.



UPC Number	ID	Size	Case Qty	Units
00-054007-12177-0	SLW	1"x5"	1	EA

3M Supply House

ELECTRICAL

TAPES



Scoth® Vinyl Plastic Electrical Tape - Cold and weather-resistant. For use in home, auto, and marine applications. UL listed. CSA approved. 3/4" x 350". Plastic dispenser with cutter.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505943-D	10455	3/4"x350" Plastic Tape	1/0/24	.340	3.49 CD

Tommy Tape Inc

Silicone Repair Tape - Tommy Tape®. Self-fusing silicone repair tape. UV, chemical, and weather-resistant. Water-tight seal for electrical, plumbing, and general-purpose applications. 20 mil. 1" x 10'. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500496-C	112253	Black	1/0/6	1.000	4.99 EA
560847-C	122252	White	1/0/6	.188	4.99 EA
560855-C	162258	Red	1/0/6	.188	4.99 EA

Henkel Consumer Adhesives

Friction Tape - Strong cotton cloth friction tape. Traditional cover for rubber electrical splices. Excellent for wrapping hockey sticks, baseball bats, etc. 3/4" x 60'. Roll.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500453-C	04108	3/4"x60' Friction Tape	1/0/12	.328	2.79 EA

Henkel Consumer Adhesives

Rubber Splicing Tape - Water tight, self-fusing rubber splicing tape. Traditional cover for rubber electrical supplies. 30 mil. rubber. 3/4" x 22'. Roll.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500461-D	04200	3/4"x22' Splicing Tape	1/0/24	.395	3.29 EA

Plastic Dip Intl.

Liquid Electrical Tape - Seals and protects electrical connections which will be subjected to extreme moisture and weathering conditions. Forms a protective dielectric coating of flexible vinyl. Hundreds of uses - boats, motor vehicles, cable TV hook-ups, pool electricals, sprinkler system timers, pumps, etc. Adheres to metal, plastic, vinyl, rubber, and composite surfaces. Holds wires and terminals together, prevents loose connections due to vibration. Complete with applicator brush cap, fast drying. 4 oz.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
526436-D	LET14Z03	Black	1/0/6	.417	7.99 CD
543462-D	LET14Z01	Red	1/0/6	.417	7.99 CD
543454-D	LET14Z07	White	1/0/6	.417	7.99 CD

GB Electrical

Closed End Connector - Vibration and corrosion-resistant. Clamshell package. UL listed, CSA approved. 10 per package.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530115-F	20-089 (30851)	Wire range: 22-14	1/0/10	.003	1.99 PKG
530123-F	20-090 (30871)	Wire range: 22-12	1/0/10	.003	1.99 PKG

GB Electrical

Butt Splice Connector - Clamshell package. UL listed, CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530077-F	21-121 (50228)	Wire range: 22-18, 10 per package	1/0/5	.003	1.99 PKG
530085-F	21-123 (50140)	Wire range: 16-14, 10 per package	1/0/5	.003	1.99 PKG
530093-F	21-126 (50126)	Wire range: 12-10, 8 per package	1/0/5	.003	1.99 PKG

TERMINALS

ELECTRICAL

GB Electrical

Quick Tap Splice Connector - Clamshell package. UL listed, CSA approved. Wire range: 16-14. 5 per package.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530107-F	21-100	16-14 Splice Connector	1/0/5	.004	1.99 PKG

GB Electrical

Insulated Ring Terminal - Clamshell package. UL listed, CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529931-F	21-101 (50220)	Wire range: 22-18, stud size: 4-6, 10 per package	1/0/5	.003	1.99 PKG
529923-F	21-102 (50222)	Wire range: 22-18, stud size: 8-10, 10 per package	1/0/5	.003	1.99 PKG
529966-F	21-103 (50150)	Wire range: 16-14, stud size: 4-6, 10 per package	1/0/5	.003	1.99 PKG
529974-F	21-104 (50160)	Wire range: 16-14, stud size: 8-10, 10 per package	1/0/5	.003	1.99 PKG
529982-F	21-105 (50162)	Wire range: 16-14, stud size: 12-1/4", 7 per package	1/0/5	.003	1.99 PKG
529990-F	21-106 (50120)	Wire range: 12-10, stud size: 8-10, 8 per package	1/0/5	.003	1.99 PKG
530026-F	21-107 (50122)	Wire range: 12-10, stud size: 12-1/4", 7 per package	1/0/5	.003	1.99 PKG

GB Electrical

Insulated Spade Terminal - Clamshell package. UL listed, CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530034-F	21-112 (50224)	Wire range: 22-18, stud size: 8-10, 7 per package	1/0/5	.003	1.99 PKG
530042-F	21-113 (50164)	Wire range: 16-14, stud size: 4-6, 10 per package	1/0/5	.003	1.99 PKG
530050-F	21-114 (50166)	Wire range: 16-14, stud size: 8-10, 10 per package	1/0/5	.003	1.99 PKG
530069-F	21-116 (50124)	Wire range: 12-10, stud size: 8-10, 8 per package	1/0/5	.003	1.99 PKG

GB Electrical

Insulated Female Disconnect - Clamshell package. UL listed, CSA approved. 10 per package.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530204-F	21-141F (50187)	Wire range: 22-18, tab size: .250	1/0/5	.003	1.99 PKG
530212-F	21-143F (50152)	Wire range: 16-14, tab size: .250	1/0/5	.003	1.99 PKG

GB Electrical

Insulated Male Disconnect - Clamshell package. UL listed, CSA approved. 10 per package.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530220-F	21-141M (50188)	Wire range: 22-18, tab size: .250	1/0/5	.003	1.99 PKG
530239-F	21-143M (50153)	Wire range: 16-14, tab size: .250	1/0/5	.003	1.99 PKG

GB Electrical

Fully Insulated Female Disconnect - Clamshell package. UL listed, CSA approved. Wire range: 22-18. Tab size: .250. 6 per package.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530247-F	21-151F	22-18 Female Disconnect	1/0/5	.003	1.99 PKG

ELECTRICAL

GB Electrical

Fully Insulated Male Disconnect - Clamshell package. UL listed, CSA approved. Wire range: 22-18. Tab size: .250. 6 per pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530727-F	21-151M	22-18 Male Disconnect	1/0/5	.003	2.29 PKG

GB Electrical

Insulated Snap Plug Receptacles - Clamshell package. UL listed, CSA approved. 6 per pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530174-F	21-161F (50180)	Wire range: 22-18, plug size: .157	1/0/5	.003	1.99 PKG
530166-F	21-163F (50144)	Wire range: 16-14, plug size: .157	1/0/5	.003	1.99 PKG

GB Electrical

Insulated Plug Connector - Clamshell package. UL listed, CSA approved. 6 per pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530158-F	21-161M (50189)	Wire range: 22-18, plug size: .157	1/0/5	.003	1.99 PKG
530131-F	21-163M (50142)	Wire range: 16-14, plug size: .157	1/0/5	.003	1.99 PKG

TERMINALS

GB Electrical

Ring Terminal - Ring-type insulated terminal. UL listed, CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506400-D	10-102	Stud size 10, wire size 22-18, 100 per box	1/0/5	.020	6.39 BX
506427-D	10-104	Stud size 10, wire size 16-14, 100 per box	1/0/5	.024	6.39 BX
506443-E	10-106	Stud size 8-10, wire size 12-10, 50 per box	1/0/5	.026	6.49 BX

GB Electrical

Ring Terminal - GB Xtreme™. Adhesive lined to environmentally seal electrical connections. Insulated and protects connection pull out, moisture intrusion, and abrasion. Resists salt water, oil, gasoline, and other environmental contaminants. 3 per pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
562904-E	AMT-100	Stud size 10, wire size 22-18 AWG	1/0/10	.030	3.99 EA
562912-E	AMT-103	Stud size 8, wire size 16-14 AWG	1/0/10	.030	3.99 EA
562920-E	AMT-106	Stud size 8, wire size 12-10 AWG	1/0/10	.030	3.99 EA
562939-E	AMT-108	Stud size 1/4", wire size 12-10 AWG	1/0/10	.030	3.99 EA

GB Electrical

Butt Splices - GB Xtreme™. Adhesive lined to environmentally seal electrical connections. Insulates and protects connection pull out, moisture intrusion, and abrasion. Resists salt water, oil, gasoline, and other environmental contaminants.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
562971-E	AMT-120	Red, wire size 22-18 AWG, 3 per pack	1/0/10	.030	3.99 EA
562998-E	AMT-123	Blue, wire size 16-14 AWG, 3 per pack	1/0/10	.030	3.99 EA
563005-E	AMT-126	Yellow, wire size 12-10 AWG, 3 per pack	1/0/10	.030	3.99 EA
563013-E	AMT-121	Red, wire size 22-18 AWG, 25 per pack	1/0/5	.060	13.49 EA
563021-E	AMT-124	Blue, wire size 16-14 AWG, 25 per pack	1/0/5	.140	13.49 EA
563048-E	AMT-127	Yellow, wire size 12-10 AWG, 25 per pack	1/0/5	.220	13.49 EA

TERMINALS

GB Electrical

Spade Terminal - GB Xtreme™. Adhesive lined to environmentally seal electrical connections. Insulated and protects connection pull out, moisture intrusion, and abrasion. Resists salt water, oil, gasoline, and other environmental contaminants. 3 per pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
562947-E	AMT-110	Stud size 8, wire size 22-18 AWG	1/0/10	.030	3.99 EA
562955-E	AMT-113	Stud size 8, wire size 16-14 AWG	1/0/10	.030	3.99 EA
562963-E	AMT-116	Stud size 8, wire size 12-10 AWG	1/0/10	.030	3.99 EA

GB Electrical

Heavy-Duty Lugs - GB Xtreme™ lugs are heavy-duty pure copper for maximum current flow. They are tinned for corrosion resistance with a seamless barrel for maximum strength. Ends are closed to seal out moisture. 2 per pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
563056-E	AML-200	Stud size 1/4", 6 AWG	1/0/10	.050	9.99 EA
563064-E	AML-201	Stud size 5/16", 6 AWG	1/0/10	.050	8.99 EA
563072-E	AML-202	Stud size 3/8", 6 AWG	1/0/10	.050	9.99 EA
563080-E	AML-203	Stud size 5/16", 4 AWG	1/0/10	.050	8.99 EA
563099-E	AML-204	Stud size 3/8", 4 AWG	1/0/10	.050	8.99 EA
563102-E	AML-205	Stud size 5/16", 2 AWG	1/0/10	.050	8.99 EA
563110-E	AML-206	Stud size 3/8", 2 AWG	1/0/10	.050	8.99 EA
563129-E	AML-207	Stud size 3/8", 1/0 AWG	1/0/5	.060	9.49 EA
563137-E	AML-208	Stud size 3/8", 2/0 AWG	1/0/5	.070	9.49 EA

GB Electrical

Butt Connector - Insulated butt connector. UL listed, CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506338-E	10-121	Wire size 18-22, 100 per box	1/0/5	.030	6.99 BX
506346-D	10-123	Wire size 16-14, 100 per box	1/0/5	.032	6.99 BX
506354-E	10-126	Wire size 12-10, 50 per box	1/0/5	.030	5.99 BX

ELECTRICAL

Ideal/Buchanan

Crimping Tool - Installs model No. 2006S, model No. 2011S splice caps and terminal lugs. Spring-loaded, cam-actuated crimping indenters with fingertip adjustment for various size fittings. Exclusive 4-way crimp insures high-strength, vibration-proof connections. Has lock position. 1 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514526-C	C-24	Crimping Tool	1/0/10	1.000	59.99 EA

Ideal/Buchanan

Splice Cap - Open-end construction for ease in cutting wires flush with caps. Caps easily removed without damaging wire. Copper.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514483-D	2006SC	Wire range: 2 No. 18 thru 4 No. 12 or equivalent combinations, 100 per box	1/0/10	.002	9.49 BX
514189-D	2011SC	Wire range: 3 No. 12 thru 3 No. 8 or 2 No. 6 or equivalent combinations, 50 per box	1/0/10	.010	12.49 BX

Ideal/Buchanan

Insulator - Snaps on instantly, even in extremely cold weather. Internal retainer ring snaps over installed splice cap, holds insulator securely. No wrapping or threading required. UL listed for 600V on building wire, 1000V in fixtures, and 1000V in electric signs.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514161-D	2007C	For use with model No. 2006S splice cap, 50 per clamshell	1/0/10	.003	10.49 BX
514152-C	2014	For use with model No. 2011S splice cap, 50 per box	1/0/5	.014	18.99 BX

ELECTRICAL

Lamson

Masonry Conduit Clamp - Noncorrosive PVC conduit strap for masonry applications. 5 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502307-C	E977NDC-CTN	1/2"	1/0/12	.100	5.49 BG
502334-C	E977NEC-CTN	3/4"	1/0/12	.117	5.49 BG

GB Electrical

Stud Insulator - SnapSHOT™ stud insulator provides code-mandated 360° protection for cable runs through metal studs, where sharp hole edges could otherwise gouge plastic or rubber-jacketed electric, communications, or network cable. Other features include folding tabs that enable fast installation with 1 hand and a universal design that fits all pre-punched holes or standard 1-11/32" field-punched holes. UL and CUL approved. 25 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505581-D	SI-25	Metal Stud Insulator	1/0/5	.480	5.99 BG

Ideal/Buchanan

Plastic Clamp - Tough, durable, and lightweight polypropylene clamps. Carded. Working temperature range: -60° to 340° F.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
515434-F	772830	1/4", 18 per card	1/0/20	.020	1.49 CD
515442-F	772831	3/8", 15 per card	1/0/20	.010	1.49 CD
515450-F	772832	1/2", 12 per card	1/0/20	.040	1.49 CD
515469-F	772833	3/4", 8 per card	1/0/20	.040	1.49 CD
515477-F	772834	1", 4 per card	1/0/20	.400	1.49 CD

Ideal/Buchanan

Do it® Heat Shrink Tubing - Use for repairing electrical cords on tools and appliances, handle grips on hand tools, etc. Full shrink ratio of 2-1 forms a smooth, tight fitting insulation for most applications with a high degree of flexibility. Carefully apply heat (below 200° F.) around the tubing until it shrinks tightly. 4" length, UL listed, CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510599-F	773801	(41257) 1/8", 7 per package	1/0/10	.010	1.99 CD
510564-F	773803	(42506) 1/4", 6 per package	1/0/10	.010	1.99 CD
510556-F	773804	(43754) 3/8", 3 per package	1/0/10	.010	1.99 CD

Continued Next Column

SPLICING

Continued From Previous Column

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510572-F	773805	(45003) 1/2", 3 per package	1/0/10	.100	1.99 CD
510580-F	773806	(47500) 3/4", 2 per package	1/0/10	.010	1.99 CD
510602-D	773808	(41008) Assorted sizes: 4 each 1/8", 2 each 3/16", 2 each 1/4"	1/0/10	.010	1.99 CD

GB Electrical


UF Splice Kit - For waterproof splicing of UF cables minimum No. 14/3, No. 12/2, maximum No. 8. Kit includes set screw splice connector and 8" x 1.3" diameter heavy wall heat-shrink tubing with water-tight adhesive liner. Simply strip outside jacket and insulation from conductors, insert cable thru tubing, install conductors into connectors and tighten set screws. Center heat-shrink tubing over connector and heat tubing until it assumes the connector configuration. Comes in polybag with header.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513172-D	HST-1300	Uf Splice Kit	1/0/5	.300	17.59 EA

3M

UF Splice Kit - Connects and protects underground electrical connections for sprinkler systems, outdoor lighting (decks, driveways, lamp posts, landscape), septic systems, etc. against corrosion and moisture. Contains twist-on wire connectors and gel-filled tubes. Locking fingers in the tube ensure the connector stays in position. 600V maximum. UL listed. CSA approved. 2 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539112-D	49947	14-18 AWG	1/0/12	.167	5.49 CD
539104-D	49945	10-12 AWG	1/0/12	.175	5.79 CD

GB Electrical

Splice Kit - For waterproof splicing of submersible pump cable and other underground UF cables. Copper wire range 8 to 14 AWG. Special brass connector is used to make a solid splice. The mastic-lined heat-shrinkable tubing is used over the connector for a complete waterproof splice connection. 600V rating 105°C (221°F). UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
523518-D	HST-WP	Splice Pump Kit	1/0/5	.200	7.49 EA

Some products shown may need to be special ordered for your convenience!

CABLE TIES



Cable Stacker - Allows easy installation of NM cables ranging from 14-2WG to 10-2WG. Angled nail allows installation from any direction, regardless of stud spacing or positioning. Covers the 2 x 4 side to side centering and spacing multiple cable on stud. Prevents tangled wires and reduces potential heating that could occur when cables are stacked under a single fastening device. 25 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539074-D	49554	Cable Stacker	1/0/10	1.840	11.49 BG



Wire Stripper - E-Z Stripper™, the tool for the professional and DIY. Jaws self-adjust to strip wires 10-26 AWG, cuts wires 10-26 AWG. Crimps insulated terminals 22-10 AWG, crimps auto ignition terminals 1/4 - 5/16, crimps noninsulated terminals 10-22 AWG. Tension adjusting knob. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518786-D	48672	Auto Wire Stripper	1/0/6	.783	18.99 EA

Thomas & Betts

Cable Tie - Self-locking, 1-piece molded nylon ties easily secure wire bundles, cables, etc. Natural color, self-extinguishing. UL listed. CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503649-D	10440C	4" tie, bundle diameter: 1/16" to 7/8", tensile strength: 18 lb., 40 per bag	1/0/25	.051	1.39 BG
503630-D	10720C	7" tie, bundle diameter: 1/16" to 1-3/4", tensile strength: 50 lb., 20 per bag	1/0/25	.036	1.39 BG
503622-D	10111C	11" tie, bundle diameter: 1/16" to 3", tensile strength: 50 lb., 10 per bag	1/0/25	.055	1.39 BG
512052-D	10148C	14" tie, bundle diameter: 1/16" to 4", tensile strength: 50 lb., 8 per bag	1/0/25	.046	1.39 BG

ELECTRICAL

Thomas & Betts

Cable Tie - Self-locking 1-piece molded nylon ties easily secure wire bundles, cables, etc. Natural color, self-extinguishing. UL listed, CSA approved. 100 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514731-D	10400C	4" tie, bundle diameter: 1/16" to 7/8", tensile strength: 18 lb.	1/0/10	.015	1.59 BG
514651-D	10700C	7" tie, bundle diameter: 1/16" to 1-3/4", tensile strength: 50 lb.	1/0/10	.340	3.49 BG
530735-D	10110C	11" tie, bundle diameter: 1/16" to 3", tensile strength: 50 lb.	1/0/10	.480	5.99 BG
530743-D	10140C	14" tie, bundle diameter: 1/16" to 4", tensile strength: 50 lb.	1/0/10	.514	7.99 BG

Thomas & Betts

Cable Tie - Multipurpose 7" nylon cable tie bags. Natural ties are ideal for any application and UV black ties are ideal for outdoor activity. These contractor packs contain 1000 ties. The 7" is great for multiple applications including electrical, auto, home, garden, and marine. This is ideal for job site use. 50 lb. tensile strength.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510394-B	20700C	Natural	1/0/5	.624	22.99 BG
510882-B	25700C	Black	1/0/5	.624	26.99 BG

Thomas & Betts

Cable Tie - Ultraviolet, weather-resistant, black nylon. Serviceable from -40° to 185° F. Tapered tale slips easily into self-locking head. UL listed, CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529877-D	15440C	4" tie, bundle diameter: 1/16" to 7/8", tensile strength: 18 lb., 40 per bag	1/0/25	.036	1.59 PKG
529885-E	15720C	7" tie, bundle diameter: 1/16" to 1-3/4", tensile strength: 50 lb., 20 per bag	1/0/25	.072	1.69 PKG
529893-E	15111C	11" tie, bundle diameter: 1/16" to 3", tensile strength: 50 lb., 10 per bag	1/0/25	.055	1.59 PKG
529907-D	15148C	14" tie, bundle diameter: 1/16" to 4", tensile strength: 50 lb., 8 per bag	1/0/25	.062	1.59 PKG


ELECTRICAL

ELECTRICAL

CABLE TIES

Thomas & Betts

Cable Ties - Ultraviolet, weather-resistant black nylon. Serviceable from 185° F. to -40° F. Tapered tale slips easily into self-locking head. 100 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518816-D	15400C	4" tie, bundle diameter: 1/16" to 7/8", tensile strength: 18 lb.	1/0/10	.015	2.19 BG
518824-D	15700C	7.5" tie, bundle diameter: 1/16" to 1-3/4", tensile strength: 50 lb.	1/0/10	.340	3.69 BG
518832-D	15110C	11" tie, bundle diameter: 1/16" to 3", tensile strength: 50 lb.	1/0/10	.480	6.79 BG
530255-C	15140C	14" tie, bundle diameter: 1/16" to 4", tensile strength: 50 lb.	1/0/10	.514	7.99 BG

Thomas & Betts


Cable Tie - Heavy-duty, self-locking cable tie with reinforced head and strap for added strength. Natural nylon ties easily secure wire bundles, cables, large plumbing pipe, and heat ducts. UL listed, CSA approved. 50 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
491691-D	L241209L	24" tie, bundle diameter: 3/16" to 7", tensile strength: 120 lb.	1/0/10	2.000	6.99 BG
491683-D	L341759L	34" tie, bundle diameter: 3/16" to 10", tensile strength: 175 lb.	1/0/10	2.000	9.49 BG

GB Electrical

Cable Tie - Self-locking, 1-piece molded nylon ties easily secures wire bundles, cables, etc. Natural color, self-extinguishing. The No. 10 screw eye can be easily attached to panels and other surfaces with screws, bolts, or rivets. 9" tie, bundle diameter 1/16" to 2-3/8", tensile strength: 50 lb. UL listed. 20-pieces per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501379-D	45-308MT	9" 20pc Natrl Cable Tie	1/0/25	.080	2.19 BG

Thomas & Betts


Cable Tie - Self-locking 1-piece molded nylon ties easily secure wire bundles, cables, etc. Natural color, self-extinguishing. 11" tie, bundle diameter 1/16" to 3". Tensile strength 50 lb. UL listed, CSA approved. 500 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
554006-C	20110C	11"500pc Natrl Cable Tie	1/0/5	.950	18.99 BG

Thomas & Betts

Mounting Pad - Allows cable tie to be mounted to clean surface. Adhesive backed, screw holes included. 1" x 1". 8 per package.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529869-E	10106C	Natural color nylon	1/0/20	.052	1.59 PKG
529915-E	15106C	Ultraviolet, weather-resistant black nylon	1/0/20	.052	1.59 PKG

GB Electrical

Insulated Staple - Used with all 2-wire UF, nonmetallic and BX cable. 1/2" unbreakable clear poly, will not bruise wires.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
515883-E	PS-50	50 per bag	1/0/10	.300	2.69 BG
504305-D	PS-150	100 per box	1/0/10	.500	4.29 BX

GB Electrical

Insulated Staple - Use with 3-wire UF, nonmetallic and BX cable. 3/4" unbreakable clear poly.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511749-D	PS-75	50 per bag	1/0/10	.320	2.69 BG
505126-D	PS-175	100 per bag	1/0/10	.525	4.79 BX

GB Electrical

Cable Staple - These large service entrance staples are made of high-quality steel for durability, strength, and ease of driving. 1-3/8" L. x 13/16" W. for SEU No. 6 with ground. 10 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
556483-E	GSE15310	Cable Staple	1/0/10	.100	1.39 CD

Thomas & Betts

Insulated Staple - For nonmetallic cable. Steel with PVC insulator. Trade size: 2 No. 14 to 3 No. 10. 100 per box.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
524166-D	19536	1/2" Insul Staple	6/0/24	.531	5.99 BX

CABLE STAPLES



Do it® Insulated Staple - 5/8" long. 40 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502717-D	87612532	Brown	1/10/100	.113	1.99 CD
502762-D	87612533	White	1/10/100	.125	1.99 CD

Thomas & Betts

Cable Staple - 1/2" x 15/16", for nonmetallic cable, 2-wire No. 14-12 AWG.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510281-D	19534	100 per box, UPC coded	1/8/80	.325	2.59 BX
517534-D	ST10-5	500 per box	1/0/20	2.550	10.99 BX

Thomas & Betts

Cable Staple - 100 staples per UPC coded box.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500791-D	17122100	9/16" x 1-1/8" for an armored and nonmetallic cable 3-wire No. 14-12-10, 100 per box	1/10/40	.060	3.29 BX
501013-D	19670	(ST50-1) 3/4" x 1-5/16" for service entrance cable to 3 No. 6	1/5/20	1.250	6.99 BX

GB Electrical

Plastic Staple - Plastic insulated staples are used to attach Romex®, UF, and other type NM cable up to 3-conductor (No. 10). Use the 1/2" for 2-conductor Romex® and other type No. 12 and No. 14 NM cable conductors. Use the 3/4" for 3-conductor Romex® and other type No. 10 and No. 12 NM cable conductors. Fast and easy-to-install, both of the zinc-plated nails can be driven together without splitting wood. Nail heads recess into the staple for minimum exposure. Made of high-grade UV-resistant polyethylene, they will resist rot, rust, and resist the effects of temperature extremes and the degradation of the ultraviolet rays of sunlight.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
563196-C	PS-225J	1/2", 225 per jar	1/0/6	1.183	6.99 BX
563242-C	PS-175J	3/4", 175 per jar	1/0/6	1.050	6.99 BX

Your representative can give you details on product availability and shipping requirements!

ELECTRICAL

GB Electrical

Service Entrance Cable Strap - Use with type SEU and SER wire. Has polyethylene cradles with electro-zinc plated nails.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505161-E	GSE-105	Use with No. 6 SEU wire, 5 per card	1/0/6	.100	2.19 CD
505625-E	GSE-205	Use with No. 2 SEU wire, 5 per card	1/0/6	.100	2.29 CD
507903-E	GSE-304	Use with No. 2 SER wire, 4 per card	1/0/10	.100	1.99 CD
508438-E	GSE-402	Use with No. 4/0 SEU wire, 2 per card	1/0/6	.100	1.99 CD

Can't Find It! Give Us a Call!

GB Electrical

Wire Connector - GB WireGard™ wire connectors make quick, secure connections for positive continuity. Their tough, thermoplastic shell shields against environmental extremes. The color-coded high dielectric shell features a deep skirt design to prevent exposure of bare wire while providing superior flash-over protection. GB connectors comply with Federal Specification W-5-610d and are UL486C listed and CSA certified. Threads wire immediately. Firm-grip surface. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505366-D	10-001	Minature, gray, splices copper-to-copper, joins No. 22AWG thru No. 16AWG, minimum combination: 1 No. 20 with 1 No. 22, maximum combination: 2 No. 16, 100 per box	1/0/10	.200	5.29 BX
505313-D	10-002	Extra small, blue, splices copper-to-copper, joins No. 22AWG thru No. 16AWG, minimum combination: 3 No. 22, maximum combination: 3 No. 16, 100 per box	1/0/10	.400	5.79 BX
510815-D	10-003	Small, orange, splices copper-to-copper, joins No. 22AWG thru No. 14AWG, minimum combination: 3 No. 20, maximum combination: 4 No. 16 with 1 No. 20, 100 per box	1/0/10	.500	6.79 BX
510824-D	10-004	Medium, yellow, splices copper-to-copper, joins No. 18AWG thru No. 10AWG, minimum combination: 1 No. 14 with 1 No. 18, maximum combination: 4 No. 14, 100 per box	1/0/10	.863	8.99 BX
510833-C	10-006	Large, red, splices copper-to-copper, joins No. 18AWG thru No. 14AWG, minimum combination: 2 No. 14, maximum combination: 2 No. 10 with 2 No. 12, 100 per box	1/0/10	1.381	10.49 BX
555932-D	16-003	Small, orange, splices copper-to-copper, joins No. 22AWG thru No. 14AWG, minimum combination: 3 No. 20, maximum combination: 4 No. 16 with 1 No. 20, 100 per jar	1/0/6	.352	7.99 EA
554731-D	16-004	Medium, yellow, splices copper-to-copper, joins No. 18AWG thru No. 10AWG, minimum combination: 1 No. 14 with 1 No. 18, maximum combination: 4 No. 14, 200 per jar	1/0/6	1.093	15.99 EA
554758-D	16-006	Large, red, splices copper-to-copper, joins No. 18AWG thru No. 14AWG, minimum combination: 2 No. 14, maximum combination: 2 No. 10 with 2 No. 12, 125 per jar	1/0/6	1.135	13.99 EA

GB Electrical

Wire Connector - GB WingGard™ wire connectors make quick, secure connections with easy-on wing-type design providing positive continuity between conductors. The expandable square wire spring creates a strong vibration-resistant connection. Their tough, thermoplastic shell shields against environmental extremes. The color-coded, high dielectric shell features a deep skirt design to prevent exposure of bare wire while providing superior flash-over protection. GB connectors comply with Federal specification W-5-610d and are UL486C listed and CSA certified. The connector is flame-retardant, nonporous and noncorrosive, and resists surface cracking and chemical action. Temperature rated to 221° F. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
554707-D	25-084	Small, yellow, splices copper-to-copper, joins No. 22AWG thru No. 10AWG, minimum combination: 2 No. 18, maximum combination: 3 No. 12, 25 per ziplock bag	1/0/10	.125	3.19 BG
554723-D	25-089	Large, blue, splices copper-to-copper, joins No. 14AWG thru No. 6AWG, minimum combination: 1 No. 10, with 1 No. 12, maximum combination: 1 No. STR, 10 per ziplock bag	1/0/10	.215	5.29 BG
509515-D	10-084	Yellow, joins No. 18 thru 10AWG, minimum: 2 No. 18, maximum: 4 No. 12, 100 per box	1/0/10	.450	8.99 BX
509531-D	10-086	Red, joins No. 18 thru No. 10AWG, minimum: 2 No. 14, maximum: 4 No. 12, 100 per box	1/0/10	.850	9.99 BX
509566-D	10-089	Blue, joins No. 12 thru No. 6AWG, minimum: 1 No. 10, maximum: 1 No. 6 and 2 No. 8, 50 per box	1/0/10	1.800	13.59 BX
555916-D	16-084	Small, yellow, splices copper-to-copper, joins No. 22AWG thru No. 10AWG, minimum combination: 2 No. 18, maximum combination: 3 No. 12, 100 per jar	1/0/6	.453	10.99 EA
555924-D	16-086	Medium, red, splices copper-to-copper, joins No. 18AWG thru No. 10AWG, minimum combination: 3 No. 14, maximum combination: 5 No. 12 125 per jar	1/0/6	1.120	13.39 EA

GB Electrical

Wire Connector - The Hex-Loc® connector has a hex head design that allows for automatic or manual driven installations with a 7/16" socket. These multi-range, copper-to-copper connectors cover most everyday electrical applications. The square wire spring grabs and holds the wires for a secure connection. The long skirt covers stripped wires and the streamlined design provides for compact installations. These connectors are rated at 600V maximum with a 1000V maximum in lighting fixtures, luminaires, and signs. Grey. Joins No. 14AWG thru No. 6AWG. Minimum combination: 3 No. 14. Maximum combination: 1 No. 6 with 1 No. 8. UL listed. 50 per box.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500658-E	10-2H2	14-6awg Hexlck Connector	1/0/10	.850	13.99 BX

CONNECTORS

GB Electrical

Wire Connector - The Hex-Loc® connector has a hex head design that allows for automatic or manual driven installations with a 7/16" socket. These multi-range, copper-to-copper connectors cover most everyday electrical applications. The square wire spring grabs and holds the wires for a secure connection. The long skirt covers stripped wires and the streamlined design provides for compact installations. These connectors are rated at 600V maximum with a 1000V maximum in lighting fixtures, luminaires, and signs. Wire range No. 22-No. 6AWG. Ivory. CSA and UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505386-D	10-1H1	100/box	1/0/10	.560	14.49 EA
505457-C	25-1H1	25/resealable bag	1/0/10	.150	4.39 BG



Ranger™ Wire Connectors - Wing type professional grade contractor/commercial quality electrical spring connector. Tough nylon outer jacket with wings for easy installation. Live inner spring grips wires and resists vibration. UL listed. 100 per box.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512036-D	312	22-10 gauge wire, yellow	1/0/10	.485	16.99 BX
512044-C	512	20-8 gauge wire, red	1/0/10	.750	21.99 BX




Scotchlock® Wire Connectors - Electrical spring connectors have 3-part construction: Flexible PVC insulation, steel inner shell, and powerful spring grip. Carded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
521723-D	6110	Type Y, No. 22-10 gauge wire, 5 per card	1/4/40	.065	1.49 CD
521732-D	6111	Type R, No. 18-10 gauge wire, 4 per card	1/4/40	.075	1.49 CD
528293-D	6112	Type G, No. 14-8 gauge wire, 3 per card	1/4/40	.025	1.49 CD



Scotchlok® Wire Connectors - Electrical spring connectors have 3-part construction: Flexible PVC insulation, steel inner shell, and powerful spring grip. Color coded for easy identification. UL listed. CSA.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
524999-D	Type Y	(yellow), small size for fixture connections, wire range No. 22 thru No. 10 AWG, 100 per box	1/0/10	.500	16.99 BX
525006-C	Type R	(red), medium size for general circuit connections, wire range No. 18 thru No. 10 AWG, 100 per box	1/0/10	.900	21.99 BX
510575-C	Type G	(gray), large size for appliance circuits, wire range No. 14 thru No. 8 AWG, 100 per box	1/0/10	1.500	46.99 BX
525015-D	Type B	(blue), extra large size for heavy-duty applications, wire range No. 12 thru No. 6 AWG, 50 per box	1/0/10	1.580	40.00 BX



Wire Connector - For making tap, inline, and pigtail wire connections on low voltage electrical wiring. Simply squeeze shut for a dependable connection. Fits wire size 18-14 AWG. 100 per box.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
525024-C	560B-100	20-8 Red Wire Connector	1/0/10	.313	17.99 BX

Ideal/Buchanan

Wire Connector - In-Sure wire connector. Features include no twist connection, low insertion force for fast, easy application. Accepts solid and many stranded wire combinations. Clear shell makes connection easy to inspect. Rated to 600V maximum, shell rated to 105° C. Check port for continuity testing. Electrolytic tin-plated internal copper bus for high conductivity. 10 per clamshell. UL listed and CSA certified.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502165-C	30-285	3-port	1/0/10	.100	2.19 CD
502183-C	30-286	4-port	1/0/10	.100	2.49 CD
502192-C	30-287	5-port	1/0/10	.100	2.69 CD
502209-C	30-291	Assorted connectors	1/0/10	.100	2.39 CD

ELECTRICAL

King Innovation

Underground Wire Connector - Applications for all wet locations. Includes outdoor and inground splices, no junction box needed.

UL 50 tested as raintight/watertight. Eliminates unwanted maintenance call backs. No on-site assembly, no need for multi-piece kits. Custom silicone locks out moisture and air. Useable in approved direct bury applications. Enhances all NEMA-rated enclosures. Meets NEC 110-11 requirements. Color coded to industry standards. 1-step operation saves money, time, and effort. Spring ensures safe, tight grip with improved continuity. Sealant never leaks or hardens. Lifetime guarantee. Temperature rating of 167° F./75° C. Splices copper-to-copper.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
523097-D	10600	Blue, direct bury pressure type connector for use in lamp posts, wells, pumps, fountains, site lighting, UF-cable, and in rated boxes, maximum voltage 600 to 1000V in fixtures and signs, 2" x 13/16" connector, sealant temperature range of -45° F. to 400° F., wire size minimum 3 No. 22, maximum 4 No. 12, or 3 No. 10, card of 2	1/6/96	.083	4.29 CD
506559-D	20101	Tan, low voltage direct bury pressure type connector for lawn irrigation systems, auto, marine applications, and security systems, maximum voltage 30V, 10A; size 2" x 13/16", sealant temperature range of 29° F. to 250° F., wire size minimum 3 No. 22, maximum 4 No. 12, or 3 No. 10, card of 4	1/6/96	2.000	3.99 CD
523178-D	20111	Tan, low voltage direct bury pressure type connector for lawn irrigation systems, auto, marine applications, and security systems, maximum voltage 30V, 10A; size 2" x 13/16", sealant temperature range of 29° F. to 250° F., wire size minimum 3 No. 22, maximum 4 No. 12, or 3 No. 10, bag of 15	1/10/100	.280	13.49 BG

Greenlee Textron

Wire Stripper - Kwik Stripper™ CATV/UTP stripper makes switching from 4 pair UTP to RG6 or RG59 easy by just changing the cartridges. The cartridges are color-coded for quick identification; yellow for UTP and black for coax. Premeasured stops eliminate time consuming measuring and trimming. UTP cartridge strips 4-pair UTP without scoring the individual conductors. Spare cartridge holder is conveniently built into the tool. Extra-large finger hole. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510968-B	45677	Catv/utp Wire Stripper	0/0/1	.020	24.99 EA

GB Electrical

Do it™ Wire Stripper - 6" combination wire stripper-cutter. Plier nose for pulling and looping wires. Light and compact. Power spring return and vinyl cushion grips add to comfort and handling ease. 10 thru 20 AWG solid. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503606-D	503606	Deluxe Wire Stripper	1/0/10	.300	14.99 CD

GB Electrical

Do it™ Wire Stripper - Compact 5" tool cuts and strips both solid and stranded wire. Made of high-quality hardened spring steel for strength and lasting cutting edge. Simple adjustment presets tool for wire sizes 10 to 24 AWG. Spring action design and comfortable vinyl grip for extra leverage. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503614-D	503614	Adjustable Wire Stripper	1/0/10	.250	6.39 CD

GB Electrical

Wire Stripper - Armor EDGE™ wire stripper has stainless steel, dual ground cutting blades for maximum durability and sharper cuts. Other features include: Dual Grip™ rubber handles that offer comfort and a choice of grip positions - forward or standard, symmetric ergonomic handle, and easy-to-read laser etched markings that will not wear off. Gauge 10-18 Sld/12-20 Str.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505554-B	GESP-55	Armor Edge Cable Stripper	1/0/5	.380	19.99 EA

GB Electrical

Wire Stripper And Crimper - ArmorEdge™ wire stripper has stainless steel, dual ground cutting blades for maximum durability and sharper cuts. Other features include: Dual Grip™ rubber handles that offer comfort and a choice of grip positions - forward or standard, symmetric ergonomic handle, and easy-to-read laser-etched marking that will not wear off. Gauge 10-22 Sld/8-24 Str.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505563-A	GESP-70	Armor Edg Cable Stripper	1/0/5	.460	19.99 EA

WIRE STRIPPERS

GB Electrical

NM Cable Stripper - ArmorEDGE™ wire stripper has stainless steel, dual ground cutting blades for maximum durability and sharper cuts. Other features include: Dual Grip™ rubber handles that offer comfort and a choice of grip positions - forward or standard, symmetric ergonomic handle, and easy-to-read laser-etched markings that will not wear off. Gauge 14-2 and 12-2.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505572-A	GESF-224	Armor Edge Cable Stripper	1/0/5	.460	19.99 EA

GB Electrical

Voltage-Sensing Wire Stripper - Circuit Alert™ NM cable stripper with voltage sensor is 2 tools in 1. Noncontact voltage sensor with visible and audible alerts warns user when voltage is present (50V to 600V AC). Other features include nick-resistant double-bevel blades, bolt cutting stations, looping stations, and Dual Grip™ handle for forward and standard grip. Will work with 12-2 and 14-2 Romex® (NM) cable. Includes (2) 1.5V button cell batteries. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507644-B	GST224	Romex Circuit Alert Tool	1/0/5	.422	29.99 EA

GB Electrical

Voltage-Sensing Wire Stripper - Circuit Alert™ NM wire stripper with voltage sensor is 2 tools in 1. Noncontact voltage sensor with visible and audible alerts warns user when voltage is present (50V to 600V AC). Other features include nick-resistant double-bevel blades, bolt cutting stations, looping stations, and Dual Grip™ handle for forward and standard grip. Will work with No. 10-18 AWG wire. Includes (2) 1.5V button cell batteries. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507652-B	GST-55	Circuit Alert Tool	1/0/5	.432	29.99 EA

GB Electrical

Do it® Cable Ripper - Cable ripper and wire gauge. Slits outer covering of Romex (all sizes) and other nonmetallic (type NM) sheathed cable. Nickel-plated finish resists corrosion. Wire gauge goes from 6 to 14. 3-3/4" long.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505215-E	505215	Cable Ripper	1/0/10	.125	2.19 CD

ELECTRICAL

GB Electrical

Crimping Pliers - Designed for cutting and crimping of insulated and noninsulated solderless connectors and terminals. 8".



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
563250-D	GS-88	8" Crimping Plier	1/0/5	.660	11.99 EA

Woods Ind.

Extension Cord - Slimline™ plug keeps cord close to wall so furniture can be placed closer to baseboard. Patented cord curvature design keeps cord looking neat at outlet. Soft strap makes it easy to pull from wall. Plug does not block other outlet. Does not glitter to attract attention of children. 13A/125V rating. SPT-2 cord. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549363-C	82236	7', 16/2 SPT-2, white	1/0/18	.667	4.99 EA
549371-C	82237	13', 16/2 SPT-2, white	1/0/18	.633	6.49 EA
549398-C	82239	7', 16/2, SPT-2, tan	1/0/18	.667	4.99 EA
549428-C	82241	8', 16/3, SPT-2, white	1/0/8	.750	10.99 EA
549436-C	82243	8', 16/3, SPT-2, black	1/0/8	.625	10.99 EA

Woods Ind.

Outdoor Extension Cord - 2-conductor round vinyl cord manufactured with copper conductors and solid molded plugs. 2 layers of insulation. Moisture and abrasion-resistant. 16/2 SJTW-A black cord. 13A/125V rating. Meets OSHA standards. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549452-D	8257	8'	1/0/18	.500	7.99 EA
548766-D	8258	15'	1/0/12	.917	10.99 EA

Woods Ind.

Twist-To-Lock Outdoor Extension Cord - Extra heavy-duty cord with 20A/125V rating and double thick 600V insulation. Manufactured with stranded copper conductors, bright yellow jacket, and solid molded plugs. 12-gauge. UL listed. Meets OSHA standards.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549541-D	1445	50'	1/0/2	12.400	89.99 EA
549568-D	1446	100'	1/0/2	22.700	149.99 EA

ELECTRICAL

CORDS



Cord Protector - Corduct™ covers, hides and protects cords and cables while keeping floors clear and safe. It lays flat, stays flat. Easy-to-install. Fits over cords up to 5/16" in diameter.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514969-D	CDB-5	5', brown	1/0/5	1.488	13.49 EA
518751-D	CDI-5	5', beige	1/0/5	1.488	13.49 EA
513385-D	CDG-5	5', gray	1/0/5	1.540	13.49 EA
518743-D	CDB-50	50', brown	0/0/1	12.438	104.99 RL
518778-D	CDI-50	50', beige	0/0/1	12.438	104.99 RL
513334-D	CDG-50	50', gray	0/0/1	12.700	104.99 RL

Woods Ind.

Do it® Air Conditioner Cord - 14/3, SPT-3 all vinyl cord. Grounded. For air conditioners, appliances, and other equipment. Beige. 15A/ 125V/1875W. UL listed. NEMA 5-15.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
524445-D	524445	6'	1/0/15	.727	7.99 EA
528904-D	528904	9'	1/0/15	.987	9.99 EA

Woods Ind.

Do it® Appliance Cord - 18/2, HPN neoprene cord. High heat-resistant midget appliance plug. 1/2" center to center spaced contacts. Fits all popular makes of small appliances. Key slot on plug fits Sunbeam fry pan and coffee maker. 10A/125V/1250W. UL listed. NEMA 1-15R.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
516301-D	516301	2'	1/0/10	.250	4.99 EA
516338-D	516338	6'	1/0/10	.290	5.99 EA

Woods Ind.


Appliance Cord - Heavy-duty insulation and right angle Male plugs for use with major appliances. 9' 12/3 SPT-3 beige cord. 20A/250V rating. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549290-C	0568	Beige 9' Appliance Cord	1/0/12	1.500	17.99 EA

Woods Ind.

Appliance Cord - Replacement cord for nonpolarized irons and appliances. 7', 16/2 HPN black cord. 15A/125V rating. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549312-D	0288	7 Blk 16/2 Appliance Cord	1/0/10	.340	5.99 EA

Woods Ind.

Appliance Cord - Cord fits all kitchen appliances using 11/16" spacing between contacts such as waffle irons and bottle warmers. 6', 198/2 HPN black cord. 10A/125V rating. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549320-D	0291	Blk 6' Appliance Cord	1/0/10	.380	6.99 EA

Woods Ind.

Appliance Cord, Air Conditioner - Beige 14/3 replacement cord for air conditioner and other major appliances or equipment. 15A, SPT-3. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549282-C	0043	3'	1/0/15	.467	5.49 EA
560944-C	0046	12'	1/0/12	1.417	9.99 EA
560952-C	0047	15'	1/0/12	1.750	12.99 EA

Woods Import

Do it® Triple Outlet Extension Cord - 12/3 STW heavy-duty power block extension cord adapter. Plug 3 tools into 1-outlet. Orange, 2' 15A/125V/1875W. UL listed. NEMA 5-15.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529020-E	529020	2' 12/3 3-outlet Cord	1/0/10	1.000	15.99 EA

CORDS



Tri-Tap Reel - Retractable extension cord reel with 3 grounded outlets molded onto cord. 30' SJT 16/3 cord pulls out to desired length and locks, automatically retracts with slight tug on cord. Includes necessary hardware for ceiling or wall mounting. Safety yellow metal housing. 10A/125V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
521299-C	5000A30GF	Tri-tap Outlet Reel	1/0/4	10.750	45.99 EA

Woods Import

Do it® Outdoor Extension Cord - 16/3 SJTW medium-duty, all-weather extension cord. Ideal for garden and outdoor tools or indoor use. Grounded. Orange. 8'. 13A/125V/1625W. UL listed. NEMA 5-15.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
524356-E	524356	8 16/3 Outdoor Cord	1/0/15	.733	7.99 EA

Woods Import

Do it® Outdoor Extension Cord - 16/3 SJTW medium-duty, all-weather extension cord. Ideal for garden and outdoor tools or indoor use. Grounded. Orange. UL listed. NEMA 5-15.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
524338-B	524338	25', 13A/125V/1625W	1/0/12	1.875	5.99 EA
513867-B	513867	50', 13A/125V/1625W	1/0/12	3.667	8.49 EA

ELECTRICAL

Woods Industries

Do it® Outdoor Extension Cord - 16/3 SJTW medium-duty, all-weather extension cord. Ideal for garden and outdoor tools or indoor use. Grounded. Orange. UL listed. NEMA 5-15. 100', 10A/125V/1250W.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514287-A	514287	Org 16/3 100 SjtW Cord	1/0/6	7.333	16.49 EA

Woods Industries

Outdoor Extension Cord - 16/3 SJT medium-duty, all-weather extension cord. Ideal for garden and outdoor tools or indoor use. Grounded. Orange. UL listed. Meets OSHA standards.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517444-B	0267	16/3 SJT 25', 13A/125V/1625W	1/0/12	1.825	7.99 EA
517408-B	0268	16/3 SJT 50', 13A/125V/1625W	1/0/12	3.583	13.99 EA
514571-B	0269	16/3 SJT 100', 10A/125V/1250W	1/0/6	7.333	19.99 EA

Woods Import

Do it® Heavy-Duty Outdoor Extension Cord - 3 conductor SJTW heavy-duty, all-weather extension cord. For outdoor or indoor use. Orange. UL listed. NEMA 5-15.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531623-D	531623	14/3 SJTW 25', 15A/125V/1875W, heavy capacity	1/0/12	2.408	12.99 EA
524230-C	524230	14/3 SJTW 50', 15A/125V/1875W, heavy capacity	1/0/6	4.867	17.99 EA

ELECTRICAL

CORDS

Woods Ind.

Do it® Heavy-Duty Outdoor Extension Cord - 3 conductor SJTW heavy-duty, all-weather extension cord. For outdoor or indoor use. Orange. UL listed. NEMA 5-15.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517321-C	517321	12/3 SJTW 25', 15A/125V/1875W, extra heavy capacity	1/0/6	3.500	22.99 EA
531231-C	531231	12/3 SJTW 50', 15A/125V/1875W, extra heavy capacity	1/0/4	6.875	39.99 EA
531240-C	531240	12/3 SJTW 100', 15A/125V/1875W, extra heavy capacity	1/0/2	13.300	69.99 EA

Woods Ind.

Heavy-Duty Outdoor Extension Cord - 3 conductor SJT heavy-duty, all-weather extension cord. For outdoor or indoor use. Orange. UL listed. Meets OSHA standards.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517682-C	0625	14/3 SJT 25', 15A/125V/1875W	1/0/12	2.408	18.99 EA
517372-C	0626	14/3 SJT 50', 15A/125V/1875W	1/0/6	4.867	27.99 EA
517402-C	0627	14/3 SJT 100', 13A/125V/1625W	1/0/3	9.000	49.99 EA
517399-C	0529	12/3 SJT 50', 15A/125V/1875W	1/0/4	6.875	42.99 EA
517429-C	0530	12/3 SJT 100', 15A/125V/1875W	1/0/2	13.000	76.99 EA

Woods Ind.

Contractor Grade Extension Cord - Yellow Jacket® SJTW-A high-gloss super flexible power cord. More flexible at any temperature than standard vinyl compounds. PowerLite power indicator plug glows when the cord has power. Extra heavy, clear molded plugs. 300V rating. Meets OSHA specifications. Lifetime warranty. NEMA 5-15, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536687-C	2886	14/3 25', 15A/125V/1875W	1/0/12	2.350	26.99 EA
536695-B	2887	14/3 50', 15A/125V/1875W	1/0/6	4.700	39.99 EA
536709-C	2888	14/3 100', 13A/125V/1625W	1/0/3	8.533	74.99 EA
536717-C	2884	12/3 50', 15A/125V/1875W	1/0/4	6.900	62.99 EA
536725-C	2885	12/3 100', 15A/125V/1875W	1/0/2	13.300	99.99 EA
536741-B	2805	10/3 50', 15A/125V/1875W	1/0/2	13.000	89.99 EA
536768-B	2806	10/3 100', 15A/125V/1875W	1/0/2	23.000	159.99 EA

Woods Ind.


Lock-Jaw™ Extension Cord - Yellow Jacket® cord with locking plug grabs plug blades for a tight connection, helps to keep tools plugged in. Provides a safer tool connection on a busy jobsite. Heavy-duty water-resistant SJTW-A 12/3 cord provides flexibility, premium durability, weather-resistant, and a full lifetime guarantee. Yellow, 15A/120V, NEMA 5-15. 1875W. UL listed. Meets OSHA specifications. Boxed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
544019-C	2737	50'	1/0/4	7.000	74.99 EA
544027-B	2738	100'	1/0/2	13.500	109.99 EA

Woods Ind.

T-Blade Extension Cord - Yellow Jacket® super flexible power cord with T-Blade connector that accepts both 15A and 20A tools. PowerLite power indicator plug glows when the cord has power. SJTW-A 10/3 cord is more flexible at any temperature than standard vinyl compounds; premium durability, and a full lifetime guarantee. Yellow, 20A/125V, NEMA 5-20R. UL listed. Meets OSHA specifications. Boxed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
544043-C	2991	50'	1/0/2	13.000	99.99 EA
544051-C	2992	100'	1/0/2	23.000	179.99 EA

Woods Ind.

Contractor Grade Power Block Extension Cord - 2' Yellow Jacket® super flexible 3-outlet power block extension cord. More flexible at any temperature than standard vinyl compounds. Extra heavy, clear molded plugs. 12/3 STW-A, 300V rating. 15A/125V. UL listed. Meets OSHA specifications. Lifetime warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536733-D	2882	2 12/3 3-outlet Cord	1/0/10	1.030	14.99 EA

CORDS

Woods Ind.

3-Outlet Power Block Extension Cord - 3-conductor heavy-duty power block extension cords. Made with solid molded 3-outlet plugs. SJTW-A 300V orange wire. 15A/125V. Outdoor/indoor use. UL Listed. Meet OSHA specifications.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536784-C	0825	14/3, 25'	1/0/12	3.000	29.99 EA
536792-C	8819	12/3, 50'	1/0/6	7.000	67.99 EA

Woods Ind.

Lighted Tap - 3 conductor, 1 outlet lighted tap. Bulb inside plug shows that the power is on. Ideal for quick visual check. Clear.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500265-D	4325C	Clear Lighted Tap	1/0/6	.167	3.79 EA

Woods Ind.

Lighted Triple Tap - 3 conductor, 3 outlet lighted tap. Bulb inside plug shows that the power is on. Ideal for quick visual check. Clear.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500274-D	4327C	Clear Lighted Triple Tap	1/0/4	.350	6.99 EA

ELECTRICAL

Woods Industries

Do it® Range Cord - Range replacement cord with 4 conductors, right angle Male cap, and strain relief. 10/4, SRDT, 45A gray cord. NEMA 14-50P. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549460-D	549460	4'	1/0/6	2.400	25.99 EA
559334-C	559334	6'	1/0/6	3.300	32.99 EA

Woods Industries

Do it® Dryer Cord - Dryer replacement cord with 4 conductors, right angle Male cap, and strain relief. 10/4, SRDT, 30A black cord. NEMA 14-30P. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549479-D	549479	4'	1/0/6	1.733	19.99 EA
558257-C	558257	6'	1/0/6	1.800	23.99 EA

Woods Ind.

Appliance Cord - General-purpose replacement cord with right angle Male cap and strain relief. 3', 16/3, SPT-3, 13A gray cord. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549487-D	88570	3 Gray 16/3 Appliance Cord	1/0/20	1.370	4.49 EA

Woods Ind.

Contractor Grade GFI Extension Cord - 6' Yellow Jacket® super flexible GFI extension cord. More flexible at any temperature than standard vinyl compounds. Right angle Male plug GFCI. Manual test and reset buttons. PowerLite Female plug glows when the cord has power 15A/125V. UL listed. Meets OSHA specifications. Lifetime warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536776-C	2879	Yel 6' 14/3 Gfi Cord	1/0/6	2.317	39.99 EA



Circuit Breaker Protected Cord - Immediately provides circuit breaker protection where none may be available. Cuts off power due to accidental shorts, protects cord set from equipment overload. Has resettable circuit breaker. 6', SJTW-A cord with triple outlet. 125V. 15A/1875W. UL listed, yellow.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528390-C	CST6M	14/3	1/0/12	1.250	9.99 EA
528404-C	CST6T	12/3	1/0/12	1.500	10.99 EA

Woods Ind.


Do it Best® Premium Worklight - 16/3 SJTW premium grade, all-weather light. Cord is oil and abrasion-resistant. Metal guard with On/Off switch and grounded side outlet in handle. Lightweight. Dual hook system. 100W bulb maximum. Orange. 13A/125V/1625W. UL listed. NEMA 5-15.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512010-F	512010	25'	1/0/12	2.508	19.99 EA
509507-E	509507	50'	1/0/6	4.050	29.99 EA

Woods Industries

Do it® 30A Dryer Cord - 10/3 SDRT 3-pole, 3-wire dryer cord kit. Molded-on plug provides excellent strain relief, safe handling and durability. Appliance strain relief installed on cord. Gray. 30A/125/250V. NEMA 10-30. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512680-D	512680	4'	1/0/6	1.317	11.49 EA
512699-D	512699	6'	1/0/6	1.750	14.99 EA

Woods Industries

Do it® 50A Range Cord - 6/2, 8/1 SRDT, 3-pole, 3-wire range cord kit. Molded-on plug provides excellent strain relief, safe handling and durability. Appliance strain relief installed on cord. Gray. 50A. UL listed. NEMA 14-50.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508463-C	508463	4'	1/0/6	2.000	14.99 EA
512644-C	512644	6'	1/0/6	2.833	18.99 EA

Woods Ind.

Power Block Adapter Cord - Converts a single twist-to-lock cord into 3 grounded, standard 15A outlets. 15A/125V rating. Double thick 600V insulation. Manufactured with stranded copper conductors, bright yellow jacket, and solid molded plugs. 12/3. Length 24". UL listed. Meets OSHA standards.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549517-D	1442	Power Block Adapter Cord	1/0/6	1.167	19.99 EA

Woods Ind.

Power Block Adapter Cord - Converts a single twist-to-lock cord into 3 individual twist-to-lock outlets. 20A/125V rating. Double thick 600V insulation. Manufactured with stranded copper conductors, bright yellow jacket, and solid molded plugs. Length 20". UL listed. Meets OSHA standards.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549525-D	1443	Power Block Adapter Cord	1/0/6	2.150	29.99 EA

CORDS

Woods Ind.


Power Block Adapter Cord - Converts a single twist-to-lock cord into 2 individual twist-to-lock outlets. 20A/125V rating. Double thick 600V insulation. Manufactured with stranded copper conductors, bright yellow jacket, and solid molded plugs. Length 20". UL listed. Meets OSHA standards.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549533-E	1444	Power Block Adapter Cord	1/0/6	1.633	29.99 EA

Woods Ind.

Do it® Cord Frame - H-frame cord storage device holds up to 100' of 16/3 cord. Also ideal for Christmas lights, rope, wire, or yarn. Stores neatly and compactly on a peg hook.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501476-D	K-150	Cord Frame	1/0/24	.317	1.49 EA

Woods Ind.

Cord Wheel - 13" reel holds 150' of 16/3 extension cord. Can also hold 14 and 12 gauges. Easy-to-hold. Yellow.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
553522-C	KW-130	150' Cord Wheel	1/0/6	3.667	6.99 EA

Woods Ind.

Cord Wheel With Stand - Detachable cord reel with stand. 13" reel with comfortable carrying handle. Yellow reel with black stand.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
553530-C	K-100	150' Cord Reel W/stand	1/0/6	6.000	9.99 EA

ELECTRICAL

Bayco

Cord Reel With Circuit Breaker - Add-A-Cord quad plug cord reel with circuit breaker brings the power to the work site. 4-outlet powerized reel works with almost any single-tap extension cord. Holds up to 100' of 16 and 14-gauge extension cords and up to 75' of 12-gauge. Impact-resistant polypropylene hand wind reel, polarized plug with 4 grounded receptacles, resettable 11A circuit breaker. Durable steel stand with grip handle.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502987-C	K-2000	4 Plug Cord Reel	1/0/4	2.250	15.99 EA

Franzus

Foreign Auto Adjust Smart Converter - Converts 220V foreign electricity to 110V for use on low wattage 0W to 49W appliances such as electric shavers, radios, etc., and high wattage (50W to 2000W) appliances such as some hair dryers, irons, etc. Solid state circuitry with high/low wattage indicator lights. The circuit breaker reset button corrects additional overloads.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
525804-C	PS200	Converter	1/0/6	1.167	31.49 EA

NOTE 1: Warning: Franzus converters should *not* be used with power tools and electronic circuitry products.

Franzus

Foreign Heavy-Duty Transformer - Converts 220V foreign electricity to 110V for continuous use on electronic products, VCRs, computers, fax machines, etc. Built-in 3 prong grounded receptacle. European grounded Schuko plug and power light. For up to 500W.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
525928-C	TS501TR	Foreign Transformer	0/0/1	8.000	59.99 EA

NOTE 1: Warning: Franzus converters should *not* be used with power tools and electronic circuitry products.

INTERMATIC

Wall Timer - Replaces any wall switch to provide total, automatic control of inside or outside lights. Use with existing wall plate, standard (toggle) or decorator (rocker) styles. Provides up to 24 On/24 Off settings per day. Programming is: Automatic (unit will repeat the first 24 hour On/Off pattern), manual (you set the time dial to desired On/Off times), or random (turns light On/Off at slightly different times each day). 15 minute memory guard protects against power failure. 120V/25A tri-ac. 40W to 500W incandescent or P type ballast switching. UL and CSA rated. 1 per box. White. Single pole.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
534544-C	EJ351C	1-pole Wall Timer	1/0/12	.458	24.99 EA

ELECTRICAL

TIMERS



Heavy-Duty Timer - Grounded 24-hour timer has 3 On/Off settings per day. Override switch with On/Off indicator. Plugs directly into wall outlet. 15A/1750W/125V AC - 60Hz. NEMA 5-15R. Clamshell package. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518859-C	TN311C	15a Grounded 24hr Timer	1/0/12	.458	12.99 EA



Heavy-Duty Timer - Grounded plug-in timer plugs directly into wall outlet. 2 On/Off settings per day. 3-prong grounded plug and receptacle. Manual override On/Off switch. Maximum On time 23-1/2 hours, minimum On time 1/2 hour. 20A/2500W/120V AC- 60Hz, 1HP. NEMA 5-20R. Clamshell package. UL listed.



S-20R

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518875-C	HB113C	20a 120v Hvy Duty Timer	1/0/12	.592	18.99 EA




Heavy-Duty Timer - Grounded plug-in timer automatically controls 240V air conditioners, heaters, heavy-duty appliances, and lamps. Plugs directly into 240V wall outlet, 2 On/Off settings per day. Manual override On/Off switch. Manual override On/Off switch. Maximum On time 23-1/2 hour, minimum On time 1/2 hour. White. Clamshell packaging. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518867-C	HB112C	240V/15A/3750W, NEMA 6-15R	1/0/12	.592	18.99 EA
518883-C	HB114C	240V/20A/5000W, NEMA 6-20R	1/0/12	.592	19.49 EA



Time Switch - Heavy-duty mechanical time switch is designed for industrial, commercial, and residential applications. Has the highest HP ratings in the industry for loads up to 40A resistive from 120-277 volts providing direct 24 hour time switch control of most loads. Provides 1 to 12 On/Off operations each day with minimum On/Off times of 1 hour. All models are equipped with 1 On and 1 Off tripper. Combination 1/2"-3/4" nominal knockouts, 1 on back and each side of case, 2 on bottom. Steel case is 7-3/4" H. x 5" W. x 3" D. Spring hasp with hole for lock, side hinged door closed. 3 mounting holes on back. UL listed. CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512485-C	T101	Single pole/single throw switch, 125V, 60 Hz, HP rating: 2	1/0/12	2.750	59.99 EA
527904-C	T103	Double pole/single throw switch, 125V, 60 Hz, HP rating: 2	1/0/12	2.650	69.99 EA
500135-E	156T1978A	On/Off trippers only (1 On/1 Off) for model No. T100, T170, T7000, and WLT series	0/0/1	.100	3.39 SET



Decorator Timer - 60 minute spring wound decorator style timer uses no energy for operation. Compact design allows easy installation in most 2-1/2" deep junction boxes. Fits any standard decorator style wall plate (not included). 1 HP and 2HP at 120V and 240V. UL listed and CSA rated.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527874-C	FD60MC	Ivory	1/0/6	.208	19.99 EA
562793-C	FD60MWC	White	1/0/6	.500	22.99 EA



Outdoor Timer - Provides year-round all-weather control over lighting. Choice of operating modes: Photo On/Timer Off provides automatic On at dusk, Off after choice of 2, 4, 6, or 8 hours; Always On override; Photo On/Photo Off automatic On at dusk, Off at dawn. Grounded compact 6" cord. 1000W/125V, 60Hz, 8A. Maximum On time - dusk to 8 hours. Minimum On time - dusk to 2 hours. Operating temperature -31° F. to 104° F. UL listed. Black. Clamshell package.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
544124-C	HB51RC	Outdoor Timer	1/0/8	.688	13.99 EA

TIMERS



Digital Outdoor Timer - Heavy-duty digital outdoor timer controls landscape and holiday lighting and motor loads, such as engine block heaters and pool/spa pumps. Features include 7 day/7event programming, multiple daily programming options and 2 timed receptacles. 15A/1000W/120VAC. 3-prong grounded plug and receptacle. Easy to program, to-the-minute accuracy.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
504475-C	HB88RC	Outdoor Digital Timer	1/0/6	1.067	24.99 EA




Power Stake With Timer - 6-outlet electromechanical timer with stake includes weatherproof cover, grounded cord, and 6 receptacles. Other features included 2 On/Off settings per day and manual override switch. Timer can be wall-mounted or installed on the ground stake. All receptacles are timer controlled. 15A/120VAC. Operating temperatures -40C to +40C.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
504637-C	HB1116R	6 Outlet Outdoor Timer	1/0/8	2.288	24.99 EA



All-Weather Timer - 15A. 2 On/Off settings per day, manual override On/Off switch. Maximum On time 23-1/2 hours, minimum On time 1/2 hour. Operating temperature -40° F. to 104° F., NEMA 5-15P. Durable weatherproof case. Heavy-duty 12" cord. 120V/1800W, 15A. Single outlet. UL listed, CSA and NOM listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513059-C	HB31R	Outdoor Timer	1/0/12	2.042	18.99 EA



All-Weather Timer - 10A. Up to 2 On/Off settings per day. Grounded plug. 15" heavy-duty 14-gauge cord. Manual override On/Off switch. Plastic weatherproof case. 1200W/120V. Maximum On time 23-1/2 hours, minimum On time 1/2 hour. Operating temperature -40° F. to +104° F. NEMA 5-15P.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552208-C	HB35RC	10a Outdoor Timer	1/0/8	1.167	12.99 EA

ELECTRICAL

Woods Ind.

Do it® Worklight - 18/3 SJTW 25' all- weather cord with metal, snap-open guard. On/Off switch, grounded side outlet. Dual hook system. Maximum 100W bulb. Orange cord. 13A/125V/1625W. UL listed. NEMA 5-15.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530544-D	530544	25 18/3 Worklight	1/0/12	2.183	21.99 EA

Woods Industries

Do it® Clamp Lamp With Wire Guard - 18/2 SPT-2 6' vinyl cord. Heavy steel wire protective guard. Heat-resistant porcelain socket. Swivel spring clamp with protective base covering. 150W maximum. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508267-D	508267	Wire Guard/clamp Lamp	1/0/12	1.133	19.99 EA

Woods Industries

Do it® Brooder Heat Lamp - 18/2 SJTW 6' 105° C. vinyl cord. 10" aluminum reflector shade. Heat-resistant porcelain socket. Ideal for pig and chicken brooders, workshop, garage or wherever a supplemental heat source is needed. Convenient hang hook. Wire bulb guard. 250W bulb maximum. Not UL listed but made to industry standards.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503896-D	503896	Brooder Heat Lamp	1/0/12	1.000	12.99 EA

ELECTRICAL

WORK LIGHTS

Woods Ind.

Heavy-Duty Clamp Lamp - 18/2 SPT-2 12' vinyl cord. Heavy-duty clamp with extra holding power. Vinyl coated grips. 8-1/2" aluminum shade. Heat resistant socket. 150W maximum bulb. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536814-C	82839	Heavy-duty Clamp Lamp	0/0/4	.650	21.99 EA

Woods Ind.

Contractor Grade Worklight - Yellow Jacket® super flexible worklight. 25' 16/3 SJT. More flexible at any temperature than standard vinyl compounds. High heat-resistant bulb collar. Grounded metal guard. 13A grounded receptacle in handle. Dual hanging hooks. Hex shape coated wire cage. 100W maximum bulb. 13A/125V. UL listed. Meets OSHA specifications.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536806-C	2893	Yel 25' 16/3 Work Light	1/0/12	2.517	29.99 EA



Worklight - SJT 16/3 25'. Resetable 13A circuit breaker, grounded side outlet and on/off switch built into handle. Grounded metal swing-open bulb guard with hanging hook. 1625W, 13A, 120V. Uses 1 medium base A-19 bulb, up to 100W (not included). UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
560928-C	TL25GMCB	16/3 Worklight	1/0/6	2.550	16.99 EA



Worklight Reel - Retractable reel light. 20' 18/3 SVT pulls out to any length and locks. Cord automatically retracts with light tug on cord. Metal grounded side outlet, circuit breaker protection, and On/Off switch. Safety yellow housing. Includes mounting hardware. 7A/125V/ 60Hz. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522143-D	900GP-CB	20' Reel/worklight	1/0/4	.400	29.99 EA



Reel Light - Retractable cord reel with trouble light. On/Off switch, grounded side outlet in handle. Metal bulb guard with extended ground. 30' SJT 16/3 cord pulls out to desired length and locks, automatically retracts with slight tug on cord. Includes necessary hardware for ceiling or wall mounting. Safety yellow metal housing. 10A/125V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
521310-C	5000A30G	30' Reel/worklight	1/0/4	10.000	45.99 EA



Fluorescent Worklight - 13W fluorescent worklight. Ballast and starter switch built in handle. 15' SJT 18/2 cord. Polycarbonate lens with 270° arc of light. Shatter-resistant and ergonomically designed outer housing. Adjustable hanging hook swivels 360°. Takes a standard 13W fluorescent bulb. Bulb requires no tools to change. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552267-C	EPL15	Fluorescent Worklight	1/0/6	2.467	13.99 EA

WORK LIGHTS



Fluorescent Worklight - 15W fluorescent worklight. 3-conductor, plug-in ballast. Starter switch in handle. 25' 18/2 SJT cord. Shatter-resistant, glare-free outer housing. Multipurpose hanger hook. Use standard 15W fluorescent tube. Unit minus the cord measures 20-3/4", UL listed. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503533-C	15F25	Fluorescent Worklight	1/0/6	3.583	22.99 EA

Woods Ind.

Cord Reel - Retractable cord reel with drop light. Lightweight plastic case with mounting hardware. 7A/125V/875W. Black durable plastic reel. 20' 18/3 SVT wire, super flexible. UL and C-UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507466-D	28020	20' Retractable Cord Reel	1/0/3	3.500	59.99 EA

Woods Ind.

Cord Reel - Retractable corded reel with patented locking plug keeps tools secure. Rugged steel case with mounting hardware. 12A/12V/1625W. Red metal reel. 30', 14/3 SJT wire. UL and C-UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509191-B	28004	30' Retractable Cord Reel	1/0/3	12.000	84.99 EA

Woods Ind.

Cord Reel - Retractable corded reel with 3-outlet lightweight power block. Rugged steel case with mounting hardware. 13A/12V/1625W. 30' 14/3 SJT wire. UL and C-UL listed. Portable.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508365-C	28001	30' Retractable Cord Reel	1/0/3	12.000	69.99 EA

ELECTRICAL



Tri-Tap Reel - Pro Reel™ retractable extension cord reel with 3 grounded outlets molded onto cord. 50' SJTW 14/3 cord pulls out to desired length and locks, automatically retracts with slight tug on cord. Includes necessary hardware for ceiling or wall mounting. This cord reel has a heavy-duty industrial grade reel housing, quick release mounting bracket, convenient carrying handle, and resetable circuit breaker. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
534129-B	8050MP	Triple Tap Cord Reel	1/0/2	12.500	79.99 EA




Multi-Plug Reel - Portable, wind-up plug reel with 4 grounded outlets and built-in, resetable circuit breaker. 25'SJT 16/3 cord pulls out to desired length and locks, automatically retracts with slight tug on cord. Includes necessary hardware for ceiling or wall mounting. Safety yellow metal housing. 10A/125/1250W maximum rating. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
534137-C	600025G	Multi Plug Reel	1/0/4	4.000	17.99 EA

Philips/Gemini


Speaker Wire - 24-gauge speaker wire with clear insulation. Minimizes possible power loss from sound source to speakers.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501889-E	M62111	50' coil, hanked	1/6/72	.270	3.49 CD
524383-E	M62110	100' spool	1/6/36	.290	6.29 CD

Woods Ind.

Speaker Wire - Parallel wire, power limited circuit copper wire. Used in stereo and hi-fi systems and home theatre sound systems. Type CL2, 300V rating. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
548804-D	0180	12-2, 250', clear	1/0/2	15.000	119.99 SPL
531057-C	0181	14-2, 250', clear	1/0/2	10.150	85.99 SPL
530980-D	0182	16-2, 250', clear	1/0/2	6.150	58.99 SPL
549150-D	0783	18-2, 250', clear	1/0/2	5.000	43.99 SPL
549142-D	0782	24-2, 1000', clear	1/0/2	5.000	72.99 SPL

ELECTRICAL

WIRE/CABLE

Philips/Gemini


Do it® Coaxial Cable - RG59/U, black.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528897-E	528897	(RG50), (M61220), 50'	1/0/10	.800	10.99 EA
528931-D	528931	(RG100), (M61221), 100'	1/0/6	1.640	16.49 EA

Woods Ind.


Coaxial Cable - Single conductor, solid bare copper covered steel wire for use in CATV, MATV, class 2 circuits internal wiring, local area networks, and RF signal transmission. 500' spool. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
548898-D	0344	RG59/U 22/1, black	0/0/1	11.600	109.99 SPL
548901-D	0344W	RG59/U 22/1, white	0/0/1	15.000	109.99 SPL
548936-C	0351	RG6/U 18/1, black	0/0/1	17.000	159.99 SPL

Woods Ind.


Telephone Station Wire, Single Phone Line - Beige thermoplastic insulated, general-purpose communication wire for single line telephone station. Used in in-wall installations, single line telephone systems, and intercoms. Fire-resistant jacket. 24/4, 300V rating in 500' spool. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
548928-D	0345	Bge 500 24/4 Wire	0/0/1	8.400	62.99 SPL

Woods Ind.


Voice And Data Multi-Line Wire - Beige twisted pair (3 pair), 300V rated wire used in communication network hookup, multi-line telephone hookup, and fax machines. 24/6, 500', category 3 compliant spec. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549193-D	0894	Bge 500 24/6 Wire	0/0/1	7.400	99.99 SPL



Voice And Data Multi-Line Wire - Cat 5e wire is designed to meet TIA/EIA 586-B specifications. Applications: 4Mbps Token Ring™ (IEEE 802.5), 10 Mbps 10 base T Ethernet™ (IEEE802.3), 16 Mbps Token Ring™ (IEEE 802.5), 100 Mbps (ANSI x 379.5 TPDDI), 100VG Anylan (IEEE 802.12), 100 Mbps 100 base T Fast Ethernet™ (IEEE 802.3), 155 Mbps ATM, 622 ATM, 1000 Mbps 1000 Base-T Gigabit Ethernet (IEEE 802.3). 1000', boxed. Features an EZ-Count® marking system. 4 pair, 24-gauge, riser blue. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
558370-C	CR5.30.07	1000 Cat5e Wire	0/0/1	22.000	149.99 EA

Philips/Gemini


Quad Shield Kit - Pro series home kit. Includes tool and connectors. For RG6U quad shield coax cable.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561045-C	ZDS5060	Rg6u Quad Shield Kit	1/0/6	.590	34.99 EA

Philips/Gemini


Quad Shield tool - Pro series home tool. Enables simple attachment of connector to cable. For RG6U quad shield coax cable.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561053-B	ZDS5061	Rg6u Quad Shield Tool	1/0/6	.190	11.99 EA

Philips/Gemini

Quad Shield Connector - Pro series quad connectors. Radial compression connectors prevent signal loss for sound reproduction. Indoor/outdoor use. For RG6U quad shield coax cable.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561061-D	ZDS5062	2 pack	1/0/6	.050	3.99 EA
561088-B	ZDS5162	12 pack Available Only At Cape, Dixon, Medina, Waco, Lexington, Woodburn, Montgomery	1/0/6	.300	26.99 EA



Plastic Reusable Spool - Constructed of tough nylon, this product is built to last. The Reel Easy fits all Southwire coils.

This reusable spool was designed to withstand physical and environmental abuse. It eases the wire pulling process by eliminating kinks and the need for additional people to *walk out* the wire before pulling. Tested in job environments, this product proves to be contractor durable and a time saving product.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510227-C	55380701	Plastic Reusable Spool	1/0/8	2.000	14.99 EA



Coaxial Cable RG6U Quad - Multi-use cable for analog and digital video installations. Extended bandwidth satellite service, HDTV signals, CATV, and 2-way cable modems. Quad shielding improves performance for extended 1 GHz CATV/DSS broadband services. 18 AWG copper clad steel core; foil/60% aluminum braid foil; foil/40% aluminum braid shielding; PVC jacket. Not for direct burial. Box features E-Z count marking system. Black. Nominal diameter: 0.297", 30 lb., 1000'.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
558389-D	C5785.30.01	Rg6u Quad Coaxial Cable	0/0/1	30.000	179.99 EA




Voice And Data Multi-Line Wire - Cat 3. Typically used for voice and data transmission rates up to 10 Mbps. It is the cable choice for 10 base T Ethernet™ and 4 Mbps Token Ring™ systems. CAT 3 cables are FCC part 68 compliant and verified to TIA/EIA 568-A. Indoor use for the interconnection of telephone key systems, PBX and intercom systems. For Riser (SMR, MPR) applications. 1000', boxed. Features a QuickCount® marking system. 4 pair, 24-gauge, beige. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509590-D	C3R002.30.10	1000 Cat3 Wire	0/0/1	20.000	129.99 EA



Coaxial Cable - Single copper clad steel conductor. PE foam insulation. PVC jacket multiple use cable for analog and digital video installations. 1000', box features E-Z count marking system. UL listed. Not for direct burial.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510378-C	C5775.30.01	RG6U 18/1, black	0/0/1	30.000	99.99 EA

Woods Ind.


Low Voltage Lighting Wire - Thermoplastic jacketed service cord for use in outdoor low voltage lighting systems. Not for hard use. SPT-3, 300V rating in 500' spool. Black. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
548820-D	0188	12-2, 25A	0/0/1	36.000	299.99 SPL
548839-D	0338	16-2, 13A	0/0/1	15.000	149.99 SPL
548847-D	0339	14-2, 18A	0/0/1	36.300	229.99 SPL

Woods Ind.

Round Service Cord, Cold Flex - For hard usage applications in portable tools and lamps, pumps, portable farm equipment. SJEW rubber, 300V rating in 250' spool. Black. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549002-D	0485	18/2, 10A	0/0/1	9.100	109.99 SPL
549010-C	0486	18/3, 7A	0/0/1	9.800	129.99 SPL
549029-D	0487	16/2, 13A	0/0/1	12.000	119.99 SPL
549037-C	0488	16/3, 10A	0/0/1	6.000	139.99 SPL
549118-D	0771	14/2, 18A	0/0/1	14.900	169.99 SPL
549126-C	0772	14/3, 15A	0/0/1	19.000	179.99 SPL
549134-C	0774	12/3, 20A	0/0/1	29.100	259.99 SPL



Nonmetallic Sheathed Cable - Type NM-B cable with PVC jacket. 90° C. rating meets or exceeds requirements of UL. Available in 14 and 12-gauge; 250' coils or 25', 50' and 100' cut coils (shrink wrapped). 600V. UL listed.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527638-C	28827421	25 14/2 W/g Nm Wire	1/0/10	1.500	14.49 CL
527683-B	28827422	50 14/2 W/g Nm Wire	1/0/10	3.000	24.99 CL
527709-C	28827423	100 14/2 W/g Nm Wire	1/0/5	6.000	47.99 CL
527790-B	28828221	25 12/2 W/g Nm Wire	1/0/10	2.130	18.99 CL
527807-C	28828222	50 12/2 W/g Nm Wire	1/0/10	4.250	34.99 CL
527825-C	28828223	100 12/2 W/g Nm Wire	1/0/5	8.500	64.99 CL



Underground Feeder Cable - 60° C. Thermoplastic cable for direct earth burial in branch circuits. Resistant to acids, alkalis, corrosive fumes, chemicals, lubricants and ground water. Noncorroding, sunlight-resistant and will not support combustion. Available in 14 and 12-gauge; 250' coils or 25', 50' and 100' cut coils (shrink wrapped). 600V. UL listed.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527745-C	13054221	25 14/2 W/g Uf Wire	1/0/10	1.780	14.99 CL
527772-B	13054222	50 14/2 W/g Uf Wire	1/0/10	3.550	25.99 CL
527781-C	13054223	100 14/2 W/g Uf Wire	1/0/5	7.100	49.99 CL
527898-C	13055921	25 12/2 W/g Uf Wire	1/0/10	2.430	21.99 CL
527905-B	13055922	50 12/2 W/g Uf Wire	1/0/10	4.850	37.99 CL
527941-C	13055923	100 12/2 W/g Uf Wire	1/0/5	9.700	72.99 CL



Dog Fence Cable - Single conductor and low-voltage solid copper circuit cable has PVC coated jacket and is suitable for landscape irrigation at conductor temperatures not to exceed 60° C. Ideal for golf course and commercial lawn care, controlling landscape irrigation systems around parking lots, shopping centers, and large commercial projects. Also ideal for invisible dog fence systems. 150V. 500'. 18-gauge. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539562-C	49293401	18 Sol Uf Dog Fence Wire	1/0/4	6.250	26.99 CL

ELECTRICAL



UD Cable - Aluminum conductors, polyethylene insulation. Used for secondary distribution and underground service at 600V or less, either direct burial or in ducts. 500'. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539597-B	55417407	Ramapo 100A	0/0/1	146.000	849.99 CL
539589-B	4/0-4/0-2/0	Sweetbriar 200A	0/0/1	370.000	1629.99 CL




Nonmetallic With Ground Sheathed Cable - Type NM-B cable is designed specifically for use in residential and commercial wiring of branch circuits. Installation above ground and in dry locations only. Approved for service to 600V. PVC jacket and PVC insulated, nylon jacketed conductors with ground (WG). Flame-retardant and crush-resistant. UL listed. Shrink wrapped.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506385-A	28827455	14-2W/G, 250', white jacket	0/0/1	14.310	59.99 CL
506394-A	28828255	12-2W/G, 250', yellow jacket	0/0/1	20.450	89.99 CL
506401-C	28829055	10-2W/G, 250', orange jacket	0/0/1	30.960	209.99 CL
506410-C	63946855	14-3W/G, 250', white jacket	0/0/1	18.550	124.99 CL
506429-C	63947655	12-3W/G, 250', yellow jacket	0/0/1	26.760	199.99 CL
519291-C	63948455	10-3W/G, 250', orange jacket	0/0/1	40.840	309.99 CL
519647-B	63949202	8-3W/G, 125', black jacket	0/0/1	31.590	254.99 CL
523976-C	63949205	8-3NMW/G, 500', black jacket	0/0/1	126.370	1049.99 CL
519488-C	63950002	6-3W/G, 125', black jacket	0/0/1	44.550	379.99 CL
523747-C	63950005	6-3NMW/G, 500', black jacket	0/0/1	178.200	1499.99 CL



Nonmetallic Sheathed Cable - Type NM-B cable is designed specifically for use in residential and commercial wiring of branch circuits. Installation above ground and in dry locations only. Approved for service to 600V. PVC jacket and PVC insulated, nylon jacketed conductors. Flame-retardant and crush-resistant. UL listed. Shrink wrapped.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506349-C	63945055	10-3, 250', orange jacket	0/0/1	32.300	329.99 CL
506358-B	63975702	8-3, 125', black jacket	0/0/1	27.170	239.99 CL
523366-C	63977302	6-3, 125', black jacket	0/0/1	40.060	379.99 CL



Nonmetallic Sheathed Cable - Spooled type NM-B cable is designed specifically for use in residential and commercial wiring of branch circuits. Installation above ground and in dry locations only. Approved for service to 600V. PVC jacket and PVC insulated, nylon jacketed conductors. Flame retardant and crush-resistant. UL listed.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506729-A	28827401	14-2W/G, 1000', white jacket	0/0/1	57.260	244.99 SPL
506737-A	28828201	12-2W/G, 1000', yellow jacket	0/0/1	81.820	379.99 SPL



Do it@Nonmetallic Sheathed Cable - Cut coil of type NM-B cable is designed specifically for use in residential and commercial wiring of branch circuits. Installation above ground and in dry locations only. Approved for service to 600V. PVC jacket and PVC insulated, nylon jacketed conductors. Flame-retardant and crush-resistant. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506269-C	28827417	25', white jacket	1/0/10	1.430	14.99 CL
506599-C	28827418	50', white jacket	1/0/10	2.860	25.99 CL
506615-C	28827419	100', white jacket	1/0/5	5.720	48.99 CL
506580-C	28828217	25', yellow jacket	1/0/10	2.040	19.99 CL
506606-C	28828218	50', yellow jacket	1/0/10	4.090	35.99 CL
506624-C	28828219	100', yellow jacket	1/0/5	8.180	67.99 CL




Nonmetallic Sheathed Cable - Cut coil of type NM-B cable is designed specifically for use in residential and commercial wiring of branch circuits. Installation above ground and in dry locations only. Approved for service to 600V. PVC jacket and PVC insulated, nylon jacketed conductors. Flame-retardant and crush-resistant. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506745-C	28829021	10-2W/G, 25', orange jacket	1/0/10	3.090	31.99 CL
506753-C	28829022	10-2W/G, 50', orange jacket	1/0/5	6.190	59.99 CL
506761-B	28829023	10-2W/G, 100', orange jacket	1/0/5	61.900	89.99 CL
539309-C	63946821	14-3W/G, 25', white jacket	1/0/10	1.850	18.99 CL
539295-C	63946822	14-3W/G, 50', white jacket	1/0/5	3.710	33.99 CL
539287-C	63946823	14-3W/G, 100', white jacket	1/0/5	37.100	63.99 CL
539317-C	63947621	12-3W/G, 25', yellow jacket	1/0/10	2.670	27.99 CL
508071-C	63947622	12-3W/G, 50', yellow jacket	1/0/5	5.350	51.99 CL
508160-B	63947623	12-3W/G, 100', yellow jacket	1/0/5	53.500	89.99 CL
539325-C	63948421	10-3W/G, 25', yellow jacket	1/0/10	4.080	43.99 CL
506850-C	63948422	10-3W/G, 50', orange jacket	1/0/5	8.160	79.99 CL
507075-C	63948426	10-3W/G, 100', orange jacket	0/0/1	16.330	159.99 CL
507989-C	63949221	8-3W/G, 25', black jacket	1/0/5	8.400	53.99 CL
508055-C	63950021	6-3W/G, 25', black jacket	1/0/5	12.000	75.99 CL



Bare Ground Wire - Soft drawn. Used for grounding grid systems.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506759-B	10614602	SD-14GR, solid, 2000', diameter .064"	0/0/1	24.870	229.99 SPL
506777-B	10638502	SD-6GR, solid, 315', diameter .162"	0/0/1	25.000	219.99 SPL
506786-B	10644302	SD-4GR, solid, 200', diameter .204"	0/0/1	25.260	219.99 SPL
506795-B	10665803	SD-6GR, stranded, 315', diameter .184"	0/0/1	25.520	229.99 SPL
501139-B	10674003	SD-4GR, stranded, 200', diameter .232" Available Only At Cape, Dixon, Medina, Waco, Lexington, Woodburn, Montgomery	0/0/1	25.510	229.99 SPL

WIRE/CABLE




Underground Service Entrance Cable - Mobile home feeder consists of 4 quadruplexed type RHH or RHW-2 or USE-2 AlumaFlex A-8000 series aluminum alloy compacted conductors. The cable contains a triple extruded white striped neutral conductor and a solid green jacketed grounding conductor. Insulation is sunlight-resistant. Mobile home feeder is intended for the connection of mobile homes to a supply of electricity where permanent wiring is required as specified in the National Electrical Code. It is suitable for direct burial at temperatures not to exceed 90° C. Voltage rating is 600V. UL listed. 500' reel.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
562777-A	30161401	4/0-4/0-2/0-4 Seu Cable	0/0/1	397.000	1799.99 EA



Service Entrance Cable - SEU copper service entrance cable can be used for service from pole to house and service entrance cable. Jacket resistant to moisture, chemical, corrosion, crushing, and sunlight. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506893-B	13076502	2/8-1/8, copper, 250', 50A	0/0/1	52.730	499.99 CL
506900-B	13081502	2/6-1/8, copper, 200', 65A	0/0/1	56.090	499.99 CL
506919-B	13077302	2/6-1/6, copper, 150', 65A	0/0/1	46.150	419.99 CL
506955-B	13080702	2/2-1/2, copper, 100', 115A Available Only At Cape, Dixon, Medina, Waco, Lexington, Woodburn, Montgomery	0/0/1	71.760	649.99 CL
539473-B	13078102	4/4/4, copper, 150', 85A Available Only At Cape, Dixon, Medina, Waco, Lexington, Woodburn, Montgomery	0/0/1	70.650	624.99 CL



SEU, Service Entrance Cable - Aluminum unarmored Triple E service entrance cable used to convey power from the service drop to the meter base and from the meter base to the distribution panel board. May also be used for certain branch circuits. Suitable for use at temperatures not to exceed 90° C., wet or dry locations. 600V. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506964-C	2/6-1/6	250', 55A	0/0/1	27.000	249.99 CL
506991-C	2/2-1/2	200', 95A	0/0/1	57.000	329.99 CL
512095-B	4/0-4/0-4/0	100', 185A Available only at Cape, Dixon, Lexington, Medina, Montgomery, Waco	0/0/1	82.000	389.99 CL

ELECTRICAL



Underground Feeder Cable - Type UF-B cable is designed specifically for use as underground feeder cable for direct earth burial in branch circuits, and indoors for wet or corrosive locations. Highly resistant to acids, alkalis, corrosive fumes, chemicals, and ground water. It is non-corroding, sunlight-resistant, and will not support combustion. UL listed. Shrink wrapped.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507062-C	13054255	14-2W/G, 250'	0/0/1	17.430	99.99 CL
539333-A	13054201	14-2W/G, 1000'	0/0/1	69.740	299.99 SPL
507071-B	13055955	12-2W/G, 250'	0/0/1	23.810	139.99 CL
532983-C	13055901	12-2W/G, 1000'	0/0/1	95.240	629.99 SPL
502726-C	13056755	10-2W/G, 250'	0/0/1	34.510	259.99 CL
532975-B	13056701	10-2W/G, 1000'	0/0/1	138.050	999.99 SPL
506710-C	13057555	14-3W/G, 250'	0/0/1	23.960	149.99 CL
526149-C	13058355	12-3W/G, 250'	0/0/1	32.320	219.99 CL
513598-C	13059155	10-3W/G, 250'	0/0/1	47.670	334.99 CL



Direct Burial Wire - Stranded type USE XLPE copper. Cross linked polyethylene (XLPE) insulation rated at 90° C. wet or dry. 600V. Suitable for direct burial or use in conduit and raceways installed underground, in wet locations, and where moisture accumulation within the raceway may occur. Resistant to: Acids, alkalis, grease, and chemicals; abrasion and crushing; moisture and ozone. 500'. UL listed



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539481-B	11346403	6, USE XLPE, 75A	0/0/1	53.080	519.99 SPL
539503-C	11347207	4, USE XLPE, 95A	0/0/1	78.000	799.99 SPL
539511-C	11349805	2, USE XLPE, 130A	0/0/1	119.040	1199.99 SPL



Do it® Underground Feeder Cable - Cut coils of type UF-B cable is designed specifically for use as underground feeder cable for direct earth burial in branch circuits, and indoors for wet or corrosive locations. Highly resistant to acids, alkalis, corrosive fumes, chemicals, lubricants, and ground water. It is noncorroding, sunlight-resistant, and will not support combustion. 600V, 75° C. rated. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
524971-C	13054217	25'	1/0/10	1.740	14.99 CL
524980-C	13054218	50'	1/0/10	3.480	26.99 CL
534728-C	13054219	100'	1/0/5	6.970	51.99 CL
525328-C	13055917	25'	1/0/10	2.380	21.99 CL
525854-B	13055918	50'	1/0/10	4.760	38.99 CL
534719-C	13055919	100'	1/0/5	9.520	74.99 CL

ELECTRICAL



Underground Feeder Cable - Cut coils of type UF-B cable is designed specifically for use as underground feeder cable for direct earth burial in branch circuits, and indoors for wet or corrosive locations. Highly resistant to acids, alkalis, corrosive fumes, chemicals, lubricants, and ground water. It is noncorroding, sunlight-resistant, and will not support combustion. 600V, 75° C. rated. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539368-C	13056722	10-2W/G, 50'	1/0/5	13.800	61.99 CL
539341-C	13057522	10-2W/G, 100'	1/0/5	69.000	119.99 CL
539376-C	14-3UFW/G	14-3W/G, 50'	1/0/5	6.000	27.99 CL
539384-C	13058322	12-3W/G, 50'	1/0/5	8.200	53.99 CL
539392-B	10-3UFW/G	10-3W/G, 50'	1/0/5	10.600	79.99 CL
561819-C	13059123	10-3W/G, 100'	1/0/4	76.280	159.99 EA
561827-B	13058323	12-3W/G, 100'	1/0/4	51.720	99.99 EA



THHN Wire - 90° C, small diameter, general-purpose, 600V building wire to be used as power, lighting, and control wiring. Suitable for use in conduit and raceways. Solid or stranded copper with flame-retardant PVC insulation and nylon jacket. Resistant to oil, gasoline, chemicals, and abrasion. UL listed. 500' spool.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501956-B	11579001	14-gauge, solid, black	1/0/4	7.420	59.99 SPL
501948-B	11580801	14-gauge, solid, white	1/0/4	7.420	59.99 SPL
504343-B	11581601	14-gauge, solid, red	1/0/4	7.420	59.99 SPL
501964-B	11583201	14-gauge, solid, green	1/0/4	7.420	59.99 SPL
515167-B	11582401	14-gauge, solid, blue	1/0/4	7.420	59.99 SPL
539406-B	11584001	14-gauge, solid, yellow	1/0/4	7.420	59.99 SPL
501980-C	11587301	12-gauge, solid, black	1/0/4	11.270	89.99 SPL
501972-C	11588101	12-gauge, solid, white	1/0/4	11.270	89.99 SPL
504351-C	11589901	12-gauge, solid, red	1/0/4	11.270	89.99 SPL
501999-C	11591501	12-gauge, solid, green	1/0/4	11.270	89.99 SPL
512508-C	11590701	12-gauge, solid, blue	1/0/4	11.270	89.99 SPL
539414-B	11592301	12-gauge, solid, yellow	1/0/4	11.270	89.99 SPL
502325-C	11595601	10-gauge, solid, black	1/0/2	17.940	139.99 SPL
501674-C	11596401	10-gauge, solid, white	1/0/2	17.940	139.99 SPL
501665-C	11597201	10-gauge, solid, red	1/0/2	17.940	139.99 SPL
512494-C	11599801	10-gauge, solid, green	1/0/2	17.940	139.99 SPL
515175-C	11598001	10-gauge, solid, blue	1/0/2	17.940	139.99 SPL
502487-B	22955901	14-gauge, stranded, black	1/0/4	7.870	66.99 SPL
503191-B	22956701	14-gauge, stranded, white	1/0/4	7.870	67.99 SPL
510467-B	22957501	14-gauge, stranded, red	1/0/4	7.870	67.99 SPL
510475-C	22959101	14-gauge, stranded, green	1/0/4	7.870	69.99 SPL
501120-B	22964101	12-gauge, stranded, black	1/0/4	11.990	104.99 SPL
501111-B	22965801	12-gauge, stranded, white	1/0/4	11.990	104.99 SPL
516392-B	22966601	12-gauge, stranded, red	1/0/4	11.990	104.99 SPL
510483-B	22968201	12-gauge, stranded, green	1/0/4	11.990	104.99 SPL
539422-B	22967401	12-gauge, stranded, blue	1/0/4	11.990	104.99 SPL
539430-B	22969001	12-gauge, stranded, yellow	1/0/4	11.990	104.99 SPL
510408-C	22973201	10-gauge, stranded, black	1/0/2	19.040	169.99 SPL
510459-C	22974001	10-gauge, stranded, white	1/0/2	19.040	169.99 SPL
510440-C	22975701	10-gauge, stranded, red	1/0/2	19.040	169.99 SPL
539449-C	22977301	10-gauge, stranded, green	1/0/2	19.040	169.99 SPL
539457-C	22976501	10-gauge, stranded, blue	1/0/2	19.040	169.99 SPL
525693-C	20488312	8-gauge, stranded, black	0/0/1	31.220	254.99 SPL
525677-C	20489112	8-gauge, stranded, white	0/0/1	31.220	254.99 SPL
525669-C	20490912	8-gauge, stranded, red	0/0/1	31.220	254.99 SPL
539465-C	20492512	8-gauge, stranded, green	0/0/1	31.220	254.99 SPL
525650-B	20493301	6-gauge, stranded, black	0/0/1	47.410	379.99 SPL
525642-B	20494101	6-gauge, stranded, white	0/0/1	47.410	379.99 SPL
525634-B	20495801	6-gauge, stranded, red	0/0/1	47.410	379.99 SPL

Continued Next Column

WIRE/CABLE



Continued From Previous Column

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
525626-C	20499001	4-gauge, stranded, black	0/0/1	75.990	599.99 SPL
525618-C	20500501	4-gauge, stranded, white	0/0/1	75.990	599.99 SPL
525596-C	032886233005	2-gauge, stranded, black	0/0/1	116.920	949.99 SPL
525553-B	20506202	2/0, stranded, black	0/0/1	230.530	1649.99 SPL
525537-B	20507002	3/0, stranded, black	0/0/1	287.200	2099.99 SPL

Lamson

PVC Flexible Ent Conduit - Highly flexible, no special tools required. Corrugated design for easy wire pulling/pushing. Lightweight, cuts easily and cleanly.


Interchangeable with other metallic or nonmetallic products. Listed for use with 90° C. conductors. UL listed (NEC Article 331). Blue.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501808-D	12005UPC	1/2", .840 O.D., .622 I.D., available in 10' lengths	1/0/20	.645	3.99 LGTH
501824-D	12007UPC	3/4", 1.050 O.D., .824 I.D., available in 10' lengths	1/0/10	1.720	5.79 LGTH
540536-D	12008-010	1", 1.315 O.D., available in 10' lengths	1/0/10	1.710	9.49 LGTH
526339-C	12005-200	1/2", .840 O.D., .622 I.D., available in 200' coil	0/0/1	18.920	69.99 CL
526347-C	12007-100	3/4", 1.050 O.D., .824 I.D., available in 100' coil	0/0/1	12.920	47.99 CL
526320-C	12008-100	1", 1.315 O.D., available in 100' coil	0/0/1	16.380	79.99 CL

Lamson

PVC Flex Elbow - PVC conduit elbow/offset, 0° to 90° bending and offset applications, maintains shape throughout bend, fully assembled. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
556726-D	UAFAD	1/2"	1/0/8	.200	5.69 EA
556734-D	UAFAE	3/4"	1/0/6	.325	7.59 EA

Lamson

Ent Adapter - 1-piece quick connect snap-in termination adapter for fast, easy termination of ENT flexible conduit. Simply insert and push, no taping or assembly required. Adapter locks securely in place. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501670-D	A253DCAR	1/2"	1/0/25	.048	.99 EA
501689-D	A253ECAR	3/4"	1/0/25	.033	1.49 EA

PVC CONDUIT

Lamson

Ent Coupling - 1-piece quick connect coupling for fast, easy connections of ENT flexible conduit. Nonmetallic, nonconductive. Simply insert and push, no taping or assembly required. Concrete tight. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501654-D	A240DCAR	1/2"	1/0/25	.030	.89 EA
501662-D	A240ECAR	3/4"	1/0/25	.033	1.29 EA

Lamson


Locknut - For use with PVC conduit. 5 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
538949-E	LT9LDR	1/2"	1/0/20	.035	1.39 BG
538957-D	LT9LER	3/4"	1/0/20	.040	1.39 BG

Lamson

Coupling - Socket-type coupling. For jointing PVC conduit. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506982-D	E940DRCTN	1/2"	1/0/75	.030	.29 EA
507017-E	E940ERCTN	3/4"	1/0/45	.050	.39 EA
507080-D	E940FRCTN	1"	1/0/24	.116	.59 EA
507099-D	E940GRCTN	1-1/4"	1/0/30	.123	.69 EA
507286-D	E940HRCTN	1-1/2"	1/0/12	.170	.89 EA
507393-C	E940JRCTN	2"	1/0/16	.188	.99 EA
515779-D	E940KCTN	2-1/2"	1/0/7	.470	2.19 EA
538388-D	E940LR	3"	1/0/3	.309	2.99 EA

Lamson

Reducer - PVC reducer bushing for reducing Female Schedule 40 conduit runs or fitting to Male. Will not rust or corrode. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
550787-D	E950LJCAR	3" x 2"	1/0/10	.532	8.99 EA
557293-D	E950EDCTN	1/2" x 3/4"	1/0/25	.025	.89 EA
561746-D	E950HGR	1-1/2" x 1-1/4"	1/0/7	.052	2.79 EA
561754-D	E950HGCAR	2" x 1-1/2"	1/0/10	.144	3.49 EA
557307-D	E950FECTN	1" X 3/4"	1/0/20	.048	1.89 EA

ELECTRICAL

Lamson

Female Adapter - For adapting PVC conduit to threaded fittings, metallic systems. Female threads on 1 end, socket end on other. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507464-D	E942DRCTN	1/2"	1/0/30	.032	.39 EA
507838-D	E942ERCTN	3/4"	1/0/20	.046	.59 EA
507856-D	E942FRCTN	1"	1/0/10	.074	.69 EA
508258-C	E942GRCTN	1-1/4"	1/0/15	.183	.89 EA
508338-C	E942HRCTN	1-1/2"	1/0/10	.136	.99 EA
508436-D	E942JR	2"	1/0/4	.098	1.39 EA
515787-D	E942KCAR	2-1/2"	1/0/4	.355	2.99 EA
561762-D	E942LCAR	3" Available Only At Cape, Waco, Woodburn, Mesquite	1/0/3	.493	5.79 EA

Lamson

Terminal Adapter - For adapting PVC conduit to boxes, threaded fittings, metallic systems. Male threads on 1 end, socket end on other. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508533-D	E943DRCTN	1/2"	1/0/100	.024	.39 EA
508579-D	E943ERCTN	3/4"	1/0/50	.035	.59 EA
508597-D	E943FRCTN	1"	1/0/30	.056	.69 EA
508668-D	E943GRCTN	1-1/4"	1/0/20	.088	.89 EA
508739-D	E943HRCTN	1-1/2"	1/0/16	.210	1.19 EA
508757-D	E943JRR	2"	1/0/28	.248	1.49 EA
515795-D	E943KCTN	2-1/2"	1/0/6	.280	2.49 EA
538418-D	E943LCAR	3"	1/0/5	.354	2.99 EA

Lamson

Conduit Body Type X - Type X with cover. 4 knock-out type socket openings, 90° spacing. 4-1/8" diameter x 2-3/16" H. Includes cover and gasket. Supplied with separate mounting feet for easy mounting. Noncorrosive, nonconductive assuring a safe system.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561770-D	E970CDCTN	1/2"	1/0/5	.668	10.49 EA
561789-D	E970CECTN	3/4"	1/0/5	.640	10.49 EA

ELECTRICAL

Lamson

Service Entrance Cap - PVC weatherproof slip end cap for wires entering service meter box from utility pole.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508864-D	E998ECAR	3/4"	1/0/5	.136	5.29 EA
509060-D	E998GCAR	1-1/4"	1/0/5	.426	6.99 EA
509293-D	E998J-CAR	2"	1/0/5	1.100	12.49 EA
515833-D	E998KUPC	2-1/2"	1/0/2	4.450	74.99 EA

Lamson

Meter Offset - PVC slip end 30° meter offset to connect PVC conduit to service meter box.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509499-C	E995GCTN	1-1/4"	1/0/6	.250	3.39 EA
509514-D	E995JCTN	2"	1/0/4	.250	4.39 EA

Lamson

Access Fitting - Type T. Adopts PVC conduit to boxes, threaded fittings and metallic systems. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510192-D	E983DCTN	1/2"	1/0/8	.230	3.39 EA
510209-D	E983ECTN	3/4"	1/0/8	.460	3.89 EA
510218-D	E983FRCAR	1"	1/0/10	.328	4.29 EA
510245-D	E983GRCAR	1-1/4"	1/0/4	1.270	6.59 EA
510557-D	E983HCAR	1-1/2"	1/0/4	.860	8.39 EA
510959-C	E983JCAR	2"	1/0/3	2.850	12.99 EA

Lamson

Access Fitting - Type LL, adapts PVC conduit to boxes. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
540455-D	E984DCTN	1/2"	1/0/8	.195	2.59 EA
540463-D	E984ECTN	3/4"	1/0/4	.425	3.89 EA
540471-D	E984FCAR	1"	1/0/10	.430	4.99 EA
540498-D	E984GCAR	1-1/4"	1/0/5	.860	6.39 EA
540501-D	E984HCAR	1-1/2"	1/0/5	.980	8.49 EA
540528-C	E984JCAR	2"	1/0/3	1.607	12.99 EA

Lamson

Access Fitting - Type LR, adapts PVC conduit to boxes. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
540374-D	E985DCTN	1/2"	1/0/8	.195	2.59 EA
540382-D	E985ECTN	3/4"	1/0/4	.440	3.79 EA
540390-D	E985FCAR	1"	1/0/10	.450	4.89 EA
540404-D	E985GCAR	1-1/4"	1/0/5	.920	6.39 EA
540412-D	E985HCAR	1-1/2"	1/0/5	.942	8.49 EA
540420-C	E985JCAR	2"	1/0/3	1.610	12.99 EA

PVC CONDUIT

Lamson

Access Fitting - Type LB, PVC access fitting for 90° turns with wire pulling access through back plate. Gasket and brass screws included. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511985-D	E986DCTN	1/2"	1/0/20	.212	2.69 EA
511994-D	E986ECTN	3/4"	1/0/12	.440	3.19 EA
512001-D	E986FCTN	1"	1/0/12	.514	3.49 EA
512047-D	E986GR	1-1/4"	1/0/6	1.094	5.29 EA
512056-D	E986HR	1-1/2"	1/0/6	1.056	6.39 EA
512074-C	E986JCTN	2"	1/0/4	1.630	10.99 EA
515825-D	E986KCAR	2-1/2"	0/0/1	3.630	39.99 EA

Lamson

Access Fitting - Type C, adapts PVC conduit to boxes. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
540439-C	E987DCTN	1/2"	1/0/8	.200	2.99 EA
540447-D	E987ECTN	3/4"	1/0/4	.425	4.39 EA

Lamson

CONDUIT BODY - Access pull elbow for use with PVC conduit. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
535532-D	E990DRCAR	1/2"	1/0/25	.091	3.49 EA
535540-D	E990ERCAR	3/4"	1/0/20	.120	3.99 EA

Lamson


Cover - Fits PVC "FS" Series boxes and will also fit standard outlet boxes. Designed so face of single or duplex receptacle is properly exposed when receptacle is mounted directly to FSC box. Brass mounting screws and gasket included. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510995-D	E98SSCNCAR	Toggle switch	1/0/10	.205	6.39 EA
511002-D	E98SRCNCAR	Single outlet	1/0/10	.205	6.79 EA
511084-D	E98GDRNCAR	Duplex outlet	1/0/10	.197	6.39 EA
511967-D	E98GFCNCAR	GFI outlet/rocker switch	1/0/10	.200	6.39 EA
529346-D	E980CNCAR	Single gang blank	1/0/12	.123	2.79 EA

Lamson

Toggle Switch Cover - Single toggle switch for weatherproof applications. Gasket included. Will not rust or corrode. Grey. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
550809-D	E98TSCNCAR	Switch Cover	1/0/5	.400	6.49 EA

PVC CONDUIT

Lamson


Outlet Box - PVC molded conduit outlet box. Type FSE. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501034-D	E980DFNCTN	1/2"	1/0/12	.396	5.49 EA
501042-D	E980EFNCTN	3/4"	1/0/12	.487	5.79 EA
501050-D	E980FFNCTN	1"	1/0/8	.490	7.59 EA

Lamson

Outlet Box - PVC molded conduit outlet box. Type FSC. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501069-D	E981DFNCTN	1/2"	1/0/12	.410	5.49 EA
501085-D	E981EFNCTN	3/4"	1/0/12	.416	5.69 EA
501093-D	E981FFNCTN	1"	1/0/8	.423	7.69 EA

Lamson

Outlet Box - PVC molded conduit outlet box. Type FSS. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501107-D	E982DFNCTN	1/2"	1/0/12	.458	5.49 EA
501115-D	E982EFNCTN	3/4"	1/0/12	.457	5.29 EA
501026-D	E982FFNCTN	1"	1/0/8	.459	7.79 EA

Lamson

Elbow - PVC 45° elbows. Couplings not included. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512145-D	UA7ADRCAR	1/2"	1/0/25	.108	.79 EA
512252-D	UA7AERCAR	3/4"	1/0/15	.148	.89 EA
512261-D	UA7AFRCTN	1"	1/0/15	.290	1.29 EA
512314-D	UA7AGRCTN	1-1/4"	1/0/6	.430	1.79 EA
512323-D	UA7AHRCTN	1-1/2"	1/0/6	.570	2.49 EA
512332-D	UA7AJCAR	2"	1/0/4	.780	3.59 EA
515817-D	UA7AKCAR	2-1/2"	1/0/5	1.640	7.39 EA

Lamson

Elbow - PVC 90° elbows. Couplings not included. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512350-C	UA9ADRCTN	1/2"	1/0/45	.140	.69 EA
512421-D	UA9AERCTN	3/4"	1/0/25	.230	.89 EA
512449-D	UA9AFRCTN	1"	1/0/25	.360	1.39 EA
512458-D	UA9AGRCTN	1-1/4"	1/0/6	.733	1.89 EA
512467-D	UA9AHCAR	1-1/2"	1/0/5	.888	2.39 EA
512476-D	UA9AJCAR	2"	1/0/5	1.412	3.39 EA
515809-D	UA9AKCAR	2-1/2"	1/0/10	2.650	6.29 EA
538396-C	UA9ALCAR	3"	1/0/5	4.080	11.99 EA

Lamson

Elbow - Schedule 80 PVC, 90° elbows. Standard radius. Couplings not included. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
553263-D	UB9AJCAR	2"	1/0/5	1.144	9.99 EA
553271-D	UB9AKCAR	2-1/2"	1/0/10	3.470	21.99 EA

Lamson

PVC Elbow - PVC 90° 2", 24" special radius elbow. Schedule 40. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502236-C	UA9DJ	2"x24" 90 Deg Pvc Elbow	0/0/1	2.640	9.99 EA

Lamson

Strap - Noncorrosive PVC conduit strap for PVC and galvanized conduit. 5 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508853-D	E977DCCTN	1/2"	1/0/20	.013	1.49 BG
508845-D	E977ECCTN	3/4"	1/0/20	.014	1.99 BG
508829-D	E977FCCTN	1"	1/0/12	.019	2.39 BG
508810-D	E977GCCTN	1-1/4"	1/0/8	.096	2.69 BG
508802-D	E977HCCTN	1-1/2"	1/0/6	.070	3.19 BG
508799-D	E977JCCTN	2"	1/0/4	.180	3.39 BG

Lamson


Liquidtight Nonmetallic Connector - 1-piece straight connector for use with nonmetallic liquidtight flexible conduit systems.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
515884-D	LN43DACTN	1/2"	1/0/30	.031	2.29 EA
515892-C	LN43EACTN	3/4"	1/0/20	.044	2.99 EA

Thomas & Betts

Liquidtight Connector - Liquidtight flexible nonmetallic conduit connector for nonmetallic conduit. UL listed. CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
540811-D	LT501	1/2"	1/0/20	.075	2.79 EA
540838-C	LT502	3/4"	1/0/10	.120	3.99 EA

Lamson

Liquidtight Nonmetallic Elbow - 1-piece 90° elbows for use with nonmetallic, liquidtight flexible conduit systems.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
515906-D	LN20DACTN	1/2"	1/0/20	.048	3.19 EA
515914-D	LN20EACTN	3/4"	1/0/15	.078	5.29 EA




Wire Channel - The heart of the surface wiring system made of heavy-gauge .040" steel. Off-white baked enamel finish may also be painted to blend with wall or ceiling color. One 5' length per poly bag. UL listed. For use with NM building cable ("B" Series Accessories).



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501263-D	B1	5 Channel Wire	1/0/10	1.544	7.99 EA




Box - Extension box normally used as starting point to adapt an existing outlet for connection with model No. B1 wire channel. UL listed, 1 per card. For use with NM wire ("B" Series System).



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501271-D	B5	Extension Box	1/5/30	.085	7.49 CD



Box - Shallow switch/receptacle box for mounting shallow wiring devices. UL listed. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
525293-C	B2	Switch/outlet Box	1/5/30	.102	7.79 CD




Box - Extra deep switch/receptacle box for use with B1 raceway system, 1-3/4" deep. Steel, ivory baked enamel finish. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
525337-C	B3	1-3/8" deep	1/5/30	.115	8.29 CD
513393-C	B35	1-3/4" deep	1/0/5	.780	8.79 CD




Box - Double gang switch/receptacle box. UL listed. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
524719-C	B32	2-gang Box	1/5/30	.133	10.99 CD




Box - Round ceiling box for installing a circular fixture box for ceiling fans, smoke alarms, or lighting fixtures. Extra hardware included. UL listed. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
525346-C	B4F	Round Ceiling Box	1/0/5	.150	13.79 CD




Elbow - Flat elbow for making right or left hand turns on a flat surface. UL listed. 1 per card. For use with NM wire ("B" Series System).



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501298-D	B6	Flat Elbow	1/5/30	.019	4.99 CD



Elbow - Inside elbow to make an inside turn from wall to ceiling, wall to wall, etc. UL listed, 1 per card. For use with NM wire ("B" Series System).




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501301-D	B7	Inside Elbow	1/5/30	.038	4.99 CD

WIREMOLD




Elbow - Outside elbow to make an outside turn around a corner. UL listed, 1 per card. For use with NM wire ("B" Series System).



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501328-D	B8	Outside Elbow	1/5/30	.019	4.99 CD



Accessory Kit - Contains the following items per card: 4-wire channel clips to mount wire channel to flat surface, 5-wire channel straps to mount wire channel to uneven surfaces, 4 couplings to join and support connecting lengths of wire channel, 8 bushings to slip into open ends of wire channel to protect wires and 4 connecting covers to conceal any open gaps between lengths of wire channel. UL listed. For use with NM wire. ("B" Series System).



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501336-D	B9-10-11	Accessories Kit	1/5/30	.052	6.79 CD




Elbow - To make right or left turn and continue wire channel on a different surface. UL listed, 1 right and left elbow per card. For use with NM wire ("B" Series System).



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501352-C	B13-14	Right/left Elbow	1/5/30	.071	9.29 CD




T-Fitting - To make 90° branching of 2 incoming wires. UL listed. 1 per card. For use with NM wire ("B" Series System).



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501360-D	B16	T-fitting	1/5/30	.038	6.79 CD



Connector - Conduit connector used to connect B1 raceway directly to 1/2" conduit. Can also be used with outlet boxes with 1/2" knockout. Steel, ivory baked enamel finish. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
515671-D	B17	Steel Connector	1/0/5	.140	6.79 CD

ELECTRICAL



Connector - 1/2" box connector used to connect B1 raceway to conduit boxes with 1/2" knockout. Galvanize steel. UL listed. 2 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513466-C	B81	1/2" Box Connector	1/0/5	.180	6.49 CD



Wire Channel - Rigid PVC nonmetallic raceway system. Smooth finish. Packaged in easy-to-handle 5' lengths. Running wires through the channel is no problem with the Sure-Snap™ System. The snap together base and cover make it safe and simple, positive locking feature deters children from opening. Just drill and screw the channel base to the wall in desired location, lay the wires in and affix wire holders. Snap the cover on, no need to fish wires. UL listed. *Wire capacity:* Ten model No. 14 THHN wires, seven model No. 12 THHN wires, 5 model No. 10 THHN wires; or up to 12/2 with ground NM wire. Use a model No. NM 910 or NMW910 accessory kit for every 5' of wire channel.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505951-D	NM1	Ivory	1/0/20	.628	9.29 EA
554375-D	NMW1	White	1/0/20	.645	9.29 EA

AFC Cable

Nonmetallic Whip - Nonmetallic prewired liquidtight flexible conduit system. Convenient labor and material saving assemblies used for connecting air conditioners, pumps, swimming pool motors, and compressors. The prewired lengths include nonmetallic connectors for quick and trouble-free installations. Won't rust, crack, or conduct electricity, providing the best protection for extreme applications. UL listed, CSA approved.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531405-C	8015	1/2" x 6', 3 No. 10-gauge THHN stranded wire, 35A-600V	1/0/10	3.667	11.49 EA
531413-C	8017	3/4" x 6', 3 No. 8-gauge THHN stranded wire, 50A-600V	1/0/8	3.667	14.99 EA

ELECTRICAL

AFC Cable


Liquidtight Nonmetallic Conduit - AMERI-TITE® takes the place of metallic liquidtight conduit and is for machinery, air conditioning and heating applications, and outdoor lighting. Safe and easy-to-use. Nonconductive, noncorrosive, abrasion-resistant and consistent diameter. Highly flexible, won't fracture or separate. Cuts easily and smoothly. Resistant to Ozone, Alkaline, Acid, and Oil. Conduit and fittings provide complete nonmetallic, nonconductive system. Ground integrity never compromised. UL listed for direct burial.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531367-C	6002-22-00	1/2" x 25'	0/0/1	4.000	12.49 CL
531375-C	6002-24-00	1/2" x 50'	0/0/1	7.000	22.99 CL
515868-C	6002-30-00	1/2" x 100'	0/0/1	15.000	45.99 CL
531383-C	6003-22-00	3/4" x 25'	0/0/1	4.000	16.99 CL
531391-C	6003-24-00	3/4" x 50'	0/0/1	8.000	31.99 CL
515876-C	6003-30-00	3/4" x 100'	0/0/1	17.000	62.99 CL

AFC Cable

RWS Flexible Conduit - Flexible reduced wall steel conduit. Fits regular armored cable or flexible conduit connectors. Designed for electrical wiring where UL listing is required. Made from hot dipped galvanized steel with heavy zinc coating. Medium weight conduit. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531990-C	5501-30-00	3/8" x 100', internal diameter: 0.375 minimum, 0.393 maximum; external diameter: 0.560 minimum, 0.610 maximum; 2" bending radius	0/0/1	18.000	43.99 CL
505279-C	5502-22-00	1/2" x 25', internal diameter: 0.625 minimum, 0.645 maximum; external diameter: 0.860 minimum, 0.920 maximum; 3" bending radius	0/0/1	7.000	12.99 CL
505322-C	5502-24-00	1/2" x 50', internal diameter: 0.625 minimum, 0.645 maximum; external diameter: 0.860 minimum, 0.920 maximum; 3" bending radius	0/0/1	14.000	25.99 CL
532007-C	5502-30-00	1/2" x 100', internal diameter: 0.625 minimum, 0.645 maximum; external diameter: 0.860 minimum, 0.920 maximum; 3" bending radius	0/0/1	28.000	49.99 CL
505643-C	5503-22-00	3/4" x 25', internal diameter: 0.812 minimum, 0.835 maximum; external diameter: 1.045 minimum, 1.105 maximum; 4" bending radius	0/0/1	33.000	17.49 CL
505750-C	5503-24-00	3/4" x 50', internal diameter: 0.812 minimum, 0.835 maximum; external diameter: 1.045 minimum, 1.105 maximum; 4" bending radius	0/0/1	17.000	34.99 CL

CONDUIT

AFC Cable

Aluminum Flexible Conduit - Reduced wall flexible aluminum conduit. Maintains all the strength and durability of steel, but is 2/3 lighter in weight. Designed to meet industry specifications for use with standard conduit connectors and device boxes. Meets UL Standard 1, NEC Article 350, and Federal Specification WW-C 566C.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502995-C	5601-30-00	3/8" x 100', internal diameter: 0.375 minimum, 0.393 maximum; external diameter: 0.560 minimum, 0.610 maximum; 2" bending radius	0/0/1	7.000	42.99 CL
532568-C	5602-22-00	1/2" x 25', internal diameter: 0.625 minimum, 0.645 maximum; external diameter: 0.860 minimum, 0.920 maximum; 3" bending radius	0/0/1	3.000	13.49 CL
532576-C	5602-24-00	1/2" x 50', internal diameter: 0.625 minimum, 0.645 maximum; external diameter: 0.860 minimum, 0.920 maximum; 3" bending radius	0/0/1	4.750	26.99 CL
503002-D	5602-30-00	1/2" x 100', internal diameter: 0.625 minimum, 0.645 maximum; external diameter: 0.860 minimum, 0.920 maximum; 3" bending radius	0/0/1	12.000	52.99 CL
532584-C	5603-22-00	3/4" x 25', internal diameter: 0.812 minimum, 0.835 maximum; external diameter: 1.045 minimum, 1.105 maximum; 4" bending radius	0/0/1	4.000	17.99 CL
532592-C	5603-24-00	3/4" x 50', internal diameter: 0.812 minimum, 0.835 maximum; external diameter: 1.045 minimum, 1.105 maximum; 4" bending radius	0/0/1	8.000	36.99 CL
529354-C	5603-30-00	3/4" x 100', internal diameter: 0.812 minimum, 0.835 maximum; external diameter: 1.045 minimum, 1.105 maximum; 4" bending radius	0/0/1	15.000	69.99 CL

FLEXIBLE CONDUIT

AFC Cable

Liquidtight Conduit - Liquidtight flexible steel conduit provides the safest possible protection for extremely wet and oily locations. Spiral wound, squarelocked flexible galvanized steel core covered with PVC. Sunlight-resistant. Sizes are printed on extruded cover with *foot* marks to make measuring easy. Integral copper ground wire. UL listed. CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506205-C	6202-22-00	1/2" x 25', internal diameter: 0.622 minimum, 0.642 maximum; external diameter: 0.820 minimum, 0.840 maximum; 3-1/4" bending radius	0/0/1	9.000	31.99 CL
506027-C	6202-24-00	1/2" x 50', internal diameter: 0.622 minimum, 0.642 maximum; external diameter: 0.820 minimum, 0.840 maximum; 3-1/4" bending radius	0/0/1	34.000	59.99 CL
505901-C	6203-22-00	3/4" x 25', internal diameter: 0.820 minimum, 0.840 maximum; external diameter: 1.030 minimum, 1.050 maximum; 4-1/4" bending radius	0/0/1	9.000	42.89 CL
505812-C	6203-24-00	3/4" x 50', internal diameter: 0.820 minimum, 0.840 maximum; external diameter: 1.030 minimum, 1.050 maximum; 4-1/4" bending radius	0/0/1	18.000	82.99 CL

AFC Cable

AC Cable - AC-90® steel armored cable is black striped color-coded. Flexible and efficient, no couplings or elbows needed. Copper conductors are THHN 90° C. rated. 14AWG continuous wire. Anti-short bushings included. Permitted for branch circuits and feeders on both exposed and concealed work. Dry locations only. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509035-C	1401N22-00	14-2 AWG x 25'	1/0/12	5.000	21.99 CL
509043-C	1401N24-00	14-2 AWG x 50'	1/0/6	9.000	47.99 CL
509078-C	1401N30-00	14-2 AWG x 100'	1/0/3	6.000	86.99 CL
507197-C	1401N42-00	14-2 AWG x 250'	0/0/1	45.000	189.99 CL
534269-C	1402N22-00	14-3 AWG x 25'	1/0/12	.417	34.99 CL
534277-C	1402N24-00	14-3 AWG x 50'	1/0/6	10.833	69.99 CL
534285-C	1402N30-00	14-3 AWG x 100'	1/0/3	20.500	139.99 CL
507204-C	1402N42-00	14-3 AWG x 250'	0/0/1	50.000	299.99 CL
509000-C	1404N22-00	12-2 AWG x 25'	1/0/12	.417	22.49 CL
509019-C	1404N24-00	12-2 AWG x 50'	1/0/6	9.800	44.99 CL
509027-C	1404N30-00	12-2 AWG x 100'	1/0/3	19.333	89.99 CL
507213-C	1404N42-00	12-2 AWG x 250'	0/0/1	53.000	199.99 CL
534234-C	1405N22-00	12-3 AWG x 25'	1/0/12	6.000	34.99 CL
534242-C	1405N24-00	12-3 AWG x 50'	1/0/6	13.000	67.99 CL
534250-C	1405N30-00	12-3 AWG x 100'	1/0/3	14.400	139.99 CL
507222-C	1405N42-00	12-3 AWG x 250'	0/0/1	61.000	299.99 CL

ELECTRICAL

AFC Cable

MC Cable - McTuff® MC lightweight steel cable is blue-tipped color-coded. 30% lighter than steel AC. Flexible-no special bending, easier to work with in limited space. Rounded profile pulls easily through studs. Rewired, has full size insulated green ground included. Copper conductors are type THHN 90° C wire, anti-short bushings, marker tape. May be exposed or concealed, in cable trays, approved raceways or as an open run of cable. Dry locations only. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531480-C	1701B22T00	14-2 AWG x 25'	1/0/12	.250	22.99 CL
531499-C	1701B24T00	14-2 AWG x 50'	1/0/6	1.000	45.99 CL
531502-C	1701B30T00	14-2 AWG x 100'	1/0/3	4.000	89.99 CL
531510-C	1701B42T00	14-2 AWG x 250'	0/0/1	30.000	199.99 CL
531421-C	1704B22T00	12-2 AWG x 25'	1/0/12	.333	22.99 CL
531448-C	1704B24T00	12-2 AWG x 50'	1/0/6	1.167	46.99 CL
531456-C	1704B30T00	12-2 AWG x 100'	1/0/3	5.000	92.99 CL
531464-C	1704B42T00	12-2 AWG x 250'	0/0/1	37.000	209.99 CL
531472-C	1705B42T00	12-3 AWG x 250'	0/0/1	47.000	329.99 CL

AFC Cable

Armored Cable Cutter - Armored cable cutter for AC & MC cables. Exclusive automatic pop cable release. For No. 14, 12, and 10 AC & MC cables with 2,3, or 4 wires and No. 8-1 and 3/4 Flex. Unique self-adjusting clamping system. No adjustment needed between #14 & 12 cable sizes.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502960-C	8080	Armored Cable Cutter	1/0/3	1.600	31.99 EA

Thomas & Betts

Locking Armored Cable Connector - Single locking connector for armored cable. 1-piece installation with no locknuts. Captive screw designed for pullout resistance. Corrosion-resistant zinc-chromatic plating. Positive grounding. Vibration-resistant screw design. 1/2". UL listed. 5 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
521051-D	XC730-5	3/8" Locking Connector	1/25/100	.090	12.49 BG

Allied Tube

Thin Wall Conduit - Electrical metal tubing less couplings. Galvanized exterior, lacquered interior. 10' lengths. Order in full lengths only.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507133-A	101534	1/2" Emt Conduit	1/10/700	2.900	2.29 LGTH
507142-A	101550	3/4" Emt Conduit	1/10/500	4.500	4.49 LGTH
507151-B	101568	1" Emt Conduit	1/0/10	6.500	9.69 LGTH
507160-C	101576	1-1/4" Emt Conduit	1/0/5	9.600	16.99 LGTH
507179-B	101584	1-1/2" Emt Conduit	1/0/5	11.100	18.99 LGTH
507188-C	101592	2" Emt Conduit	0/0/1	14.100	22.99 LGTH

ELECTRICAL

Allied Tube


IMC Conduit - IMC (Intermediate Metal Conduit) is the lighter-weight rigid-type steel conduit. Made of high-performance steel, given extra strength by a special electro-weld forming process. Has lighter steel wall yet in many instances is more *rigid* than Rigid conduit. UL listed, recognized by the 1978 NEC for all uses, including hazardous locations. Comes in 10' lengths with threaded ends.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
526461-C	358192	1/2" Imc Conduit	1/0/10	6.000	9.49 LGTH
526470-B	358184	3/4" Imc Conduit	1/0/5	8.300	11.49 LGTH
526489-C	358176	1" Imc Conduit	1/0/5	11.600	17.99 LGTH
526498-C	358119	1-1/4" Imc Conduit	0/0/1	15.000	22.99 LGTH
526504-C	358101	1-1/2" Imc Conduit	0/0/1	18.200	26.99 LGTH
526513-C	358168	2" Imc Conduit	0/0/1	24.200	35.99 LGTH
517437-C	358150	2-1/2" Imc Conduit	0/0/1	42.800	64.99 LGTH

Allied Tube

Conduit, Rigid, 2" - Galvanized rigid metal conduit is a hot dip galvanized product that meets the requirements of UL 6, ANSI C80.1, and other applicable Federal specifications. NPT threads are full-cut, hot dip galvanized, and end-capped with color-coded thread protectors. 10' length. 2". Outside diameter 2.375. 35 lb.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506702-C	103101	2" Rigid Conduit	0/0/1	35.200	49.99 LGTH

GB Electrical

Conduit Bender - Made of high-strength aluminum alloy. Lightweight and durable. Double levels. Blister packed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500292-C	930B	For use with 1/2" thinwall. 5" radius	1/0/2	1.400	23.99 EA
500194-C	931B	For use with 3/4" thinwall or 1/2" rigid	1/0/2	2.400	31.99 EA

GB Electrical

Conduit Bender - Big Ben™ aluminum hand bender. Features include built-in sight-lines for bending on the floor, conduit bend back channel easily corrects over bends, Vise-Mate™ conduit vise holds conduit while cutting or reaming, and Benfield™ style angle markings for bending in the air. Limited lifetime warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505466-C	960	For use with 1/2" EMT, bend radius 3.69"	1/0/2	1.750	19.99 EA
505475-C	961	For use with 3/4" EMT and 1/2" IMC, bend radius 4.74"	1/0/2	2.200	29.99 EA

FISH TAPE

GB Electrical

Fish Tape Reel - 50'. Economy model. Compact 7" reel serves as a handle for ease in pulling wire through conduit and walls. Durable steel case holds coiled tape securely at any extension. 1/8" x .045" x 50'.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518794-C	EFT-50B	50 Fish Tape	1/0/5	1.750	26.99 EA

GB Electrical

Fish Tape Reel - Standard carbon steel tapes feature the Upperhand™ ergonomic handle. The handle keeps the user's wrist in a normal, upright position to reduce strain and enhance productivity on the job. Red shatterproof case stands up to on-the-job abuse. 4 viewing ports on reel show at a glance how much tape remains. Easy disassembly for fast tape replacement.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505260-B	FTS-65	65' x 1/8" x .060" tape, 8-1/2" reel diameter	1/0/5	2.960	29.99 EA
505251-A	FTS-125	125' x 1/8" x .060" tape, 12" reel diameter, fish tape ball included	1/0/2	2.160	49.99 EA
518956-C	FTS-250	250' x 1/8" x .060" tape, 12" reel diameter, fish tape ball included	1/0/2	3.440	84.99 EA

Greenlee Textron

Fish Stick - E Z Reach™ Fish Stix are highly visible green rods that can be easily threaded together and seen when working above ceilings, down walls, or under raised floors. 1/4" (6.4mm) diameter fiberglass rods provide added rigidity when multiple sections are connected. 200 lb. minimum pulling strength for long-lasting durability and peace of mind. Includes bullet nose and J hook threaded tips to accommodate various bundles of wire or cable.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511119-B	540-12	12" Fish Stix	1/0/3	1.333	39.99 EA

SUPERSTRUT

ELECTRICAL

Greenlee Textron

Fish Stick - Glo Stix™ luminescent fiberglass stix for better visibility when fishing above dark ceilings, up walls, or below raised floors. Includes (3) 5' sections.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511011-B	54015	15 Glo Stix Fish Stix	1/0/3	1.617	49.99 EA

GB Electrical


Electrical Duct Sealant - A gray mastic for hand application designed to seal irregular openings between materials such as metal, masonry and wood in entrances into foundations and structures. Seals against the entrance of water, dust and insects. Also aids in vibration dampening. Nonhardening, nonshrinking, noncorrosive or staining, nontoxic. Temperature range of 20° to 200° F. Application temperature range 60° to 90° F. 1 lb. package.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509663-D	DS-110	Electrical Duct Sealant	0/0/10	1.000	3.19 EA

GB Electrical

Antioxidant - Ox-gard™ antioxidant compound penetrates aluminum oxide to maintain inter-strand and inter-conductive current paths. Guards against oxidation, improves conductivity and produces a cooler connection. Excellent for AL/AL, AL/CU wire connections and aluminum conduit joints. 1 oz. tube.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507083-D	OX-100B	1 oz. tube	1/0/10	.067	4.69 EA
562556-D	OX-400	4 oz. tube	1/0/12	.292	7.79 EA

GB Electrical

Wire Lubricant - Wire-Aide wire pulling lubricant slides on smoothly and clings throughout the pull. Modified wax base formula dries to a slippery film. Greaseless, nontoxic compound will not stain skin, clothing, or construction trim; cleans up quickly with soap and water. Stable and safe to use. Withstands normal temperature extremes and will not dry out in the container. Noncombustible, nonconductive, and noncorrosive. Will not damage conduit or insulation. 1 quart squeeze bottle. UL listed and CSA approved.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530557-D	79-006	Wire Lubricant	1/0/12	2.292	6.99 EA

GB Electrical

Fish Tape Leader Ball - Replacement leader ball for GB Electrical Streamline™ fish tape model No. FTS50B, FTS100B, FTS200B, RTS50B, and RTS100. Attaches directly to 1/8" tapes. Eye holds 7 No. 10, 12 No. 12, or 19 No. 14 bare wires. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549789-C	FTB-10	Fish Tape Leader Ball	1/0/10	.075	7.99 EA

GB Electrical


Wire Marker - Pocket-sized booklet of cloth wire marker and matching terminal marker saves time and money during all on-site and in-plant initial hookup, troubleshooting, maintenance, and repair. Vinyl impregnated cloth resists moisture, dirt, and oil. Nonsmear legends assure high visibility for instant, positive identification. Self-sticking, not affected by temperature extremes from 40 to +300 F. 10 markers each of: Assortment A thru Z; 0 thru 15; and symbols +, -, /; plus an extra page of blank write-on wire and terminal markers for special legends.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530751-D	42-028	Wire Marker	1/0/10	.100	12.59 PKG

Thomas & Betts

Superstrut® - Metal framing channels. For use with Superstrut® metal framing and hanger systems. *Goldgalv* electroplated zinc finish on 12-gauge steel. Excellent corrosion resistance. Half slot (9/16" x 1-1/8") channel. Slots on 2" centers. Channel dimensions: 1-5/8" x 1-5/8".



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
515256-C	ZA1200HS4	4'	1/0/10	7.390	14.99 EA
515248-D	ZA1200HS6	6'	1/0/10	11.080	22.99 EA
508470-C	ZA1200HS10	10'	1/0/10	17.700	34.99 EA

Thomas & Betts

Superstrut® - Continuous thread rod. For use with Superstrut® metal framing and hanger systems. National coarse thread. Galvanized.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509337-D	ZR1038	3/8" x 16 x 10', load 1900 lb.	1/0/25	2.900	5.59 EA
508578-D	ZR1048	1/2" x 13 x 10', load 3500 lb.	1/0/10	5.200	8.79 EA

ELECTRICAL

Thomas & Betts

Superstrut® - Beam clamp. U-bolt type clamp for attaching Superstrut® channels to steel beams. *Goldgalv* electro-plated zinc finish. Load rating: 2150 lb. 2-3/8" x 3". Poly bag of 1 each.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510254-D	ZU501	U-bolt Beam Clamp	1/0/10	.753	4.79 BG

Thomas & Betts

Superstrut® - Self-aligning spring nuts provide easy fastening for all A series struts and inserts. 5 per pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
563749-D	ZA100 1/4	1/4" spring nut	1/0/10	1.750	4.89 EA
563757-D	ZA100 3/8	3/8" spring nut	1/0/10	.450	4.99 PKG
563765-D	ZA100 1/2	1/2" spring nut	1/0/10	2.900	5.29 EA

Thomas & Betts

Superstrut® - Top beam clamp. For attaching Superstrut® pipe hangers to beams using threaded rod. Malleable iron. *Goldgalv* electro-plated zinc finish. Clamps have tapped holes in base and back to accept bolt or hanger rod. Jaw openings accommodate I-beam, column, or angle flanges up to 1" thickness. Poly bag of 1 each.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511722-D	Z500	1" x 1-1/4" base, 15/16" jaw opening, tapped 1/4 20	1/0/50	.213	.99 EA
511692-D	Z502	2" x 2" base, 1" jaw opening, tapped 3/8 16	1/0/25	.954	4.99 BG
511684-D	Z503	2-5/8" x 2-1/2" base, 1" jaw opening, tapped 1/2 13	1/0/10	1.700	6.99 BG

SUPERSTRUT

Thomas & Betts

Superstrut® - Universal pipe clamp. For attaching rigid or IMC conduit, pipe, and EMT to Superstrut® channel. Fits both 1-5/8" and 1-1/2" channel. *Goldgalv* electro-plated zinc finish. Poly bag of 1 each, except 2".



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511250-D	Z703-1/2	1/2" for pipe O.D., .706-840, 16-gauge, load 400 lb.	1/0/50	.125	1.59 BG
511315-D	Z703-3/4	3/4" for pipe O.D., .932-1.050, 14-gauge, 550 lb.	1/0/100	.067	1.69 BG
511579-E	Z703-1	1" for pipe O.D., 1.163-1.315, 14-gauge, load 550 lb.	1/0/50	.145	1.79 BG
511587-D	Z703-1 1/4	1-1/4" for pipe O.D., 1.508-1.660, 14-gauge, load 800 lb.	1/0/25	.276	1.89 BG
511595-D	Z703-1 1/2	1-1/2" for pipe O.D., 1.738-1.900, 14-gauge, load 800 lb.	1/0/25	.276	2.29 BG
511617-D	Z703-2	2" for pipe O.D., 2.195-2.375, 14-gauge, load 800 lb.	1/0/50	.301	2.49 BG

Thomas & Betts


Superstrut® - 90° corner angle bracket. For use with Superstrut® metal framing and hanger system. *Goldgalv* electroplated zinc finish. 3-1/2" x 4-1/8". Poly bag of 1 each.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511021-D	ZAB205	Corner Bracket	1/0/25	.610	3.89 BG

Thomas & Betts

Superstrut® - Right angle bracket. For use with Superstrut® metal framing and hanger system. *Goldgalv* electro-plated zinc finish. 3-1/2" x 3-1/2". Poly bag of 1 each.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511625-D	ZAB219	Right Angle Bracket	1/0/25	.558	4.29 BG

SUPERSTRUT

Thomas & Betts

Superstrut® - Straight flat plate bracket. For use with Superstrut® metal framing and hanger system. *Goldgalv* electroplated zinc finish. 7-1/4" long. Polybag of 1 each.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511226-D	ZX207	Flat Plate	1/0/25	.744	3.89 BG

Thomas & Betts


Superstrut® - Straight flat plate bracket. For use with Superstrut® metal framing and hanger system. *Goldgalv* electroplated zinc finish. 3-1/2" long. Poly bag of 1 each.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511633-D	ZAB206	Straight Bracket	1/0/25	.362	2.29 BG

Thomas & Betts

Superstrut® - Square washer. For use with Superstrut® metal framing and hanger system. *Goldgalv* electro-plated zinc finish. 1-5/8" square. Poly bag of 5. 3/8" bolt size.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512788-D	ZAB241-3/8	Superstrut Square Washer	1/0/10	.843	6.39 PKG

Thomas & Betts

Superstrut® - Nylon cone channel nut. For use with Superstrut® metal framing and hanger systems. *Goldgalv* electroplated zinc finish on case hardened steel. Extreme resistance to pull out and side slip. Unique design of alternate teeth provides a wedging action that increases with the load. Pliable nylon cone secures the nut in place. Fits all 1-5/8" channel. Poly bag of 5.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513806-D	ZCM100-1/4	1/4"	1/0/10	.475	5.99 PKG
514136-D	ZCM100-3/8	3/8"	1/0/10	.470	6.49 PKG
512982-D	ZCM100-1/2	1/2"	1/0/10	.655	6.49 PKG

ELECTRICAL

Lamson

Low Voltage Old Work Box - This low voltage old work box is designed to provide a secure method of mounting low voltage Class 2 devices, such as a telephone or cable TV jack, in an existing wall. Adjusts from a wall thickness of 1/8" to 1-1/8" and can be mounted horizontally or vertically. Will allow full unrestricted bend radius of coaxial rigid cable. Mounts solidly and securely to any surface. Will not pull out like screws or lags.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
559369-C	B200RCRD	Low Voltage Box	1/0/6	.325	3.29 EA

Lamson

Low Voltage Brackets - 1 and 2 nail-on low voltage bracket. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
559377-C	SC100A	1 gang	1/0/24	.221	1.99 EA
559385-D	SC200A	2 gang	1/0/24	.321	2.79 EA

Lamson


Low Voltage Divider Plate - Low voltage divider plate. For use with Carlon Super Blue™ boxes.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
559415-D	SCDIV	Lv Divider Plate	1/0/50	.044	.79 EA

Lamson

Switch Box - Old work wall box. 3-1/2" x 2-1/4" x 1-1/4" deep, 8 cu. in. One 1/2" knockout on top and bottom. UL listed, PVC.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527637-C	B108RUPC	Old Work Switch Box	1/0/25	.116	1.09 EA

ELECTRICAL

PVC BOXES

Lamson

Switch Box - Old work wall box. 3-1/2" x 2-1/4" x 1-1/4" deep, 8 cu. in. One 1/2" knockout on top and bottom. With wall bracket. UL listed, PVC.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527602-C	B108BUPC	Switch Box	1/0/25	.116	1.09 EA

Lamson

Switch Box - PVC, 4-1/8" x 2-1/4" x 2-3/4" D., 14 cu. in. Old work box with Zip Mount™ retainer and 4 integral clamps. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500968-C	B114RUPC	Old Work Switch Box	1/0/50	.188	1.99 EA

Thomas & Betts

Switch Box - New work *side car* or *pregnant* nail-on box used primarily where framing studs are placed on walls sideways. Offers additional wiring space in shallow design. Thermoplastic, 4" x 2-1/4" opening, 3-1/4" overall x 1-11/16" D.; 16 cu. in. Single gang. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
540803-C	SN018	1 Gang Switch Box	1/0/100	.250	1.79 EA

Lamson

Switch Box - PVC, 3-15/16" x 3-1/8" x 2-3/4" deep, 25 cu. in. Old work box with Zip Mount™ retainer and 6 integral clamps. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511153-C	B225RUPC	2 Gang Old Work Box	1/0/30	.270	2.99 EA

Lamson

Switch Box - PVC, 2-3/4" deep, 18 cu. in. Old work box with Zip Mount™ retainer and 4 integral clamps. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509604-D	B618RRUPC	Old Work Ceiling Box	1/0/8	.275	3.59 EA

Lamson

Switch Box - PVC, for use in new construction. With captive nails and 4 knockouts. UL listed



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500984-B	B118A	3-3/4" x 2-1/4" x 2-7/8" D., 18 cu. in.	1/0/100	.187	.29 EA
500992-D	B120AUPC	3-7/8" x 2-1/4" x 3-1/4" D., 20.3 cu. in.	1/0/100	.240	.79 EA
504033-D	B122AUPC	3.6" x 2.1" x 3.45" D., 22.5 cu. in.	1/0/100	.248	.89 EA

Lamson


Switch Box - PVC, 3-3/4" x 4" x 3" D., 32 cu. in. For use in new construction. 2 gang, with captive nails and 8 integral clamps. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501018-C	B232AUPC	2 Gang Switch Box	1/0/50	.484	1.79 EA

Lamson

Switch Box - PVC, triple gang flush device box. 5-13/16" x 3-11/16" x 2-9/16" D. Provided with 2 brackets. 6 integral clamps on each side. For new construction. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509620-D	B344ARUPC	3 Gang Switch Box	1/0/8	.443	3.39 EA

PVC BOXES

Lamson

Ceiling Box - PVC 4" diameter x 2-1/4" D., 20 cu. in. For use in new construction. 3/0-4/0 combination ceiling box with captive nails, 6 integral clamps and fixture spacing for 2-3/4" - 3-1/2". UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500941-D	B520AUPC	Box	1/0/75	.225	1.79 EA
525308-D	B520PRUPC	Box with grounding lug and screw	1/0/15	.200	2.59 EA

Lamson

Ceiling Box - PVC, 4" diameter x 2-1/4" D., 20 cu. in. For use in new construction. 3/0 - 4/0 combination ceiling box with 14-1/4" to 23-1/2" adjustable bar hanger, 6 integral clamps and fixture spacing for 2-3/4" to 3-1/2". UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500925-D	B620HRUPC	Box	1/0/8	.573	4.39 EA
525316-D	B620HGRUPC	Box with grounding lug and screw	1/0/8	.625	4.59 EA

Lamson

Super Blue™ Ceiling Box - Super Blue™ hard body box. Direct substitute for fiberglass boxes. Super Blue™ will not break when hit with a hammer. Box comes complete with a ground lug. 4" x 7.3" x 3". 24.5 cu. in. volume. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
558621-D	BH525P	Ceiling Box	1/0/24	.649	3.59 EA

Lamson

Super Blue™ Ceiling Box - Super Blue hard body box. Direct substitute for fiberglass boxes. Super Blue™ will not break when hit with a hammer. The box has a special, larger hanger bar bracket which opens from 11-1/2" to 18-1/2". 4" diameter x 3". UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
558648-D	BH525H	Ceiling Box	1/0/20	.675	6.39 EA

Lamson


Super Blue™ Ceiling Box - Super Blue™ hard body box. Direct substitute for fiberglass boxes. Super Blue™ will not break when hit with a hammer. The box has an L bracket which combines the mounting feature of a metal bracket plus the angled nails for quick mounting. Designed and UL approved to support a ceiling fan of up to 35 lb. and a light fixture of 50 lb. Comes complete with a snap-on cover to protect wires from ceiling paint or drywall during construction. 4" x 3", 24.5 cu. in. volume.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
558656-D	BH525L	Ceiling Fan Box	1/0/24	.475	8.99 EA

Lamson

Box Cover - PVC, 4" square, 2 gang blank. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510998-D	A400RCAR	4" Blank Box Cover	1/0/25	.086	1.29 EA

Lamson


Box Cover - PVC, 4" round blank cover. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511013-D	E460RCAR	4" Rnd Blank Cover	1/0/35	.063	1.19 EA

Lamson


Junction Box - PVC, 4" x 4" x 2-5/8" D., 32 cu. in. New work box with captive nails and 10 integral clamps. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
535524-D	B432AUPC	2 Gang Junction Box	1/0/50	.309	3.29 EA

Lamson

Switch Box - PVC, 7-3/5" x 3-7/10" x 2-1/2" D., 55 cu. in. For use in new construction. 4 gang, with captive nails, 12 integral clamps and bracket support. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533041-D	B455AUPC	4 Gang Switch Box	1/0/25	.780	6.79 EA

ELECTRICAL

PVC BOXES

Lamson


Box Cover - PVC, 4" square, single gang. 1/2" rise. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
540579-D	A410RCAR	1/2" 1 Gang Cover	1/0/20	.095	1.19 EA

Thomas & Betts


Cover - Steel City® single device box support cover. Raised 5/8" with 4 cu. in. cap. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506152-D	52CM145/8	5/8" 1 Gang Cover	1/0/25	.400	2.29 EA

Thomas & Betts

Cover - Steel City® single device box support cover. Raised 1/2" with 3 cu. in. cap. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506161-D	52CM13	1/2" 1 Gang Cover	1/0/25	.392	1.99 EA

Allied Moulded

Range And Dryer Box - Strong and sturdy construction, this box has a deep 38.0 cu. in. capacity, with large knockout that can accommodate 8 and 6-gauge wire and includes an internal clamp and captive nails. 2 hour fire wall rated and UL listed. 4" x 4" x 3.5" D.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
558567-D	RD38	Range/dryer Box	1/0/24	.800	6.99 EA

Thomas & Betts

Handy Box - Steel, 4" x 2-1/8" x 1-1/2" D. 11.5 cu. in., eleven 1/2" knockouts. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508141-E	583511/2	4x2-1/8x1-1/2 Box	1/0/50	.500	1.49 EA

Thomas & Betts

Handy Box - Steel, 4" x 2-1/8" x 1-7/8" D. 13 cu. in., eleven 1/2" knockouts. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508150-E	583611/2	4x2-1/8x1-7/8 Box	1/0/50	.500	1.29 EA

Thomas & Betts

Handy Box - Steel, 4" x 2-1/8" x 2-1/8" D. 16.5 cu. in., eleven 1/2" knockouts. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508169-F	583711/230	4x2-1/8x2-1/8 Box	1/0/30	.580	1.89 EA

STEEL BOXES

Thomas & Betts

Handy Box Extension - Steel, 4" x 2-1/8" x 1-7/8" D., 13 cu. in., eight 1/2" knockouts. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
516855-E	593611/230	1-7/8d Extensn Handy Box	1/0/30	.408	1.79 EA

Thomas & Betts

Handy Box Cover - Steel, blank, captive screws included. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508178-F	58C1	Handy Blank Cover	1/0/25	.104	.69 EA

Thomas & Betts


Handy Box Cover - Steel, 1/2" knockout, captive screws included.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509434-E	861	Handy 1/2" Ko Cover	1/0/25	.088	.79 EA

Thomas & Betts

Handy Box Cover - Steel, for toggle switch, captive screws included. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508203-F	58C30	Handy 1-switch Cover	1/0/25	.100	.69 EA

ELECTRICAL

Thomas & Betts


Handy Box Cover - Steel, for use with duplex receptacle, captive screws included. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508196-F	58C7	Handy 2-outlet Cover	1/0/25	.076	.69 EA

Thomas & Betts


Handy Box Cover - Steel, captive screws included. For single receptacle, 1.406 diameter. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508187-F	58C5	Handy 1-outlet Cover	1/0/25	.088	.69 EA

Thomas & Betts

Switch Box - Steel, 3" x 2" x 2" D. 10 cu. in. Gangable, eight 1/2" knockouts and ears. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507650-E	51	3x2x2 Gangable Box	1/0/50	.520	1.99 EA

ELECTRICAL

STEEL BOXES

Thomas & Betts


Switch Box - Steel, 3" x 2" x 2-1/2" D., 12.5 cu. in. Gangable, eight 1/2" knockouts and ears. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507669-F	CDOW	3x2x2-1/2 Gangable Box	1/0/50	.640	2.29 EA

Thomas & Betts

Switch Box - Steel, 3-3/4" x 2" x 1" D., 6.5 cu. in. Has 2 priout's and a Q wire clamp. One 1/2" knockout. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
521750-E	SSQV	3-3/4x2x1 Switch Box	1/0/25	.394	2.29 EA

Thomas & Betts

Octagon Box - Steel, 4" x 2-1/8" D., 21.5 cu. in. Maximum fixture weight 150 lb., fans up to 70 lb. Heavy-duty screws included. For new and existing construction where joists are accessible. Exceeds National Electrical code. UL listed. Recommended for earthquake areas.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512141-E	54171-F-CFB	Ceiling Fan Box	1/0/10	1.285	11.49 EA

Thomas & Betts

Switch Box - Steel, 3" x 2" x 1-1/2" D., 7.5 cu. in. with ears. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507641-E	SWB25	3x2x1-1/2 Switch Box	1/0/25	.480	2.49 EA

Thomas & Betts

Switch Box - Steel, 3" x 2" x 2-1/4" D., 10.5 cu. in. Gangable, beveled corner, with ears, one 1/2" knockout. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507482-E	LCOW25	3x2x2-1/4 Gangable Box	1/0/25	.580	1.99 EA

Thomas & Betts

Switch Box - Steel, 3" x 2" x 2-1/4" D., 10.5 cu. in. Gangable, level bumps, three 1/2" knockouts. Beveled corner. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507507-E	LCLE25	3x2x2-1/4 Gangable Box	1/0/25	.250	2.29 EA

Thomas & Betts

Switch Box - Steel, 3" x 2" x 2-1/4" D., 10.5 cu. in. Gangable, beveled corner, old work, Griptite with ears. Three 1/2" knockouts. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507589-D	LCOWC	3x2x2-1/4 Gangable Box	1/0/25	.550	2.99 EA

Thomas & Betts

Switch Box - Steel, 3" x 2" x 2-1/2" D., 12.5 cu. in. Gangable, with ears. One 1/2" knockout. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507721-F	LXWOW25	3x2x2-1/2 Gangable Box	1/0/25	.651	2.49 EA

STEEL BOXES

ELECTRICAL

Thomas & Betts

Switch Box - Steel, 3" x 2" x 2-1/2" D., 12.5 cu. in. Gangable, with level bumps and three 1/2" knockouts. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507730-E	LXWLE25	3x2x2-1/2 Gangable Box	1/0/25	.625	1.99 EA

Thomas & Betts

Switch Box - Steel, 3" x 2" x 2-1/2" D., 12.5 cu. in. Gangable, with side mounted FA bracket with back-up flange - set back 5/8". Three 1/2" knockouts. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513135-E	LXWSV	3x2x2-1/2 Gangable Box	1/0/25	.740	2.49 EA

Thomas & Betts


Switch Box - Steel, 3" x 2" x 2-1/2" D., 12.5 cu. in. Old work with ears and box support for faster, safer installation in hollow walls and ceilings. Four 1/2" cable priouts. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
523829-D	LXWOWC25	3x2x2-1/2 Switch Box	1/0/25	.256	3.29 EA

Thomas & Betts

Switch Box - Steel, 3" x 2" x 2-27/32" D. 15.8 cu. in. With sides extended and S bracket. Option of staked, angled 16d nails. Ganging notches at 3/8", 1/2" and 5/8". One 1/2" knockout. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522170-E	A257-25	3x2x2-27/32 Box	1/0/25	.648	2.29 EA

Thomas & Betts

Switch Box - Steel, 3" x 2" x 2-3/4" D., 14 cu. in. With ears, four 1/2" knockouts on side and one 1/2" knockout on bottom. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513117-E	CWN25	3x2x2-3/4 Gangable Box	1/0/25	.647	3.39 EA

Thomas & Betts


Switch Box - Steel, 3" x 2" x 3-1/2" D., 18 cu. in. Gangable, with ears and seven 1/2" knockouts. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507703-E	CXWOW	3x2x3-1/2 Gangable Box	1/0/25	.750	3.29 EA

Thomas & Betts

Switch Box - Steel City® 3" x 2" switch box. 3-1/2" deep gangable with armored cable/metal clad clamps. 18.0 cu. in. capacity.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506107-C	CXLE-SSX	3x2 Switch Box	1/0/20	.890	3.99 EA

Thomas & Betts

Switch Box - Steel, 3" x 2" x 3-1/2" D., 18 cu. in. Gangable, side mounted FA bracket with back-up flange - set back 5/8". Seven 1/2" knockouts. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
523801-E	CXWV	3x2x3-1/2 Gangable Box	1/0/25	.898	3.79 EA

ELECTRICAL

STEEL BOXES




Bell Weatherproof Electrical Box - Single gang box with lugs, 2" deep with three 3/4" outlets. A total of 17.0 cu. in. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations; closure plugs and ground screw included. Individually shrink wrapped. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
562475-C	5324-0	Outdoor Box	1/0/20	.600	4.49 EA




Bell Weatherproof Electrical Box - Single gang box with lugs, 2" deep with five 3/4" outlets. A total of 16.5 cu. in. Made of corrosion-resistant aluminum, finished with a protective color coating. For wet locations; closure plugs and ground screw included. Individually shrink wrapped. Gray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
562467-C	5332-0	Outdoor Box	1/0/20	.600	6.99 EA

Thomas & Betts

Octagon Box - Steel, 4" x 1-1/2" D., 15.5 cu in. Four 1/2" knockouts on side and five 1/2" knockouts on bottom. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507785-D	541511/2	4x4x1-1/2 Octagon Box	1/0/50	.560	1.19 EA

Thomas & Betts


Octagon Box - Steel, 4" x 1-1/2" D., 15.5 cu. in. Two 1/2" and 3/4" knockouts on side, three 1/2" and two 3/4" knockouts on bottom. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507794-E	541511/23/4	4x4x1-1/2 Octagon Box	1/0/50	.560	1.59 EA

Thomas & Betts


Square Box Cover - Steel, 4" square for 30A to 60A receptacle (2.465" diameter). For exposed work, raised 1/2". Crushed corners. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527297-E	RS1430	4" Sq 30a/60a Box Cover	1/0/30	.350	2.29 EA

Thomas & Betts


Square Box Cover - Steel, 4-11/16" square for 30A to 60A receptacle (2.465" diameter). For exposed work, raised 1/2". UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527300-D	RSL14	4-11/16 30/60a Cover	1/0/10	.350	3.99 EA

Thomas & Betts

Square Box Cover - Steel, 4-11/16" square combination, covers 2 devices, raised 1/2". UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
559172-E	72C17	4-11/16 Sq Rsd Cover	1/0/25	.288	2.79 EA

STEEL BOXES

Thomas & Betts


Square Box Cover - Steel, 4-11/16" square combination, covers 1 device, raised 1/2". UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
559180-E	72C13	4-11/16 Sq Rsd Cover	1/0/25	.350	2.39 EA

Thomas & Betts


Cover - Steel City® 2 device box support cover. Raised 5/8" with 7.3 cu. in. cap. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506134-D	52CMD185/8	5/8" 2 Gang Cover	1/0/25	.336	2.49 EA

Thomas & Betts

Cover - Steel City® 2 device box support cover. Raised 1/2" with 6.3 cu. in. cap. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506143-D	52CMD17	1/2" 2 Gang Cover	1/0/25	.328	2.49 EA

Thomas & Betts

Octagon Box - Steel, 4" x 1-1/2" D., 15.5 cu. in. Side mounted FA bracket with back-up flange is set back 1/2". Three 1/2" knockouts on side and five 1/2" knockouts on bottom. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503339-E	54151V1/2	4x4x1-1/2 Octagon Box	1/0/25	.670	2.39 EA

ELECTRICAL

Thomas & Betts

Octagon Box - Steel. 4" x 2-1/8" D., 21.5 cu. in. Two 1/2" & 3/4" knockouts on side, three 1/2" and two 3/4" knockouts on bottom. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507801-E	541711/23/4	4x4x2-1/8 Octagon Box	1/0/25	.671	2.59 EA

Thomas & Betts

Octagon Box Extension - Steel, 4" x 1-1/2" D., 16.5 cu. in. Four 1/2" knockouts on side. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507810-F	551511/225	4x4x1-1/2 Box Ext	1/0/25	.200	2.29 EA

Thomas & Betts

Octagon Box - Steel. 4" x 1-1/2" D., 15.5 cu. in. Three 1/2" knockouts. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507829-E	54151N30	4x4x1-1/2 Octagon Box	1/0/30	.600	1.99 EA

Thomas & Betts

Octagon Box - Steel, 4" x 1-1/2" D., 15.5 cu. in. J bracket has 2 spurs, slotted holes for toe-nailing bracket set flush with gauging notches at 3/8" and 1/2". Three 1/2" knockouts. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507847-E	54151NL30	4x4x1-1/2 Octagon Box	1/0/30	.760	2.59 EA

ELECTRICAL

STEEL BOXES

Thomas & Betts

Octagon Box - Steel, 4" x 2-1/8" D., 21.5 cu. in. Three 1/2" knockouts. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501317-E	54171N25	4x4x2-1/8 Oct Box	1/0/25	.750	2.99 EA

Thomas & Betts

Octagon Box - Steel, 4" x 1-1/2" D., 15.5 cu. in. With 3/8" stud, adjusts from 11-1/2" to 18-1/2". Two 1/2" knockouts. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508276-D	54151NO	4x4x1-1/2 Octagon Box	1/0/25	1.000	3.99 EA

Thomas & Betts


Cover - Steel, 4" round, flat, blank. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507909-F	54C1	4" Flat Round Cover	1/0/50	.422	.69 EA

Thomas & Betts


Cover - Steel, 4" round, flat, 1/2" knockout. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507927-F	54C6	1/2" Ko 4" Round Cover	1/0/50	.231	.69 EA

ELECTRICAL PRODUCTS


Cover - Steel, 4" round, flat, for toggle switch. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507945-C	729	4" Rnd 1-switch Cover	1/0/50	.218	1.39 EA

Thomas & Betts

Cover - Steel, 4" round, flat, for duplex receptacle. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507954-E	500DR	4" Rnd 2-outlet Cover	1/0/50	.340	1.49 EA

Thomas & Betts

Cover - Steel, 4" round, raised 5/8", open. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507936-E	54C3	4" Raised Round Cover	1/0/25	.205	1.39 EA

Thomas & Betts

Cover - Steel, 4" round, raised 1/2", open. With ears 2-3/4" O.C. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506656-E	54C31/2	4" Rnd Raise 1/2" Cover	1/0/25	.186	1.29 EA

STEEL BOXES

Thomas & Betts


Square Box - Steel, 4" x 4" x 1-1/2" D., 21 cu. in., welded. Twelve 1/2" and four 3/4" knockouts on sides, three 1/2" and two 3/4" knockouts on bottom. Uses TKO technology - designed with 1/2" knockout slightly off-center from the 3/4" so the tangs of 1/2" locknut bite into the metal box. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501239-F	521511234EW	4x4x1-1/2 Tko Square Box	1/0/50	.704	1.59 EA

Thomas & Betts

Square Box - Steel, 4" x 4" x 1-1/2" D., 21 cu. in. drawn. Twelve 1/2" knockouts on sides, five 1/2" knockouts on bottom. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507963-F	521511/230	4x4x1-1/2 Square Box	1/0/30	.726	1.99 EA

Thomas & Betts

Square Box - Steel, 4" x 4" x 1-1/2" D., 21 cu. in., drawn. Eight 1/2" and four 3/4" knockouts on sides, three 1/2" and two 3/4" knockouts on bottom. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507981-F	521511/23/4	4x4x1-1/2 Square Box	1/0/50	.760	1.99 EA

Thomas & Betts

Square Box - Steel, 4" x 4" x 1-1/2" D., 21 cu. in. Side mounted FH bracket with hooks that drive into the face of the stud. Nine 1/2" knockouts on sides, five 1/2" knockouts on bottom. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517801-F	52151V1234	4x4x1-1/2 Square Box	1/0/25	.832	2.49 EA

ELECTRICAL

Thomas & Betts


Square Box - Steel, 4" x 4" x 1-1/2" D., 21 cu. in. B bracket mounts on face of stud. Nine 1/2" and three 3/4" knockouts on sides, three 1/2" and two 3/4" knockouts on bottom. Uses TKO technology - designed with 1/2" knockout slightly off-center from the 3/4" so the tangs of 1/2" locknut bite into the metal box. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501247-E	52151B1234	4x4x1-1/2 Tko Square Box	1/0/25	.792	2.59 EA

Thomas & Betts

Square Box - 4" x 4" x 2-1/8" D., with 4 nonmetallic sheathed cable clamps, 30.3 cu. in. Four 1/2" and 2 TKO® on sides, and one 1/2" on the bottom. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561649-F	52171N	4" Square Box	1/0/25	.948	5.49 EA

Thomas & Betts


Square Box - Steel, 4" x 4" x 2-1/8" D., 30.3 cu. in. Eight 1/2" and four 3/4" knockouts on sides, three 1/2" and two 3/4" knockouts on bottom. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510785-F	521711/23/4E30	4x4x2-1/8 Sq Box	1/0/30	.940	2.99 EA

Thomas & Betts

Square Box - Steel, 4" x 4" x 2-1/8" D., 30.3 cu. in. With device ears. (2) 1/2", (1) 3/4" knockouts on each side and end, (3) 1/2", (2) 3/4" knockouts on bottom. For use with conduit. 2 gang. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
520772-D	2G4D1/23/4	4x4x2-1/8 Square Box	1/0/25	.920	4.79 EA

ELECTRICAL

STEEL BOXES

Thomas & Betts


Square Box Extension - Steel, 4" x 4" x 1-1/2" D., 22.5 cu. in. Eight 1/2" knockouts and four 3/4" knockouts on sides. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
526069-D	53151123430	4x4x1-1/2 Box Ext	1/0/30	.513	1.99 EA

Thomas & Betts


Square Box - Steel City® 4" square box. 2-1/8" deep for armored cable and metal clad clamps. 30.0 cu. in. capacity. C-3 clamps. SSX.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506170-C	52171EWSSX	4" Sq Wrap Around Box	1/0/20	1.000	2.99 EA

Thomas & Betts


Square Box - Steel City® 4" square box. 1-1/2" deep with conduit knockouts. 18.0 cu. in. capacity. SSC brackets.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506189-D	52151EFSSX	4" Square Shallow Box	1/0/20	.840	2.99 EA

Thomas & Betts

Box Cover With Grounding Pigtail - Steel City® box, grounding pigtail and box support cover for pre-fabricated assemblies. Includes box type 521551234EW, box department 1-1/2", GSC12 pigtail, 52CM13 support cover, raised 1/2", for 1 device.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506198-C	52151 CM13	1/2" Box Support Cover	1/0/25	1.100	6.49 EA

Thomas & Betts

Square Box Cover - Steel, 4" square, flat, blank. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507990-F	52C1	4" Sq Blank Cover	1/0/50	.315	.79 EA

Thomas & Betts


Square Box Cover - Steel, 4" square, flat, knockout. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
516463-F	52C6	4" Sq 1/2" Ko Cover	1/0/50	.295	.79 EA

Thomas & Betts


Square Box Cover - Steel, 4" square combination, covers 1 device, raised 3/4". UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508016-E	52C14	4" Sq Rsd 3/4" Cover	1/0/50	.320	1.29 EA

Thomas & Betts

Square Box Cover - Steel, 4" square combination covers 1 device, raised 1/2", drawn. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508007-F	52C13	4" Sq Rsd 1/2" Cover	1/0/50	.250	.99 EA

STEEL BOXES

ELECTRICAL

Thomas & Betts

Square Box Cover - Steel, 4" square combination, covers 2 devices, flat. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501611-D	52C00	4" Sq 2-device Cover	1/0/25	.116	1.29 EA

Thomas & Betts


Square Box Cover - Steel, 4" square combination, covers 2 devices. Crushed corners. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508025-E	52C1725	Raised 1/2"	1/0/25	.190	1.39 EA
507970-E	52C185/825	Raised 5/8"	1/0/25	.202	1.49 EA
508034-E	52C18	Raised 3/4"	1/0/25	.256	1.49 EA

Thomas & Betts


Square Box Cover - Steel, 4" square, for duplex receptacle. For exposed work, raised 1/2". Crushed corners. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508052-E	RS1230	4" Sq 2-outlet Box Cover	1/0/30	.392	1.79 EA

Thomas & Betts


Square Box Cover - Steel, 4" square, for 2 duplex receptacles. For exposed work, raised 1/2". UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505055-D	RSL8	4" Sq Cover Outlet Box	1/0/10	.560	.99 EA

Thomas & Betts


Square Box Cover - Steel, 4" square, for 2 duplex receptacles. For exposed work, raised 1/2". Crushed corners. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508089-E	RS830	4" Sq 4-outlet Box Cover	1/0/30	.420	1.79 EA

Thomas & Betts

Square Box Cover - Steel, 4" square for 2 toggle switches. For exposed work, raised 1/2". UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
504993-D	RSL5	Sq Cover Switch Box	1/0/50	.560	.99 EA

ELECTRICAL

STEEL BOXES

Thomas & Betts


Square Box Cover - Steel, 4" square, for switch/outlet combination. For exposed work raised 1/2". UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505019-D	RSL2	4" Sq Cover Outlet Box	1/0/10	.500	.99 EA

Thomas & Betts


Square Box Cover - Steel, 4" square, for switch/outlet combination. For exposed work raised 1/2". Crushed corners. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508070-E	RS230	4"sq Switch/outlet Cover	1/0/30	.430	1.79 EA

Thomas & Betts


Cover Plate - Steel City® 4" square surface cover. For 1 single, flush receptacle. 1/2" deep - 5.0 cu. in. capacity. 1-13/32" diameter.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506081-C	RS11-30	4" Square Cover	1/0/30	.348	.99 EA

Thomas & Betts


Square Box Cover - Steel, 4" square, for 30A locking receptacle (1.719" diameter). For exposed work, raised 1/2". Crushed corners. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509477-E	RS1530	4" Sq 30a Box Cover	1/0/30	.390	1.99 EA

Thomas & Betts


Square Box Cover - Steel, 4" square, for 1 GFI outlet. For exposed work, raised 1/2". Crushed corners. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533076-E	RS16CC	4" Sq Gfi Box Cover	1/0/25	.352	1.99 EA

Thomas & Betts


Square Box Cover - Steel, 4" square, for 1 GFI outlet and 1 toggle switch. For exposed work, raised 1/2". Crushed corners. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533092-E	RS18CC	4" Sq Gfi/switch Cover	1/0/25	.378	1.99 EA

Thomas & Betts


Square Box Cover - Steel, 4" square, for 1 GFI outlet and 1 duplex outlet. For exposed work, raised 1/2". Crushed corners. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533068-E	RS19CC	4" Sq Gfi/outlet Cover	1/0/25	.378	2.29 EA

Thomas & Betts

Square Box - Steel, 4-11/16" x 4-11/16" x 2-1/8" D., 42 cu. in. Eight 1/2" and four 3/4" knockouts on sides, three 1/2" and two 3/4" knockouts on bottom. 2 gang. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508123-E	721711/23/4E	4-11/16 Square Box	1/0/20	1.160	3.59 EA

STEEL BOXES

Thomas & Betts

Square Cover - Steel, 4-11/16" square, flat, blank. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508098-F	72C1	4-11/16 Sq Blank Cover	1/0/50	.433	1.29 EA

Thomas & Betts

Ceiling Pan - Steel, 3-1/2" diameter x 1/2" D., 3.9 cu. in. Nonmetallic cable clamps, 4 priouts and one 1/2" knockout. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507865-F	36115C30	3-1/2x1/2 Ceiling Pan	1/0/30	.300	1.99 EA

Thomas & Betts

Ceiling Pan - Steel, 3-1/2" diameter x 3/4" D., 5 cu. in. Nonmetallic cable clamps, 4 priouts and one 1/2" knockout. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507883-E	36125D	3-1/2x3/4 Ceiling Pan	1/0/25	.333	2.79 EA

Thomas & Betts

Ceiling Pan - Steel, 4" diameter x 1/2" D., 6 cu. in. Five 1/2" knockouts. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507874-E	56111	4" Rnd Ceiling Pan	1/0/50	.380	1.99 EA

ELECTRICAL

Thomas & Betts

Floor Box Carpet Flange - Brass carpet flange for Raco single gang electrical floor box model No. 6224. Mop-tight. Brass. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
525995-D	P60CP	5-1/4" diameter	1/0/4	1.930	29.99 EA

Thomas & Betts

Floor Box Carpet Flange - Polycarbonate carpet flange for Raco single gang electrical floor box model No. 6224. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
526304-F	P60LCP	Poly Carpet Flange	1/0/4	.480	14.99 EA

Thomas & Betts

Electrical Floor Box - PVC, adjustable, 6" H. x 5-1/2" diameter. Suggested for use in concrete floors. Reduced installation time-simply level by cutting top off to height of finished floor. Compatible with standard schedule PVC conduit or ENT; 1/2", 3/4" and 1". Pre-packaged with concrete cap and 4 reducer hub plugs. Two 1/2" and two 3/4" openings. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
532452-D	68P	Pvc Floor Box	1/0/8	1.900	15.99 EA

Thomas & Betts

Floor Box Cover - PVC, cover with flange and adaptor for use with model No. 5511 floor box. Mounts on duplex receptacle. Flange holds carpet neatly to floor box. UL listed. Gray.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
532479-E	68PAR	Gray Cover/flange	1/0/8	.390	15.99 EA

ELECTRICAL

Thomas & Betts

Floor Box Cover - Polished brass cover plate for use with model No. 5511 floor box and model No. 5579 adapter. For 1 duplex outlet, furnished with sealing gasket and brass screws. 4-1/4" O.D. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
532444-E	P60DU	Brass Outlet Cover	1/0/4	.800	19.99 EA

Thomas & Betts

Box Extension - Switch box extension allows a way to work with a box set too deeply in the wall. The extension slips inside any 3" x 2" switch box and fastens to the device ears with extra long screws supplied with the box. Will extend the switch box from 1/4" to a maximum of 5/8". Can also be used in a single device cover on a 4" square box and, by bending the open sides, 2 rings can be used in a 2-device cover on a 4" square box. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506168-E	SBEX	Extension Ring	1/0/50	.118	1.99 EA

Thomas & Betts

In Use Cover - Red Dot® Code Keeper® universal while-in-use cover.


Single or 2-gang kits accommodate up to 8 configurations each, and every cover is designed with a method to secure using an external locking device. Perfect for all outdoor outlets including landscape lighting, lawn equipment, pool/hot tub pumps, and holiday lighting. Features include vertical or horizontal mounting, weatherproof, transparent, high-impact thermoplastic cover, high-impact UV-resistant polycarbonate base construction. Accommodates GFCI, single and duplex receptacles, toggle switches, and single receptacles up to 1.59" diameter. Meets NEC 406.8(B) code requirements. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
564109-C	CKNM	Single-gang	1/0/6	.750	10.99 EA
564117-C	2CKNM	2-gang	1/0/4	.920	13.99 EA

Thomas & Betts

Enclosure - Indoor Wiegmann NEMA 1 screw cover pull box, ideal for surface mounting. Typical uses: Junction box for terminating or pull box for runs of conduit for power or communication conductors. 16-gauge steel box with gray enamel finish has flat removable cover fastened with screws. Holes in back for mounting. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
538558-C	AB-664SBGK003	6 x 6 x 4	0/0/1	3.000	11.99 EA
538531-D	AB-884SBGK001	8 x 8 x 4	0/0/1	5.000	16.99 EA
538523-D	AB-10104SBGK02	10 x 10 x 4	0/0/1	7.000	22.99 EA

BOX ACCESSORIES

Thomas & Betts

Enclosure - Rainproof Wiegmann NEMA 3R screw cover box, ideal for surface mounting. Typical uses: Junction box for terminating or pull box for runs of conduit for power or communication conductors, service box for wiring devices, or switch box for controlling wet location equipment. 16-gauge pre-galvanized steel box and cover with gray polyester powder finish inside and out. Box features a drip shield top and smooth seamless sides. Knockouts in bottom, no gasket required. Hasp for padlocking and provisions for meter seal provided. Slip-on reversible removable cover is securely fastened with screws on bottom edge.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
538493-C	AB-664RBGK001	6 x 6 x 4, UL listed	0/0/1	4.000	18.49 EA
538485-C	AB884RBGK001	8 x 8 x 4, UL listed	0/0/1	5.000	23.49 EA
538477-C	AB-10104RBGK01	10 x 10 x 4, UL listed	0/0/1	7.000	29.99 EA

Thomas & Betts

Outdoor Cover - Red Dot® Code Keeper® wet location covers.

Protects receptacles, switches, and plugs for single gang and 2 gang configurations in dry and wet locations. Provides a lockable cover that complies with OSHA lockout/tagout requirements. Prevents accidental equipment disconnects, reduces tampering, and deters theft and equipment removal. Die-cast metal construction provides long-lasting durability. NEMA 3R rating ensures protection against falling rain, sleet, and external ice formation when used with appropriate device boxes. Combination box or device mounting design provides flexibility in installation. Accepts most common cord sets up to 1/2" diameter (12/3) CAS certified. Meets NEC 406-8(B) code requirements. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
562491-C	CKMGV	In Use Metal Cover	1/0/6	.740	16.49 EA

GB Electrical

Hole Grommet - Snap into holes in steel boxes, sheet metal, auto firewall, and more. Protects wire insulation or cording from sharp steel edges. Made of flexible black vinyl. Carded. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530271-E	GHG-1525	1/4" inside diameter, 6 per card	1/0/10	.025	1.99 CD
530298-E	GHG-1538	3/8" inside diameter, 5 per card	1/0/10	.025	1.99 CD
530301-E	GHG-1550	1/2" inside diameter, 4 per card	1/0/10	.025	1.99 CD
530328-E	GHG-1575	3/4" inside diameter, 3 per card	1/0/10	.025	1.99 CD

BOX ACCESSORIES

Thomas & Betts

Nonmetallic Cable Protector - Protects nonmetallic sheathed cables or raceway-type wires running through wood studs, joists, rafters, or similar structural wood members from accidental nail, screw, or drill penetration. No nails required. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
554960-D	CP1100	25 per bag	1/0/4	.060	4.49 BG

Thomas & Betts

Grip Lock - Steel box support. Shipped in pairs (set of 2). UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508301-F	820D2	Switch Box Support	1/0/25	.060	.69 BG

Thomas & Betts

Adjustable Bar Hanger - Expands from 14-1/4" to 22-1/2". Can be used for joist spacing on 16" or 24" centers. Has locking tabs for secure installation on either 16" or 24" joist spacing. Positioning claws assist in installation. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508230-E	6010ADW25	Adjustable Hanger Bar	1/0/25	.375	2.29 EA

Thomas & Betts

Switch Box Support - Use with boxes with plaster ears for support and strength in wall. Fastens through 1/2" knockout in bottom. For use with standard single gang steel switch boxes in hollow walls. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511986-F	OWC2/BAG	Switch Box Support	0/0/25	.030	1.29 EA

ELECTRICAL

Thomas & Betts

Watertight Service Entrance Cable Connector - Type "U" flat style. 2 insulating conductors, 1 bare pressure cast body. Soft pliable grommet. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555673-D	WT203C1	1" hub trade size, .625" x .938" grommet opening, 3 No. 4 wire cable	1/0/10	1.360	4.99 EA
509756-D	WT204B1	1-1/4" hub trade size, .580" x .960" grommet opening, 3 No. 2 wire cable	1/10/40	.418	9.39 EA
509729-D	WT205B1	1-1/2" hub trade size, .875" x 1.375" grommet opening, 3 No. 2/0 wire cable, and 3 No. 3/0 wire cable	1/5/20	1.020	13.79 EA
555681-D	WT206E1	2" hub trade size, 1.063" x 1.688" grommet opening, 3 No. 4/0 wire cable	1/0/5	3.770	15.99 EA

GB Electrical

Grounding Pigtail - For grounding type receptacles, green insulation. 12 AWG stranded 8" long with captured screw, other end bare fork terminal. 2 per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530409-E	GGP-1502	Grounding Pigtail	1/0/10	.100	2.69 CD

Thomas & Betts

Grounded Screw And Pigtail - No. 12 AWG insulated 8" stranded pigtail with a captive 10-32 x 3/8 round head screw on 1 end and a fork tongue terminal on the other end. 2 per bag. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
554995-D	GSC12SM2	Grounded Screw/pigtail	1/0/20	.096	3.29 BG

Thomas & Betts

Green Grounding Screw - 10-32 x 3/8" hex washer combination slotted/cross recess Type 1 for No. 2 driver size. Green. UL listed. 10 per poly bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
515838-E	GS1SCIO	Grounding Screw	1/25/250	.130	1.29 BG

GB Electrical

Grounding Clip - Zinc-plated for No. 10, No. 12 or No. 14 aluminum or copper grounding wire. 8 per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518840-D	GGC-1508	Grounding Clip	1/0/10	.050	1.59 CD

ELECTRICAL

Thomas & Betts

Thinwall (EMT) Elbow - Tubular 90° elbow. UPC coded. 1 each. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502197-D	TTE121	1/2" trade size	1/8/80	.250	5.79 EA
502200-D	TTE341	3/4" trade size	1/8/80	.470	5.79 EA
502219-D	TTE11	1" trade size	1/0/5	.840	7.99 EA
502235-D	TTE1141	1-1/4" trade size	1/0/3	1.570	10.99 EA
502243-D	TTE1121	1-1/2" trade size	1/0/3	2.150	11.99 EA
502251-D	TTE21	2" trade size	1/0/3	2.990	17.79 EA

Thomas & Betts

Rigid Elbow - Hot-dipped galvanized rigid conduit elbows. 90° heavy coating of zinc inside/out. Steel duct threads are clean and full cut, galvanized after cutting to comply with all UL thread specifications. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
524481-D	TRE121	1/2" trade size	1/10/40	.710	8.79 EA
524506-D	TRE341	3/4" trade size	1/6/24	1.100	10.59 EA
524515-D	TRE11	1" trade size	1/0/5	1.980	15.59 EA
524533-D	TRE1141	1-1/4" trade size	1/0/3	3.100	22.49 EA
524551-D	TRE1121	1-1/2" trade size	1/0/3	4.460	26.99 EA
524579-D	TRE21	2" trade size	1/0/3	6.733	39.99 EA

Seminole Tubular Products


Galvanized Pipe Nipple - Welded steel pipe. Hot dipped galvanized, meets ASTM A/53 standards. Schedule 40, standard pipe.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
420930-F	P100250100	1/4xclose Galv Nipple	1/5/500	.020	1.49 EA

Seminole Tubular Products

Galvanized Pipe Nipple - Welded steel pipe. Hot dipped galvanized, meets ASTM A/53 standards. Schedule 40, standard pipe.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
421939-E	0101500100	1-1/2xclose Galv Nipple	1/0/200	.270	2.99 EA

Thomas & Betts

Rigid Coupling - Hot-dipped galvanized rigid conduit couplings. Heavy coating of zinc inside/out. Steel duct threads are clean and full cut, galvanized after cutting to comply with all UL thread specifications. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
525774-D	TRC121	1/2" trade size	1/25/250	.120	2.79 EA
525792-D	TRC341	3/4" trade size	1/20/200	.180	3.29 EA
525818-D	TRC11	1" trade size	1/20/80	.300	4.99 EA
526416-D	TRC1141	1-1/4" trade size	1/10/40	.375	6.29 EA

Continued Next Column


CONDUIT/CONNECTORS

Continued From Previous Column

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
526425-D	TRC1121	1-1/2" trade size	1/10/40	.520	7.79 EA
526434-D	TRC21	2" trade size	1/4/40	.720	10.49 EA

Thomas & Betts


90° Pull Elbow - Female threaded type for conduit to conduit connections. To facilitate pulling wires around 90° bend through threaded rigid conduit or IMC. Zinc die-cast body. Neoprene gasket and steel screws. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508588-D	LG14111	1/2" trade size	1/20/80	.280	5.59 EA
508720-D	LG14121	3/4" trade size	1/10/40	.310	6.79 EA

Thomas & Betts


Rigid Offset - Rigid offset nipple, pressure cast. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502294-D	HO2211	1/2"	1/10/100	.103	2.29 EA
502286-D	HO2221	3/4"	1/10/100	.212	2.79 EA
500569-D	HO2231	1"	1/10/100	.217	3.49 EA
501166-D	HO2241	1-1/4"	1/5/50	.350	4.99 EA
501816-D	HO2251	1-1/2"	1/5/50	.420	6.49 EA
503029-D	HO2261	2"	1/4/40	.639	9.49 EA

Thomas & Betts

Conduit Body - Type LB threaded oval conduit body for rigid conduit. Pressure cast, with cover and gasket assembled. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502189-D	L961CG1	1/2"	1/8/80	.380	8.99 EA
502170-D	L962CG1	3/4"	1/4/40	.570	11.59 EA
555207-D	L963CG1	1"	1/0/2	.660	15.99 EA
541362-D	L964CG1	1-1/4"	1/2/20	1.200	25.99 EA
541354-C	L965CG1	1-1/2"	1/2/8	2.000	34.99 EA
541346-D	L966CG1	2"	1/2/8	3.375	47.99 EA

Thomas & Betts

Conduit Body - Type T threaded oval conduit body for rigid conduit. Pressure cast, cover and gasket assembled. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502162-D	L981CG1	1/2"	1/6/60	.400	11.49 EA
502154-D	L982CG1	3/4"	1/4/40	.610	15.49 EA
555215-D	L983CG1	1"	1/0/2	.550	22.99 EA

CONDUIT/CONNECTORS

ELECTRICAL

Thomas & Betts


Conduit Body - Type *LR* threaded oval conduit body for rigid conduit. Pressure cast, cover and gasket assembled. UPC coded. 1 each. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502146-D	L991CG1	1/2"	1/6/60	.380	8.99 EA
502359-D	L992CG1	3/4"	1/0/4	.570	11.49 EA
555223-D	L993CG1	1"	1/0/2	8.400	13.49 EA

Thomas & Betts

Conduit Body - Type *LL* threaded oval conduit body for rigid conduit. Pressure cast, cover and gasket assembled. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502340-D	L1001CG1	1/2"	1/6/60	.380	8.99 EA
502375-D	L1002CG1	3/4"	1/4/40	.570	11.49 EA
555142-D	L1003CG1	1"	1/0/4	8.400	14.99 EA

Thomas & Betts

Conduit Body - Type *C* threaded oval conduit body for rigid conduit. Pressure cast, cover and gasket assembled. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502367-D	L1011CG1	1/2"	1/8/80	.380	8.99 EA
502332-D	L1012CG1	3/4"	1/4/40	.570	11.59 EA
556475-D	L1013CG1	1"	1/0/4	4.200	18.49 EA

Thomas & Betts


Hit Lock Box Connector - For use with single wire, nonmetallic wire 14-2 or 14-3, 12-2, or 12-3, or 10-2. Requires no tools, screws, or locknuts to assemble or disassemble. Plastic. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555355-E	NC501SC5	5 per bag	1/0/15	.040	1.79 BG

Thomas & Betts

Hit Lock Box Connector - For use with double wire, nonmetallic wire. Two No. 14-2 or 2 No. 12-2, one 14-2 and one 12-2, one 14-2 and one 10-2, or one 12-2 and one 10-2. Requires no tools, screws, or locknuts to assemble or disassemble. Plastic. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555347-E	NC501DBL5	5 per bag	1/0/15	.040	1.79 BG

Thomas & Betts


Box Connector - Clamp-type for nonmetallic sheathed cable. Die-cast zinc body. 2 screws. Maximum wire size No. 10-3. 3/8" trade size. For 1/2" knockout. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
521221-D	NC301100CP	Bulk, 100 per box	1/0/10	.500	29.99 BX
555320-D	NC301M5	UPC coded, 5 per bag	1/6/60	.515	1.99 BG

Thomas & Betts


Box Connector - Clamp type. Die-cast zinc. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509630-C	NC3021	3/4"; dimensions: 0.18" minimum, 0.82" maximum x 1.87"; 1 per bag, UPC coded	1/25/250	.100	.99 BG
555339-D	NC3025	3/4"; dimensions: 0.18" minimum, 0.82" maximum x 1.87"; 5 per bag, UPC coded	1/0/20	.504	5.59 BG
521213-E	NC302	3/4"; dimensions: 0.18" minimum, 0.82" maximum x 1.87"; 50 per bag, UPC coded	50/0/500	.126	1.29 EA
509649-D	NC3031	1"; dimensions: 0.34" minimum, 0.94" maximum x 2.01"; 1 per bag, UPC coded	1/25/100	.151	2.29 BG

Thomas & Betts

Box Connector - Clamp type. Die-cast body. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509658-D	NC0411	1/4" knockout, 3=1/0 maximum SEU, UPC coded, 1 each	1/10/100	.240	3.29 EA
505484-D	NC0511	1-1/2" knockout, 3=3/0 maximum SEU, UPC coded, 1 each	1/5/50	.316	4.29 EA
505082-D	NC0611	2" knockout, 3=4/0 maximum SEU, UPC coded, 1 each	1/5/50	.426	5.49 EA

Thomas & Betts

Cable Connector - Watertight connector for underground feeder cable. Pressure cast. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502324-D	UF2011	1/2" trade size	1/25/100	.170	3.49 BG
502308-D	UF2021	3/4" trade size	1/25/100	.135	3.99 BG

Save time by letting us locate those hard-to-find items for you!

ELECTRICAL

Thomas & Betts


EMT Connector - Set screw type. Rated concrete tight. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
520861-D	TC221SC50CP	1/2" trade size, bulk, 50 per box	1/0/10	3.100	17.99 BX
555479-D	TC221SC5	1/2" trade size, UPC coded, 5 per bag	1/0/25	.262	2.59 BG
508542-D	TC221SC1	1/2" trade size, UPC coded, 1 each	1/50/500	.070	.69 BG
520829-D	TC222SC25CP	3/4" trade size, bulk, 25 per box	1/0/10	.278	14.99 BX
555487-D	TC222SC5	3/4" trade size, UPC coded, 5 per bag	1/0/10	1.014	4.19 BG
508551-D	TC222SC1	3/4" trade size, UPC coded 1 per bag	1/25/250	.100	.89 BG
508560-D	TC223SC1	1" trade size, UPC coded, 1 each	1/25/250	.151	1.29 EA
534835-D	TC224SC1	1-1/4" trade size, UPC coded, 1 each	1/10/100	.231	1.99 EA
534844-D	TC225SC1	1-1/2" trade size, UPC coded, 1 each	1/10/100	.341	2.99 EA
534853-D	TC226SC1	2" trade size, UPC coded, 1 each	1/4/40	.453	3.99 EA

Thomas & Betts

EMT Connector - Set screw-type. Rated concrete tight. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
520845-D	TK221SC50CP	1/2" trade size, bulk, 50 per box	1/0/10	.340	21.99 BX
555517-D	TK221SC5	1/2" trade size, UPC coded, 5 per bag	1/0/20	.232	2.99 BG
508686-D	TK221SC1	1/2" trade size, UPC coded, 1 per bag	1/50/500	.070	.69 EA
520780-D	TK222SC25CP	3/4" trade size, bulk, 25 per box	1/0/10	.267	16.49 BX
555525-D	TK222SC5	3/4" trade size, UPC coded, 5 per bag	1/0/10	.885	4.29 BG
508695-D	TK222SC1	3/4" trade size, UPC coded, 1 per bag	1/25/250	.090	.89 EA
508702-D	TK223SC1	1" trade size, UPC coded, 1 each	1/20/200	.139	1.29 EA
534862-D	TK224SC1	1-1/4" trade size, UPC coded, 1 each	1/10/100	.283	2.29 EA
534871-D	TK225SC1	1-1/2" trade size, UPC coded, 1 each	1/5/50	.370	2.99 EA
534880-D	TK226SC1	2" trade size, UPC coded, 1 each	1/4/40	.560	3.99 EA

Thomas & Betts

EMT Connector - 2-piece die-cast zinc compression connector, 1/2". Concrete tight. Compact design fits in tight spaces. 1 each. UL listed. CSA approved. UPC coded.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502766-E	TC201SC1	1/2" Emt Connector	1/25/100	.060	1.79 BG

CONDUIT/CONNECTORS

Thomas & Betts


Combination Coupler - Flexible metallic conduit. Set-screw type. Die-cast zinc. UPC coded. UL listed. EMT to flex. 1 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509701-D	TX2101	1/2" to 3/8"	1/50/500	.022	1.89 BG
555606-D	TX2111	1/2" to 1/2"	1/0/25	.365	2.79 EA

Thomas & Betts

EMT Offset - 1/2". Provides a simple means of properly aligning distribution boxes, cabinets, pull boxes, etc., by themselves or with runs of EMT. Die-cast zinc. Complete with locknut and compression type connection end. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508748-D	TO211SC1	1/2" Emt Offset	1/20/200	.113	3.99 EA

Thomas & Betts

EMT Offset Connector - Set screw type, concrete tight, die-cast zinc. 1 each. UPC coded. UL listed. Trade size.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517916-D	T02211	3/8" offset, 1/2" conduit size	1/10/100	.100	3.29 BG
517445-D	T02221	3/4" offset, 3/4" conduit size	1/10/100	.440	3.99 EA

Thomas & Betts

EMT Thinwall Inside Corner Elbow - Set screw type, for EMT to EMT. Die-cast zinc. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501549-D	TL2911	1/2" trade size	1/10/100	.193	6.49 EA
531188-D	TL2921	3/4" trade size	1/5/50	.290	8.79 EA

Thomas & Betts

EMT Connector - Compression (no thread) type. Rated rain and concrete tight. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
520497-D	TC211SC50CP	1/2" trade size, bulk, 50 per box	1/0/10	.750	29.99 BX
555452-D	TC211SC5	1/2" trade size, UPC coded, 5 per bag	1/0/20	.361	3.99 BG
508481-D	TC11SC1	1/2" trade size, UPC coded, 1 each	1/50/200	.100	.89 EA
519677-D	TC212SC25CP	3/4" trade size, bulk, 25 per box	1/0/10	.338	23.99 BX
555460-D	TC212SC5	3/4" trade size, UPC coded, 5 per bag	1/0/20	.531	5.99 BG

Continued Next Column

CONDUIT/CONNECTORS

ELECTRICAL

Continued From Previous Column

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508490-D	TC212SC1	3/4" trade size, UPC coded, 1 per bag	1/25/100	.350	1.29 EA
508506-D	TC213SC1	1" trade size, UPC coded, 1 per bag	1/20/80	.222	1.89 EA
508515-D	TC214SC1	1-1/4" trade size, UPC coded, 1 per bag	1/10/100	.348	2.99 EA
508524-D	TC215SC1	1-1/2" trade size, UPC coded, 1 each	1/5/50	.546	4.29 EA
534906-D	TC216SC1	2" trade size, UPC coded, 1 each	1/4/40	.815	6.49 EA

Thomas & Betts


EMT Coupling - Compression (no thread) type. Center stop assures conduit alignment for correct assembly. Rated rain and concrete tight. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
520209-D	TK211SC50CP	1/2" trade size, bulk, 50 per box	1/0/10	.629	45.49 BX
555495-D	TK211SC5	1/2" trade size, UPC coded, 5 per bag	1/0/15	.474	5.79 BG
508622-E	TK211SC1	1/2" trade size, UPC coded, 1 per bag	1/25/100	.300	1.29 BG
519278-D	TK212SC25CP	3/4" trade size, bulk, 25 per box	1/0/10	.401	27.99 BX
555509-D	TK212SC5	3/4" trade size, UPC coded, 5 per bag	1/0/10	.631	6.79 BG
508631-D	TK212SC1	3/4" trade size, UPC coded, 1 each	1/25/100	.190	1.49 BG
508640-D	TK213SC1	1" trade size, UPC coded, 1 each	1/20/80	.295	1.99 EA
508659-D	TK214SC1	1-1/4" trade size, UPC coded, 1 each	1/10/100	.402	3.49 EA
534899-D	TK215SC1	1-1/2" trade size, UPC coded, 1 each	1/4/40	.668	5.49 EA
534915-D	TK216SC1	2" trade size, UPC coded, 1 each	1/4/40	.925	7.29 EA

Thomas & Betts


90° EMT Connector - Compression (no thread) type. Rated rain and concrete tight. 1 each. UL listed. UPC coded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508604-D	TC911SC1	1/2" trade size	1/25/100	.243	3.79 EA
508613-D	TC912SC1	3/4" trade size	1/20/80	.286	5.29 BG

Thomas & Betts

90° EMT Connector - Set screw type. Rated rain and concrete tight. 1 each. 1/2" trade size. UL listed. UPC coded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
559202-D	TC9211	1/2" 90deg Emt Connector	1/25/100	.160	4.29 EA

Thomas & Betts

Locknut - 3/8" fixture locknut for rigid conduit and IMC. Plated steel, easily tightened. UL listed. UPC coded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
556068-D	FLN385	5 per bag	1/0/20	.050	1.99 BG

Thomas & Betts

Locknut - For rigid conduit and IMC, steel. Fully reversible, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508784-D	LN101100CP	1/2" trade size, 100 per box	1/0/10	.209	15.99 BX
555231-D	LN101M5	1/2" trade size, UPC coded, 5 per bag	1/0/10	.144	.79 BG
529133-D	LN1013	1/2" trade size, UPC coded, 3 per bag	1/50/500	.036	.49 BG
508793-D	LN102	3/4" trade size, 100 per box	100/0/1000	.021	.19 EA
555258-D	LN102M5	3/4" trade size, UPC coded, 5 per bag	1/0/10	.209	.99 BG
529117-D	LN1022	3/4" trade size, UPC coded, 2 per bag	1/50/500	.040	.49 BG
555266-D	LN103M5	1" trade size, UPC coded, 5 per bag	1/0/10	.394	1.99 BG
508800-C	LN1031	1" trade size, UPC coded, 1 per bag	1/100/1000	.036	.39 BG
555274-D	LN1045	1-1/4" trade size, UPC coded, 5 per bag	1/0/20	.214	2.79 BG
508819-D	LN1041	1-1/4" trade size, UPC coded, 1 per bag	1/50/500	.048	.69 BG
555282-D	LN1052	1-1/2" trade size, UPC coded, 2 per bag	1/0/20	.660	1.49 BG
508828-D	LN1051	1-1/2" trade size, UPC coded, 1 per bag	1/50/500	.058	.79 BG
555290-D	LN1062	2" trade size, UPC coded, 2 per bag	1/0/25	.200	2.29 BG
508837-D	LN1061	2" trade size, UPC coded, 1 per bag	1/50/500	.080	.99 BG
517488-D	LN1071	2-1/2" trade size, UPC coded, 1 per bag	1/25/100	.283	2.49 EA
544116-D	LN1081	3" trade size, UPC coded, 1 per bag	1/25/100	.372	3.49 EA

Thomas & Betts

Reducing Bushing - Used to reduce the entry size of rigid threaded conduit to permit joining conduits of 2 different sizes. Steel. UPC coded. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555363-D	RB1214	3/4" x 1/2" trade size, 4 per bag	1/0/10	.004	5.79 BG
502278-D	RB1211	3/4" x 1/2" trade size, 1 each	1/100/400	.040	1.49 BG
555371-D	RB1322	1" x 3/4" trade size, 2 per bag	1/0/10	.015	4.49 BG
510424-D	RB1321	1" x 3/4" trade size, 1 each	1/50/500	.170	2.29 EA

ELECTRICAL

Thomas & Betts


Conduit Nipple - For rigid conduit and IMC. Ideal for coupling boxes or housings through knockouts. Also can be used as a knockout bushing in conjunction with a series No. 150 locknut. Smooth finish on inside surfaces allow easy wire pulling. Steel. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555002-D	HA2015	1/2" trade size, 5 per bag	1/0/10	.150	2.29 BG
555010-D	HA2022	3/4" trade size, 2 per bag	1/0/10	.588	1.79 BG
555029-D	HA2031	1" trade size, 1 per bag	1/0/10	.326	1.49 EA
555037-D	HA2041	1-1/4" trade size, 1 per bag	1/0/10	.560	2.29 EA
555045-D	HA2051	1-1/2" trade size, 1 per bag	1/0/8	.876	3.29 EA
555053-D	HA2061	2" trade size, 1 per bag	1/0/5	1.315	3.99 EA

Thomas & Betts


Insulating Bushing - Plastic, for threaded rigid conduit or IMC 105° C rated. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508908-D	BU501	Bulk, 1/2" trade size, 100 per box	100/0/400	.005	.15 EA
508917-D	BU502	3/4" trade size, bulk, 100 per box	100/0/400	.008	.19 EA
554944-D	BU5015	1/2" trade size, UPC coded, 5 per bag	1/0/10	.052	.79 BG
554952-E	BU5025	3/4" trade size, UPC coded, 5 per bag	1/0/10	.078	1.29 BG
508926-D	BU5031	1" trade size, UPC coded, 1 per bag	1/50/500	.152	.39 BG
508935-D	BU5041	1-1/4" trade size, UPC coded, 1 per bag	1/25/250	.026	.49 BG
508944-D	BU5051	1-1/2" trade size, UPC coded, 1 per bag	1/25/250	.031	.59 EA
508953-E	BU5061	2" trade size, UPC coded, 1 per bag	1/25/250	.041	1.29 EA
517518-D	BU5071	2-1/2" trade size, UPC coded, 1 per bag	1/10/40	.083	1.99 BG
561797-D	BU5081	3" trade size, UPC coded, 1 per bag	1/0/10	.113	3.29 EA

Thomas & Betts

Insulated Metallic Grounding Bushing - Die-cast zinc. Dual rated for copper and aluminum conductors. For threaded rigid conduit or IMC. Tin-plated open-type lug. 105° C. rated thermoplastic liner. 1 per bag. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
554839-D	BG2011	1/2" trade size	1/0/25	.240	5.79 EA
554847-D	BG2021	3/4" trade size	1/0/25	.280	6.29 EA
509113-D	BG204A1	1-1/4" trade size	1/10/40	.130	6.79 BG
509122-D	BG205A1	1-1/2" trade size	1/10/40	.125	7.99 EA
509131-D	BG206A1	2" trade size	1/5/20	.160	9.99 EA

CONDUIT/CONNECTORS

Thomas & Betts

Flexible Metallic Conduit Connector - Squeeze type. For use with flexible steel aluminum, or armored cable. UL listed. Die-cast zinc. UPC coded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555770-D	XC2693	3/8" trade size, 1/2" knockout, 3 per bag	1/0/25	.258	2.29 BG
519914-D	XC2691	3/8" trade size, 1/2" knockout, 1 per bag	1/50/500	.070	.79 BG
555789-D	XC2703	1/2" trade size, 1/2" knockout, 3 per bag	1/0/25	.362	2.99 BG
509532-D	XC2701	1/2" trade size, 1/2" knockout, 1 per bag	1/25/250	.100	.99 BG
555797-D	XC2722	3/4" trade size, 3/4" knockout, 2 per bag	1/0/15	.495	3.49 BG
509541-D	XC2721	3/4" trade size, 3/4" knockout, 1 each	1/25/250	.130	1.79 EA

Thomas & Betts


Flexible Connector - Die-cast zinc flexible connector terminates metal clad cable to a box or enclosure. For use with aluminum interlocking metal clad flexible cable. 3/8" trade size, 1/2" knockout. UL listed. UPC coded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555800-D	XC2805	5 per bag	1/0/25	.214	3.39 BG
507946-D	XC2801	1 per bag	1/100/400	.060	.69 EA

Thomas & Betts

90° Flexible Steel Conduit Connector - 2 screw wing type. For armored cable, flexible steel, or flexible aluminum conduit, with cable stop and free floating wing for simple installation. UL listed. UPC coded. Trade size. 1 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509603-D	XC2901	3/8"	1/25/250	.098	.99 BG
509578-D	XC2911	1/2"	1/20/200	.136	1.59 EA
509587-D	SC2921	3/4"	1/10/100	.220	3.59 BG

Thomas & Betts

Cable Connector - Armored, set screw type. 1/2" knockout, 3/8" trade size. Die-cast zinc. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518263-D	XC220SC100CP	Bulk, 100 per box	1/0/10	.551	34.99 BX
555711-D	SC220SC5	UPC coded, 5 per bag	1/0/25	.212	2.79 BG
509694-D	XC220SC1	UPC coded, 1 per bag	1/100/1000	.012	.59 BG

NOTE: Not for use with aluminum armored cable.

CONDUIT/CONNECTORS

Thomas & Betts

Box Connector - For flexible steel conduit and armored (BX) cable. Set screw type. Can also be used with nonmetallic cable. 1/2" pressure cast. UPC coded. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555738-D	XC2215	5 per bag	1/0/15	.322	5.79 BG

NOTE: Not for use with aluminum armored cable.

Thomas & Betts


Flexible Steel Conduit Connector - Also for use with armored (BX) cable. Screw-in type, pressure cast zinc. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555746-D	XC2405	3/8" trade size, 1/2" knockout, 5 per bag	1/0/25	.176	2.99 BG
555754-D	XC2415	1/2" trade size, 1/2" knockout, 5 per bag	1/0/25	.220	2.79 BG
555762-D	XC2422	3/4" trade size, 3/4" knockout, 2 per bag	1/0/20	.423	3.29 BG

Thomas & Betts

Box Connector - 2-piece steel clamp-type connector used to terminate 1 or more type NM cables to a knockout in a dry location. Also used in *old work* renovations when a locknut cannot be installed outside a box (no locknut required). UL listed. 3/8" (for 1/2" knockout); fits 2 or 3 No. 14 through No. 8, 10 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
556270-D	NC85010	3/8" Box Connector	1/0/30	.011	6.99 BG

Thomas & Betts

Duplex Connector - 1 connector for 2 armored cables. For flexible steel and aluminum conduits, IMC cable and nonmetallic sheathed cable. 3/8" trade size, 1/2" knockout. Die-cast zinc. UPC coded. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509685-D	XC2101	1 per bag	1/25/250	.130	1.69 EA
555703-D	XC2102	2 per bag	1/0/10	1.230	3.39 BG

ELECTRICAL

Thomas & Betts

Flexible Coupling - Screw-in type coupling for flexible metal conduit. Die-cast zinc. UL listed. UPC coded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507342-D	XK2411	1/2" trade size, 1 per bag	1/50/500	.060	1.29 BG
507776-D	XK2421	3/4" trade size, 1 per bag	1/25/250	.026	2.09 BG

Thomas & Betts

Anti-Short Bushing - Insert into the open end of armored cable or flexible metal conduit to protect conductors from sharp edges. Fits standard cable range 14/2-14/3-12/2. Plastic, 35 per poly bag. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517514-D	IT100SC35	Anti-s Bushing	1/15/150	.001	2.99 BG

Thomas & Betts

Steel Strap - 1-hole *Click on* type for rigid and IMC conduit.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517712-D	HS10150CP	1/2" trade size, bulk, 50 per box	1/0/10	.268	7.99 BX
555061-D	HS10110	1/2" trade size, UPC coded, 10 per bag	1/0/10	.537	1.99 BG
528145-D	HS1013	1/2" trade size, UPC coded, 3 per bag	1/50/500	.180	.59 BG
517690-D	HS10250CP	3/4" trade size, bulk, 50 per box	1/0/10	.309	14.49 BX
555088-D	HS10210	3/4" trade size, UPC coded, 10 per bag	1/0/10	.247	2.99 BG
528137-D	HS1023	3/4" trade size, UPC coded, 3 per bag	1/25/250	.240	.89 BG
555096-D	HS10310	1" trade size, UPC coded, 10 per bag	1/0/10	.377	4.39 BG
509998-D	HS1031	1" trade size, UPC coded, 1 each	1/50/500	.110	.49 BG
510003-D	HS1041	1-1/4" trade size, UPC coded, 1 each	1/25/100	.115	.79 EA
510012-D	HS1051	1-1/2" trade size, UPC coded, 1 each	1/20/80	.155	.99 EA
510021-D	HS1061	2" trade size, UPC coded, 1 each	1/15/60	.198	1.29 EA
561800-D	HS1071	2-1/2"	1/0/10	6.820	6.99 EA

Thomas & Betts

1-Hole Armored Cable Strap - 1-hole strap for armored cable and flexible metal conduit. Made of steel. Used to secure AC and MC armored cable having a nominal diameter of .475". Also can be used with 3/8" flexible metal conduit.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555827-F	XS1005	5 per bag	1/0/15	.040	1.29 BG

ELECTRICAL

Thomas & Betts

1-Hole Strap - To be used for service cables.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522139-D	SE0983	12-2, 14-2 NM cable, 3 per bag, UPC coded	1/50/500	.030	.89 BG
555398-D	SE10010	3#8, 3#6, 3#4 Available Only At Cape, Dixon, Medina, Waco, Lexington, Woodburn, Montgomery	1/0/20	.196	3.99 BG
555401-D	SE1016	3#3, 3#2 Available Only At Cape, Dixon, Medina, Lexington, Montgomery	1/0/25	.221	2.69 BG
503576-D	SE1021	3#1, 3#0, 3#1/0, 3#2/0 Available Only At Cape, Dixon, Medina, Waco, Lexington, Woodburn, Montgomery	1/50/200	.002	.89 BG
555428-D	SE1034	3#3/0, 3#4/0 Available Only At Cape, Dixon, Medina, Waco, Lexington, Woodburn, Montgomery	1/0/10	.939	1.49 BG
503568-C	SE101	3#3, 3#2	100/0/1000	.022	.29 EA

Thomas & Betts

2-Hole Service Cable Strap - Steel cable to be used in installation of service entrance cable. UL approved. UPC coded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555436-D	SE9016	3#3, 3#2; 6 per bag	1/0/15	.310	4.29 BG
532770-D	SE9031	3#3/0, 3#4/0; 1 per bag	1/50/200	.072	.69 BG
555444-D	SE9036	3#3/0, 3#4/0; 6 per bag	1/0/10	.488	1.79 BG

Thomas & Betts

EMT Strap - Click-on type.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517410-B	TS101100CP	1/2" trade size, bulk, 100 per box	1/0/10	3.750	9.99 BX
555533-D	TS101M5	1/2" trade size, UPC coded, 5 per bag	1/10/100	.375	.69 BG
517356-D	TS10250CP	3/4" trade size, bulk, 50 per box	1/0/10	2.356	7.99 BX
555541-D	TS102M5	3/4" trade size, UPC coded, 5 per bag	1/0/6	.467	.99 BG
517348-D	TS103	1" trade size, bulk, 50 per box	50/0/500	.082	.25 EA
555568-D	TS103M2	1" trade size, UPC coded, 2 per bag	1/0/6	.816	.79 BG
510067-D	TS1041	1-1/4" trade size, UPC coded, 1 per bag	1/25/250	.110	.59 EA
510076-D	TS1051	1-1/2" trade size, UPC coded, 1 per bag	1/25/100	.146	.99 EA
510085-E	TS1061	2" trade size, UPC coded, 1 per bag	1/15/60	.185	1.29 EA

STRAPS

Thomas & Betts

EMT Strap - 2-hole.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517313-C	TS901100CP	1/2" trade size, bulk, 100 per box	1/0/10	1.750	9.99 BX
555576-C	TS90110	1/2" trade size, UPC coded, 10 per bag	1/0/20	1.751	.99 BG
517283-D	TS90250CP	3/4" trade size, bulk, 50 per box	1/0/10	1.313	6.29 BX
555584-D	TS90210	3/4" trade size, UPC coded, 10 per bag	1/0/20	1.751	1.49 BG
517267-E	TS903	1" trade size, bulk, 100 per box	0/0/100	.033	.25 EA
555592-D	TS9034	1" trade size, UPC coded, 4 per bag	1/0/25	.325	1.19 BG
510129-D	TS9041	1-1/4" trade size, UPC coded, 1 each	1/25/250	.043	.49 EA
510138-D	TS9051	1-1/2" trade size, UPC coded, 1 per bag	1/15/150	.043	.59 EA
510147-D	TS9061	2" trade size, UPC coded, 1 each	1/10/100	.064	.69 EA

Thomas & Betts

Rigid Strap - 2-hole, snap-on type.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
520624-D	HS901	1/2", bulk, 200 per box	200/0/1200	.026	.15 EA
555118-D	HS90110	1/2", UPC coded, 10 per bag	1/0/20	.104	1.49 BG
520632-D	HS902	3/4", bulk, 150 per box	150/0/900	.045	.25 EA
555126-D	HS90210	3/4", UPC coded, 10 per bag	1/0/20	.180	1.99 BG
555134-D	HS9035	1", UPC coded, 5 per bag	1/0/20	.229	1.59 BG
520659-D	HS9041	1-1/4", UPC coded, bulk	1/25/250	.096	.49 EA
520667-C	HS9051	1-1/2", UPC coded, bulk	1/15/150	.125	.59 EA
520675-D	HS9061	2", UPC coded, bulk	1/10/100	.202	.79 EA
520683-E	HS9071	2-1/2", UPC coded, 1 each	1/8/80	.180	1.29 EA

GB Electrical

Cushion Clamp - Clamps and wraps are manufactured from the toughest of materials to resist common solvents, alkalis, dilute mineral acids, most organic acids, and most petrochemicals. Steel strap with 1 hole for attachment, rubber insert also reduces vibration. 2 per card.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
562513-D	PPR-1550	1/2" diameter	1/0/10	.070	1.39 CD
562521-D	PPR-1558	5/8" diameter	1/0/10	.070	1.39 CD
562548-D	PPR-1575	3/4" diameter	1/0/10	.070	1.39 CD

CLAMPS

Thomas & Betts


Drive Strap - Steel stamped, for EMT conduit.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555304-D	N101SC25	1/2", UPC coded, 25 per bag	1/0/20	1.749	3.79 BG
521787-D	N101SC3	1/2", UPC coded, 3 per bag	1/50/500	.046	.59 BG
521280-D	N102SC3	3/4", UPC coded, 3 per bag	1/50/500	.052	.69 BG

Thomas & Betts


Conduit Hanger - For EMT, IMC, and rigid conduit. With bolt assembly. UPC coded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
554774-D	6H0B5	Use with 3/8" to 1/2" rigid conduit, 1/2" EMT conduit, 5 per bag	1/0/25	.242	1.89 BG
554782-D	6H1B5	Use with 3/4" rigid and EMT conduit, 5 per bag	1/0/25	.296	1.99 BG
507156-D	6H2B1	Use with 1", 1 each rigid and EMT conduit	1/25/250	.088	.79 EA
554790-D	6H2-1/2B1	Use with 1-1/4" EMT conduit, 1 each	1/0/25	.964	.79 EA
507113-D	6H3B1	Use with 1-1/4" rigid and 1-1/2" EMT conduit, 1 each	1/20/200	.096	.79 EA
507105-D	6H4B1	Use with 1-1/2" rigid conduit, 1 each	1/10/100	.207	.99 EA
507091-D	6H5B1	Use with 2" rigid and EMT conduit, 1 each	1/10/100	.299	.99 EA
504203-D	6H6B1	Use with 2-1/2" rigid conduit, 1 each	1/0/5	.329	1.59 EA

Thomas & Betts


Beam Clamp - 1" trade size. UPC coded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
554820-D	BC12	Steel, dimensions: A-1.50", B-.87", C-1.62", 2 per bag	1/0/50	.560	2.39 BG

Thomas & Betts

Beam Clamp - Malleable iron, electroplated finish. Base size: 1" W. x 1-1/4" D. Weight per 100 lb. is 23. 1 each.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
554766-D	500SC1	1" Beam Clamp	1/25/100	.852	1.89 EA

ELECTRICAL

Thomas & Betts

Reducing Washer - Plated steel Concave construction centers connectors, conduit, nipples in oversize knockouts. Used in pairs, 1 on either side of box. UL listed. UPC coded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509140-D	WA121250CP	Reduces from 3/4" to 1/2" trade size, bulk, 250 per box	1/0/2	1.275	39.99 BX
555614-D	WA1214	Reduces from 3/4" to 1/2" trade size, UPC coded, 4 per bag	1/0/25	.102	.69 BG
509159-E	WA131	Reduces from 1" to 1/2" trade size, bulk, 500 per box	250/0/500	.015	.29 EA
555622-D	WA1314	Reduces from 1" to 1/2" trade size, UPC coded, 4 per bag	1/0/25	.149	1.09 BG
509168-E	WA132	Reduces from 1" to 3/4" trade size, bulk, 500 per box	250/0/500	.030	.29 EA
555630-D	WA1324	Reduces from 1" to 3/4" trade size, UPC coded, 4 per bag	1/0/25	.150	1.09 BG
541397-D	WA1432	Reduces from 1-1/4" to 1" trade size, UPC coded, 2 per bag	1/25/250	.019	.89 BG
555649-D	WA1542	Reduces from 1-1/2" to 1-1/4" trade size, UPC coded, 2 per bag	1/0/25	.121	1.49 BG
555657-D	WA1652	Reduces from 2" to 1-1/2" trade size, UPC coded, 2 per bag	1/0/25	.480	2.29 BG
555665-D	WA1762	Reduces from 2-1/2" to 2" trade size, UPC coded, 2 per bag	1/0/25	.190	4.49 BG

Thomas & Betts

Knockout Seal - Springy steel clips hold plug completely and securely in knockout. Plated steel.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
554863-D	BL1114	1/2" trade size, 4 per bag	1/0/25	.145	1.79 BG
554871-D	BL1124	3/4" trade size, 4 per bag	1/0/25	.169	1.99 BG
554898-D	BL1134	1" trade size, 4 per bag	1/0/25	.080	3.79 BG
541370-D	BL1141	1-1/4" trade size, 1 per bag	1/25/100	.030	.99 BG
554901-D	BL1151	1-1/2" trade size, 1 each	1/0/25	.182	1.99 EA
554928-D	BL1161	2" trade size, 1 each	1/0/25	.050	2.79 EA

ELECTRICAL

Thomas & Betts

Split Bolt Connector - For copper-to-copper connections. Bolt and nut made of high-strength, corrosion-resistant silicon bronze alloy. For making pigtail, tap or straight splice with larger conductors, solid or stranded. Split bolts slip over continuous wire. The end of the other wire is then placed over the continuous wire inside the unit and the nut is tightened. Connections must be completely insulated. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510593-E	E9H25	Split Bolt Connector	1/25/100	.020	1.89 EA
510600-E	E8H25	Split Bolt Connector	1/25/100	.030	1.89 EA
510619-E	E6H25	Split Bolt Connector	1/25/100	.055	1.89 EA
510628-D	E4H25	Split Bolt Connector	1/25/100	.070	1.99 EA
510637-D	E2H25	Split Bolt Connector	1/25/100	.095	2.89 EA
510646-D	E10H25	Split Bolt Connector	1/25/100	.338	3.99 EA
524255-D	20H-B1	Split Bolt Connector	1/0/10	.051	5.29 EA
538175-E	1H	Split Bolt Connector	1/0/100	.125	1.89 EA
510655-D	30H	Split Bolt Connector	1/25/100	.410	7.99 EA

No.	Range for Equal Main and Tap	Min. Tap With One Max. Main
E9H25	10 Str.-12 Sol.	14 Sol.
E8H25	8 Str. 10 Sol.	14 Sol.
E6H25	6 Sol. 8 Sol.	16 Str.
E4H25	4 Sol. 8 Sol.	14 Sol.
E2H25	2 Sol. 6 Sol.	14 Sol.
E10H25	1/0 Str. 4 Sol.	14 Sol.
20HB1	2/0 Str. 2 Sol.	14 Sol.
1H	2 Str. 6 Sol.	14 Sol.
30H	4/0 Str. 2 Sol.	6 Sol.

Thomas & Betts

Split Bolt Connector - Dual-rated, accomodates all aluminum and copper conductor combinations. Corrosion-resistant tin plated aluminum. Can be installed with standard wrench. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
538132-D	APS06	6 to 10 Str. AWG	1/0/100	.029	2.99 EA
538108-D	APS04	4 to 10 Str. AWG	1/0/100	.029	3.69 EA
538094-D	APS02	2 to 8 Str. AWG	1/0/100	.051	3.99 EA

Thomas & Betts

Split Bolt Connector - Plated with spacer, for use on copper, aluminum, and ACSR conductors. Bolt and pressure bar made of tin plated copper alloy. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510682-D	E6HPS25	Split Bolt Connector	1/25/100	.054	3.59 EA
510673-D	4HPS	Split Bolt Connector	1/25/100	.082	4.39 EA
510664-D	E2HPS25	Split Bolt Connector	1/25/100	.109	5.99 EA
538086-D	1HPS	Split Bolt Connector	1/0/100	.153	6.49 EA
538167-D	10HPS	Split Bolt Connector	1/0/50	.260	6.59 EA
538159-D	20HPS	Split Bolt Connector	1/0/25	.320	8.99 EA
538140-D	40HPS	Split Bolt Connector	1/0/25	.470	12.99 EA

CONDUIT/CONNECTORS

Thomas & Betts

Splicer and Reducer - Splicer/reducer with solid barrier wire stop, all aluminum body, tin plated for low contact resistance. For copper and aluminum conductors. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
538183-D	ASR0214	2 Str. to 14 AWG Available At Cape, Dixon, Medina, Waco, Lexington, Woodburn, Montgomery	1/0/12	.043	5.49 EA
538124-D	ASR2506	250 kcmil to 6 Str. AWG	1/0/12	2.847	14.99 EA

GB Electrical

Splicer and Reducer - Dual rated aluminum splicer/reducer made from high-strength aluminum alloy, suitable for use with either copper or aluminum conductors. Electro-tin plating provides low contact resistance. Chamfered wire entry for easy installation. Rounded bottoms facilitates taping. Large screw diameters insure all wire strands are held securely, solid center barrier prevents dissimilar metals from coming into contact. UL listed, CSA.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
538884-D	GSPA-2	2 to 14 AWG, 2 per clamshell	1/0/10	.020	7.49 EA
538892-D	GSPA-0	1/0 to 14 AWG, 1 per clamshell	1/0/10	.126	5.49 EA
538906-D	GSPA-4/0	4/0 to 6 AWG, 1 per clamshell	1/0/10	.356	8.99 EA

Thomas & Betts

Dual Rated Split Bolt Connector - Aluminum. Accommodates aluminum and copper conductor combinations. Tin plated aluminum inhibits corrosion and increases conductivity. UL listed. 4/0 Str. to 2 sol. range for equal main and tap. 2 sol. minimum tap with one maximum main.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501573-D	EAPS4125	Split Bolt Connector	1/25/100	.250	11.49 EA

Thomas & Betts

Service Wedge Clamp - Aluminum. For dead-ending self-supporting drop wire. Attach directly to bare neutral and anchor to home. Hot wires are braided around the neutral and dropped to service head. Saves conductor since drop wires may be cut to exact lengths. Can be attached to bare neutral at any point in the span. There is a maximum of 2 and a minimum of 6 ASCR and AAAC wire range. There is a 1 Str. maximum, and a 6 Sol. minimum aluminum wire range.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510762-D	W621	Service Wedge Clamp	1/0/100	.195	5.59 EA

CONNECTORS

Thomas & Betts


Entrance Eil - For threaded rigid conduit or IMC. Designed for service entrance connections. Die-cast copper-free aluminum alloy with painted finish. Tapered threaded hubs. Die-cast cover, paper gasket, and steel screws included. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509364-D	SL6011	1/2" trade size	1/10/100	.223	5.99 EA
509373-D	SL6021	3/4" trade size	1/6/60	.274	6.99 EA
509382-D	SL6031	1" trade size	1/5/50	.485	11.49 EA
509391-D	SL6041	1-1/4" trade size	1/2/20	.790	14.99 EA

Thomas & Betts

90° EMT Pull Elbow - For conduit to conduit connection. Set screw type. Zinc die-cast body. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509426-D	LT2011	1/2" trade size	1/10/100	.198	5.39 EA
509435-D	TL2021	3/4" trade size	1/10/100	.020	5.79 EA

Thomas & Betts


LiquidTight Connector - Multi-piece straight liquidtight connector. Die-cast zinc. 1 per bag. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506009-D	LT2011	1/2" trade size	1/25/100	.222	2.79 EA
506250-D	LT2021	3/4" trade size	1/20/80	.031	4.99 EA

Thomas & Betts

LiquidTight Connector - Multi-piece 90° liquidtight connector. Die-cast zinc. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506571-D	LT2911	1/2" trade size	1/20/80	.285	5.39 EA
506633-D	LT2921	3/4" trade size	1/10/40	.480	8.39 EA

Thomas & Betts

Service Entrance Cap - Clamp-on type for use with unthreaded rigid/IMC or EMT. Aluminum castings. 1 each. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508268-D	SH1021	3/4" trade size	1/6/24	.063	5.59 EA
509872-D	SH1031	1" trade size	1/5/20	.010	6.79 EA
509881-D	SH1041	1-1/4" trade size	1/3/30	.490	7.79 EA
509890-D	SH1051	1-1/2" trade size	1/2/20	.850	12.99 EA
509907-D	SH1061	2" trade size	1/2/20	1.480	18.49 EA
517461-C	SH1071	2-1/2" trade size	1/0/2	4.350	69.99 EA

ELECTRICAL

Thomas & Betts

Oval Service Cable Cap - For use in permitting weather-resistant entrance for type SE and SEU cable. Die-cast zinc. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509916-D	SC10001	3-No. 3/2	1/8/32	.290	9.49 EA
525375-D	SC20011	3-No. 3-4/0	1/4/16	.610	12.99 EA

Thomas & Betts


Ground Clamp - Set screw type. Serrated clamp swings apart for easy installation. Steel screws are plated to resist corrosion. Pressure cast brass. For use with copper water pipe or EMT conduit. 1 per bag. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510423-D	L160B1	Fits pipe sizes 1/2", 3/4", and 1"	1/25/100	.190	4.59 BG
510389-D	L1802B1	Fits pipe sizes 1-1/4", 1-1/2", and 2"	1/10/40	.420	11.99 BG

Thomas & Betts


Ground Rod Clamp - Cast of high-strength corrosion-resistant copper alloy. Hex bolts included. Simplified compact design makes a lasting, trouble-free connection. 1 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
554979-D	G41	1/2"	1/0/50	.427	5.49 EA
554987-D	G51	5/8"	1/0/40	.417	4.59 EA

Thomas & Betts

Ground Clamp - 1/2" - 1" brass ground clamp. For mounting on water pipes, conduit, or pipe electrodes with bare copper wire. Provides binding path to ground. Fits 10/2 AWG. Includes 8" copper strap. Brass construction. 1 each. UPC coded. 1/2" hub.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555177-D	L184C1	Clamp W/strap & Hub	1/0/40	1.560	8.99 EA

ELECTRICAL

CLAMPS

Thomas & Betts


Ground Clamp - Pressure bar grips armored cable insulation to decrease chances of grounding conductor being pulled out. For No. 8 and No. 4 AWG. Bronze. UL and CSA listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
524778-D	L181B1	Heavy Duty Ground Clamp	1/25/100	.220	5.79 EA

Thomas & Betts


Ground Clamp - Set screw-type. Bronze with bronze screws. For use with model No. 10, 8, 6, 4, or 2 bare copper wire. Listed for direct burial. 1/2" - 1" grounded electrodes size range. 1 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555169-D	L160DB1	1/2-1 Ground Rod Clamp	1/0/25	.760	6.49 EA

Thomas & Betts

Ground Clamp - (L160) Set screw type. Zinc die-cast. For use with copper water pipe or EMT conduit, 1/2", 3/4", and 1". For No. 2 to No. 10 AWG solid or standard bare copper ground wire. UPC coded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510398-D	L1601	Zinc Grounding Clamp	1/25/100	.172	2.49 BG

Thomas & Betts

Wire Holder (Insulator) - Pipe mounting. All porcelain. Designed especially for service entrance masts. May be used in all applications requiring attachment to pipe. Galvanized metal parts.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
519095-D	W31	Adjustable from 1-1/4" to 1-1/2"	1/0/50	.174	12.79 EA
553026-D	W32	For 2" conduit	1/0/50	.171	11.99 EA

Thomas & Betts


Heavy-Duty Wireholder - Galvanized steel saddle with solid rivet through head. 2-1/4" lag screw. Porcelain/steel. 1 each.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
554812-D	B7B1	2-1/2" Wire Holder	1/5/20	.710	5.99 EA

Erico


Ground Rod - Steel core copper bonded ground rods.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
534153-D	615840UPC	5/8" x 4'	1/0/5	3.400	12.99 EA
510450-D	611285UPC	1/2" x 8'	1/0/5	5.400	17.99 EA
510469-D	611205UPC	1/2" x 10'	1/0/5	5.880	22.99 EA
510478-D	615880UPC	5/8" x 8", UL listed	1/0/5	6.660	22.99 EA

Erico

Bronze Ground Rod Clamp - UL listed for 1/2" and 5/8" copper or galvanized ground rods. Maximum service and conductivity. Listed for direct burial. UL and CSA listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510496-D	CP58BX	5/8"	1/0/25	.100	3.99 EA

Thomas & Betts

Porcelain Insulator - Midget sized. Mounting screw has a special head leaded into a grooved hole. 2" porcelain head, 1-11/16" screw, 1-3/8" diameter and 1/2" wire hole. 600 lb. pullout strength.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510566-D	B9-1	Porcelain Wireholder	1/10/100	.280	4.29 EA



Do it® Dimmer - Single pole dimmer for incandescents only. Easy-to-install, shallow profile for ample mounting room. Complete with 4" No. 18 AWG leads. 600W/120V AC only. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510971-B	876700	On/Off full range rotary, ivory	1/5/50	.211	3.99 CD
557676-B	877700W	On/Off full range rotary, white	1/5/50	.211	3.99 EA
508624-B	876705BP	Push On/Off, ivory	1/5/50	.200	4.99 EA

SWITCHES

ELECTRICAL



Do it Best® Dimmer - Compact design allows for maximum space inside switch box. Built-in radio/TV interference filter. Saves electricity, extends bulb life. 600W, 120V. When ganging 2 dimmers, load limit on each is 500W. When ganging 3 or more, 400W. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
526746-A	871-6602G-001	Rotary, ivory	1/5/50	.288	4.79 CD
530867-B	8726602G00W	Rotary, white	1/5/50	.260	4.99 CD



Do it Best® Dimmer - Push On/Off dimmer with compact design allows for maximum space inside switch box. Built-in radio/TV interference filter. Saves electricity, extends bulb life. 600W, 120V. When ganging 2 dimmers, load limit on each is 500W. When ganging 3 or more, 400W. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505830-C	8716681G	Single pole, ivory	1/5/50	.200	5.79 CD
530875-C	8726681G00W	Single pole, white	1/0/5	.220	5.79 CD
549770-B	8726683G00W	3-way, white	1/5/50	.250	7.99 CD



Do it Best® Dimmer - Push On/Off dimmer with compact design allows for maximum space inside switch box. Built-in radio/TV interference filter. Saves electricity, extends bulb life. 600W, 120V. When ganging 2 dimmers, load limit on each is 500W. When ganging 3 or more, 400W. Almond. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
562580-B	6130668100A	Single pole	1/0/5	.200	4.99 EA



Do it Best® Dimmer - Compact design allows for maximum space inside switch box. Built-in radio/TV interference filter. Saves electricity, extends bulb life. 600W, 120V. When ganging 2 dimmers, load limit on each is 500W. When ganging 3 or more, 400W. Push On/Off, lighted, clear. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522325-B	8706682G	Lighted Dimmer	1/5/50	.300	10.49 CD



Rotary Dimmer - Commercial Specification Grade. Single pole architectural rotary dimmer has compact housing that fits into a standard wall box. Has positive On/Off switching with rotary action brightness control, snap-off fins permit easy ganging. Snap-on cover hides heat dissipating fins. Color-match control knob with gold metal inset, held firmly in place by snap-on cover. Radio/TV interference filter. 1000W/120V, incandescent. UL listed. CSA.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539058-C	60461000ISP	Ivory	1/0/5	.747	29.99 EA
539031-C	60561000WSP	White	1/0/5	.747	29.99 EA




Do it® Dimmer Knob - Replacement knob fits dimmer and fan controls with half moon stem. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508136-F	87526115I	Ivory	1/10/50	.140	1.99 CD
522333-F	87626115W	White	1/10/50	.070	1.99 CD



Do it Best® Dimmer - Illuminated full range dimmer, smooth sliding action. Solid state circuitry with built-in radio/TV interference filter. Compact design for maximum space in wall box. Can be ganged with other units, matching wall plate included. 600W/120V, 5A, incandescent only. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514381-A	DB106631OLI	Ivory	1/0/5	.390	9.99 CD
514373-A	DB206631OLW	White	1/0/5	.800	9.99 CD

GB Electrical

Door Switch Kit - Mounts in door jamb to operate lights, etc.

Push-button switch with metal box, cover plate, and mounting hardware included. Operates on GSW-26 momentary contact normally on switch. Single pole single throw (included), 6" leads, 10A/125V AC, 10A/250V AC, 10A/277V AC. 1 per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
553395-C	GSW-SK	Door Jamb Switch	1/0/5	.500	24.99 EA

GB Electrical

Pull Chain Switch - (GSW32). On/Off. 2 prewired 6" stripped, for ceiling fixtures and lighting, 72" white cotton pull cord to attach to the switch pull chain, included, commonly used in bathroom wall fixtures--incandescent and fluorescent. Single pole, single throw. 1A/125V, fluorescent; 1A/250V; 3A/125V ACL; 6A/125V AC. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
553409-D	GSW-31	Nickel chain and nickel attaching device, 1 per card	1/0/5	.090	4.29 EA
553417-D	GSW-31BP	Nickel chain and nickel attaching device, 10 per box	1/0/10	.045	3.89 EA

GB Electrical

Toggle - Medium-duty toggle switch. With On/Off faceplate single pole, single throw. Mounts in a 1/2" diameter hole, hex nut provided. 2 prewired 6" stripped leads for household appliances, small body, short ball toggle. 3A/125V, 6A/125V, 3A/250V. 1 per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
553425-D	GSW-125	Med Duty Toggle Switch	1/0/5	.090	3.19 EA

GB Electrical

Toggle Switch - Heavy-duty toggle switch. On/Off faceplates, single pole, single throw with 2 screw-type terminals, motor rated with O-ring for moisture and dust resistance, 10A/277V AC, 20A/12V AC, 3/4 HP 125/250V AC. 1 per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
553433-D	GSW-110	Heavy Duty Toggle Switch	1/0/5	.090	4.89 EA

GB Electrical

Push-Button Switch - Single pole, single throw maintained contact. For household appliances, various lamps, and lighting fixtures. 2 prewired 6" stripped leads. 3A/250V AC; 3A/125VT; 6A/125V AC; 6A/125VL. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
553441-D	GSW-24BP	Nickel-plated, 10 per box	1/0/10	.045	3.49 EA
517739-D	GSW-25	Brass-plated, 1 per card	1/0/5	.100	4.19 CD

GB Electrical

Rotary Switch - Rotary On/Off single pole, single throw white rotary switch, 2 prewired 6" stripped leads, for lamps and exhaust fans snap-in design, 1.5A/250V AC. 1 per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
553468-D	GSW-63W	Rotary Switch	1/0/5	.090	4.29 EA



Do it Best® Toggle Dimmer - Matches toggle switches. Shallow design, replaces standard switches. Built-in radio/TV filter and positive On/Off action. 600W/120V. When ganging 2 dimmers, load limit on each is 400W. When ganging 3 or more, 300W. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503509-B	8716641G001	Single pole, ivory	1/5/20	.262	7.99 EA
503479-B	8726641G00W	Single pole, white	1/5/20	.262	7.99 EA
508608-C	8706691G	Single pole, illuminated, clear	1/0/5	.260	9.99 EA
507350-B	8716643G1	3-way, ivory	1/5/20	.275	9.99 EA

Continued Next Column

SWITCHES

Continued From Previous Column

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508217-B	8726643GW	3-way, white	1/5/20	.917	9.99 EA
508594-C	8706693G	3-easy, illuminated, clear	1/5/20	.260	9.99 EA



Grounded Quiet Switch - Commercial Specification Grade.

Double-pole toggle. Switch mechanism is fully enclosed in a rugged urea housing providing outstanding strength, track and arc resistance. Consistently firm toggle action. Large silver-cadmium oxide contacts insure long life. Deep wire wells for back wiring and large head, deep-slotted terminal screws accept up to No. 10 copper wire. Shallow body, only 3/4" D. 30A/120/277V, 2 HP at 120/240V. Limited 10 year warranty. UL listed, CSA approved. *See Pack.* Ivory.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
519553-B	251303202I	Iv 2pole Grnd Switch	1/0/10	.430	14.99 EA



Grounded Quiet Switch - Commercial Specification Grade.

Long-life toggle switch with captive mounting screws for fast installation. Large-head terminal screws backed out and staked for fast side wiring of up to No. 10 copper wire. Heavy-gauge rust-resistant steel mounting strap, break-off plaster ears for best alignment. Large silver-cadmium oxide contacts insure long life. 20A-120/277V; 1 HP at 120V, 2 HP at 240V. Limited 10 year warranty. UL listed. *See Pack.*



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514688-D	R40-CS120-2	Single pole, brown	1/0/5	.402	4.99 EA
515188-D	R01CS120-2I	Single pole, ivory	1/0/10	.248	4.99 EA
514985-D	R02CS1202W	Single pole, white	1/0/10	.248	4.99 EA
519610-C	6355522-2SP	Double pole, brown	1/0/5	.280	9.99 EA
515730-C	R41CS2202IS	Double pole, ivory	1/0/10	.185	9.99 EA
503495-D	R41-CS320-2IS	3-way, ivory	1/0/5	.306	6.29 EA
514624-D	R02CS320-2W	3-way, white	1/0/5	.306	6.29 EA



Grounded Quiet Switch - Commercial Specification Grade.

Long-life toggle switch with captive mounting screws for fast installation. Large-head terminal screws backed out and staked for fast side wiring of up to No. 10 copper wire. Heavy-gauge rust-resistant steel mounting strap, break-off plaster ears for best alignment. Large silver-cadmium oxide contacts insure long life. 15A/120/277V; 1/2 HP at 120V, 2 HP at 240V. Limited 10 year warranty. UL listed. *See Pack.*



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501514-D	5501-2ISP	Single pole, ivory	1/10/100	.177	2.99 EA
516716-D	5501-2WSP	Single pole, white	1/10/100	.179	2.99 EA
501557-B	5503-2ISP	3-way, ivory	1/10/100	.199	3.99 EA
515698-B	5503-2WSP	3-way, white	1/0/10	.194	3.99 EA

ELECTRICAL



Lighted Quiet Switch - Commercial Specification Grade.

Lighted long-life toggle switch with captive mounting screws for fast installation stays lit when the power goes off. Large-head terminal screws backed out and staked for fast side wiring of up to No. 10 copper wire. Heavy-gauge rust-resistant steel mounting strap, break-off plaster ears for best alignment. Large silver-cadmium oxide contacts insure long life. 15A/120/277V; 1/2 HP at 120V, 2 HP at 240V. Limited 10 year warranty. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517003-B	5501LHI	Single pole, ivory	1/0/10	.192	5.99 EA
516597-B	5501LHW	Single pole, white	1/0/10	.198	5.99 EA
515078-C	R115503LHI	3-way, ivory	1/0/5	.213	9.99 EA
515000-C	R4205503LHW	3-way, white	1/0/10	.195	9.99 EA



Grounded Quiet Switch - Commercial Specification Grade.

4-way framed long-life toggle switch with captive mounting screws for fast installation. Large-head terminal screws backed out and staked for fast side wiring of up to No. 10 copper wire. Heavy-gauge rust-resistant steel mounting strap, break-off plaster ears for best alignment. Large silver-cadmium oxide contacts insure long life. 15A/120/277V; 1/2HP at 120V, 2HP at 240V. Limited 10 year warranty. UL listed. CSA approved. *Individually Boxed*



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
520680-C	54504-2	Brown	1/0/10	.203	14.99 EA
521484-B	R41-CS415-02I	Iv 4-way Grnd Switch	1/0/5	.330	10.99 EA
527661-B	R42-CS415-2WS	Wht 4-way Grnd Switch	1/0/5	.105	10.99 EA
562629-B	066CS41502A	Almd 4-way Grnd Switch	1/0/10	.170	10.99 EA

See Pack No. R41CS41502I: Ivory No. R42-CS415-2WS: White No. 066CS41502A: Almond



Quiet Switch - Single pole framed toggle switch allows faster

installation with combination side and *Quickwire* push-in wiring. 15A/120V, 1/2 HP at 120V. Promotional contractor pack. Limited 2 year warranty. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531669-C	1451CP	Brown	10/0/100	.145	.79 EA
531678-C	1451ICP	Ivory	10/0/100	.145	.79 EA
518298-C	1451WCP	White	10/0/100	.145	.79 EA

NOTE 1: Effective January 1, 1995, UL Standard 498 requires that push-wire receptacles accept only 14 AWG solid copper conductors in their push-wire terminations.

We can become your single-source supplier on many of the products you currently use!

ELECTRICAL

SWITCHES



Quiet Switch - 3-way framed toggle switch allows faster installation with combination side and *Quickwire* push-in wiring. 15A/120V, 1/2 HP at 120V. Limited 2 year warranty. UL listed. *Promotional Contractor Pack*



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552542-C	1453-2ACP	Almond	10/0/100	.126	1.59 EA
527246-C	1453CP	Brown	10/0/100	.139	1.59 EA
527237-C	1453ICP	Ivory	10/0/100	.120	1.59 EA
518301-C	1453WCP	White	10/0/100	.120	1.59 EA
525300-C	1453SP	Brown	1/0/10	.163	1.99 EA
525319-C	1453ISP	Ivory	1/10/100	.169	1.99 EA
531552-C	1453WSP	White	1/10/100	.140	1.99 EA



Surface Mount Switch - Single pole, accepts up to No. 12 conductor. Mounting holes spaced 1-7/16" to fit No. 4 wall screws. Cover snaps on. 10A/125V, 5A/250V. UL listed. Ivory.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513475-D	1210I	Surface Mount Switch	1/0/10	.161	3.79 EA



Quiet Switch - Single pole. For direct connection to aluminum wire. Silver alloy contacts, break-off plastic ears. Terminal screws accept up to No. 10 copper, copper clad or aluminum conductors. 15A/120V AC. UL listed. Grounded. Ivory.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508105-B	2651-2I	Iv Copper/alum Switch	1/0/10	.103	3.99 EA



Quiet Switch - 3-way operation. For direct connection to aluminum wire. Silver alloy contacts for longer switch life. Break-off plastic ears. Terminal screws accept up to No. 10 copper, copper clad or aluminum conductors. 15A/120V AC. UL listed. Grounded. Ivory.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507491-C	2653-2I	Iv Copper/alum Switch	1/0/10	.138	5.99 EA

Lutron

Slide Dimmer - Glyder® slide dimmer provides full range dimming. Uses standard wall plate (not included). 120V/600W, single pole. White and ivory control knobs included. Limited 1 year warranty. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505117-C	GL-600H-DK	600w Wh/iv Slide Dimmer	1/0/6	.320	14.49 EA

Lutron

Slide Dimmer - Skylark® slide-to-Off dimmer includes dimmer and wall plate. 120V/600W, single pole. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505129-C	S-600H-IV	Ivory	1/0/6	2.867	17.49 EA
505135-C	S-600H-WH	White	1/0/6	2.867	17.49 EA

DIMMERS

Lutron

Slide Dimmer - Separate push On/Off rocker switch. Preselect the dimmer light level, adjust the light level with the slide control. For incandescent lights only. RFI filtering. Easy-to-install instructions. Captured bolts can't be lost, wire ends are twisted to make installation a snap. 600W/120V single pole. UL listed. Limited 1 year warranty. Clamshell package.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
557463-D	S600PH-WH	White	1/0/6	.358	26.99 EA
557471-D	S600PH-IV	Ivory	1/0/6	.358	26.99 EA

Lutron

Slide Dimmer - Separate push On/Off rocker switch. Preselect the dimmer light level, adjust the light level with the slide control. For incandescent lights only. RFI filtering. Easy-to-install instructions. Captured bolts can't be lost, wire ends are twisted to make installation a snap. 600W/120V 3-way. UL listed. Limited 1 year warranty. Clamshell package.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
557498-C	S603PH-WH	White	1/0/6	.358	34.99 EA
557501-C	S603PH-IV	Ivory	1/0/6	.358	34.99 EA

Lutron

Slide Dimmer with On-Off Switch - A designer dimmer that matches popular designer paddle switches. Package includes dimmer and Claro wall plate. Night-light glows softly in the dark. For incandescent lights only. 120V/600W, single pole. Clamshell package. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
557528-B	DVW-600PH-WH	White	1/0/6	.556	29.99 EA

ELECTRICAL

Lutron

Slide Dimmer with On-Off Switch - A designer dimmer that matches popular designer paddle switches. Package includes dimmer and Claro wall plate. Night-light glows softly in the dark. For incandescent lights only. 3-way, 120V/600W single. Clamshell package. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
557536-B	DVW-603PH-WH	White	1/0/3	.556	36.99 EA

Lutron

Dimmer - Maestro Smart Dimmer. Microprocessor technology. On with 1 tap, fully on with 2 taps. Off with 3 second fade 1 tap, Off with ten second fade press and hold. 120V/600W single pole. Includes dimmer and wall plate. White. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
557544-B	MAW-600H-WH	Wht Dimmer Remote	1/0/6	.838	42.49 EA



Grounded Outlet - Shallow design for maximum wiring room. Large head terminal screws accept up to No. 10 copper wire, Quickwire push-in terminals for speedy installation. Double-wire power contacts for maximum conductivity and plug retention, captive mounting screws. Break-off plaster ears, break-off fins for 2-circuit conversion. 15A/125V, NEMA 5-15R. Limited 2 year warranty. UL listed. *Promotional Contractor Pack*



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552402-A	5320ACP	Almond	10/0/200	.120	.49 EA
531641-A	5320CP	Brown	10/0/200	.175	.49 EA
531650-A	30305320ICP	Ivory	10/0/200	.123	.49 EA
518271-A	5320WCP	White	10/0/200	.175	.49 EA
502272-B	<emph>See Pack<rs>	<emph>See Pack<rs>	1/10/200	.175	.79 EA
502281-B	5320ISP	Iv Duplex Outlet	1/10/200	.176	.79 EA
531561-B	5320WSP	Wht Duplex Outlet	1/10/200	.170	.79 EA


No. 5320SP: Brown No. 5320ISP: Ivory No. 5320WSP: White **NOTE:** Effective January 1, 1995, UL Standard 498 requires that push-wire receptacles accept *only* 14 AWG solid copper conductors in their push-wire terminations.

ELECTRICAL

OUTLETS




Grounded Outlet - *Commercial Specification Grade*. Duplex outlet has shallow design for maximum wiring room. Side wired, large-head terminal screws accept up to No. 10 copper wire. Double-wire power contacts for maximum conductivity and plug retention, captive mounting screws. Washer-type break-off plaster ears, break-off fins for 2-circuit conversion. 15A/125V, NEMA 5-15R. Limited 10 year warranty. UL listed. *See Pack*.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503137-C	5014SP	Brown	1/0/10	.192	1.99 EA
503226-C	5014ISP	Ivory	1/10/100	.194	1.99 EA
531537-C	5014WSP	White	1/10/100	.198	1.99 EA



Grounded Outlet - *Commercial Specification Grade*. Duplex outlet has shallow design for maximum wiring room. Side wired, large-head terminal screws accept up to No. 10 copper wire. Back-wiring clamps accept up to No. 10 copper wire. Triple wire power contacts for maximum conductivity and plug retention. Captive mounting screws for fast installation. Convenient washer-type break-off plaster ears for best flush alignment. Break-off tabs for easy 2-circuit conversion. Heavy-duty wraparound mounting strap locked into body. 15A/125V, NEMA 5-15R. Limited 10 year warranty. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552682-B	111BR1500I	Ivory	1/0/10	.071	2.29 EA
552690-B	112BR1500W	White	1/0/10	.080	2.29 EA
552511-B	R43-0BR15-0AS	Almond	1/0/35	.226	2.29 EA



Grounded Outlet - *Commercial Specification Grade*. Single outlet has shallow design for maximum wiring room. Side wired, large-head terminal screws accept up to No. 10 copper wire. Double-wire power contacts for maximum conductivity and plug retention, captive mounting screws. Washer-type break-off plaster ears, break-off fins for 2-circuit conversion. 15A/125V, NEMA 5-15R. Limited 10 year warranty. UL listed. *See Pack*. Ivory.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
519049-C	5015ISP	Iv Single Outlet	1/0/10	.167	3.49 EA



Grounded Outlet - *Industrial Specification Grade*. Duplex outlet has nylon face and base. Back and side wired, 4 large-head brass spring loaded terminal screws with steel wire nuts and 8 back wiring holes for maximum wiring convenience. Wire containment rib, groundamatic self-grounding strap locked into base, green grounding screw. Meets all requirements of latest Fed Spec. WC-596F. 15A/125V, NEMA 5-15R. UL listed. Limited 10 year warranty. *See Pack*.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
519030-D	R41-5252I	Ivory	1/0/10	.220	5.29 EA
518166-D	R42-5252-0WS	White	1/0/10	.220	5.29 EA
500014-D	247-5252-A	Almond	1/0/10	.100	5.29 EA




Grounded Outlet - *Industrial Specification Grade*. Duplex outlet has molded nylon body. Isolated grounding path (indicated by orange triangle on face) separates the transient currents which can cause electronic equipment such as cash registers, computers and medical instruments to perform poorly. Feed-through and back wire through 8 deep-funnelled wire wells. Double-wire copper power contacts for conductivity. Large-head deep-slotted terminal screws are backed out, staked, and spring backed. Use up to No. 10 copper wire. Break-off fins for 2-circuit wiring. UL listed hospital grade (indicated by green dot on face). 20A/125V, NEMA 5-20R. Limited 10 year warranty. *See Pack*. Orange.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518093-C	R41-05362-IGS	20a Orng Grounded Outlet	1/0/5	.250	15.99 EA




Outlet - *Heavy-Duty Specification Grade* grounding outlet. Side-wired, accepts up to No. 10 conductors. 15A/250V. UL listed. NEMA 6-15R.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512626-C	5029	Brown	1/0/10	.175	3.29 EA
512635-C	5029I	Ivory	1/10/100	.181	3.29 EA



Outlet - *Heavy-Duty Specification Grade* grounding outlet. Side-wired, accepts up to No. 10 conductors. Break-off fins for 2-circuit conversion. 20A/125V. UL listed. NEMA 5-20R. *See Pack*.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517293-D	5800SP	Brown	1/10/100	.196	2.99 EA
517284-D	5800ISP	Ivory	1/10/100	.220	2.99 EA
531570-D	5800WSP	White	1/10/100	.200	2.99 EA
562564-D	0640CR20A	Almond	1/0/10	.179	2.99 EA

OUTLETS




Grounded Outlet - Commercial Specification Grade. Single outlet has shallow design for maximum wiring room. Side wired, large-head terminal screws accept up to No. 10 copper wire. Double-wire power contacts for maximum conductivity and plug retention, captive mounting screws. Washer-type break-off plaster ears, break-off fins for 2-circuit conversion. 20A/125V, NEMA 5-20R. Limited 10 year warranty. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509582-C	5801	Brown, individually boxed	1/0/10	.180	3.99 EA
509574-C	5801ISP	Ivory, <i>see pack</i>	1/10/100	.183	3.99 EA
512702-C	5801WSP	White, <i>see pack</i>	1/10/100	.182	3.99 EA




Clock Outlet - Recessed plate with heavy-duty hook for holding large clock. Fits standard box. 15A/125V. UL listed. NEMA 5-15R. Ivory.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
519656-D	R0100688001	Iv Clock Outlet	1/0/5	.280	6.79 EA



Grounding Outlet - For direct connection with aluminum wire. Terminal screws accept up to No. 10 conductors. Break-off fins for 2-circuit conversion. 15A/125V. UL listed. NEMA 5-15R. Ivory.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507455-D	12650I	Iv Copper/alum Outlet	1/10/200	.161	3.79 EA

Thomas & Betts


Floor Box Outlet Kit - Kit contains a solid brushed brass cover, fully gasketed steel box, single outer receptacle. 15A/125V. Instructions and hardware for mounting the plate and receptacle. UL listed. Code approved meets section 370-27 (b).



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
557668-C	71WDS	Brz Floor Outlet Kit	1/0/4	1.375	59.99 EA




Flush Outlet - Power grounding outlet. 2-pole, 3-wire. 30A/250V. UL listed to accept aluminum or copper conductors. Maximum 4 AWG. Black. NEMA 6-30R.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
523669-C	R005372	Flush Outlet	1/0/5	.340	11.99 EA




Surface Outlet - Power grounding outlet. 2-pole, 3-wire. 30A/250V. UL listed to accept aluminum or copper conductors. Maximum 4 AWG. Black. NEMA 6-30R.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
523650-C	5376	Surface Outlet	1/0/10	.875	16.49 EA




Flush Welder Outlet - Power grounding outlet; 2-pole, 3-wire. UL listed to accept aluminum or copper conductors. Maximum 4 AWG. 50A/250V. Black. NEMA 6-50R.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
532221-B	5374	Flush Welder Outlet	1/0/10	.341	12.49 EA



Surface Welder Outlet - Power grounding outlet; 2-pole, 3-wire. UL listed to accept aluminum or copper conductors. Maximum 4 AWG. 50A/250V. Black. NEMA 6-50R.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
532203-C	5378	Surface Welder Outlet	1/0/10	1.050	14.99 EA

ELECTRICAL

OUTLETS




Outlet - Flush dryer outlet will accept aluminum or copper conductors. Maximum 4 AWG. 3-pole, 3-wire, nongrounding. 30A/125/250V. Black, NEMA 10-30R. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514429-C	5207	Flush Dryer Outlet	1/0/20	.320	4.29 EA



Outlet - Surface dryer outlet will accept aluminum or copper conductors. Maximum 4 AWG. 3-pole, 3-wire, nongrounding. 30A/125/250V. Black. NEMA 10-30R. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514704-C	5054	Surface Dryer Outlet	1/0/10	.762	5.99 EA




Outlet - Flush range outlet will accept aluminum or copper conductors. Maximum 4 AWG. 3-pole, 3-wire, nongrounding. Black, 50A/125/250V. NEMA 10-50R, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514606-C	5206	Flush Range Outlet	1/0/20	.340	4.29 EA




Outlet - Surface range outlet will accept aluminum or copper conductors. Maximum 4 AWG. 3-pole, 3-wire, nongrounding. Black, 50A/125/250V. NEMA 10-50R, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514599-C	5050	Surface Range Outlet	1/0/10	1.040	5.99 EA




Dryer Outlet - 3-pole, 4-wire surface mount grounding outlet for dryers. Lay-in terminals accept up to No. 4 conductor. For use with copper or aluminum wire. Black. 30A/125/250V. NEMA 14-30R, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513279-C	55054	Surface Dryer Outlet	1/0/10	.820	11.49 EA




Range Outlet - 3-pole, 4-wire surface mount grounding outlet for ranges. Lay-in terminals accept up to No. 4 conductor, use with copper or aluminum wire. Black. 50A/125/250V. NEMA 14-50R, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512920-B	55050	Surface Range Outlet	1/0/10	.830	11.49 EA



Range Outlet - 3-pole, 4-wire flush mount grounding outlet for ranges. Lay-in terminals accept up to No. 4 conductor, use with copper or aluminum wire. Black. 50A/125/250V. NEMA 14-50R, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
524336-C	R01279	Flush Range Outlet	1/0/6	.625	10.49 EA



Dryer Outlet - 3-pole, 4-wire flush mount grounding outlet for dryers. Lay-in terminals accept up to No. 4 conductor, copper or aluminum wire. Black. 30A/125/250V. NEMA 14-30R, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
524328-C	R01278	Flush Dryer Outlet	1/0/6	.637	10.49 EA

OUTLETS




Locking Outlet - V-O-MAX™ industrial grade, flush mount locking receptacle. 3-pole, 4-wire. 20A 125/250V. NEMA L14-20R black. Lifetime warranty. UL/CSA listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505992-C	065-02410-000	Locking Outlet	1/0/10	.310	14.99 EA




Locking Outlet - Spec-Master® Premium Industrial Specification Grade single locking flush outlet. Bronze double-wire contacts for maximum electrical conductivity. Accepts both polarized and nonpolarized plugs. 2-pole, 3-wire grounding, NEMA L5-20, 20A/125V. Backed by a limited 10 year warranty. UL listed. CSA approved. Use with wall plate model No. 84020-40.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501751-C	R012310	Locking Outlet	1/0/5	.300	12.99 EA




Locking Outlet - Spec-Master® Premium Industrial Specification Grade single locking flush outlet. Bronze double-wire contacts for maximum electrical conductivity. Accepts both polarized and nonpolarized plugs. 2-pole, 3-wire grounding, NEMA L5-30, 30A/125V. Backed by a limited 10 year warranty. UL listed. Use with wall plate model No. 84020-40.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501735-C	R012610	Locking Outlet	1/0/5	.300	14.99 EA



Locking Outlet - Spec-Master® Premium Industrial Specification Grade single locking flush outlet. Bronze double-wire contacts for maximum electrical conductivity. Accepts both polarized and nonpolarized plugs. 2-pole, 3-wire grounding, NEMA L6-20, 20A/250V. Backed by a limited 10 year warranty. UL listed, CSA approved. Use with wall plate model No. 84020-40.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501743-C	R022320	Locking Outlet	1/0/3	.201	12.99 EA

ELECTRICAL



Locking Outlet - Spec-Master® Premium Industrial Specification Grade single locking flush outlet. Bronze double-wire contacts for maximum electrical conductivity. Accepts both polarized and nonpolarized plugs. 2-pole, 3-wire grounding, NEMA L6-30, 30A/250V. Backed by a limited 10 year warranty. UL listed. Use with wall plate model No. 84020-40.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501484-C	065-02620-000	Locking Outlet	1/0/10	1.860	14.99 EA



GFCI Receptacle - SmartLock® GFCI duplex receptacles are designed to comply with UL 2003 code requirements. Can be wired to protect all receptacles downstream on the same circuit. Terminal screw wiring can be back and side wired. Compact design with rounded corners fits easily in all surface and flush boxes, only 1-1/8" deep. Impact-resistant thermoplastic cover and body. Silver-alloy terminal contacts. Conforms with UL Standard 943, Class A (GFCI); and UL Standard 498 (receptacles). 15A/125V. NEMA 5-15R. Complete with matching wall plate. 1 per clamshell.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552550-B	L038599A	Almond monochromatic, without indicator light	1/3/30	1.400	11.99 EA
504327-B	L1185990AI	Ivory monochromatic, without indicator light	1/3/30	1.400	11.99 EA
514462-B	L1285990AW	White monochromatic, without indicator light	1/0/3	1.400	11.99 EA
523984-A	L038598A	Almond with black and red buttons, with indicator light	1/3/30	.467	14.99 EA
523534-A	L019598I	Ivory with black and red buttons, with indicator light	1/3/30	2.800	14.99 EA
514454-A	L028598W	White with black and red buttons, with indicator light	1/3/30	2.800	14.99 EA



GFCI Receptacle - SmartLock® GFCI duplex receptacles are designed to comply with UL 2003 code requirements. Can be wired to protect all receptacles downstream on the same circuit. Terminal screw wiring can be back and side wired. Compact design with rounded corners fits easily in all surface and flush boxes, only 1-1/8" deep. Impact-resistant thermoplastic cover and body. Silver-alloy terminal contacts. Conforms with UL Standard 943, Class A (GFCI); and UL Standard 498 (receptacles). 15A/125V. NEMA 5-15R. Wall plate not included. 1 per box.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
524026-B	R43-08599-RBA	Almond with black and red buttons, without indicator light	1/0/10	.927	11.99 EA
523992-B	R41-08599	Ivory with black and red buttons, without indicator light	1/0/50	1.580	11.99 EA
524018-B	R42-08599-RBW	White with black and red buttons, without indicator light	1/0/10	1.440	11.99 EA
522660-B	R40085990RB	Brown with black and red buttons, without indicator light	1/0/6	.328	11.99 EA



GFCI Receptacle - SmartLock® GFCI duplex receptacles are designed to comply with UL 2003 code requirements. Can be wired to protect all receptacles downstream on the same circuit. Terminal screw wiring can be back and side wired. Compact design with rounded corners fits easily in all surface and flush boxes, only 1-1/8" deep. Impact-resistant thermoplastic cover and body. Silver-alloy terminal contacts. Conforms with UL Standard 943, Class A (GFCI); and UL Standard 498 (receptacles). 20A/125V. NEMA 5-20R. Wall plate not included. 1 per box.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
556351-A	B038899A	Almond with black and red buttons, without indicator light	1/0/5	.150	12.99 EA
530840-A	B01-8899-RB1	Ivory with black and red buttons, without indicator light	1/0/5	.150	12.99 EA
530859-A	B02-8899-RBW	White with black and red buttons, without indicator light	1/0/5	.150	12.99 EA



Switch And GFCI Outlet - Combination switch and GFCI receptacle is designed for 1-gang boxes requiring a switch and receptacle. The switch is 15A rated. The GFCI receptacle meets UL 943 requirements. Device can be both back and side wired for ease in installation. The included wall plate is midsize to hide blemishes around the perimeter of the device. Packed in a versatile window display hang tab box. 8.3A/1000W at 120V AC.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506370-D	R01829900I	Ivory	1/0/4	.536	23.99 CD
506389-D	R4282990AW	White	1/0/4	.550	23.99 CD

Thomas & Betts

Weatherproof GFCI - Red Dot® weatherproof GFCI kit includes lockable outlet cover, metal outlet box, 20A GFCI, gasket, plugs, screws, mounting lugs, and sealant. Use for all outdoor outlets including landscape lighting, lawn equipment, pool/hot tub pumps, bug zappers, and holiday lighting.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508962-B	CSNMG	Outdoor Nm Gfci Kit	1/0/4	1.720	29.99 EA

Thomas & Betts

Weatherproof GFCI - Red Dot® weatherproof GFCI kit includes lockable outlet cover, metal outlet box, 20A GFCI, gasket, plugs, screws, mounting lugs, and sealant. Use for all outdoor outlets including landscape lighting, lawn equipment, pool/hot tub pumps, bug zappers, and holiday lighting.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508971-B	CSMGV	Outdoor Metal Gfci Kit	1/0/4	2.010	31.99 EA



Portable GFI - Helps to improve safety in construction sites, workshops, garages, etc., anywhere electrical tools are used. Has test and reset button, shatter-resistant outer case, water-resistant, 6' cord. 15A/125V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
521329-C	4115-6GFCI	Portable Gfi	1/0/4	2.000	42.99 EA



Grounded Outlet - Decora duplex outlet, side wire and Quickwire push-in wiring options. Heavy-duty double-wire brass contacts, heavy-gauge zinc-plated steel mounting strap. 15A/125V, NEMA 5-15R. UL listed. Limited 1 year warranty. See pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552518-C	R435325A	Almond	1/0/10	.220	1.99 EA
523641-C	5325ISP	Ivory	1/10/100	.186	1.99 EA
523785-C	5325WSP	White	1/10/100	.188	1.99 EA

SWITCHES

ELECTRICAL



Grounded Switch - Single pole Decora switch allows faster installation with *Quickwire* push-in and side wiring. Terminal screws accept up to No. 10 copper wire. 15A/120/277V, 1/2 HP-120V, 2 HP-240V. Limited 10 year warranty. UL listed. See Pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552526-A	R03-05601-2AS	Almond	1/0/10	.192	2.29 EA
523945-A	5601-2ISP	Ivory	1/10/100	.183	2.29 EA
524016-A	5601-2WSP	White	1/10/100	.183	2.29 EA

NOTE 1: Effective January 1, 1995, UL Standard 498 requires that push-wire receptacles accept only 14 AWG solid copper conductors in their push-wire terminations.



Grounded Switch - 3-way Decora switch allows faster installation with *Quickwire* push-in and side wiring. Terminal screws accept up to No. 10 copper wire. 15A/120/277V, 1/2 HP-120V, 2 HP-240V. Limited 10 year warranty. UL listed. See Pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552348-B	R4356032AS	Almond	1/0/5	.244	3.49 EA
524061-B	5603-2ISP	Ivory	1/0/10	.196	3.49 EA
524098-B	5603-2WSP	White	1/10/100	.191	3.49 EA



Grounded Switch - Illuminated single pole Decora switch allows faster installation with *Quickwire* push-in and side wiring. Terminal screws accept up to No. 10 copper wire. 15A/12/277V, 1/2 HP-120V, 2 HP-240V. Limited 10 year warranty. UL listed. See Pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552364-B	R4356112AS	Almond	1/0/5	.220	6.99 EA
524123-B	5611-2ISP	Ivory	1/0/5	.209	6.99 EA
524132-B	5611-2WSP	White	1/5/50	.209	6.99 EA



Grounded Switch - Illuminated 3-way Decora switch allows faster installation with *Quickwire* push-in and side wiring. Terminal screws accept up to No. 10 copper wire. 15A/12/277V, 1/2 HP-120V, 2 HP-240V. Limited 10 year warranty. UL listed. See Pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552372-C	R43-05612-2AS	Almond Available Only At Cape, Dixon, Medina, Waco, Lexington, Woodburn, Montgomery	1/0/5	.248	10.49 EA
524285-C	5613-2WSP	White	1/0/5	.218	10.49 EA



Grounded Switch - 4-way Decora switch allows faster installation with *Quickwire* push-in and side wiring. Terminal screws accept up to No. 10 copper wire. 15A/12/277V, 1/2 HP-120V, 2 HP-240V. Limited 10 year warranty. UL listed. See Pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552356-D	R43-05604-2AS	Almond	1/0/5	.246	12.99 EA
513067-D	5604-2ISP	Ivory	1/0/5	.264	12.99 EA
512885-D	5604-2WSP	White	1/5/20	.265	12.99 EA

NOTE 1: Effective January 1, 1995, UL Standard 498 requires that push-wire receptacles accept only 14 AWG solid copper conductors in their push-wire terminations.



Duplex Switch - Install 2 single pole switches in a single gang space. 15A/120/277V, 1/2 HP-120V, 2 HP-240V. (The total combined load for both switches must not exceed 20A.) Limited 10 year warranty. UL listed. See Pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552399-D	R035634A	Almond	1/0/5	.120	11.99 EA
512796-D	R1105634I	Ivory	1/0/5	.147	11.99 EA
512761-D	R025634W	White	1/0/10	.147	11.99 EA

ELECTRICAL

WALLPLATES



Telephone Jack - Decora flush-mount 4-conductor modular telephone wall jack with nickel-plated screw terminals. Use with single or multi-gang boxes. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508497-D	01240649W	White	1/0/10	.131	4.79 EA




Cable Jack - Decora flush-mount F-connector wall jack for CATV or other video applications. Nickel-plated screw terminals, use with single or multi-gang boxes. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508500-D	40681I	Ivory	1/0/10	.058	4.49 EA
508616-D	40681W	White	1/0/10	.059	4.49 EA



Wall Plate Mounting Bracket - 1 gang metal bracket inserts into wall opening and has flexible tabs that bend up to secure the bracket to the opening. Standard screw holes accept all wall plate configurations. 2 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
558168-C	R02-C0224-000	Mounting Bracket	1/0/10	.260	2.49 EA



Plastic Wall Plate - Single gang standard size rocker switch/GFI smooth plastic wall plate. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552607-E	80401A	Almond	1/25/250	.058	.59 EA
562483-E	002-80401-00	Brown	1/0/25	.244	.59 EA
524365-E	02080401I	Ivory	1/20/200	.055	.59 EA
524436-E	021-8040-00W	White	1/20/200	.046	.59 EA



Plastic Wall Plate - 2-gang standard size rocker switch/GFI smooth plastic wall plate. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552593-D	80409A	Almond	1/0/25	.098	1.39 EA
524472-D	80409I	Ivory	1/25/100	.098	1.39 EA
524542-D	80409W	White	1/25/100	.100	1.39 EA



Plastic Wall Plate - 3-gang standard size rocker switch/GFI smooth plastic wall plate. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552577-E	80411A	Almond	1/0/10	.135	2.19 EA
524640-E	80411I	Ivory	1/0/10	.136	2.19 EA
524659-E	80411W	White	1/10/100	.137	2.19 EA

WALLPLATES

ELECTRICAL



Nylon Wall Plate - Commercial Specification Grade. Single gang standard size rocker switch/GFI nylon wall plate. UL listed. Limited 10 year warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506095-D	80401NI	Ivory	1/0/20	.046	.99 EA
506222-D	80401NW	White	1/0/20	.045	.99 EA
505652-D	80401NA	Almond	1/0/20	.046	.99 EA



Nylon Wall Plate - Commercial Specification Grade. Single gang standard size single toggle nylon wall plate. UL listed. Limited 10 year warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511676-D	80701I	Ivory	1/20/200	.050	.69 EA
511366-D	80701W	White	1/20/200	.052	.69 EA
505787-D	80701A	Almond	1/0/25	.049	.69 EA



Nylon Wall Plate - Commercial Specification Grade. 2 gang standard size double toggle nylon wall plate. UL listed. Limited 10 year warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508888-C	80709I	Ivory	1/0/25	.085	1.19 EA
509647-C	80709W	White	1/0/25	.085	1.19 EA
505661-C	80709A	Almond	1/0/25	.084	1.19 EA



Nylon Wall Plate - Commercial Specification Grade. 3-gang standard size 3 toggle nylon wall plate. UL listed. Limited 10 year warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509698-D	80711I	Ivory	1/0/10	.132	1.89 EA
509825-D	80711W	White	1/10/50	.143	1.89 EA
505689-D	80711A	Almond	1/0/25	.120	1.89 EA



Nylon Wall Plate - Commercial Specification Grade. Duplex outlet standard size nylon wall plate with a captive screw. UL listed. Limited 10 year warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511331-E	80703I	Ivory	1/20/200	.088	.69 EA
511323-E	80703W	White	1/20/200	.080	.69 EA
502478-E	023807030NA	Almond	1/0/25	.042	.69 EA



Nylon Wall Plate - Commercial Specification Grade. Duplex outlet/toggle switch combination standard size nylon wall plate. UL listed. Limited 10 year warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511307-C	80705I	Ivory	1/0/25	.077	1.19 EA
508632-C	80705W	White	1/0/25	.077	1.19 EA
502539-C	0138070500A	Almond	1/0/25	.042	1.19 EA

ELECTRICAL

WALLPLATES



Nylon Wall Plate - Commercial Specification Grade. Blank standard size nylon wall plate. UL listed. Limited 10 year warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510939-E	80714I	Ivory	1/25/100	.056	.79 EA
510947-E	80714W	White	1/25/100	.056	.79 EA



Plastic Wall Plate - Smooth plastic, standard size. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552658-E	82011	Almond	1/10/100	.164	1.49 EA
500240-E	85011	Brown	1/10/100	.160	1.49 EA
500259-E	86011	Ivory	1/10/100	.162	1.49 EA
500267-E	88011	White	1/10/100	.163	1.49 EA



Plastic Wall Plate - Smooth plastic, standard size. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552615-B	82001	Almond	1/25/250	.071	.24 EA
525630-B	85001	Brown	1/25/250	.065	.24 EA
525809-B	86001	Ivory	1/20/200	.069	.24 EA
531589-B	88001	White	1/20/200	.066	.24 EA



Plastic Wall Plate - Smooth plastic, standard size. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518433-D	85012	Brown	1/0/10	.260	1.99 EA
518441-D	86012	Ivory	1/10/50	.220	1.99 EA
518468-D	88012	White	1/10/50	.207	1.99 EA
562610-D	82012	Almond	1/0/10	.203	1.99 EA



Plastic Wall Plate - Smooth plastic, standard size. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552631-D	82009	Almond	1/25/250	.109	.89 EA
525783-E	85009	Brown	1/25/250	.106	.89 EA
525989-E	86009	Ivory	1/25/250	.112	.89 EA
531614-E	88009	White	1/25/250	.113	.89 EA



Plastic Wall Plate - Smooth plastic, standard size. UL listed.

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552623-B	82003	Almond	1/25/250	.055	.24 EA
525612-B	85003	Brown	1/25/250	.053	.24 EA
525943-B	86003	Ivory	1/20/200	.080	.24 EA
531598-B	88003	White	1/20/200	.057	.24 EA

WALLPLATES

ELECTRICAL



Plastic Wall Plate - Smooth plastic, standard size. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509221-D	85004	Brown	1/25/100	.077	.49 EA
509213-D	86004	Ivory	1/25/100	.074	.49 EA
518379-D	88004	White	1/25/100	.044	.49 EA
505741-D	82004	Almond	1/0/25	.063	.49 EA




Plastic Wall Plate - Smooth plastic, standard size.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
559105-E	82016	Almond	1/25/100	.092	.89 EA
500216-E	85016	Brown	1/25/100	.090	.89 EA
500224-E	86016	Ivory	1/25/100	.091	.89 EA
500232-E	88016	White	1/25/100	.090	.89 EA



Plastic Wall Plate - Smooth plastic, standard size.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
525765-E	85005	Brown	1/25/250	.100	.89 EA
525970-E	86005	Ivory	1/25/250	.096	.89 EA
531605-E	88005	White	1/25/250	.098	.89 EA
562602-D	82005	Almond	1/25/250	.100	.89 EA



Plastic Wall Plate - Smooth plastic, standard size.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514214-D	85021	Brown	1/0/10	.169	1.89 EA
514223-D	86021	Ivory	1/10/100	.148	1.89 EA
518913-D	88021	White	1/10/100	.151	1.89 EA



Plastic Telephone Wall Plate - .406" hole with knockout to enlarge hole to .625".



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514205-D	85018	Brown	1/0/10	.099	1.59 EA
521331-D	86018	Ivory	1/10/100	.091	1.59 EA
518387-D	88018	White	1/10/100	.092	1.59 EA



Plastic Wall Plate - Standard size plastic telephone/cable wall plate. Box mount, 0.312" hole.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511285-D	86013	Ivory	1/25/100	.075	.49 EA
511293-D	88013	White	1/25/100	.072	.49 EA
505616-D	82013	Almond	1/0/25	.068	.49 EA

ELECTRICAL

WALLPLATES



Plastic Wall Plate - Smooth plastic, standard size.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514116-D	85014	Brown	1/25/100	.071	.49 EA
521322-D	86014	Ivory	1/25/100	.076	.49 EA
515388-D	88014	White	1/25/100	.077	.49 EA
505876-D	82014	Almond	1/0/30	.067	.49 EA



Plastic Wall Plate - Smooth plastic, standard size. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518395-E	85025	Brown	1/0/25	.140	.89 EA
518409-E	86025	Ivory	1/25/100	.121	.89 EA
518417-E	88025	White	1/25/100	.128	.89 EA
505778-E	82025	Almond	1/0/25	.123	.89 EA



Range Or Dryer Wall Plate - Designed for use with wall mounted range and dryer outlets. 2.147" hole diameter. 1-gang standard size plate. Matching mounting screws included. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
504476-D	83028	Aluminum	1/10/100	.130	2.39 EA
514713-D	4927	Steel	1/10/100	.093	2.19 EA



Range Or Dryer Wall Plate - 2-gang, standard size plate for 1 device. Designed for use with wall mounted range and dryer outlets. 2.145" hole diameter. Matching mounting screws included. Aluminum finished steel. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514722-D	4934	Alum Rang/dry Wall Plate	1/10/100	.181	4.29 EA



Range Or Dryer Wall Plate - 2-gang standard size plate for use with 3-pole, 4-wire devices model No. 278 or 279. 2.465" hole diameter. Aluminum finished steel. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
524298-D	001-0S701-0GY	Alum Rang/dry Wall Plate	1/10/100	1.760	2.79 EA



Stainless Steel Wall Plate - Single toggle standard size stainless steel wall plate. Round on edges to prevent injury and wall damage. Type 302, .035" thick. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511161-D	84001	Ss 1-toggle Wall Plate	1/20/200	.134	1.89 EA

WALLPLATES

ELECTRICAL




Stainless Steel Wall Plate - 2-toggle standard size stainless steel wall plate. Round on edges to prevent injury and wall damage. Type 302, .035" thick. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511234-B	84009	Ss 2-toggle Wall Plate	1/0/20	.220	3.19 EA



Stainless Steel Wall Plate - Duplex outlet/toggle switch combination, standard size. Round on edges to prevent injury and wall damage. Type 302, .035" thick. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511218-B	84005	Ss Combo Wall Plate	1/0/20	.174	3.19 EA



Stainless Steel Wall Plate - Duplex outlet standard size stainless steel wall plate. Round on edges to prevent injury and wall damage. Type 302, .035" thick. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511188-D	84003	Ss Duplex Wall Plate	1/20/200	.103	1.89 EA



Stainless Steel Wall Plate - GFI. Round on edges to prevent injury and wall damage. Type 302, .035" thick. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511277-D	8440140	Ss Gfi Wall Plate	1/0/10	.140	3.19 EA



Stainless Steel Wall Plate - Single outlet, standard size, 1.406" hole. Round on edges to prevent injury and wall damage. Type 302, .035" thick. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511196-D	84004	Ss 1-outlet Wall Plate	1/0/10	.120	1.89 EA



Stainless Steel Wall Plate - Single gang blank, standard size. Round on edges to prevent injury and wall damage. Type 302, .035" thick. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511269-D	84014	Ss Blank Wall Plate	1/10/100	.152	1.89 EA



Plastic Mid-Way® Wall Plate - Smooth plastic Mid-Way® size (3/8" higher and wider than standard size wall plates). UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530036-D	80501	Brown	1/25/100	.087	.79 EA
530027-D	020-80501-I	Ivory	1/20/200	.147	.79 EA
518476-D	021-80501-W	White	1/20/200	.147	.79 EA

ELECTRICAL

WALLPLATES




Plastic Mid-Way® Wall Plate - Smooth plastic Mid-Way® size (3/8" higher and wider than standard size wall plates). UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530018-D	80503	Brown	1/25/100	.070	.79 EA
530009-D	020-80503I	Ivory	1/20/200	.146	.79 EA
518522-D	0218050300W	White	1/20/200	.138	.79 EA




Plastic Mid-Way® Wall Plate - Smooth plastic Mid-Way® size (3/8" higher and wider than standard size wall plates). UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529985-C	80505I	Ivory	1/0/25	.092	1.39 EA
520918-C	80505W	White	1/25/100	.088	1.39 EA




Plastic Oversized Wall Plate - Smooth plastic, oversized plate (3/4" higher and wider than standard size wall plates). UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518565-E	85101	Brown	1/25/100	.103	1.19 EA
518573-E	86101I	Ivory	1/25/100	.101	1.19 EA
518581-E	88101	White	1/25/100	.110	1.19 EA




Plastic Oversized Wall Plate - Smooth plastic, oversized plate (3/4" higher and wider than standard wall plates). UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518603-D	85109	Brown	1/0/25	.075	1.89 EA
518638-D	86109	Ivory	1/25/50	.194	1.89 EA
518646-D	88109	White	1/25/50	.140	1.89 EA



Plastic Oversized Wall Plate - Smooth plastic, oversized plate (3/4" higher and wider than standard size wall plates). UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518530-E	85103	Brown	1/25/100	.086	1.19 EA
518549-E	86103I	Ivory	1/25/100	.087	1.19 EA
518557-E	88103	White	1/25/100	.091	1.19 EA



Plastic Oversized Wall plate - Smooth plastic, oversized plate (3/4" higher and wider than standard wall plates). UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502391-D	86105	Ivory	1/25/50	.183	1.89 EA
505846-D	88105	White	1/25/50	.183	1.89 EA



Wall Plate End Panel - Toggle switch. Create-your-own plastic sectional wall plate program is the multiple outlet solution that can be combined to fit any wall plate configuration. Assemble together any combination of 2 or more wall plate panels. Choose from end and center panels the necessary configuration. All plates fit standard opening. Each plate individually cellophane packaged, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552704-D	PSE1I	Ivory	1/5/20	.060	2.49 EA
552712-D	PSE1W	White	1/5/20	.060	2.49 EA



Wall Plate End Panel - Duplex receptacle. Create-your-own plastic sectional wall plate program is the multiple outlet solution that can be combined to fit any wall plate configuration. Assemble together any combination of 2 or more wall plate panels. Choose from end and center panels the necessary configuration. All plates fit standard opening. Each plate individually cellophane packaged, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552720-D	PSE8I	Ivory	1/5/20	.055	2.49 EA
552739-D	PSE8W	White	1/5/20	.050	2.49 EA

WALLPLATES

ELECTRICAL



Wall Plate End Panel - Single receptacle. Create-your-own plastic sectional wall plate program is the multiple outlet solution that can be combined to fit any wall plate configuration. Assemble together any combination of 2 or more wall plate panels. Choose from end and center panels the necessary configuration. All plates fit standard opening. Each plate individually cellophane packaged, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552747-D	PSE7I	Ivory	1/0/5	.057	2.49 EA
552755-D	PSE7W	White	1/0/5	.055	2.49 EA



Wall Plate End Panel - Blank. Create-your-own plastic sectional wall plate program is the multiple outlet solution that can be combined to fit any wall plate configuration. Assemble together any combination of 2 or more wall plate panels. Choose from end and center panels the necessary configuration. All plates fit standard opening. Each plate individually cellophane packaged, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552763-D	PSE14I	Ivory	1/5/20	.077	2.49 EA
552771-D	PSE14W	White	1/5/20	.077	2.49 EA



Wall Plate End Panel - Rocker/GFI. Create-your-own plastic sectional wall plate program is the multiple outlet solution that can be combined to fit any wall plate configuration. Assemble together any combination of 2 or more wall plate panels. Choose from end and center panels the necessary configuration. All plates fit standard opening. Each plate individually cellophane packaged, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552798-D	PSE26I	Ivory	1/5/20	.050	2.49 EA
552801-D	PSE26W	White	1/5/20	.047	2.49 EA



Wall Plate Center Panel - Toggle switch. Create-your-own plastic sectional wall plate program is the multiple outlet solution that can be combined to fit any wall plate configuration. Assemble together any combination of 2 or more wall plate panels. Choose from end and center panels the necessary configuration. All plates fit standard opening. Each plate individually cellophane packaged, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552828-D	PSC1I	Ivory	1/0/5	.055	2.49 EA
552836-D	PSC1W	White	1/5/20	.055	2.49 EA



Wall Plate Center Panel - Duplex receptacle. Create-your-own plastic sectional wall plate program is the multiple outlet solution that can be combined to fit any wall plate configuration. Assemble together any combination of 2 or more wall plate panels. Choose from end and center panels the necessary configuration. All plates fit standard opening. Each plate individually cellophane packaged, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552844-D	PSC8I	Ivory	1/0/5	.045	2.49 EA
552852-D	PSC8W	White	1/0/5	.045	2.49 EA



Wall Plate Center Panel - Single receptacle. Create-your-own plastic sectional wall plate program is the multiple outlet solution that can be combined to fit any wall plate configuration. Assemble together any combination of 2 or more wall plate panels. Choose from end and center panels the necessary configuration. All plates fit standard opening. Each plate individually cellophane packaged, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552860-D	PSC7I	Ivory	1/0/5	.050	2.49 EA
552879-D	PSC7W	White	1/0/5	.052	2.49 EA

ELECTRICAL

WALLPLATES



Wall Plate Center Panel - Blank. Create-your-own plastic sectional wall plate program is the multiple outlet solution that can be combined to fit any wall plate configuration. Assemble together any combination of 2 or more wall plate panels. Choose from end and center panels the necessary configuration. All plates fit standard opening. Each plate individually cellophane packaged, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552887-D	PSC14I	Ivory	1/0/5	.075	2.49 EA
552895-D	PSC14W	White	1/0/5	.070	2.49 EA



Wall Plate Center Panel - Rocker/GFI. Create-your-own plastic sectional wall plate program is the multiple outlet solution that can be combined to fit any wall plate configuration. Assemble together any combination of 2 or more wall plate panels. Choose from end and center panels the necessary configuration. All plates fit standard opening. Each plate individually cellophane packaged, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552909-D	PSC26I	Ivory	1/0/5	.045	2.49 EA
552917-D	PSC26W	White	1/0/5	.047	2.49 EA



Flush Mount Wall Plate - *Quickport* flush mount wall plates offer field-configurability in an attractive single-piece housing. Mounting screws included. White. 1 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
558036-D	R02410802W	2-port	1/0/20	.166	2.39 EA
558044-D	R044108003W	3-port	1/0/10	.131	2.39 EA
558052-D	R064108004W	4-port	1/0/10	.196	2.39 EA
558060-D	R08410806W	6-port	1/0/10	.307	2.39 EA




Wall Plate Insert - 2-port insert is fully field-configurable with all *Quickport* snap-in modules and fits standard NEMA wallboxes and most floor monuments and uses standard duplex receptacle wall plates. White. 1 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
558117-F	R02410872W	Insert Wall Plate	1/0/10	.075	2.49 EA



Wall Plate Blank - Snap-in blank module. UL listed. White. 4 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
558125-C	8344085900W	Blank Wall Plate	1/0/5	.158	2.29 EA

Jackson-Deerfield Mfg.

Bright Brass Wall Plate - Bright brass stamped steel wall plate. 1 per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507784-D	9BS101	Single switch	1/0/6	.133	1.79 EA
507741-D	9BS102	Double switch	1/0/3	.233	2.99 EA
522961-C	9BS103	Triple switch	1/0/3	.300	4.79 EA
507733-D	9BS106	Single switch/single duplex outlet	1/0/3	.200	2.99 EA
507768-D	9BS108	Single duplex outlet	1/0/6	.117	1.79 EA
522945-C	9BS117	Single rocker (GFI)	1/0/6	.117	1.79 EA
522937-C	9BS127	Double rocker (GFI)	1/0/3	.167	2.99 EA

Jackson-Deerfield Mfg.

Antique Brass Wall Plate - Antique brass stamped steel wall plate. 1 per card. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
548553-D	9AB101	Single switch	1/0/6	.150	2.29 EA
549681-C	9AB102	Double switch	1/0/3	.300	3.49 EA
507806-D	9AB108	Single duplex outlet	1/0/6	.133	2.29 EA
522864-C	9AB117	Single rocker (GFI)	1/0/6	.117	2.29 EA

WALLPLATES

Jackson-Deerfield Mfg.

Pro-Ivory Steel Wrinkle Wall Plate - Ivory wrinkle finish steel wall plate, UL listed, powder-coated and individually packaged in clear utility plastic. Perfect for your professional customers. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513555-E	8IK100	Blank	1/0/20	.116	.69 EA
513504-C	8IK101	Single switch	1/0/20	.116	.49 EA
513512-D	8IK102	Double switch	1/0/20	.208	.99 EA
513539-C	8IK108	Single duplex	1/0/20	.099	.49 EA
551457-C	8IK117	Single rocker (GFI) Available Only At Cape, Dixon, Medina, Waco, Lexington, Woodburn, Montgomery	1/0/20	.101	.49 EA
513547-D	8IK118	Double duplex outlet	1/0/20	.161	1.29 EA

Jackson-Deerfield Mfg.


Pro-White Steel Smooth Wall Plate - White smooth finish steel wall plate. UL listed. Powder-coated and individually packaged in clear utility plastic. Perfect for your professional customers. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500356-D	8WS101	Single switch	1/0/20	.116	.49 EA
500364-D	8WS102	Double switch	1/0/20	.208	.99 EA
500402-D	8WS108	Single duplex outlet	1/0/20	.099	.49 EA
500763-E	8WS118	Double duplex outlet	1/0/20	.161	1.29 EA

Jackson-Deerfield Mfg.


Pro-White Steel Wrinkle Wall Plate - White wrinkle finish steel wall plate. UL listed. Powder-coated and individually packaged in clear utility plastic. Perfect for your professional customers. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513474-C	8WK100	Single blank	1/0/20	.116	.49 EA
513407-C	8WK101	Single switch	1/0/20	.116	.49 EA
513415-D	8WK102	Double switch	1/0/20	.208	.99 EA
513431-C	8WK108	Single duplex outlet	1/0/20	.099	.49 EA
513458-C	8WK118	Double duplex outlet	1/0/20	.161	.99 EA

Jackson-Deerfield Mfg.

Pro-Bright Chrome Steel Wall Plate - Bright chrome wall plate. Individually packaged in clear utility plastic. Perfect for your professional customers. UL listed. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513253-D	8CS100	Blank	1/0/20	.116	.99 EA
513202-D	8CS101	Single switch	1/0/20	.116	.99 EA
513210-D	8CS102	Double switch	1/0/20	.208	1.79 EA
513237-D	8CS108	Single duplex outlet	1/0/20	.098	.99 EA
551503-C	8CS117	Single rocker (GFI)	1/0/20	.101	.89 EA
513245-D	8CS118	Double duplex outlet	1/0/20	.161	1.99 EA

ELECTRICAL

GB Electrical

Electrical Spacer - Brings receptacles and switches flush with drywall or paneling to allow proper fit of wall plates. Easy installation: Simply compress the stack of spacers to the thickness needed, cut or twist off the required amount. Spacers can be snapped or slid over machine screw shaft where screw tightening is required. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539023-D	GSP-04	Electrical Box Spacer	1/0/10	.100	3.39 EA




Duplex Switch - Commercial Specification Grade. Combination single pole and 3-way switch. Side wired. Break-off fins for conversion to separate feeds. Accepts up to No. 10 copper/ copper clad wire. Silver cadmium oxide contacts. Fits standard duplex wall plate. 10 year warranty. 15A/120/277V AC. 1/2 HP at 120V, 2 HP at 240V. UL listed. CSA.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508446-C	R41-5241I	Ivory	1/0/5	.270	11.99 EA
504211-C	R425241WS	White	1/0/10	.280	11.99 EA



Armored Grounding Plug - Commercial Specification Grade. For use in shops, garages, and other work areas with hard floors. Rugged armored husk and cord clamp protects against chipping and cracking. Triple combination screws. Husk and wiring module keyed for easy alignment during assembly. 2-piece steel strain relief clamp centers cord for neat installation. Can be used with 18-3 to 12-3 cables. 15A/125V, NEMA 5-15. Yellow. UL listed. Use with model No. 515CA connector.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528101-C	515PA	Yel Armored Plug	1/10/50	.168	2.99 EA



Armored Grounding Connector - Commercial Specification Grade. For use in shops, garages, and other work areas with hard floors. Rugged armored husk and cord clamp protects against chipping and cracking. Triple combination screws. Husk and wiring module keyed for easy alignment during assembly. 2-piece steel strain relief clamp centers cord for neat installation. Can be used with 18-3 to 12-3 cables. 15A/125V, NEMA 5-15. Yellow. UL listed. Use with model No. 515PA plug.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529468-B	515CA	Yel Armored Connector	1/10/100	.194	4.99 EA

ELECTRICAL



Grounding Plug - Commercial Specification Grade. Python™

grounding plug with 1-piece hinge construction for quick assembly. Triple-drive screws; straight blade, Phillips, and Robertson head. Clear thermoplastic back terminal cover, high impact-resistant nylon housing resists abuse. Curved and crimp-lock terminal clamps allow electrical connection without cutting wire strands. Wide cord clamp range (.250 - .650) with removable inserts (18-3SVT - 10-3ST). Durable front module lock withstands punishment. 15A/125V, NEMA 5-15P. Yellow. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
523794-B	5256VY	15a Yel Nylon Cord Plug	1/10/50	.155	5.49 EA



Grounding Connector - Commercial Specification Grade. Python™

grounding connector with 1-piece hinge construction for quick assembly. Triple-drive screws; straight blade, Phillips, and Robertson head. Clear thermoplastic back terminal cover, high impact-resistant nylon housing resists abuse. Curved and crimp-lock terminal clamps allow electrical connection without cutting wire strands. Wide cord clamp range (.250 - .650) with removable inserts (18-3SVT - 10-3ST). Durable front module lock withstands punishment. 15A/125V, NEMA 5-15R. Yellow. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
523810-B	5259VY	15a Grnd Cord Connector	1/10/50	.179	9.49 EA



Armored Grounding Plug - Commercial Specification Grade. For

use in shops, garages, and other work areas with hard floors. Rugged armored husk and cord clamp protects against chipping and cracking. Triple combination screws. Husk and wiring module keyed for easy alignment during assembly. 2-piece steel strain relief clamp centers cord for neat installation. Can be used with 18-3 to 12-3 cables. 15A/250V, NEMA 6-15. Yellow. UL listed. Use with model No. 615CA connector.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
519852-D	615PA	Yel Armored Plug	1/10/50	.168	3.99 EA



Armored Grounding Connector - Commercial Specification

Grade. For use in shops, garages, and other work areas with hard floors. Rugged armored husk and cord clamp protects against chipping and cracking. Triple combination screws. Husk and wiring module keyed for easy alignment during assembly. 2-piece steel strain relief clamp centers cord for neat installation. Can be used with 18-3 to 12-3 cables. 15A/250V, NEMA 6-15. Yellow. UL listed. Use with model No. 615PA plug.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529459-B	615CA	Yel Armored Connector	1/0/10	.180	5.99 EA

PLUGS/CONNECTORS

Cooper Wiring

Connector - 2-pole, 3-wire dead front tandem armored grounding connector with cord clamp. Cord hole: .450 (11.43) to .685 (17.39). Cord clamp insert easily removed for larger diameter cords. Will take to 3 No. 12 wires. Each polarity separated by vinyl divider. Heavy-duty double wipe contacts. Yellow vinyl. 15A/250V, NEMA 6-15R. UL listed, CSA approved. Use with matching plug model No. 2866.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511949-D	2227	Yel Cord Connector	1/10/100	.190	6.49 EA



Grounding Plug - Commercial Specification Grade. Python™

grounding plug with 1-piece hinge construction for quick assembly. Triple-drive screws; straight blade, Phillips, and Robertson head. Clear thermoplastic back terminal cover, high impact-resistant nylon housing resists abuse. Curved and crimp-lock terminal clamps allow electrical connection without cutting wire strands. Wide cord clamp range (.250 - .650) with removable inserts (18-3SVT - 10-3ST). Durable front module lock withstands punishment. 15A/250V, NEMA 6-15P. Yellow. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512745-D	081-15656-0VY	15a Yel Nylon Cord Plug	1/0/10	.159	7.99 EA



Armored Grounding Plug - Commercial Specification Grade. For

use in shops, garages, and other work areas with hard floors. Rugged armored husk and cord clamp protects against chipping and cracking. Triple combination screws. Husk and wiring module keyed for easy alignment during assembly. 2-piece steel strain relief clamp centers cord for neat installation. Can be used with 18-3 to 12-3 cables. 20A/250V, NEMA 6-20. Yellow. UL listed. Use with model No. 620CA connector.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
519629-F	620PA	Yel Armored Plug	1/10/50	.160	6.79 EA



Armored Grounding Connector - Commercial Specification

Grade. For use in shops, garages, and other work areas with hard floors. Rugged armored husk and cord clamp protects against chipping and cracking. Triple combination screws. Husk and wiring module keyed for easy alignment during assembly. 2-piece steel strain relief clamp centers cord for neat installation. Can be used with 18-3 to 12-3 cables. 20A/250V, NEMA 6-20. Yellow. UL listed. Use with model No. 620PA plug.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
519638-D	620CA	Yel Armored Connector	1/10/100	.120	8.99 EA

PLUGS/CONNECTORS



Grounding Plug - COMMERCIAL SPECIFICATION GRADE.

Python™ grounding plug with 1-piece hinge construction for quick assembly. Triple-drive screws; straight blade, Phillips, and Robertson head. Clear thermoplastic back terminal cover, high impact-resistant nylon housing resists abuse. Curved and crimp-lock terminal clamps allow electrical connection without cutting wire strands. Wide cord clamp range (.250 - .650) with removable inserts (18-3SVT - 10-3ST). Durable front module lock withstands punishment. 20A/250V, NEMA 6-20P. Yellow. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513997-C	0815456VY	20a Yel Grnd Cord Plug	1/0/10	.158	7.99 EA



Grounding Connector - COMMERCIAL SPECIFICATION GRADE.


Python™ grounding plug with 1-piece hinge construction for quick assembly. Triple-drive screws; straight blade, Phillips, and Robertson head. Clear thermoplastic back terminal cover, high impact-resistant nylon housing resists abuse. Curved and crimp-lock terminal clamps allow electrical connection without cutting wire strands. Wide cord clamp range (.250 - .650) with removable inserts (18-3SVT - 10-3ST). Durable front module lock withstands punishment. 20A/250V, NEMA 6-20R. Yellow. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514004-C	5459VY	20a Grnd Cord Connector	1/0/10	.171	12.99 EA



Range and Dryer Plug - Maximum cord diameter .875". Can be used with either 30A or 50A 3-wire cord. 2 interchangeable neutral prongs are supplied (L-prong for 30A, flat prong for 50A). 30A/125/250V, NEMA 10-30P. 50A/125/250V, NEMA 10-50P. Self-displaying rack pack. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522401-C	R00287	Range/dryer Plug	1/0/10	.531	9.99 EA



Dual Power Plug - 30A and 50A right angle, dead front plug. Includes

30A blades and flat 50A blade. Built-in rejection feature prevents closure if blade is incorrectly positioned. Cord clamp for use with No. 14, 12, 10, 8, and 6 AWG round cord and No. 10/3 SRDT, 8/2-10/1 SRDT, and 6/2-8/1 flat wire. Cord diameter .630-1.050. Shell and bottom hinged for easy assembly. CSA. 30A/250V grounding, NEMA 6-30P. 50A/250V grounding, NEMA 6-50P. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
532212-C	R00931	30a/50a Dual Plug	1/0/5	.600	15.99 EA

ELECTRICAL



Plastic Lampholder - 1-piece incandescent outlet box plastic lampholder. Keyless, top wired, medium base socket. 4-1/2" O.D., fits 3-1/4" or 4" box. 600W/600V. UL listed, CSA. White.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507490-E	8829CW1	2 terminals	1/0/50	.260	2.79 EA
533998-C	8829CW4	4 terminals, allows continuous wiring	1/0/50	.282	2.99 EA



Lampholder - 2-piece pull chain outlet box incandescent lampholder.

Plastic, topwired, 2 terminal screws and 2 clamps, removable interior mechanism. Medium base socket, 4-1/2" O.D., fits 3-1/4" or 4" box. 250W/250V. UL listed, CSA. White.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507296-D	8827CW4	Plastic Lampholder	1/0/50	.344	4.99 EA



Replacement Socket - For model No. 8827CW4 lampholder.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
516249-D	29816-CM	Replacement Socket	1/0/25	.154	4.29 EA

ELECTRICAL

LAMP HOLDERS



Keyless Porcelain Lampholder - 1-piece, 2 screw terminals backed out and staked. Mounting holes on 2-3/4" centers. Shade holder groove. 660W/ 250V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513769-D	9874	3-3/4" O.D. For 3-1/4" outlet box.	1/0/50	.451	3.99 EA
513778-D	9875	4-1/4" O.D. Fits either 3-1/4" or 4" outlet box.	1/0/50	.625	1.99 EA

NOTE: Meets Federal Specification W-L-142A.



Keyless Porcelain Lampholder - 1-piece, 4 screw terminals for continuous wiring. Knockouts to fit either 3-1/4" or 4" outlet box. Shade holder groove. 660W/ 250V. UL listed.


NOTE: 4-1/2" O.D. Fits 3-1/4" or 4" outlet box.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506848-D	49875	Porcelain Lampholder	1/0/50	.630	1.99 EA



1-Piece Porcelain Lampholder - Terminal clamping system allows for continuous wiring. Maximum of 2 wires per clamp. Combination head screws which accept slotted or phillips head screwdrivers. Can be mounted on 3/4" or 4" box. Short chain with 3' braided cord connector and bell end included. 660W/250V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506857-D	49816C	Porcelain Lampholder	1/0/50	.938	3.99 EA



Pull Chain Lampholder - 1-piece, 2 screw terminals. 4-1/2" O.D. with knockouts to fit 3-1/4" or 4" outlet box. Captive mounting screws. Removable interior top wired. Short chain with 3' braided cord and bell included. Shade holder groove. 660W/ 250V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513796-B	29816C	Porcelain Lampholder	1/0/50	.660	3.29 EA



Pull Chain Porcelain Lamp-holder With Outlet - 2-wire outlet of NEMA configuration 1-15R. 2 screw terminals. Removable interior. Mounting screws and short chain with 3' braided cord and bell included. Lampholder rated 250W/125V. Outlet rated 15A/125V. 4-1/2" O.D. Fits 3-1/4" or 4" outlet box. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513812-C	9716C	Porcelain Lampholder	1/0/50	.820	4.79 EA



Porcelain Lampholder - Pull chain with grounding outlet. 3-wire outlet, 2 screw terminals. Removable interior allows wiring without removal. Mounting screws and short chain with 3' braided cord, belled end. 4-1/2" O.D., fits 3-1/4" or 4" outlet box. Lampholder rated 660W/125V. 3-wire outlet rated 15A/125V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503878-D	9726C	Porcelain Lampholder	1/0/50	.810	5.29 EA

Allied Moulded

Fiberglass Ceiling Lampholder With Chain - 1-piece construction, fits 3-1/3", 3-1/2" or 4" outlet boxes. Shatter and heat-resistant. UL listed. 250W/250V. 4' pull chain.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
521402-D	LH=2P	Lampholder/chain	1/0/50	.380	4.79 EA

LAMPHOLDERS

Allied Moulded

Keyless Fiberglass Ceiling Lamp Holder - Fits 3-1/4", 3-1/2" or 4" outlet boxes. Shatter and heat-resistant. 1-piece construction with double screw terminals. UL listed. 250W/250V.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518014-D	LH=1P	Ceiling Lampholder	1/0/50	.260	2.49 EA



Lampholder Guard - Durable plastic guard helps prevent burns and damage. Snaps open easily for bulb replacement. Ideal for use with porcelain lampholders and temporary lighting. White. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
540234-D	R40-122200W	Lampholder Guard	1/0/10	.110	2.99 EA

Cooper Wiring

Pull Cord - 3' heavy white braid pull cord with end bell and connector.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
515361-D	315	3' Pull Cord	50/0/1000	.005	.69 EA



Lampholder - Porcelain keyless commercial lampholder. Single circuit screw terminal. Straight body with cap. 1-1/2" O.D., 2-1/8" O.H. 660W/250V. UL listed, CSA.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507520-D	10045	Porcelain Socket	1/0/10	.200	4.99 EA

ELECTRICAL

Westinghouse Lighting

Keyless Lamp Socket - Medium base, with 1/8 IP threaded hickey for exterior fixtures. Porcelain. 1 per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507377-D	70409	Keyless Lamp Socket	1/6/72	.208	4.49 CD



porcelain Lampholder - 2-piece, ring-type. Screw terminals/wire ways. 1-3/4" O.D. x 1-3/8" H. Medium base, single circuit. Rated 660W/250V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513750-D	9350	Porcelain Lampholder	1/10/100	.292	3.49 EA



Cleat-Type Lampholder - Surface mounted. Medium base with open terminals. 1-7/8" O.D. x 1-1/2" H. Mounting holes on 1-15/16" centers (diagonal from terminals). Rated 660W/250V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513723-D	19062	White porcelain	1/0/10	.219	3.99 EA
513741-D	9063	Brown phenolic plastic	1/0/10	.094	3.49 EA

ELECTRICAL

Westinghouse Lighting

Ceiling Lampholder - Twin cluster ceiling socket and lampholder. Includes crossbar and all head screws necessary for installation. All parts UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507547-D	70234	Twin Ceiling Lampholder	1/0/4	.500	6.79 CD

Westinghouse Lighting

3-Way Lamp Socket - Porcelain 3-way socket, with removable turn-knob. Mogul base. Bushing: 1/4" I.P. Height: 4-1/4". Rated for maximum 750W/250V. UL listed. 1 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539066-C	22281	3-way Lamp Socket	1/0/50	.700	17.49 EA

Westinghouse Lighting

3-Way Lamp Socket - Pull chain socket, bright brass finish. Threaded 1/8 IP, 120V. 1 per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507407-D	70431	3-way Lamp Socket	1/0/6	.135	10.49 CD

LAMPHOLDERS

Westinghouse Lighting

3-Wire Lamp Socket - Brass turn-knob socket for lamps with light in base and top. Threaded 1/8 IP, 120V. 1 per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507385-D	70421	3-wire Lamp Socket	1/6/72	.135	4.79 CD



Phenolic 1-Piece Interior - Screw terminals backed out. Mandrel is insulated from mechanism, threaded 4-36 for knob. Fits 1-13/16" diameter socket cup. Knob furnished. Electroiler, 2-circuit, 2 filament lamps: Low-medium-high-Off. Rated: 250W/250V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
504779-E	7090M	Turn Knob Lamp Socket	1/25/100	.048	3.29 EA



Keyless Socket - Porcelain keyless fixture socket. Single circuit, medium base. For indoor/outdoor use, adaptable to many different fixtures. With leads and removable bracket. Leads are 9" long, stripped 3/4". 660W/250V, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
504408-E	022-08052-001	Keyless Socket	1/10/100	.120	2.79 EA

CLIPS




Lampholder - Medium base, keyless. Removable hickey. Terminal screws backed out and staked. 660W/250V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513616-C	3352-8	Phenolic, brown	1/10/100	.062	2.59 EA
506524-E	3152-8	Porcelain	1/10/100	.123	2.59 EA




Triple Tap - Heavy-duty grounded vinyl triple tap. Converts a single grounded outlet to a triple grounded outlet source. Orange. 15A/125V, NEMA 5-15R. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509280-D	699	Orgn Triple Grnd Tap	1/10/100	.280	6.49 EA




Do it® Outlet - Plug-in, 3-prong grounding outlet. Vinyl, 15A/125V. UL listed, NEMA 5-15R, orange.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500100-C	876699	Orgn Triple Grnd Tap	1/10/50	.180	7.39 CD



Do it® Adapter - Converts outlet for 2-prong plugs to outlet for 3-prong grounding plugs. 15A/125V. UL listed. Gray.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
520494-C	875274	1 per card	1/10/100	.100	.99 CD
557838-D	876274-2PK	2 per card	1/0/5	.130	1.79 EA

ELECTRICAL

GB Electrical

Battery Clip - All steel general purpose test and battery clips. Screw connection. Carded. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510851-E	14-510	10A, 4 per card	1/0/10	.125	2.69 CD
510860-E	14-520	20A, 2 per card	1/0/10	.100	2.19 CD
513395-E	14-530	30A, 2 per card	1/0/10	.125	2.69 CD
513377-D	14-550	50A, 1 per card	1/0/10	.200	2.69 CD
505411-D	14-552	50A, 2 per card	1/0/10	.200	4.99 CD

GB Electrical


Alligator Clip - Standard alligator clips with convenient thumb grip. Screw terminal. Wire range 22-14-gauge. 2" long. 7/16" jaw spread. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510897-E	14-076	Noninsulated. 4 per card.	1/0/10	.025	1.89 CD
510904-E	14-077	Insulated barrel. 2 per card.	1/0/10	.050	1.59 CD

GB Electrical

Alligator Clip - Standard alligator clips. Fully insulated. Black and red vinyl insulators cover entire clip except the tip. Wire range 22-14-gauge. 2" long. 7/16" jaw spread. 2 per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
504866-E	14-078	Insulated Alligator Clip	1/0/10	.050	1.59 CD

GB Electrical

Mini Alligator Clip - 1-1/4" long with fine, even grip teeth and strong spring action for positive gripping on fine wire. Noninsulated. Wire range 22-14-gauge. Card of 4 clips. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
504823-E	14-075	1-1/4" Alligator Clip	1/0/10	.025	1.59 CD

ELECTRICAL

CLIPS

GB Electrical

Battery Clamp - Heavy-duty plated spring comes with tough vinyl insulators in red or black. Length: 3". Jaws open to 15/16". Jaws clamp solidly on terminal, stud, or bare battery post. Copper plated. 50A for auto and marine batteries. 1 red and 1 black per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531632-E	14-630	2/cd 50amp Battery Clamp	1/0/10	.150	2.69 CD

GB Electrical

Toggle Switch - Heavy-duty for household appliances and power tools. On/Off. UL listed. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522045-D	GSW-11	Motor rated, single pole, single throw; with On/Off faceplate, 2 screw-type terminals, 20A/125V AC; 10A/250V AC; 12V DC.	1/0/5	.100	4.89 CD
538981-E	GSW-121	Single pole, single throw; On/Off faceplate with 2 spade-type terminals for power tools, 20A/125V AC; 10A/250V AC; 3/4 HP-125V/250V AC.	1/0/5	.100	5.39 EA
522054-D	GSW-13	Motor rated, single pole, double throw; 3 screw-type terminals, 20A/125V AC; 10A/250V AC; 12V DC.	1/0/5	.100	5.39 CD
538973-D	GSW-119	Double pole, single throw; with 4 spade-type terminals, motor rated 20A/125V AC; 10A/250V AC; 1-1/2 HP-125V/250V AC.	1/0/5	.100	7.29 EA

GB Electrical

Toggle Switch - Medium-duty single pole, single throw. Smooth action On/Off faceplate. 2 prewired 6" stripped leads for small power tools, appliances, and electric motors up to 1/3 HP. 4A/250V; up to 10A/125V AC. UL listed. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522134-D	GSW-18	Med Duty Toggle Switch	1/0/5	.100	5.89 CD

GB Electrical

Toggle Switch - Medium-duty single pole, single throw with On/Off faceplate. 2 screw terminals for lamps and automotive, and short ball toggle. 3A-240V AC; 6A/120V AC. UL listed. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539007-E	GSW-124	Med Duty Toggle Switch	1/0/5	.100	5.29 EA

GB Electrical

Toggle Switch - Heavy-duty single pole, double throw, motor rated for power tools and household appliances. 2-speed On/On. 3 screw-type terminals. 20A/125V AC; 10A/250V AC; 3/4 HP, 125/250V. UL listed, 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
523589-D	GSW-12	Heavy Duty Toggle Switch	1/0/5	.100	5.29 CD

GB Electrical

Toggle Switch - Medium-duty single pole, single throw with On/Off faceplate. 2 Screw-type terminals for household appliances. 6A/120V AC; 3A/240V AC. UL listed. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513792-D	GSW-17	Med Duty Toggle Switch	1/0/5	.080	4.89 CD

GB Electrical

Toggle Switch - Heavy-duty double pole, single throw. On/Off. 4 screw-type terminals for power tools - especially belt-driven tools and lathes, and motors, rated up to 1-1/2 HP. 10A/250V AC; 20A/125V AC; or 12V DC. UL listed. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522116-E	GSW-14	Heavy Duty Toggle Switch	1/0/5	.100	6.99 CD

SWITCHES

GB Electrical

Toggle Switch - Heavy-duty, double pole, double throw, smooth action. 6 screw-type terminals for power tools, appliances, and motors, rated up to 1-1/2 HP. 10A/277V AC; 20A/125V AC or 12V DC. On/Off/On. UL listed. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522107-D	GSW-16	Heavy Duty Toggle Switch	1/0/5	.100	8.29 CD

GB Electrical

Toggle Switch - Heavy-duty, double pole, double throw, motor rated for power tools and appliances. On/Off. 6 screw-type terminals. 20A/125V AC; 10A/250V AC; 1-1/2 HP; 125/250V. UL listed. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522260-D	GSW-15	Heavy Duty Toggle Switch	1/0/5	.100	8.39 EA

GB Electrical

Push-Button Switch - Momentary off. Normally on. Single pole, single throw. For test and emergency equipment, security systems, horns, and lighting. 2 screw-type terminals. 3A/120V AC; 1.5A/277V AC. UL listed. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522295-D	GSW-23	Push-button Switch	1/0/5	.080	5.79 CD

ELECTRICAL

GB Electrical

Toggle Switch - Momentary On/Off/momentary On. Single pole, double throw. Heavy-duty toggle switch with 3 screw-type terminals. Motor rated for power winches, 20A/125V AC; 10A/250V AC; 3/4 HP-125V/250V AC. UL listed. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
538965-D	GSW-117	Heavy Duty Toggle Switch	1/0/5	.100	6.39 EA

Lutron

Toggle Switch with Slide Dimmer - On/Off switch plus slide dimmer. Adjust lighting level with mini-slide dimmer, separate control for On/Off. Gloss finish. Single pole, 120V/600W. RFI filtering prevents hum, for incandescent lights only. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
564052-B	TG600PH-IV	Ivory	1/0/6	.353	16.99 EA
564060-B	TG600PH-WH	White	1/0/6	.353	16.99 EA

Lutron

Toggle Switch with Slide Dimmer - On/Off switch plus slide dimmer. Adjust lighting level with mini-slide dimmer, separate control for On/Off. Gloss finish. 3-way, 120V/600W. RFI filtering prevents hum, for incandescent lights only. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
564079-B	TG603PH-IV	Ivory	1/0/6	.353	21.99 EA
564087-B	TG603PH-WH	White	1/0/6	.353	21.99 EA

ELECTRICAL

SWITCHES

GB Electrical

Toggle Switch Cover - Screw on, tough, weather-resistant cover protects from moisture and dust. Built-in hex nut base screws easily onto toggle switch base. 2 per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513784-D	GSW-20	2pk Toggle Switch Cover	1/0/5	.050	4.89 CD

GB Electrical

Rotary Switch - Single pole, single throw On/Off single current. For household lamps and appliances. 2 prewired 6" stripped leads. 1A/125VT; 3A/250V AC; 6A/125V AC. UL listed. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517763-D	GSW-61	Rotary Switch	1/0/5	.100	3.69 CD

GB Electrical

Rotary Switch - Single pole, triple throw Off/On/On/On. For household lamps and appliances. 3 prewired 6" stripped wire leads. 1A/250V; 3A/125VT. UL listed. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517771-D	GSW-62	Rotary Switch	1/0/5	.104	4.99 CD



Switch And Pilot Light - COMMERCIAL SPECIFICATION GRADE.


Combination single pole switch and neon pilot light. Side wired. Accepts up to No. 10 copper/copper clad wire. Silver cadmium oxide contacts. Fits standard duplex wall plate. 10 year warranty. 15A/120V AC. 1/2 HP at 120V switch. 1/25W/125V neon pilot light. UL listed. CSA. Rack pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508411-C	10852261SP	1v Switch/pilot Light	1/0/10	.260	8.49 EA



Outlet - 20A outlet. Commercial specification grade. Nongrounding, 3-pole, 3 wire. Side wired. NEMA 10/20R. 20A/125/250V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502263-B	00405032000	Brown	1/0/10	.134	6.49 EA
520635-B	00305032001	Ivory	1/0/10	.134	6.49 EA

Cooper Wiring


Flasher Button - 65 to 85 flashes per minute. For use with medium base sockets only. 15W/60W, 110V/125V. 1 per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509345-D	BP1008	Flasher Button	1/5/100	.040	3.59 CD

Cooper Wiring

2-Pole 3-Wire Grounding Tap - 15A/125V grounding cube tap converts any grounding outlet into a 3 grounding outlet. Double wire contacts. Plastic housing. UL listed, CSA approved. NEMA 5-15P.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517453-C	1482B	Brown	1/10/100	.160	4.59 EA
517532-C	1482V	Ivory	1/10/100	.160	4.59 EA

Cooper Wiring

Adapter - Close-to-wall adapter swivels up and down 180°. Converts single outlet to 3 outlets. Polypropylene molded plastic. Polarized. 15A/125V, NEMA 1-15. Ivory. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511706-D	BP792V	Ivory Flat Adapter	1/5/50	.160	3.39 CD

Cooper Wiring


Flat Rubber Cap Side Outlet - 15A/125V. 2-pole, 2-wire. Base: 1-1/4" x 1/2". Height: 1". Same construction and features as model No. 183B. Matches model No. 86 connector. UL listed, CSA approved. NEMA 1-15P.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509355-D	84BKBX	Rubber Side Plug	1/25/250	.036	1.49 EA

Cooper Wiring


Flat Rubber Cap - 15A/125V. 2-pole, 2-wire. Pull handle. 1-1/8" W. x 1-1/4" L. x 9/16" thick. Binding screws separated by insulation. Prongs are molded into vinyl bar and cannot loosen, yet retain their flexibility. *Dead Front*. Use with model No. 86 connector. UL listed, CSA approved. NEMA 1-15P.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509523-D	183BKBX	Flat Rubber Plug	1/25/250	.032	1.29 EA

Cooper Wiring

Polarized Plug - Standard grade thermoplastic plug. Impact-resistant for long-term durability. Accommodates .328" cord diameter. 15A/125V. NEMA 1-15P. UL listed. Use with matching connector model No. SA155. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503193-E	SA540	Black	1/10/100	.045	1.29 EA
503207-E	SA540B	Brown	1/10/100	.045	1.29 EA
503215-E	SA540GD	Gold	1/10/100	.045	1.29 EA
503223-E	SA540W	White	1/10/100	.045	1.29 EA

Cooper Wiring


Connector - Standard grade polarized thermoplastic cord connector. Impact-resistant for long-term durability. .328" cord diameter. 15A/125V. NEMA 1-15R. UL listed. Use with matching plug model No. SA440, SA540, or SA840. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500003-D	SA155	Black	1/10/100	.030	1.89 EA
500011-D	SA155B	Brown	1/10/100	.030	1.89 EA
501174-D	SA155GD	Gold	1/10/100	.030	1.89 EA
501506-D	SA155W	White	1/10/100	.030	1.89 EA

Cooper Wiring


Flat Rubber Cord Connector - 15A/125V. 2-pole, 2-wire, cord hole 2-1/64". Body 1-1/8" W., 2" L., 9/16" thick. Female contacts molded into a vinyl bar and come out in 1 piece. Easy to wire. Large head binding screws separated by insulation. All wiring completely enclosed. *Dead Front*. Matches flat rubber caps (plugs) model No. 84 and 183B. UL listed. CSA approved. NEMA 1-15P.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
509505-D	86BKBX	Blk Cord Connector	1/10/100	.050	2.29 EA

Cooper Wiring


Angle Plug - Vinyl polarized angle plug has 8 possible positions for maximum convenience. Terminal screw clamps are designed to contain wire and prevent binding. Terminal screws are backed out and are in individual chambers to positively insulate conductors. Solid brass plug blades are firmly embedded in the body. Yellow. 15A/125V. NEMA 1-15P. UL listed. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503355-D	4862ANWBOX	Yel Angle Cord Plug	1/10/100	.135	3.99 EA

Cooper Wiring


Rubber Plug - Rubber handle plug. Quick, easy-to-wire clamps with screws staked and backed out. Will take up to No. 12 wire. Brass prongs solidly embedded in dead front, corrosion-resistant cord clamps. Cord hole has rubber flap to seal cords from .250" to .600". Body is 1-1/2" in diameter x 2" long. 15A/125V, 2-pole, 2-wire. NEMA 1-15P. CSA approved. UL listed. Use with matching connector model No. 226.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500682-D	1723	2-wire Rubber Plug	1/10/100	.130	2.29 EA

Cooper Wiring


Plug - Enclosed dead front 2-pole, 2-wire armored plug. Large terminal screws staked and backed for easy wiring. Adjustable metal card clamp. Cord hole: .250 (6.35) to .575 (14.61). O.D., 1-1/2" (38.10). Yellow vinyl, 15A/125V. UL listed, NEMA 1-15P, CSA approved. Use with matching connector model No. 2882.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510307-D	2862	2-wire Grounded Plug	1/10/100	.155	2.49 EA

Cooper Wiring

Grounded Plug - Standard grade thermoplastic plug. Impact-resistant for long-term durability. Accommodates .32" cord diameter. 15A/125V. NEMA 5-15P. UL listed. Use with matching connector model No. SA993. 1 per card. **Made in U.S.A.**




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501727-D	SA399	Black	1/10/100	.068	2.99 EA
502022-D	SA399G	Gray	1/10/100	.068	2.99 EA
503061-D	SA399O	Orange	1/10/100	.068	2.99 EA
503126-D	SA399W	White	1/10/100	.068	2.99 EA

ELECTRICAL

Cooper Wiring

Grounded Connector - Standard grade thermoplastic connector. Impact-resistant for long-term durability. Accommodates .32" cord diameter. 15A/125V. UL listed. Use with matching plug model No. SA399. 1 per card. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503274-D	SA993	Black	1/10/100	.040	3.99 EA
503282-D	SA993G	Gray	1/10/100	.040	3.99 EA
503290-D	SA993O	Orange	1/10/100	.040	3.99 EA
503320-D	SA993W	White	1/10/100	.040	3.99 EA

Cooper Wiring

Commercial Grade Plug - High visibility nylon plug for use with power tools, lawn and yard equipment, and commercial cleaning. Nylon construction provides a high level of resistance to most chemicals and solvents found on commercial and industrial job sites. Designed with rounded edges and back to prevent the plug from snagging on cables and other objects. Individual wiring pockets guide each wire into the appropriate wire clamp assembly. 15A/12V AC, 2-pole, 3-wire grounding. Cord range: No. 16-3 to No. 12-3. NEMA 5-15P. CSA and UL listed. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537225-C	BP3867-4Y	Yellow	1/0/5	.200	4.79 EA
537233-C	BP3867-4GN	Green	1/0/5	.200	4.79 EA
537241-C	BP3867-4RN	Orange	1/0/5	.200	4.79 EA

Cooper Wiring

Commercial Grade Connector - High visibility nylon connector for use with power tools, lawn and yard equipment, and commercial cleaning. Nylon construction provides a high level of resistance to most chemicals and solvents found on commercial and industrial job sites. Designed with rounded edges and back to prevent the connector from snagging on cables and other objects. Individual wiring pockets guide each wire into the appropriate wire clamp assembly. 15A/12V, 2-pole, 3-wire grounding. Cord range: No. 16-3 to No. 12-3. NEMA 5-15R. CSA and UL listed. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537608-C	BP3487-4Y	Yellow	1/0/5	.200	8.49 EA
537624-C	BP3487-4GN	Green	1/0/5	.200	8.49 EA
537667-C	BP3487-4RN	Orange	1/0/5	.200	8.49 EA

Cooper Wiring

Watertight Plug - Thermoplastic elastomeric exteriors, multipoint moisture seals, corrosion-resistant metal components, and glass reinforced nylon interior construction provide excellent watertight operation. Can withstand temperatures from -81° F. (-62° C.) to 275° F. (135° C.). Can be used in wet locations and hosedown areas, computer equipment that requires a secure power connection, locations where vibration, dust, or metal chips are present, wherever physical abuse may occur and a secure connection is required. 15A/125V, NEMA 5-15P. CSA and UL listed. 1 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537772-C	AH14W47-SP	Watertight Plug	1/0/5	.280	15.49 EA

PLUGS/CONNECTORS

Cooper Wiring


Watertight Connector - Thermoplastic elastomeric exteriors, multipoint moisture seals, corrosion-resistant metal components, and glass reinforced nylon interior construction provide excellent watertight operation. Connector closure cap seals out dirt and water when not in use. Can withstand temperatures from -81° F. (-62° C.) to 275° F. (135° C.). Can be used in wet locations and hosedown areas, computer equipment that requires a secure power connection, locations where vibration, dust, or metal chips are present, wherever physical abuse may occur and a secure connection is required. 15A/125V, NEMA 5-15C. CSA and UL listed. 1 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537780-C	AH15W47-SP	Watertight Connector	1/0/5	.380	19.99 EA

Cooper Wiring


Connector - Black rubber grounding connector with cord clamps. 19/32" cord hole diameter 15A/125V. 2-pole, 3-wire grounding NEMA 1-15R. UL listed. CSA approved. Use with matching plug model No. 1709.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514268-D	222BOX	Rubber Cord Connector	1/10/100	.220	5.49 EA



Do it® Armored Plug - Vinyl, heavy-duty. Maximum cord diameter .437". Terminals accept up to No. 16-3 grounding wire. 15A/125V. UL listed. Black. NEMA 5-15P. Use with model No. 870617 connector.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518700-D	87548648	Blk Cord Plug	1/10/100	.138	3.29 CD

Cooper Wiring

Plug - 2-pole, 3-wire armored grounding plug. Cord clamp and enclosed dead front. Cord hole: .250 (6.35) to .685 (17.39). O.D.: 1-1/2" (38.10). Yellow vinyl. 15A/125V, NEMA 5-15P. UL listed. CSA approved. Use with matching connector model No. 2887.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512430-D	2867	3-wire Grounded Plug	1/10/100	.155	3.39 EA

Cooper Wiring

Connector - Armored grounding connector. Cord hole: .250 (6.35) to .685 (17.39) with removable cord clamp insert. Heavy-duty double wipe contacts. 2-pole, 3-wire. 15A/125V, NEMA 5-15R. UL listed. CSA approved. Use with matching plug model No. 2867.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512369-C	2887	3-wire Ground Connector	1/10/100	.190	5.49 EA

Cooper Wiring

Plug - 2-pole-3-wire dead front grounding armored plug with cord clamp.

Cord hole: .250 (6.35) to .685 (17.39).


O.D.: 1-1/2" (38.10) with removable cord clamp insert.

Yellow vinyl. 20A/125V, NEMA 5-20P. UL listed.

CSA approved. Use with model No.

2228 connector.

5-20P



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511565-D	2809	3-wire Grounded Plug	1/10/100	.155	3.39 EA

Cooper Wiring

Connector - 2-pole, 3-wire armored grounding connector with cord clamp.

Cord hole: .250 (6.35) to .685 (15.87).

Removable cord clamp insert. Will take 3 No.

12 wires. Each polarity separated by a vinyl divider.

Cord clamp insert easily removed for

larger diameter cords. Heavy-duty double

wipe contacts. Unbreakable yellow vinyl body.

20A/125V, NEMA 5-20R. UL listed. Use with matching plug model No.

2809.

5-20R



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511574-C	2228	Yel Cord Connector	1/10/100	.190	5.99 EA

Cooper Wiring

Plug - Armored dead front grounding plug. 2-pole, 3-wire, tandem.

Cord hole: .250 (6.35) to .685 (17.39). O.D.: 1-1/2"

(38.10). With removable cord clamp insert.


Clamp-type wire terminals. Each polarity

separated by vinyl divider. Yellow vinyl. 15A/

250V, NEMA 6-15P. UL listed, CSA approved.

Use with matching model No. 2227 connector.

6-15P



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512181-D	2866	3-wire Grounded Plug	1/10/100	.155	3.39 EA

Cooper Wiring

Plug - 2-pole, 3-wire grounding armored plug. Dead front with card

clamp. Cord hole: .250 (6.35) to .685 (17.39).

O.D.: 1-1/2" (38.10). Removable cord clamp


insert. Clamp-type wire terminals. Yellow vinyl.

20A/250V, NEMA 6-20P. UL listed, CSA

approved. Use with matching connector model

No. 2229.

6-20P



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511869-D	3809	3-wire Grounded Plug	1/10/100	.155	3.99 EA

Cooper Wiring

Connector - 2-pole, 3-wire armored grounding connector with cord

clamp. Cord hole: .250 (6.35) to .685 (17.39).

Cord clamp easily removed for larger diameter

cords. Easy-to-wire clamps. Each polarity

separated by vinyl divider. Heavy-duty double

wipe contacts. Unbreakable yellow vinyl body.

20A/250V, NEMA 6-20R. UL listed. Use with matching plug model No.

3809.

6-20R



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511583-C	2229	Yel Cord Connector	1/10/100	.190	5.99 EA

Cooper Wiring

Plug - 2-pole, 3-wire vinyl plug. Enclosed dead front brass blades,

large-head type terminal screws for easy wiring.

Cord hole: .250" to .685". 15A/125V, NEMA

5-15P. Yellow, UL listed. Use with matching

connector model No. 4887.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511668-D	4867	3-wire Vinyl Plug	1/10/100	.150	3.39 EA

Cooper Wiring

Connector - 2-pole, 3-wire vinyl connector. Terminal screws are

large-head type for easy wiring. Strain relief

clamps provide secure mechanical grip. Cord

hole: .250" to .685". 15A/125V, NEMA 5-15R.

Yellow, UL listed. Use with matching plug

model No. 4867.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511641-C	4887	3-wire Vinyl Connector	1/10/100	.180	5.79 EA



Locking Plug - Commercial Specification Grade. 2-pole, 3-wire

grounding. All nylon construction, high-strength

brass alloy blades and connectors. Unitite®

single-screw wiring mechanism tightens all 3 wiring

terminals at once for quick assembly. Clamptype cord

grip automatically adjusts to prevent strain on wiring

terminals without damaging cord jacket or conductors

2 nested self-tapping screws ease joining of shells.

Rubber gasket seals off rear shell from dirt and particles. Convenient cord

diameter and lead stripping gauges molded inside shell. Accepts round

cord AWG No. 14-3 through 10-3. Ratings visible on face. White shell, blue

face. Neoprene dust cover. 15A/125V, NEMA L5-15P. UL listed. Use with

connector model No. 6067050515C.



L5-15P


Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536539-C	60570515P	Locking Cord Plug	1/0/10	.210	8.99 EA

ELECTRICAL

PLUGS/CONNECTORS




Locking Connector - Commercial Specification Grade. 2-pole, 3-wire grounding. All nylon construction, high-strength brass alloy blades and connectors. Unitite® single-screw wiring mechanism tightens all 3 wiring terminals at once for quick assembly. Clampite cord grip automatically adjusts to prevent strain on wiring terminals without damaging cord jacket or conductors. 2 nested self-tapping screws ease joining of shells. Rubber gasket seals off rear shell from dirt and particles. Convenient cord diameter and lead stripping gauges molded inside shell. Accepts round cord AWG No. 14-3 through 10-3. Ratings visible on face. White shell, blue face. Neoprene dust cover. 15A/125V, NEMA L5-15R. UL listed. Use with connector model No. 605705015P.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536547-C	60670515C	15a Lockg Cord Connector	1/0/10	.220	14.99 EA



Locking Plug - Commercial Specification Grade. 2-pole, 3-wire grounding. All nylon construction, high-strength brass alloy blades and connectors. Unitite® single-screw wiring mechanism tightens all 3 wiring terminals at once for quick assembly. Clampite cord grip automatically adjusts to prevent strain on wiring terminals without damaging cord jacket or conductors. 2 nested self-tapping screws ease joining of shells. Rubber gasket seals off rear shell from dirt and particles. Convenient cord diameter and lead stripping gauges moulded inside shell. Accepts round cord AWG No. 14-3 through 10-3. Ratings visible on face. White shell, red face. Neoprene dust cover. 20A/125V, NEMA L5-20P. UL listed. Use with connector model No. 63170520C.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536555-C	63570520P	20a Locking Cord Plug	1/0/5	.190	9.99 EA




Locking Plug - Commercial Specification Grade. 2-pole, 3-wire grounding. All nylon construction, high-strength brass alloy blades and connectors. Unitite® single-screw wiring mechanism tightens all 3 wiring terminals at once for quick assembly. Clampite cord grips automatically adjusts to prevent strain on wiring terminals without damaging cord jacket or conductors. 2 nested self-tapping screws ease joining of shells. Rubber gasket seals off rear shell from dirt and particles. Convenient cord diameter and lead stripping gauges molded inside shell. Accepts round cord AWG No. 14-3 through 10-3. Ratings visible on face. White shell, red face. Neoprene dust cover. 20A/125V, NEMA L5-20R. UL listed. Use with connector model No. 63570520P.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552674-C	63170520C	20a Lockg Cord Connector	1/0/5	.400	12.49 EA



Locking Plug - Commercial Specification Grade. 2-pole, 3-wire grounding. All nylon construction, high-strength brass alloy blades and connectors. Unitite® single-screw wiring mechanism tightens all 3 wiring terminals at once for quick assembly. Clampite cord grip automatically adjusts to prevent strain on wiring terminals without damaging cord jacket or conductors. 2 nested self-tapping screws ease joining of shells. Rubber gasket seals off rear shell from dirt and particles. Convenient cord diameter and lead stripping gauges moulded inside shell. Accepts round cord AWG No. 14-3 through 10-3. Ratings visible on face. White shell, green face. Neoprene dust cover. 30A/125V, NEMA L5-30P. UL listed. Use with connector model No. 63170530C.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536628-C	63070530P	30a Locking Cord Plug	1/0/5	.235	14.49 EA



Locking Connector - Commercial Specification Grade. 2-pole, 3-wire grounding. All nylon construction, high-strength brass alloy blades and connectors. Unitite® single-screw wiring mechanism tightens all 3 wiring terminals at once for quick assembly. Clampite cord grips automatically adjusts to prevent strain on wiring terminals without damaging cord jacket or conductors. 2 nested self-tapping screws ease joining of shells. Rubber gasket seals off rear shell from dirt and particles. Convenient cord diameter and lead stripping gauges molded inside shell. Accepts round cord AWG No. 14-3 through 10-3. Ratings visible on face. White shell, green face. Neoprene dust cover. 30A/125V, NEMA L5-30R. UL listed. Use with plug model No. 63070530P.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
552666-C	63170530C	30a Lockg Cord Connector	1/0/5	.496	22.49 EA



Locking Plug - Commercial Specification Grade. 2-pole, 3-wire grounding. All nylon construction, high-strength brass alloy blades and connectors. Unitite® single-screw wiring mechanism tightens all 3 wiring terminals at once for quick assembly. Clampite cord grip automatically adjusts to prevent strain on wiring terminals without damaging cord jacket or conductors. 2 nested self-tapping screws ease joining of shells. Rubber gasket seals off rear shell from dirt and particles. Convenient cord diameter and lead stripping gauges molded inside shell. Accepts round cord AWG No. 14-3 through 10-3. Ratings visible on face. White shell red face. Neoprene dust cover. 20A/250V, NEMA L6-20P. UL listed. Use with connector model No. 63170620C.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536563-C	63070620P	20a Locking Cord Plug	1/0/5	.200	9.99 EA



Locking Connector - Commercial Specification Grade. 2-pole, 3-wire grounding. All nylon construction, high-strength brass alloy blades and connectors. Unitite® single-screw wiring mechanism tightens all 3 wiring terminals at once for quick assembly. Clamptite cord grip automatically adjusts to prevent strain on wiring terminals without damaging cord jacket or conductors. 2 nested self-tapping screws ease joining of shells. Rubber gasket seals off rear shell from dirt and particles. Convenient cord diameter and lead stripping gauges molded inside shell. Accepts round cord AWG No. 14-3 through 10-3. Ratings visible on face. White shell, red face. Neoprene dust cover. 20A/250V, NEMA L6-20R UL listed. Use with connector model No. 63070620P.



L6-20R

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536571-C	63170620C	20a Lockg Cord Connector	1/0/5	.195	12.49 EA



Locking Plug - Commercial Specification Grade. 2-pole, 3-wire grounding. All nylon construction, high-strength brass alloy blades and connectors. Unitite® single-screw wiring mechanism tightens all 3 wiring terminals at once for quick assembly. Clamptite cord grip automatically adjusts to prevent strain on wiring terminals without damaging cord jacket or conductors. 2 nested self-tapping screws ease joining of shells. Rubber gasket seals off rear shell from dirt and particles. Convenient cord diameter and lead stripping gauges molded inside shell. Accepts round cord AWG No. 14-3 through 10-3. Ratings visible on face. White shell, green face. Neoprene dust cover. 30A-/250V, NEMA L6-30P. UL listed. Use with connector model No. 63170630C.



L6-30P

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536598-C	63070630P	30a Locking Cord Plug	1/0/5	.235	14.49 EA



Locking Connector - Commercial Specification Grade. 2-pole, 3-wire grounding. All nylon construction, high-strength brass alloy blades and connectors. Unitite® single-screw wiring mechanism tightens all 3 wiring terminals at once for quick assembly. Clamptite cord grip automatically adjusts to prevent strain on wiring terminals without damaging cord jacket or conductors. 2 nested self-tapping screws ease joining of shells. Rubber gasket seals off rear shell from dirt and particles. Convenient cord diameter and lead stripping gauges molded inside shell. Accepts round cord AWG No. 14-3 through 10-3. Ratings visible on face. White shell, green face. Neoprene dust cover. 30A/250V, NEMA L6-30R. UL listed. Use with plug model No. 63070630P.




L6-30R

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536601-C	63170630C	30a Lockg Cord Connector	1/0/5	.250	24.99 EA

Cooper Wiring

Plug - 3-pole, 3-wire locking armored plug with cord clamp. Cord hole: .250 (6.35) to .750 (19.05). O.D.: 1-7/8" (47.62). Removable cord clamp inserts. Clamp-type wire terminals. Yellow vinyl, dead front. 20A/125/250V, NEMA L10-20P. UL listed. Use with matching connector model No. 2355.

L10-20P



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511556-D	2365	3-wire Locking Plug	1/10/30	.200	9.49 EA

Cooper Wiring

Connector - 3-pole, 3-wire locking armored connector with cord clamp. Cord hole: .250 (6.35) to .750 (19.05). O.D.: 1-7/8" (47.62). Removable cord clamp inserts. Each polarity separated by vinyl divider, just turn to lock. Yellow vinyl. 20A/125/250V, NEMA L10-20R. UL listed. Use with matching plug model No. 2365.

L10-20R



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511155-C	2355	3-wire Locking Connector	1/10/30	.417	13.49 EA



Locking Plug - Commercial Specification Grade. 3-pole, 4-wire grounding. All nylon construction, high-strength brass alloy blades and connectors. Unitite® single-screw wiring mechanism tightens all 3 wiring terminals at once for quick assembly. Clamptite cord grip automatically adjusts to prevent strain on wiring terminals without damaging cord jacket or conductors. 2 nested self-tapping screws ease joining of shells. Rubber gasket seals off rear shell from dirt and particles. Convenient cord diameter and lead stripping gauges molded inside shell. Accepts round cord AWG No. 14-3 through 10-3. Ratings visible on face. White shell, red face. Neoprene dust cover. 20A/125V/250V, NEMA L14-20P. UL listed. Use with connector model No. 63171420C.



L14-20P

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536636-D	63071420P	20a Locking Cord Plug	1/0/5	.195	16.99 EA



Locking Connector - Commercial Specification Grade. 3-pole, 4-wire grounding connector. All nylon construction, high-strength brass alloy blades and connectors. Unitite® single-screw wiring mechanism tightens all 3 wiring terminals at once for quick assembly. Clamptite cord grip automatically adjusts to prevent strain on wiring terminals without damaging cord jacket or conductors. 2 nested self-tapping screws ease joining of shells. Rubber gasket seals off rear shell from dirt and particles. Convenient cord diameter and lead stripping gauges molded inside shell. Accepts round cord AWG No. 14-3 through 10-3. Ratings visible on face. White shell, red face. Neoprene dust cover. 20A/125V/250V, NEMA L14-20R. UL listed. Use with plug model No. 63071420P.




L14-20R

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
544892-C	63171420C	20a Lockg Cord Connector	1/0/5	.200	21.99 EA

ELECTRICAL



Locking Plug - Commercial Specification Grade. 3-pole, 4-wire grounding. All nylon construction, high-strength brass alloy blades and connectors. Unitite® single-screw wiring mechanism tightens all 3 wiring terminals at once for quick assembly. Clamptite cord grip automatically adjusts to prevent strain on wiring terminals without damaging cord jacket or conductors. 2 nested self-tapping screws ease joining of shells. Rubber gasket seals off rear shell from dirt and particles. Convenient cord diameter and lead stripping gauges molded inside shell. Accepts round cord AWG No. 14-3 through 10-3. Ratings visible on face. White shell, green face. Neoprene dust cover. 30A/125V/250V, NEMA L14-30P. UL listed. Use with connector model No. 63171430C.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536660-C	63071430P	30a Locking Cord Plug	1/0/5	.260	19.99 EA



Locking Connector - Commercial Specification Grade. 3-pole, 4-wire grounding connector. All nylon construction, high-strength brass alloy blades and connectors. Unitite® single-screw wiring mechanism tightens all 3 wiring terminals at once for quick assembly. Clamptite cord grip automatically adjusts to prevent strain on wiring terminals without damaging cord jacket or conductors. 2 nested self-tapping screws ease joining of shells. Rubber gasket seals off rear shell from dirt and particles. Convenient cord diameter and lead stripping gauges molded inside shell. Accepts round cord AWG No. 14-3 through 10-3. Ratings visible on face. White shell, green face. Neoprene dust cover. 30A/125V/250V, NEMA L14-30R. UL listed. Use with plug model No. 63071430P.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
544906-C	63171430C	30a Lock Cord Connector	1/0/5	.260	24.99 EA

Woods Ind.

4-Outlet Metal Power Strip - Heavy-duty workshop multiple outlet power block, 4-outlet. 4' 14/3 cord. Black/yellow. 15A/125V/1875W. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536857-C	2177	4-outlet Mtl Power Strip	1/0/4	1.650	12.99 EA

PLUGS/CONNECTORS

Woods Ind.

6-Outlet Metal Power Strip - 6 grounded outlets, durable all-steel casing. 6' 14/3 grounded high visibility yellow cord. Safety circuit breaker with reset button. AWG 14/3 SJTW. 125V/15A/1875W.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536830-C	5139	6-outlet Power Strip	1/0/4	2.333	13.59 EA

Woods Ind.

Workshop Power Strip - Heavy-duty Transformer Deck™ plastic power strip. 6-outlet; fits 2 transformers and 4 regular outlets. 4' 14/3 cord. Black/yellow. 15A/125V/1875W. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
536849-B	7408	6-outlet Power Strip	1/0/3	2.500	11.79 EA

Woods Import

Do it® Multiple Outlet Strip - Converts 1 grounded outlet to 6 grounded outlets. A 15A circuit breaker helps protect against electrical overload. Built-in screw head slots for easy installation under a shelf, cabinet, or to a wall. 18" 14/3 SJT cord. 15A/125V/1875W.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501123-E	501123	6-outlet Power Strip	1/0/12	.838	4.99 EA

OUTLET STRIPS



Weatherproof Multi-Outlet - Weatherproof multi-outlet with programmable timer and combination photocell. 6 heavy-duty grounded outlets and 6 position timer and photocell. Dusk to dawn settings at 2, 4, or 6 hours.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
544442-B	FB3005	Outdoor Multi-outlet	1/6/12	1.167	39.99 EA

Woods Ind.

Computer And Modem Surge Protector - 6-outlet surge protector features phone line protection for devices such as modems, fax machines, and answering machines. Other features include 1 in, 2 out phone jack, power shut down protection, 6' phone/modem cord, conveniently positioned right angle outlets, a flat 45° right angle plug that will not block other outlets, and a heavy-duty 4' 14/3 SJT cord. Surge indicator light shows unit is protecting. 1060 joules. 125V/15A/1875W.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549649-C	6929	6-outlet Surge Strip	1/0/4	1.520	15.99 EA

Woods Ind.

7-Outlet Surge Protector With Coax Line Protection

Features coax line protection for televisions and cable boxes. Other features include rotating outlet covers, 6' coax cable, transformer/adaptor spacing, power shut down protection, lighted On/Off switch, conveniently positioned right angle outlets, a flat 45° angle plug that will not block other wall outlets, and a heavy-duty 4' 14/3 SJT cord. Surge indicator light shows unit is protecting. 1085 joules. 125V/15A/1875W.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549657-D	6942	7-outlet Surge Strip	1/0/4	.167	22.99 EA

ELECTRICAL

Woods Ind.

7-Outlet Surge Protector With Phone Line Protection

Features phone line protection for devices such as modems, fax machines, and answering machines. Other features include 1 in, 2 out phone jacks, transformer/adaptor spacing, power shut down protection, rotating outlet covers, lighted On/Off switch, 6' phone/modem cord, conveniently positioned right angle outlets, a flat 45° right angle plug that will not block other outlets, and a heavy-duty 4' 14/3 SJT cord. Surge indicator light shows unit is protecting. 1085 joules. 125V/15A/1875W.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549673-D	6941	7-outlet Surge Strip	1/0/2	.433	21.99 EA

Woods Ind.

5-Outlet Adapter - Outdoor rated with cord lock feature to prevent cords from being accidentally disconnected. Cord lock accommodates 16/3 - 10/3 SJT (300V) cords up to 12/3ST (600V) cords. Ideal for outdoor lighting projects such as holiday decorations. Connect extension cords together for long power runs and add additional outlets for power tools and equipment at the connection point. Outdoor rated. Durable, overmolded vinyl jacket. Yellow.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561274-C	827362	5-outlet Adapter	1/0/6	.833	12.79 EA

Woods Ind.

Multi-Outlet Surge Protector

- 8-outlet surge protector features coax or cable modem line protection for devices such as computers, televisions, and cable boxes. Other features include conveniently positioned right angle outlets, a flat 45° right-angle plug that will not block other wall outlets, rotating outlet covers, and a heavy-duty 6' 14/3 SJT cord. Ground indicator light shows unit is properly grounded, surge indicator light shows unit is protecting. Transformer/adaptor spacing for 4 outlets. Power shut down protection and lighted On/Off switch. 2145 joules. 125V/15A/1875W.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561290-C	6955	8-outlet Surge Protector	1/0/2	2.250	21.99 EA

Woods Ind.

Multi-Outlet Surge Protector

- 8-outlet surge protector features DSS, phone/modem, and coax line protection for cable boxes, DSS, and other home entertainment systems. Other features include conveniently positioned right angle outlets, a flat 45° angle plug that will not block other wall outlets and a heavy-duty 6' 14/3 SJT cord. Also includes (1) 6' RG-59 coax cable, (1) 6' RG-6 DDS cable, and (1) 6' phone/modem cord, 1 in, 2 out phone jacks, rotating outlet covers, and transformer/adaptor spacing for 4 outlets. Ground indicator and surge indicator lights show unit is protecting. Power shut down protection and lighted On/Off switch. 125V/15A/1875W.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561282-B	6956	8-outlet Surge Protector	1/0/4	2.500	34.99 EA

ELECTRICAL

ELECTRICAL

OUTLET STRIPS

Woods Ind.

7-Outlet Surge Protector - Features conveniently positioned right angle outlets, a flat 45° angle plug that will not block other wall outlets, rotating outlet covers, transformer/adaptor spacing, power shut down protection, lighted On/Off switch, and a heavy-duty 4' 14/3 SJT cord. Surge indicator light shows unit is protecting.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549665-C	6939	7-outlet Surge Strip	1/0/4	1.625	13.49 EA

Woods Ind.

Surge Strip - 6-outlet metal surge protector with 15' power cord. Heavy-duty steel housing. 14/3 high visibility grounded yellow power cord. 1050 joules. Indicator light shows unit is protecting. Lighted On/Off switch. Power shut down protection. 100% lifetime equipment replacement guarantee.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
556319-B	5138	6-outlet Surge Strip	1/0/4	2.750	19.99 EA



Power Strip - The Plugmold® tough power strip is a 4', 10-outlet, heavy-duty power strip with diamond bright aluminum finish. Includes circuit breaker protection and 6' black cord. Mounting hardware included. Great for workshops, garages, and job sites.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506937-A	PM48TC	Diamond Power Strip	1/0/3	4.000	49.99 EA

Woods Import

Surge Protector with Phone Line Protection - 8-outlet surge protector features phone line protection for devices such as modems, fax machines, and phone answering machines. Other features include 1 in, 3 out phone jacks, 6' phone/modem cord, rotating outlet covers, transformer/adaptor spacing for 4 outlets, power shut down protection, lighted On/Off switch, conveniently positioned right angle outlets, a flat 45° angle plug that will not block other wall outlets, and a heavy-duty 6' 14/3 SJT cord. Ground indicator light shows outlet is properly grounded, surge indicator light shows unit is protecting. 125V/15A/1875W.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502529-D	502529	Phone/fax Surge Strip	1/0/4	1.396	19.99 EA

Woods Ind.

8-Outlet Surge Protector with Phone Line Protection -

Features phone line protection for devices such as modems, fax machines, and answering machines. Other features include 6' phone/modem cord, 1 in, 3 out phone jacks, transformer/adaptor spacing for 4 outlets, power shut down protection, and lighted On/Off switch. Conveniently positioned right angle outlets, rotating outlet covers, a flat 45° right angle plug that will not block other wall outlets, and a heavy-duty 6' 14/3 SJT cord. Ground indicator light shows outlet is properly grounded, surge indicator light shows unit is protecting. 2145 joules. 125V/15A/1875W.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500844-E	6953	8-outlet Surge Protector	1/0/4	1.396	39.99 EA

Cutler Hammer

Surge Protector - Surgetrap™ construction series surge protection against voltage surges, spikes, and lightning. Heavy-duty protection for job site and home construction. Features include heavy-duty metal enclosure, 8 outlets complete with transformer spacing, lighted On/Off switch, 6' heavy-duty power cord, AC power protection, and easy cord wrap. 750 joules, 19,500A (maximum surge current). This is not for use in wet or damp areas. Limited lifetime warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500871-B	SGXCONST8	8-outlet Surge Protector	1/0/5	.502	19.99 CD

Greenlee Textron

L.E.D. Voltage Detector - This voltage detector can be used to detect voltage in outlets, lighting fixtures, circuit breakers, wire and cables, or to find a break in a wire. Features include safe, noncontact voltage detection, bright L.E.D. and audible alarm sound if voltage is present, and an On/Off switch for long battery life. Convenient pen-size device easily fits into pocket or tool pouch. Includes (2) 1.5V "AAA" batteries.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511100-C	GT11	50-600 Led Volt Detector	0/0/1	.040	16.99 EA

Greenlee Textron

Digital Volt Multimeter - Use to measure voltage, check batteries, and measure the current of small electronic circuits. AC/DC voltage, DC amperage measurement. Built-in test leads and audible continuity and diode tests. Tests 1.5V and 9V batteries. Limited lifetime warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511066-C	DM-20	Digital Volt Multi Meter	0/0/1	1.200	19.99 EA

TESTERS

Greenlee Textron

Multimeter Kit With Case - This basic electrical kit includes 1 each of the following items: Model No. DM-20 manual ranging multimeter, model No. GT-10 polarity cube, model No. GT-11 noncontact voltage detector, and a durable carrying case.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511020-B	TK30	Multimeter Kit W/case	0/0/1	1.900	34.99 EA

GB Electrical

Battery Tester - Use to check 9V, "D", "C", "AA", "AAA", and "N" cell batteries.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
540846-C	GBT-502A	Battery Tester	1/0/10	.150	6.99 CD

GB Electrical

Deluxe Battery Tester - Checks battery condition instantly and accurately. Simple to use...no outside power source needed. Tests battery automatically. Scale indicates weak battery when needle drops. Tests: 9V, "C", "D", "AA", 6V, photo, hearing aid, and watch batteries.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
810347-B	GBT-500A	Battery Tester	1/0/5	.250	10.99 EA

GB Electrical

Circuit Breaker Finder - Circuit tracker - circuit locator. Locates circuits without turning off breakers. Works with a 120V AC outlet. Audible and visual indicators, built-in battery strength indicator. Easy-to-use with transmitter plugged into a live 120V AC outlet, run receiver probe over bank of breakers or fuses in a panel to identify breaker tied to the test circuit. Install a standard screwdriver in the adapter to identify light bulb sockets. Heavy-duty magnet on back to attach to metal. Requires a 9V battery (not included). 5 year limited warranty. UL listed. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529559-B	GET-1200	Circuit Breaker Finder	1/0/5	.774	39.99 CD

GB Electrical

Circuit Tester - Receptacle tester and circuit analyzer. Detects faulty wiring in any standard 110/125V AC grounded receptacle. Tests 6 circuit conditions; open neutral, open ground, open hot, hot/ground reverse, hot/neutral reverse, and correct. Easy-to-read signal indicators. Plug in and watch the yellow and red lights identify the wiring condition. Yellow. UL listed. 1 year limited warranty. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531311-C	GRT-500A	Circuit Tester	1/0/10	.125	4.79 CD

GB Electrical

GFI Tester - Ground fault receptacle tester and circuit analyzer. Tests ground fault receptacles by overloading circuit and tripping GFI. Tests for 7 conditions: Ground fault interruption, open ground, open neutral, open hot, hot/ground reverse, and correct wiring. Easy to use - simply plug tester into any 110/125V AC ground fault receptacle and press black button to overload circuit. Yellow. UL listed. 1 year limited warranty. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503959-C	GFI-501A	Gfi Tester	1/0/10	.125	8.49 CD

GB Electrical

Voltage and Continuity Tester - Tests AC/DC voltage from 4.5 to 400V. LEDs indicate polarity, tests for continuity with push-button operation. Rugged twin probe design features heavy-duty test lead insulators.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500070-C	GET-207	Voltage/continuity Tester	1/0/10	.240	18.99 EA

GB Electrical

Continuity Tester - Heavy-duty continuity tester. Tests for continuity in nonenergized circuits. Checks switches, thermostats, fuses, relays, cords, coils, etc. 30" insulated test lead with alligator clip. Bright indicator bulb lights if continuity exists. Uses 2 "AAA" batteries (not included). 1 year limited warranty. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
515918-D	GCT-204	Continuity Tester	1/0/10	.225	4.89 CD

GB Electrical

Multi-Tester - Pocket size analog tester. 6 function, 16 ranges. Tests AC/DC voltage, DC current, resistance, and decibels. 0-10-50-250-500 DC volts. 1-10-50-250-500 AC volts. 0-0.5-50-25 MA DC current. Uses 1 "AA" battery (included). 2 test leads. Replaceable fuse. UL listed. 1 year limited warranty. 1 per card.

NOTE: Uses a Bussmann model No. GMA500MABC replacement fuse or equivalent.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505315-D	GMT-12A	Multi-tester	1/0/5	.600	12.99 CD

GB Electrical

Multi-Tester - 5-function, 19-range digital multimeter with LCD digital readout for testing AC volts to 750V, DC volts to 1000V, DC current to 10A, resistance to 20 megohms. Diode check, fused overload protection. Includes 2 safety test leads, instruction manual, and one 9V battery. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
563269-B	GDT-190A	Digital Multi-tester	1/0/5	.600	24.99 EA

GB Electrical

Low Voltage Tester - Automotive 6V to 12V circuit tester. 1 end has a pointed probe, the other a 30" plug-in lead with an alligator clip. For use on 6V and 12V systems. Lamp burns indicating a complete circuit. 1 year limited warranty. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529370-D	GAT-400	Low Voltage Tester	1/0/10	.200	3.19 CD

GB Electrical

Telephone Line Tester - Tests single line telephone jacks to ensure that they have been wired correctly. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
563226-D	GTT-100	Phone Line Tester	1/0/10	.060	6.39 EA

GB Electrical

Clamp Meter - 600A 4 function, 8 range clamp meter with lockjaw feature which prevents misuse - jaws only open when dial is set to amps. Measures current drawn by appliances. AC amps to 600, AC volts to 600 DC volts to 60, ohms to 1000, measurement lock feature holds indicator in place. Analog. Uses 1 "AA" battery (included). Includes 1 spare .5A/250V fuse included. Jaw opening 1-1/4". UL listed. 1 year limited warranty. 1 per card.

NOTE: Uses a Bussmann replacement fuse model No. GMA500MABC or equivalent.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529389-B	GCM-500	Clamp-on Tester	1/0/2	1.000	84.99 CD

Bussmann

Replacement Fuse - For testers and other small electronic equipment requiring fuses. Dimensions: 5mm x 20mm. 250V.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
504726-D	GDB160MA	160 MA, for Universal tester No. M20K, 5 fuses per tin box	1/0/20	.020	13.99 BX
515957-E	GMA2ABC	2A, for Do it™ testers model No. 522713 and 513083, 1 per bag	1/0/5	.031	1.79 EA

GB Electrical

Circuit Tester - Twin probe circuit tester for general purpose electrical testing. Tests all voltages from 90V to 500V AC/DC. Neon indicator glows when voltage is present and brightens as voltage increases. Insulated housing and test leads. Pocket clip. UL listed. 1 year limited warranty. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
516999-E	GET-100A	Two Probe Circuit Tester	1/0/10	.075	2.19 CD

GB Electrical

Voltage Tester - Heavy-duty 4-way voltage tester checks 120V, 240V, 277V, and 480V AC as well as 110V DC. Solid state reliability has individual resistors and bypass resistors for each voltage range. Individual indicators for each voltage range assures reliability. Twin test leads store in the tester housing for added convenience. Handy pocket clip. UL listed. 1 year limited warranty. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
532613-D	GET-213A	4-way Low Voltage Tester	1/0/10	.125	3.79 CD

TESTERS

GB Electrical

Voltage Tester - Circuit Alert™ noncontact voltage tester audibly (beeping) and visually (flashing) indicates the presence of AC voltage from 50V to 600V. Use to locate breaks in wires and voltage at receptacles, switches and motors. Quickly locates the hot terminals in receptacles. Fully insulated probe tip eliminates the risk of contacting live electrical wires. Built-in *safe-test* indicates tester and batteries are working properly. Uses two 1.5V photo/electronic disc batteries (included). 5-year warranty. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
546348-C	GVD-504A	Voltage Tester	1/0/10	.180	12.49 CD

GB Electrical

Voltage Tester - Solenoid voltage tester tests polarity and 120/600V AC/DC. Easy-to-read voltages. Dual voltage indication: Solenoid vibration sensing and electronic neon visual indication. Positive or negative polarity of DC indicated by neon lamp. Retractable spring-loaded prod shrouds protect metal tips and lock back out of the way for easy use. Compact and easy to carry. Case serves as prod holder for 1-hand operation. UL listed. 1 year limited warranty. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
516155-D	GVT-92	Voltage Tester	1/0/5	.750	18.99 EA

GB Electrical

Circuit Breaker Finder - Locates AC circuits quickly and easily.

Simply plug the transmitter into a wall outlet on the circuit you are trying to locate, then run the receiver over the circuit breakers or fuses in your load center. Receiver will beep and flash when the correct circuit is located. No need to interrupt power. Does not interfere with sensitive electronic equipment. Receiver uses one 9V battery (not included). UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537748-B	CS500A	Circuit Breaker Finder	1/0/6	.467	36.99 EA

ELECTRICAL

Bussmann

Box Cover Unit - Buss® junction box cover with fuse receptacle. Useful for protecting electric tool and appliance motors from burning out. Fits 2-1/4" handy box. Carded packaging features wiring diagram usage suggestions and fuse selection chart.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511654-D	BPSRU	Fuse holder plus a plug-in grounded receptacle	1/0/3	.419	10.99 EA
511663-D	BPSSU	Fuse holder plus a switch	1/0/3	.394	10.99 EA
506915-C	BPSOU	Fuse holder only	1/0/3	.293	6.99 EA

Bussmann

TL Plug Fuse - Medium duty TL fuse for residential motor circuits. Use in kitchen, workshop, garage, utility room circuits, or any circuit that contains electric motors, relays or solenoids. Brass threads (Edison base) thread into fuse receptacles. Extra large clear window makes it easy to see if fuse is blown. 125V AC, 10,000 A.I.C. UL listed.

Do it Best® Carded, 3 per card



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
519235-D	519235	15A	1/5/120	.212	3.59 CD
519243-D	519243	20A	1/5/120	.212	3.59 CD
519251-D	519251	30A <i>Do it Best® Boxed, 4 per box</i>	1/5/120	.212	3.59 CD
511501-D	511501	15A	1/25/125	.256	3.99 BX
511510-D	511510	20A	1/25/125	.256	3.99 BX
511529-D	511529	25A	1/25/125	.256	3.99 BX
511538-D	511538	30A	1/25/125	.256	3.99 BX

Bussmann

T Plug Fuse - Heavy-duty T fuse for critical circuit protection such as air conditioners, furnace blowers, swimming pool pumps, deep freezers or any circuit where motors turn on and off frequently. Industrial strength, will not open under repeated motor startups. Brass threads (Edison base) thread into fuse receptacles. Extra large clear window makes it easy to see if fuse is blown. 125V AC, 10,000 A.I.C. UL listed.

Bussmann Carded, 1 per card



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506923-D	BP/T3.2	3.2A	1/0/5	.090	4.99 CD
507024-D	BP/T6-1/4	6-1/4A	1/0/5	.090	4.99 CD
507016-D	BP/T8	8A	1/0/5	.090	4.99 CD
506990-D	BP/T10	10A <i>Bussmann Bagged, 1 per bag</i>	1/0/5	.090	4.99 CD
528358-D	T-6-1/4BC	6-1/4A	1/0/4	.170	4.79 EA
528366-D	T-8BC	8A	1/0/4	.825	4.79 EA
528374-D	T-15BC	15A	1/0/4	.825	2.69 EA
528382-D	T-20BC	20A	1/0/4	.040	2.69 EA
528439-D	T-25BC	25A	1/0/4	.825	2.69 EA
528447-D	T-30BC	30A	1/0/4	.040	2.69 EA

Bussmann

Mini-Breaker® - Permanent fuse replacement. Replaces most Edison base fuses. A press of the button restores current. Built-in time delay prevents nuisance tripping during appliance start-ups. 1 minibreaker per card. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510211-C	BP/MB-15	15A	1/0/5	.150	9.49 CD
510203-C	BP/MB-20	20A	1/0/5	.150	9.49 CD

Bussmann

FRNR Cartridge Fuse - Heavy-duty time delay *FRNR* dual element

cartridge fuse for motor protection. Helps protect motors from burnout caused by overloads or single phasing. Time delay feature allows the initial startup surge for typical motors to pass, but opens prior to burnout when longer dangerous overloads are present. UL listed Class R (200,000 AIR). 1/10A to 60A have ferrule ends, 70A to 200A have knife-blade ends. 250V.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527580-D	527580	15A, 2" L. x 9/16" diameter, Do it Best®, 2 per card	1/0/5	.120	7.99 CD
527599-D	527599	20A, 2" L. x 9/16" diameter, Do it Best®, 2 per card	1/0/5	.120	7.99 CD
519197-D	519197	30A, 2" L. x 9/16" diameter, Do it Best®, 2 per card	1/5/120	.121	7.99 CD
527777-C	527777	40A, 3" L. x 13/16" diameter, Do it Best®, 2 per card	1/0/5	.260	13.99 CD
527785-C	527785	50A, 3" L. x 13/16" diameter, Do it Best®, 2 per card	1/0/5	.260	13.99 CD
519227-C	519227	60A, 3" L. x 13/16" diameter, Do it Best®, 2 per card	1/0/5	.271	13.99 CD
516872-D	FRNR10	10A, 2" L. x 9/16" diameter, Bussman, individually bagged	1/10/100	.046	4.49 EA
524169-D	524169	15A, 2" L. x 9/16" diameter, Do it Best®, individual fuses	1/10/100	.100	4.49 EA
524007-D	524007	20A, 2" L. x 9/16" diameter, Do it Best®, individual fuses	1/10/100	.100	4.49 EA
523936-D	523936	25A, 2" L. x 9/16" diameter, Do it Best®, individual fuses	1/10/100	.100	4.49 EA
523918-D	523918	30A, 2" L. x 9/16" diameter, Do it Best®, individual fuses	1/10/100	.100	4.49 EA
523883-D	523883	35A, 3" L. x 13/16" diameter, Do it Best®, individual fuses	1/10/100	.280	6.99 EA
523874-D	523874	40A, 3" L. x 13/16" diameter, Do it Best®, individual fuses	1/10/100	.280	6.99 EA
519189-D	519189	45A, 3" L. x 13/16" diameter, Do it Best®, individual fuses	1/10/100	.125	6.99 EA
523865-D	523865	50A, 3" L. x 13/16" diameter, Do it Best®, individual fuses	1/10/100	.280	6.99 EA
523856-D	523856	60A, 3" L. x 13/16" diameter, Do it Best®, individual fuses	1/10/100	.280	6.99 EA
511374-D	511374	100A, 5-7/8" L. x 1-1/16" diameter, Do it Best®, individual fuses	1/0/5	.300	15.99 EA
511382-C	511382	200A, 7-1/8" L. x 1-9/16" diameter, Do it Best®, individual fuses	0/0/1	.770	29.99 EA

Bussmann

AGC Electronic Fuse - Fast acting *AGC* glass tube electronic fuse for use with cordless phones, stereo speakers, CB radios, electric fences. 1-1/4" L. x 1/4" diameter, 250V. UL listed. Individually bagged.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
547018-F	AGC1/2BC	1/2A	1/0/5	.009	.69 BG
547026-F	AGC1BC	1A	1/0/5	.009	.69 BG
547034-F	AGC1-1/2BC	1-1/2A	1/0/5	.009	.69 BG
547042-F	AGC2BC	2A	1/0/5	.009	.69 BG
523658-F	AGC3BC	3A	1/0/5	.180	.69 BG
547050-F	AGC4BC	4A	1/0/5	.009	.69 BG
523690-F	AGC5BC	5A	1/0/5	.180	.69 BG
547069-F	AGC6BC	6A	1/0/5	.009	.69 BG
547077-F	AGC7-1/2BC	7-1/2A	1/0/5	.009	.69 BG

Bussmann

ABC Electronic Fuse - Fast acting *ABC* ceramic tube electronic fuse for use with microwave ovens. 1-1/4" L. x 1/4" diameter, 250V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527327-E	BP/ABC10	10A, 2 per card	1/0/5	.064	3.49 CD
510769-E	BP/ABC15	15A, 2 per card	1/5/120	.385	3.49 CD
502619-E	BP/ABC-20	20A, 2 per card	1/0/5	.880	3.49 EA
546976-D	ABC10BC	10A, individually bagged	1/0/5	.011	1.49 EA
546984-D	ABC15BC	15A, individually bagged	1/0/5	.011	1.49 BG
546992-D	ABC20BC	20A, individually bagged	1/0/5	.011	1.49 EA

Bussmann

MDL Electronic Fuse - Time-delay (slow blow) *MDL* glass fuse for use with computers, satellite dishes, office equipment. 1-1/4" L. x 1/4" diameter, UL listed.

Bussmann Carded, 2 per card



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
510688-E	BP/MDL1/2	1/2A/250V	1/0/5	.340	4.49 CD
510696-E	BP/MDL1	1A/250V	1/0/5	.340	4.49 CD
510718-E	BP/MDL1-1/2	1-1/2A/250V	1/0/5	.340	4.49 CD
510734-E	BP/MDL2	2A/250V	1/0/5	.340	4.49 CD
510742-E	BP/MDL3	3A/250V	1/0/5	.340	4.49 CD
502744-E	BP/MDL4	4A/250V	1/0/5	.840	3.99 EA
510750-E	BP/MDL5	5A/250V	1/0/5	.340	3.99 CD
502753-E	BP/MDL7	7A/250V	1/0/5	.840	3.99 EA
502771-E	BP/MDL8	8A/250V	1/0/5	.840	3.99 EA
502780-E	BP/MDL10	10A/32V	1/0/5	.840	3.99 EA
547085-E	MDL1BC	1A/250V	1/0/5	.009	1.99 EA
547093-E	MDL1-1/2BC	1-1/2A/250V	1/0/5	.009	1.99 EA
523704-E	MDL2BC	2A	1/0/5	.180	1.99 EA
547107-E	MDL3BC	3A/250V	1/0/5	.009	1.99 BG
547115-E	MDL4BC	4A/250V	1/0/5	.009	1.99 EA
547123-E	MDL6BC	6A	1/0/5	.009	1.99 EA
523720-E	MDL5BC	5A/250V	1/0/5	.180	1.99 EA

Continued Next Column

FUSES

Continued From Previous Column

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
547131-E	MDL7BC	7A/250V	1/0/5	.009	1.99 EA
547158-E	MDL10BC	10A/32V	1/0/5	.009	1.99 EA

Bussmann

GMA Electronic Fuse - Fast acting GMA glass fuse for use with meters, instruments, European devices. 5mm x 20mm, 3.15A/250V. UL listed. Individually bagged.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
547166-E	GMA3.15ABC	3.15a Electronic Fuse	1/0/5	.005	1.69 EA

Bussmann

GDC Cartridge Fuse - 5mm x 20mm glass time delay/low breaking capacity electronic cartridge fuse. 250V. UL listed. 2 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502637-D	BP/GDC-50	5a TI Cartridge Fuse	1/0/5	.700	4.99 EA

Bussmann

Fuse - For testers and other small electronic equipment requiring fuses. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
534188-D	GMA200MA	200MA, 5 per box	1/0/20	.040	6.39 BX
521892-E	GMA250MABC	250MA, 1 per bag	1/0/5	.180	1.79 EA
541265-E	GMA500MABC	500MA, 1 per bag	1/0/5	.031	1.79 EA
522899-E	GMA1ABC	1A, 1 per bag	1/0/5	.180	1.79 EA
523151-E	GMA5ABC	5A, 1 per bag	1/0/5	.180	1.79 EA
523216-E	GMA6ABC	6A, 1 per bag	1/0/5	.180	1.79 EA
523364-E	GMA7ABC	7A, 1 per bag	1/0/5	.180	1.79 EA
502646-D	BP/GMA-1A	1A, 2 per card	1/0/5	.700	2.99 EA
502655-D	BP/GMA-2A	2A, 2 per card	1/0/5	.700	2.99 EA
502664-D	BP/GMA-3A	3A, 2 per card	1/0/5	.700	2.99 EA
502673-D	BP/GMA-5A	5A, 2 per card	1/0/5	.700	2.99 EA
502708-D	BP/GMA-6A	6A, 2 per card	1/0/5	.700	2.99 EA
502735-D	BP/GMA-500MA	500MA, 2 per card	1/0/5	.700	2.99 EA

Bussmann

GLR Fuse - GLR integral fuse and cap assembly is made of glass with black plastic knob. For use with fluorescent lighting ballasts. 300V. UL listed. Individually bagged.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
547174-E	GLR1-1/2BC	1.5A	1/0/3	.018	2.29 EA
547182-E	GLR3BC	3A	1/0/3	.018	2.29 EA

ELECTRICAL

Bussmann

SL Plug Fuse - Medium-duty SL fuse for residential motor circuits.

Use in kitchen, garage, utility room circuits or any circuit that contains electric motors, relays or solenoids. Porcelain threads (Tamper proof base) prevent a larger amp fuse from being used. Extra large clear window makes it easy to see if fuse is blown. 125V AC, 10,000 A.I.C. UL listed.

Do it Best® Carded, 3 per card



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
521037-D	521037	15A	1/5/120	.213	3.59 CD
521046-D	521046	20A	1/5/120	.200	3.59 CD
521064-D	521064	30A Do it Best® Boxed, 4 per box	1/5/120	.206	3.59 CD
511789-D	511789	15A	1/25/125	.256	4.49 BX
511798-D	511798	20A	1/25/125	.256	4.49 BX
511805-D	511805	25A	1/0/25	.256	4.49 BX
511814-D	511814	30A	1/25/125	.256	4.49 BX

Bussmann

S Plug Fuse - Heavy-duty S fuse for critical circuit protection such as air conditioners, furnace blowers, swimming pool pumps, deep freezers or any circuit where motors turn on and off frequently. Industrial strength, will not open under repeated motor startups. Porcelain threads (tamper proof base) prevent a larger amp fuse from being used. Extra large clear window makes it easy to see if fuse is blown. 125V AC, 10,000 A.I.C. UL listed.

Bussmann Carded, 1 per card



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506974-D	BP/S3.2	3.2A	1/0/5	.086	4.99 CD
506966-D	BP/S6-1/4	6-1/4A	1/0/5	.086	4.99 CD
506958-D	BP/S8	8A	1/0/5	.086	4.99 CD
506931-D	BP/S10	10A	1/0/5	.086	4.99 CD
527793-E	S-6-1/4BC	6-1/4A	1/0/4	.825	5.49 EA
527815-E	S-10BC	10A	1/0/4	.825	5.49 EA
528129-E	S-15BC	15A	1/0/4	.825	2.99 EA
528315-E	S-20BC	20A	1/0/4	.825	2.99 EA
528323-E	S-25BC	25A	1/0/4	.825	2.99 EA
528331-E	S-30BC	30A	1/0/4	.825	2.99 EA

Bussmann

Adapter - Makes Fustat® fuses fit any plug fuse holder. Locks in place so that Fustat® fuse can be changed just like a fuse. Adapter prevents the use of oversize Fustats®. 4 per box.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511832-F	SA15	Will fit fuses S8, S10, S15	1/0/25	.029	7.49 BX
511841-D	SA20	Will fit fuse S20 only	1/0/25	.029	7.49 BX
511850-D	SA30	Will fit fuses S25 & S30	1/0/25	.029	7.49 BX

ELECTRICAL

FUSES

Bussmann

DLNR Cartridge Fuse - Designed for contractor needs, protects industrial equipment and large motors. Recommended for AC power distribution system mains, feeders, and branch circuits. Industry standard time-delay of 10 seconds at 5 times the fuse rating. 250V AC (or less). UL listed, CSA certified.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
563846-D	DLNR-10	10A	1/0/10	.025	3.39 EA
563854-D	DLNR-15	15A	1/0/10	.025	3.39 EA
563862-D	DLNR-20	20A	1/0/10	.025	3.39 EA
563870-D	DLNR-25	25A	1/0/10	.025	3.39 EA
563889-D	DLNR-30	30A	1/0/10	.025	3.39 EA
563897-C	DLNR-35	35A	1/0/10	.125	5.49 EA
563900-C	DLNR-40	40A	1/0/10	.125	5.49 EA
563919-C	DLNR-45	45A	1/0/10	.125	5.49 EA
563927-C	DLNR-50	50A	1/0/10	.125	5.49 EA
563935-C	DLNR-60	60A	1/0/10	.125	5.49 EA

Bussmann


DLS-R Cartridge Fuse - Designed for contractor needs, protects industrial equipment and large motors. Recommended for AC power distribution system mains, feeders, and branch circuits. Industry standard time-delay of 10 seconds at 5 times the fuse rating. 600V AC (or less).



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
563943-C	DLS-R-10	10A	1/0/10	.150	8.49 EA
563951-C	DLS-R-15	15A	1/0/10	.150	8.49 EA
563978-C	DLS-R-20	20A	1/0/10	.150	8.49 EA
563986-C	DLS-R-25	25A	1/0/10	.150	8.49 EA
563994-C	DLS-R-30	30A	1/0/10	.150	8.49 EA

Bussmann

FNM Cartridge Fuse - General purpose time delay FNB midget fuse. Suitable for circuits with high inrush current such as: Spas, pool pumps, and other commercial equipment. Time delay feature allows the initial start up surge for typical motors to pass, but opens prior to burnout when longer dangerous overloads are present. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528757-C	FNM-2BC	2A, 1-1/2" L. x 13/32" diameter, 250V maximum	1/0/3	.020	4.99 EA
528765-C	FNM-3BC	3A, 1-1/2" L. x 13/32" diameter, 250V maximum	1/0/3	.020	4.99 EA
528773-C	FNM-5BC	5A, 1-1/2" L. x 13/32" diameter, 250V maximum	1/0/3	.020	4.99 EA
528781-C	FNM-10BC	10A, 1-1/2" L. x 13/32" diameter, 250V maximum	1/0/3	.020	4.99 EA
528803-C	FNM-12BC	12A, 1-1/2" L. x 13/32" diameter, 125V maximum	1/0/3	.020	4.99 EA

Continued Next Column

Continued From Previous Column

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528811-C	FNM-15BC	15A, 1-1/2" L. x 13/32" diameter, 125V maximum	1/0/3	.020	4.99 EA
528838-C	FNM-20BC	20A, 1-1/2" L. x 13/32" diameter, 32V maximum	1/0/3	.020	4.99 EA
528846-C	FNM-30BC	30A, 1-1/2" L. x 13/32" diameter, 32V maximum	1/0/3	.020	4.99 EA

Bussmann

KTK Cartridge Fuse - Heavy-duty, fast-acting KTK supplemental midget fuse. Fuse has a high-strength melamine tube for high interrupting rating. 600V maximum. All fuses measure 1-1/2" L. x 13/32" diameter. Typical applications include control circuits, lighting circuits and meter circuits. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528854-C	KTK-3BC	3A	1/0/3	.020	10.99 EA
528870-C	KTK-5BC	5A	1/0/3	.020	10.99 EA
528889-C	KTK-10BC	10A	1/0/3	.020	10.99 EA
528900-C	KTK-15BC	15A	1/0/3	.020	10.99 EA
528919-C	KTK-20BC	20A	1/0/3	.020	10.99 EA
528927-C	KTK-30BC	30A	1/0/3	.020	10.99 EA

Bussmann

NonCartridge Fuse - General purpose NON cartridge use for use in lighting circuits, main panel protections or other circuits that do not contain large electric motors. No time delay. 1A to 60A fuses are UL listed Class K5 (50,000 AIR) with ferrule ends, 70A to 600A are UL listed Class H (10,000 AIR) with knife-blade ends. 250V.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502851-E	502851	20A, 2" L. x 9/16" diameter, Do it Best®, 2 per card	1/0/5	.110	2.29 CD
502860-E	502860	30A, 2" L. x 9/16" diameter, Do it Best®, 2 per card	1/5/120	.075	2.29 CD
503422-D	503422	40A, 3" L. x 13/16" diameter, Do it Best®, 2 per card	1/0/5	.175	3.29 CD
503146-D	503146	60A, 3" L. x 13/16" diameter, Do it Best®, 2 per card	1/5/120	.200	3.29 CD
516880-F	NON10	10A, 2" L. x 9/16" diameter, Bussman, individually bagged	1/10/100	.034	1.29 EA
524702-F	524702	15A, 2" L. x 9/16" diameter, Do it Best®, individual fuses	1/10/100	.038	1.29 EA
524800-F	524800	20A, 2" L. x 9/16" diameter, Do it Best®, individual fuses	1/10/100	.038	1.29 EA
524882-F	524882	25A, 2" L. x 9/16" diameter, Do it Best®, individual fuses	1/10/100	.038	1.29 EA
524668-F	524668	30A, 2" L. x 9/16" diameter, Do it Best®, individual fuses	1/10/100	.038	1.29 EA
524597-E	524597	35A, 3" L. x 13/16" diameter, Do it Best®, individual fuses	1/10/100	.100	1.99 EA
524490-E	524490	40A, 3" L. x 13/16" diameter, Do it Best®, individual fuses	1/10/100	.100	1.99 EA
524392-E	524392	45A, 3" L. x 13/16" diameter, Do it Best®, individual fuses	1/10/100	.100	1.99 EA
524203-E	524203	50A, 3" L. x 13/16" diameter, Do it Best®, individual fuses	1/10/100	.100	1.99 EA
524187-E	524187	60A, 3" L. x 13/16" diameter, Do it Best®, individual fuses	1/10/400	.100	1.99 EA
511412-D	511412	100A, 5-7/8" L. x 1-1/16" diameter, Do it Best®, individual fuses	1/0/5	.260	7.49 EA
511390-D	511390	200A, 5-7/8" L. x 1-1/16" diameter, Do it Best®, individual fuses	0/0/1	.790	18.99 EA

BREAKERS

Connecticut Electric

Wadsworth Packaged Circuit Breaker - Type A single pole plug in. Requires one 1" space. HACR, 120VAC, 10m000AIC, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561223-C	WA15	15A	1/6/48	.458	29.99 EA
561479-C	WA20	20A	1/6/48	.458	29.99 EA

Connecticut Electric

Wadsworth Packaged Circuit Breaker - Type A double pole plug in. Requires two 1" spaces. HACR, 120/240VAC, 10,000 AIC. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561487-C	WA220	20A	1/0/3	.900	69.99 EA
561495-C	WA230	30A	1/3/24	.900	69.99 EA
561509-C	WA240	40A	1/3/24	.900	69.99 EA
547816-C	WA250	50A	1/3/24	.900	69.99 EA
548170-C	WA260	60A	1/3/24	.900	69.99 EA

GE Industrial Dept.


Single Pole Circuit Breaker - 120/240V. One 1" space required. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533872-C	THQL1115	15A	1/0/10	.350	5.99 EA
533863-C	THQL1120	20A	1/0/10	.350	5.99 EA
533854-C	THQL1130	30A	1/0/10	.350	5.99 EA
561681-D	THQL1140	40A	1/0/10	.312	6.99 EA
561703-D	THQL1150	50A	1/0/10	.312	6.99 EA

GE Industrial Dept.

Double Pole Circuit Breaker - 120/240V. Two 1" spaces required. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533845-C	THQL2120	20A	1/0/5	.700	13.99 EA
533836-C	THQL2130	30A	1/0/5	.700	13.99 EA
533827-C	THQL2140	40A	1/0/5	.700	13.99 EA

Continued Next Column

ELECTRICAL

Continued From Previous Column

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533818-C	THQL2150	50A	1/0/5	.700	13.99 EA
533809-C	THQL2160	60A	1/0/5	.700	13.99 EA
508683-C	THQL21100	100A	1/0/5	.700	44.99 EA

GE Industrial Dept.


S.P. Single Pole Circuit Breaker - 1/2". 120/240V. UL listed. For G.E. load centers only.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533774-C	THQP115	15A	1/0/20	.250	5.99 EA
533765-C	THQP120	20A	1/0/20	.250	5.99 EA
533756-C	THQP130	30A	1/0/20	.250	5.99 EA

GE Industrial Dept.

S.P. Double Pole Circuit Breaker - 1/2". 120/240V. UL listed. For G.E. load centers only.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533541-C	THQP220	20A	1/0/10	.500	13.99 EA
533747-C	THQP230	30A	1/0/10	.500	13.99 EA
533550-C	THQP240	40A	1/0/10	.500	13.99 EA
533621-C	THQP250	50A	1/0/10	.500	13.99 EA

GE Industrial Dept.

Circuit Breaker - Single pole ground fault circuit interrupter circuit breaker. Type THQL, 1" module. 120/240V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
519022-B	THQL1120GF	20A	1/0/10	.516	49.99 EA
519332-B	THQL1130GFP	30A	1/0/10	.050	49.99 EA


Some prices shown may vary due to market fluctuations, and are to be used as estimates.

ELECTRICAL

BREAKERS

Siemens Energy


Circuit Breaker - Single pole type. For use only with Pushmatic load centers. 120V/240V. Bulk pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539120-C	P115	15A	1/0/40	.250	24.99 EA
539139-C	P120	20A	1/0/40	.250	24.99 EA
539147-C	P130	30A	1/0/40	.250	24.99 EA

Siemens Energy


Circuit Breaker - Double pole type. For use only with Pushmatic load centers. Bulk pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539155-C	P220	20A	1/0/20	.550	54.99 EA
539163-C	P230	30A	1/0/20	.550	54.99 EA
539171-C	P240	40A	1/0/20	.550	54.99 EA
539198-C	P250	50A	1/0/20	.550	54.99 EA
539201-C	P260	60A	1/0/20	.550	54.99 EA

Cutler Hammer

Circuit Breaker - Single pole circuit breaker for type NLC load centers. Plug-on type, 1 space required. 120/240V. For BR series panels. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518238-B	BR115	15A	1/10/50	.350	3.99 EA
518256-B	BR120	20A	1/10/50	.325	3.99 EA
518265-B	BR130	30A	1/10/50	.350	3.99 EA

Cutler Hammer

Circuit Breaker - 2-pole circuit breaker for NLC load centers. Plug-on type, 2 spaces required, common trip. 120/240V. For BR series panels. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518390-C	BR215	15A	1/5/25	.600	12.49 EA
518407-C	BR220	20A	1/5/25	.600	12.49 EA
524190-C	BR225	25A	1/5/25	.600	12.49 EA
518416-C	BR230	30A	1/5/25	.600	12.49 EA
518461-C	BR240	40A	1/5/25	.600	12.49 EA
518504-C	BR250	50A	1/5/25	.600	12.49 EA
518577-C	BR260	60A	1/5/25	.600	12.49 EA
512168-C	BR270	70A	1/5/25	.600	29.99 EA
518586-C	BR2100	100A	1/5/25	.600	45.99 EA

Cutler Hammer


GFI Circuit Breaker - GFCB, ground fault circuit interrupter. Class A ground fault and branch overcurrent protector. Single pole, 1 space required. 120V. For BR series panels. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518657-C	GFCB115	15A	1/0/20	.500	53.99 EA
518675-C	GFCB120	20A	1/0/20	.500	53.99 EA
518693-C	GFCB130	30A	1/0/20	.500	53.99 EA

Cutler Hammer

GFI Circuit Breaker - GFCB, ground fault circuit interrupter. 2-pole for multi-wire and appliance circuits, for use with copper wire only. 2 spaces required. 50A/120/240V AC, 10,000 AIC. For BR series panels. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522686-B	GFCB250	50a Gfi Circuit Breaker	0/0/1	5.000	114.99 EA

BREAKERS

Cutler Hammer


Circuit Breaker - BD duplex circuit breaker for load centers with notched bus bars. Allows the use of 2 single pole breakers in 1 space. They are not interchangeable with any other type of breaker. 120/240V. For BR series panels. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518773-C	BD1515	15A/15A	1/10/50	.320	10.99 EA
518826-C	BD1520	15A/20A	1/10/50	.320	10.99 EA
518871-C	BD2020	20A/20A	1/10/50	.320	10.99 EA

Cutler Hammer


Circuit Breaker - BQ quadplex circuit breaker for load centers with notched bus bars. Allows 2 options for use: 2 of 2 pole or one 2 pole and two 1 pole breakers in 2 spaces. 120/240V. For BR series panels. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508942-C	BQ220220	20A/20A	1/5/25	.940	26.99 EA
508934-C	BQ230230	30A/30A	1/5/25	.940	26.99 EA
518880-C	BQ230240	30A/40A	1/5/25	.940	26.99 EA

Connecticut Electric


Interchangeable Packaged Circuit Breaker - Single pole type. 120/240V. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517435-C	ICBQ115	15A	1/6/48	.257	6.99 CD
517729-C	ICBQ120	20A	1/6/48	.257	6.99 CD
518005-C	ICBQ130	30A	1/6/48	.257	6.99 CD

Connecticut Electric

Interchangeable Packaged Circuit Breaker - Double pole type. 120/240V. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518719-C	ICBQ220	20A	1/3/24	.571	15.49 CD
518791-C	Q230	30A	1/3/24	.571	15.49 CD
519512-C	ICBQ240	40A	1/3/24	.571	15.49 CD
512931-C	ICBQ250	50A	1/3/24	.571	15.49 CD
553859-C	ICBQ260	60A	1/3/24	.713	15.49 CD

ELECTRICAL

Square D Co.

ARC Fault Circuit Breaker - AFCS, arc fault circuit interrupter, provides protection from arcing faults from frayed, pinched, or compromised wires. Single pole, 1 space required. 120V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
558265-B	HOM115AFIC	15A	1/0/3	3.000	39.99 EA
558273-B	HOM120AFIC	20A	1/0/3	3.000	39.99 EA

Square D Co.


ARC Fault Circuit Breaker - AFCS, arc fault circuit interrupter, provides protection from arcing faults from frayed, pinched, or compromised wires. Single pole, 1 space required. 120V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
558281-B	QO115AFIC	15A	0/0/1	3.000	43.99 EA
558303-B	QO120AFIC	20A	1/0/3	3.000	43.99 EA

Cutler Hammer

Hub - Conduit hub for BR series and Cutler Hammer brand equipment.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517380-C	DS100H1P	1", for use with BR series of load centers and enclosures, 125A and smaller	1/0/10	.200	9.99 EA
522223-D	RH125P	1-1/4"	1/0/25	.300	9.69 EA
523291-D	DS125H1P	1-1/4", for use with BR series of load centers and enclosures, 125A and smaller	1/0/10	1.000	10.49 EA
522232-D	RH150P	1-1/2"	1/0/25	.300	9.99 EA
522241-D	RH200P	2", with 2" base	1/0/25	.300	14.99 EA
500747-D	DS200H1P	2", for use with 100A and 125A main lug and main breaker panels	1/0/10	.020	15.99 EA
518921-D	DS200H2P	2", for use with 150A and 200A main lug panels, 150A through 225A main breaker panels and RCC series enclosures.	1/0/10	.200	15.99 EA

ELECTRICAL

CUTLER HAMMER




Media Center - Enclosure accommodates up to 2 full-width pre-configured cabling panels, delivering audio/video, voice, and data to any room of the home or office. Positive stops on the housing prevents enclosure from falling through studs during installation. 1-piece 18-gauge steel unit with cover can be surface mounted or recessed, cover features a 3/4" overlap. Mounting guides on cover align screw-holes and reduce chances of dropping during attachment. Combine 2 or more enclosures for larger installation or future expansion. Multiple knockouts on top and bottom facilitate cable entry and routing. UL listed. White.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
558109-C	155-47605-140	Media Center Enclosure	1/0/2	11.781	49.99 EA




Wiring Box - Shallow 1.45" box can be used with any flush mount single gang communications outlet. Knockouts for rear and side cable entry. Mounting options include installer-supplied screws or double-sided tape. UL listed. White. 1 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
558133-C	R04-42777-00W	Wiring Box	1/0/6	.263	4.99 EA

Cutler Hammer

Load Center - Main Lug load center designed for service entrance equipment. *Main Lugs Only*. Single-phase, 3-wire, flush or surface mount. Solid neutral bar and cover included. Optional ground bar kits must be ordered separately. Load centers that accept BD and BQ type circuit breakers have a notched bus bar. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
518915-C	BR24L70FP	70a Main Lug Load Center	0/0/1	4.400	16.49 EA
518951-C	BR24L70SP	70a Main Lug Load Center	0/0/1	4.400	16.49 EA
520387-C	BR24L70RP	70a Main Lug Load Center	0/0/1	7.200	31.99 EA
544264-C	BR612L125FDP	Main Lug Load Center	0/0/1	9.300	26.99 EA
519120-C	BR612L125SDP	Main Lug Load Center	0/0/1	13.000	26.99 EA
520546-C	BR612L125RP	Main Lug Load Center	0/0/1	16.000	35.99 EA
544272-C	BR816L125FDP	Main Lug Load Center	0/0/1	9.400	33.99 EA
544280-C	BR816L125RP	Main Lug Load Center	0/0/1	9.400	55.99 EA
519362-C	BR816L125SDP	Main Lug Load Center	0/0/1	13.000	32.99 EA
501638-C	BR48L125FP	Main Lug Load Center	0/0/1	9.000	19.49 EA
501565-C	BR48L125SP	Main Lug Load Center	0/0/1	9.000	19.49 EA
502405-C	BR48L125RP	Main Lug Load Center	0/0/1	11.000	33.99 EA
519834-C	BR1224L125	Main Lug Load Center	0/0/1	18.000	47.99 EA
508519-C	BR1224L125R	Main Lug Load Center	0/0/1	20.000	69.99 EA
564125-B	BR1224L200	Main Lug Load Center	0/0/1	18.600	74.99 EA
520083-C	BR2040L200	Main Lug Load Center	0/0/1	29.000	99.99 EA
508527-C	BR2040L200R	Main Lug Load Center	0/0/1	33.000	139.99 EA

No.	Amp Capacity	Mount	Spaces	Maximum Poles	Type	Circuit Breaker Type	Ground BarKits
BR24L70FP	70	Flush	2	4	Indoor	BR, BD, BQ	GBK 5P
BR24L70SP	70	Surface	2	4	Indoor	BR, BD, BQ	GBK 5P
BR24L70RP	70	Surface	2	4	Rainproof	BR, BD, BQ	GBK 5P

Continued Next Column

Continued From Previous Column

BR612L125FDP	125	Flush	6	12	Indoor	BR, BD, BQ	GBK 5P
BR612L125SDP	125	Surface	6	12	Indoor	BR, BD, BQ	GBK 5P
BR612L125RP	125	Surface	6	12	Rainproof	BR, BD, BQ	GBK 5P
BR816L125FDP	125	Flush	8	16	Indoor	BR, BD, BQ	GBK 5P
BR816L125RP	125	Surface	8	16	Rainproof	BR, BD, BQ	GBK 5P
BR816L125SDP	125	Surface	8	16	Indoor	BR, BD, BQ	GBK 5P
BR48L125FP	125	Flush	4	8	Indoor	BR, BD, BQ	GBK 5P
BR48L125SP	125	Surface	4	8	Indoor	BR, BD, BQ	GBK 5P
BR48L125RP	125	Surface	4	8	Rainproof	BR, BD, BQ	GBK 5P
BR1224L125	125	Flush/Surface	12	24	Indoor	BR, BD, BQ	GBK 10P
BR1224L125R Available Only At Cape	125	Surface	12	24	Rainproof	BR, BD, BQ	GBK 10P
BR1224L200 Available Only At	200	Flush/Surface	12	24	Indoor	BR	GBKDP
BR1224L200R Available Only At	200	Surface	12	24	Rainproof	BR	GBK 1420
BR2040L200	200	Flush/Surface	20	40	Indoor	BR, BD, BJ, BQ	GBK 14P
BR2040L200R	200	Surface	20	40	Rainproof	BR, BD, BJ, BQ	GBK 14P

Cutler Hammer

Main Breaker Load Center - 200A main breaker type BR load center. 4 spaces, 8 circuits. Outdoor with feed through lugs.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
562459-B	BR48B200RFP	Main Breaker Load Center	0/0/1	23.400	134.99 EA


CUTLER HAMMER

ELECTRICAL

Cutler Hammer

Main Breaker Load Center - Main breaker load center designed for service entrance equipment. *Main Breaker Installed.*

Single-phase, 3-wire, flush or surface mount. Solid neutral bar and cover included. Optional ground bar kits must be ordered separately. Load centers that accept BD and BQ type breakers have a notched bus bar. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
520644-C	BR816B100	100a Load Center	0/0/1	17.000	76.99 EA
526797-C	BR1020B100RF	100a Load Center	0/0/1	23.000	114.99 EA
521117-C	BR1220B100	100a Load Center	0/0/1	19.000	69.99 EA
521340-C	BR1620B100	100a Load Center	0/0/1	21.000	99.99 EA
521448-C	BR2020B100	100a Load Center	0/0/1	24.000	76.99 EA
521607-C	BR2040B200	200a Load Center	0/0/1	30.000	154.99 EA
526819-C	BR2040B200R	200a Load Center	0/0/1	33.000	229.99 EA
521625-C	BR3040B200	200a Load Center	0/0/1	36.000	184.99 EA
521652-C	BR4040B200	200a Load Center	0/0/1	36.000	199.99 EA

No.	Amp Capacity	Mount	Spaces	Maximum Poles	Type	Circuit Breaker-Type	Ground Bar Kit
*BR816B100	100	Flush/Surface	8	16	Indoor	BR, BD, BQ	GB10C
**BR1020B100RF	100	Flush/Surface	10	20	Raintight	BR, BD, BQ	GB10C
BR1220B100	100	Flush/Surface	12	20	Indoor	BR, BD, BQ	GB10C
***BR1620B100	100	Flush/Surface	16	20	Indoor	BR, BD, BQ	GB10C
BR2020B100	100	Flush/Surface	20	20	Indoor	BR	GB10C
BR2040B200	200	Flush/Surface	20	40	Indoor	BR, BD, BQ (2)	GB10C
****BR2040B200R	200	Flush/Surface	20	40	Raintight	BR, BD, BQ (2)	GB10C
BR3040B200	200	Flush/Surface	30	40	Indoor	BR, BD, BQ	3GB39
BR4040B200	200	Flush/Surface	40	40	Indoor	BR	3GB39

Cutler Hammer

Meter Breaker Panel - Combines meter mounting and a circuit

breaker distribution section in a rainproof enclosure. In addition to residential installations, the panel can also be used for rural service entrance, mobile homes, and for temporary power on construction sites. Main breaker factory installed. Single phase, 3-wire, flush or surface mount. Solid neutral bar and cover included. 120/240V, 10,000 AIC, NEMA 3R, rainproof, with RH hub provisions. Overhead or underground service. Raintight. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
559350-C	MBE1224B100BT F	100A, top or bottom feed, flush mount, 12 spaces, 24 poles, circuit breaker type: BR, BD Available Only At Woodburn, Mesquite	0/0/1	33.000	74.99 EA


Continued Next Column

Continued From Previous Column

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
559342-C	MBE1224B100BT S	100A, top or bottom feed, surface mount, 12 spaces, 24 poles, circuit breaker type: BR, BD Available Only At Waco, Woodburn, Mesquite	0/0/1	32.000	74.99 EA
515647-C	MBE2040B200BT F	200A, top or bottom feed, flush mount, 20 spaces, 40 poles, circuit breaker type: BR, BD	0/0/1	47.000	219.99 EA
515655-C	MBE2040B200BT S	200A, top or bottom feed, surface mount, 20 spaces, 40 poles, circuit breaker type: BR, BD	0/0/1	47.000	219.99 EA

Cutler Hammer


Raintight Enclosure - Main lug only. For outdoor use with mobile homes. 125A enclosure only, use up to 125A 2 pole breaker and Westinghouse No. DS125H1P 1-1/4" hub. 1-phase, 3-wire, 120/240V AC, NEMA 3R, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512133-C	BR24L125RP	125a Raintight Enclosure	1/0/5	8.400	31.99 EA

Cutler Hammer

Raintight Enclosure - Outdoor raintight enclosure for use as a separate service entrance main breaker. Suitable for top or bottom feed, includes factory installed breaker. Outdoor NEMA 3R with rainproof conduit hub provision (hubs not included). 120/240V AC. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533444-C	BR2100BRP	100A, 12" H. x 5-3/4" W. x 4" D.	0/0/1	6.000	69.99 EA
533462-C	RCC200SEBP	200A, 21" H. x 10" W. x 5-1/4" D.	0/0/1	9.000	159.99 EA

ELECTRICAL

CUTLER HAMMER

Cutler Hammer


Feed-Thru Load Center - 200A enclosure. For use in mobile homes or modular housing requiring *feed-through* type application. Both neutral and phase conductors are wired into the top of the load center and feed up to 8 full-size circuits (or 16 half-size circuits) and then continue through the bottom to be wired to the distribution panel inside the home. Ideal for adding outside circuits such as exterior lights, water pumps, sheds and hot tubs. Twin neutral and straight-in wiring design.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512125-C	BR816L200RF	Main lug only, uses Westinghouse hub model No. DS200H2P Available Only At Cape, Medina, Waco, Lexington	0/0/1	25.000	79.99 EA
524182-C	BR816B200RF	Main breaker included.<emph>Available Only at Cape, Dixon, Medina, Waco, Lexington, Woodburn, Montgomery<rs>	0/0/1	33.000	159.99 EA

Cutler Hammer


Filler Plate - Fills opening in CH (Cutler Hammer) load center covers when twist-out has been removed. 5 per bag.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527114-D	CHFPP	Ch Filler Plate	1/0/10	.010	3.29 BG

Cutler Hammer


Filler Plate - Fills opening in BR (Cutler Hammer) load center covers when twist-out has been removed. 5 plates in each retail package.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
527122-D	BRFPP	5pk Br Filler Plate	1/0/10	.010	2.99 EA

Cutler Hammer


Safety Switch - Plug fuse general-duty safety switch designed for residential and commercial applications where economy is a prime consideration. Typical uses are heating, lighting, air conditioning and appliances. Plug fuses not included. UL listed.

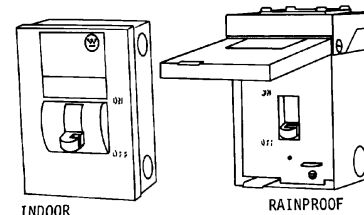

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522633-C	DP111NGB	Cutler Hammer brand, 30A, 2-wire with neutral, 120V AC; 1 fuse; NEMA 1 indoor, 1 blade	0/0/1	2.200	22.49 EA
522679-C	DP221NGB	BR series, 30A, 3-wire with neutral, 120/240V AC; 2 fuses; NEMA 1 indoor, 2 blades	1/0/10	2.600	25.99 EA

Cutler Hammer


Safety Switch - Fusible general-duty safety switch designed for residential and commercial applications where economy is a prime consideration. Typical uses are heating, lighting, air conditioning and appliances. Cartridge fuses not included. 3-wire, 2-pole, solid neutral, 240V AC.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522768-C	DG221NGB	30A, NEMA 1, indoor	1/0/10	4.500	36.99 EA
522900-C	DG221NRB	30A, NEMA 3R, rainproof Available Only At Cape, Dixon, Medina, Waco, Lexington, Woodburn, Mesquite	1/0/5	6.400	59.99 EA
522811-C	DG222NGB	60A, NEMA 1, indoor	0/0/1	15.000	65.99 EA
523044-C	DG222NRB	60A, NEMA 3R, rainproof Available Only At Cape, Dixon, Medina, Waco, Woodburn, Montgomery, Mesquite	0/0/1	15.000	99.99 EA

Cutler Hammer

Circuit Breaker - Single pole circuit breaker for CH load centers. 1 space required, 120/240V AC; 10,000 AIC. UL listed




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539872-C	CH115	15A	1/10/50	.350	7.99 EA
539880-C	CH120	20A	1/10/50	.350	7.99 EA
539899-C	CH130	30A	1/10/50	.350	7.99 EA

CUTLER HAMMER

ELECTRICAL

Cutler Hammer


Circuit Breaker - Double pole circuit breaker for type CH load centers. 2 spaces required, 120/240V AC; 10,000 AIC. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539902-C	CH215	15A	1/5/25	.550	18.99 EA
539910-C	CH220	20A	1/5/25	.550	18.99 EA
539929-C	CH230	30A	1/5/25	.550	18.99 EA
539937-C	CH240	40A	1/5/25	.550	18.99 EA
539945-C	CH250	50A	1/5/25	.550	18.99 EA
539953-C	CH260	60A	1/5/25	.550	18.99 EA
539961-C	CH270	70A	1/5/25	.550	42.99 EA
539988-C	CH2100	100A	1/5/25	.700	59.99 EA

Cutler Hammer


Circuit Breaker - Twin circuit breaker for use in CH type load centers. Provides 2 single pole circuits in 1 space. 120/240V AC; 10,000 AIC. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
539996-C	CHT1515	15A and 15A	1/0/10	.400	23.99 EA
540005-C	CHT2020	20A and 20A	1/0/10	.400	23.99 EA

Cutler Hammer


Circuit Breaker - Ground fault circuit breaker (GFCI), single pole. 1 space required. 120/240V AC; 10,000 AIC. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
538582-C	CH115GF	15A	1/0/10	.500	67.99 EA
538590-C	CH120GF	20A	1/0/10	.050	67.99 EA

Cutler Hammer


Main Breaker Kit - Type BW, use with Cutler Hammer brand type RB load centers. Kit includes: Main breaker, mounting screw, 2 bus torque nuts, and instructions. 2-pole, 120/240V AC, 10,000 AIC. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533831-C	BW2200	200a Main Breaker	0/0/1	2.000	99.99 EA

Cutler Hammer

Mainlug Load Center - Single-phase, 3-wire; flush, surface, or combination mount. Cover included. Straight-in wiring, top or bottom. Pre-attached neutral bonding strap. Solid copper bus and branch fingers. 120/240V AC; 10,000 AIC. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
540080-C	CH2L40SP	40a Mainlug Load Center	0/0/1	.320	19.99 EA
544299-C	CH2L70SP	70a Main Lug Load Center	0/0/1	3.300	19.99 EA
540145-C	CH4L125SP	Main Lug Load Center	0/0/1	7.400	25.99 EA
540161-C	CH8L125FP	Main Lug Load Center	0/0/1	11.600	46.99 EA
540188-C	CH8L125SP	Main Lug Load Center	0/0/1	11.400	46.99 EA
540218-C	CH12L125BP	Main Lug Load Center	0/0/1	16.000	59.99 EA
540129-C	CH2L70RP	70a Main Lug Load Center	0/0/1	.440	37.99 EA
540153-C	CH4L125RP	Main Lug Load Center	0/0/1	10.300	42.99 EA
540196-C	CH8L125RP	Main Lug Load Center	0/0/1	11.900	74.99 EA

INDOOR NEMA 1


No.	Amp Cap.	Mount	Spaces	Max. Poles	Type
*CH2L40SP	40	Surface	2	2	Indoor
*CH2L70SP	70	Surface	2	2	Indoor
*CH4L125SP	125	Surface	4	4	Indoor
*CH8L125FP	125	Flush	8	8	Indoor
*CH8L125SP	125	Surface	8	8	Indoor
**CH12L125BP	125	Combination	12	12	Indoor

OUTDOOR NEMA 3R

No.	Amp Cap.	Mount	Spaces	Max. Poles	Type
*CH2L70RP	70	Surface	2	2	Rainproof
CH4L125RP	100	Surface	4	4	Rainproof
CH8L125RP	100	Surface	8	8	Rainproof

Cutler Hammer

Main Breaker Load Center - Single-phase, 3-wire; factory installed main breaker and combination surface/flush outdoor cover included. Straight-in wiring, top, or bottom. Pre-attached neutral bonding strap. Solid copper bus and branch fingers. 120/240V AC; 100A load centers rated 10,000 AIC. 150A and 200A load centers rated 25,000 AIC. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
540013-C	CH14B100BP	Main Breaker Load Center	0/0/1	22.000	94.99 EA
540021-C	CH22B100CP	Main Breaker Load Center	0/0/1	13.000	99.99 EA
540056-C	CH32B200JP	Main Breaker Load Center	0/0/1	22.000	199.99 EA
540064-C	CH42B200KP	Main Breaker Load Center	0/0/1	38.000	249.99 EA

No.	Amp Cap.	Mount	Spaces	Max. Poles	Type
*CH14B100BP	100	Combination	14	14	Indoor
*CH22B100CP	100	Combination	22	22	Indoor
CH32B200JP	200	Combination	32	32	Indoor
CH42B200KP	200	Combination	42	42	Indoor

Cutler Hammer

Meter Socket - Professional, preferred quality meter socket for 100A continuous 600V, 3-wire, single phase service. Outdoor, ringless, 4-jaw, overhead or underground service design with ground wire connector and no bypass. High-quality G90 steel, polyester-coated enclosure. No hub included. 9" x 12" x 5". UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522066-D	UTRS101BCH	100a Meter Socket	0/0/1	12.000	39.99 EA

Cutler Hammer

Meter Socket - Professional, preferred quality meter socket for 200A continuous 600V, 3-wire, single phase service. Outdoor, ringless, 4-jaw, overhead or underground service design with ground wire connector and no bypass. High-quality G90 steel, polyester-coated enclosure. No hub included. 12" x 16" x 6". UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
522252-C	UTRS213BCH	200a Meter Socket	0/0/1	22.000	45.99 EA

Cutler Hammer


Meter Socket - Professional, preferred quality meter socket for 100A continuous 600V, 3-wire, single phase service. Outdoor, ringless, 4-jaw, overhead or underground service design with no bypass. High-quality G90 steel, polyester-coated enclosure. No hub included. 8.5" x 12.25" x 4.5". UL listed. Approved for areas that only require a UL listed ringless meter socket.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561576-C	URS101BCH	100a Meter Socket	0/0/1	7.000	31.99 EA

Cutler Hammer

Meter Socket - Professional, preferred quality meter socket for 100A continuous 600V, 3-wire, single phase service. Outdoor, ringless, 4-jaw, overhead or underground service design with ground wire connextor and horn bypass. High-quality G90 steel, polyester-coated enclosure. Hub not included. 8.8" x 12.5" x 4.5". UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561517-C	UHTRS101BCH	100a Meter Socket	0/0/1	12.000	34.99 EA

Cutler Hammer

Meter Socket - Professional, preferred quality meter socket for 200A continuous 600V, 3-wire, single phase service. Outdoor, ringless, 4-jaw, overhead service design with ground wire connector and no bypass. High-quality G90 steel, polyester-coated enclosure. Hub not included. 9" x 16" x 6". UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
519294-C	UTRS202BCH	200a Meter Socket	0/0/1	15.000	42.99 EA

Cutler Hammer

Meter Socket - Professional, preferred quality meter socket for 200A continuous 600V, 3-wire, single phase service. Outdoor, ringless, 4-jaw, underground service design with no bypass. High-quality G90 steel, polyester-coated enclosure. No hub included. 11.5" x 15.5" x 5". UL listed. Approved for areas that only require a UL listed ringless meter socket.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561592-C	URS212ACH	200a Meter Socket	0/0/1	13.000	49.99 EA

Cutler Hammer

Meter Socket - Professional, preferred quality meter socket for 200A continuous 600V, 3-wire, single phase service. Outdoor, ringless, 4-jaw, overhead or underground service design with ground wire connector and horn bypass. High-quality G90 steel, polyester-coated enclosure. Hub closure plate installed. 11.5" x 15.5" x 5". UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561533-C	UHTRS213CCH	200a Meter Socket	0/0/1	13.000	62.99 EA

Cutler Hammer

Hub - Rainproof conduit hub adapter kit, used with CH load centers. Allows installing a group 1 hub on devices arranged for group 2 hubs. 8" x 5" x .2".




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505091-B	DS900AP	Conduit Hub	0/0/1	.400	8.49 EA

METER SOCKETS

Cutler Hammer

Hub - Removable hub for use when installing meter sockets with overhead service.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
523542-D	ARP00004CH12	1-1/4" Available Only At Cape, Dixon, Medina, Waco, Lexington, Woodburn, Montgomery	1/0/10	.005	5.49 EA
523550-D	ARP00005CH15	1-1/2" Available Only At Cape, Dixon, Medina, Waco, Lexington, Woodburn, Montgomery	1/0/10	.005	5.79 EA
523569-D	ARP00006CH2	2"	1/0/10	.006	5.99 EA

GE Industrial Dept.

Meter Socket Load Center - PowerMark Gold™ load center. Single-phase, 3-wire. 200A, 120/240V AC. Top or bottom feed. Ideal for mobile homes or temporary power.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505137-A	TSM420CSCU	200a Meter Socket	0/0/1	33.659	129.99 EA

Model No.	AmpCap	Mount	Spaces	MaxPoles	Type
TSM420CSCU	200	Combination	4	8	Outdoor

GE Industrial Dept.

Main Breaker Load Center - PowerMark Plus™ main breaker load center. Single-phase, 3-wire. 200A, 120/240V AC. Top feed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505180-A	TM2020CCU	200a Main Breaker	0/0/1	28.685	129.99 EA

Model No.	AmpCap	Mount	Spaces	MaxPoles	Type
TM2020CCU	200	Combination	18	40	Indoor

ELECTRICAL

GE Industrial Dept.

Main Breaker - 200A TQD bolt-on main circuit breaker. Includes line and load lugs. 2-pole, 240V AC, 10,000 A.I.C. For use in model No. TQD225NR raintight enclosure.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508691-C	TQD22200WL	200a Main Breaker	0/0/1	2.500	119.99 EA

GE Industrial Dept.

Main Lug Load Center - PowerMark Plus™ thermoplastic load center. Single-phase, 3-wire. 125A, 120/240V AC. Top or bottom feed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505196-C	TPL412C	125a Plastic Main Panel	0/0/1	2.426	17.99 EA

Model No.	AmpCap	Mount	Spaces	MaxPoles	Type
TPL412C	125	Combination	4	8	Indoor

GE Industrial Dept.

Hub - Universal raintight aluminum hub. For outdoor enclosures with removable closing caps. 2" nominal conduit diameter.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505206-D	TC200P	2" Hub	1/0/10	.237	7.49 EA

GE Industrial Dept.

Angle Plug - Molded nylon cap. 30A/120V. Travel trailer use only. NEMA R32U. UL listed.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533523-C	C32U	30a Angle Plug	1/0/10	.400	9.99 EA

ELECTRICAL

GE Industrial Dept.


Angle Plug - Molded nylon cap. 50A/ 120/240V. NEMA 14-50R. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533532-C	C54U	50a Angle Plug	1/0/10	.400	14.99 EA

GE Industrial Dept.

Filler Plate - 1/2" filler plate that fills opening in load center when knock-out has been removed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549819-E	TFHP	1/2in Filler Plate	1/0/10	.125	1.29 CD

GE Industrial Dept.

Main Lug Load Center - PowerMark Gold™ convertible load center. Single-phase, 3-wire. 125A, 120/240V AC. Top feed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505285-C	TL412C	125a Main Load Center	0/0/1	5.500	19.99 EA

Model No.	AmpCap	Mount	Spaces	MaxPoles	Type
TL412C	125	Combination	12	24	Indoor

GE Industrial Dept.

Main Load Center - PowerMark Gold™ convertible load center. Single-phase, 3-wire. 125A, 120/240V AC. Top or bottom feed. Flush front, copper bus, door included.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505288-A	TLM612FCUD	125a Main Load Center	0/0/1	9.190	19.99 EA
505304-B	TLM812FCUD	125a Main Load Center	0/0/1	8.890	26.99 EA

Model No.	AmpCap	Mount	Spaces	MaxPoles	Type
TLM612FCUD	125	Flush	4	12	Indoor
TLM812FCUD	125	Flush	8	16	Indoor

LOAD CENTERS

GE Industrial Dept.

Load Center - PowerMark Plus™ convertible load center. Single-phase, 3-wire. 125A, 120/240V AC. Top feed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505359-B	TLM1212CCU	125a Main Load Center	0/0/1	19.120	36.99 EA

Model No.	AmpCap	Mount	Spaces	MaxPoles	Type
TLM1212CCU	125	Combination	12	24	Indoor

GE Industrial Dept.


Camper Adapter - Adapts 15/20A/ 120V NEMA 5-20R configuration to a 30A/120V AC. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533471-C	AD2030	Rv Adapter	1/0/10	.200	9.99 EA

GE Industrial Dept.

Travel Trailer Adapter - Adapts 30A, 120V AC NEMA R32U configuration to 15/20A/120V NEMA 5-20R plug. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533480-D	AD3020	Rv Adapter	1/0/10	.200	8.99 EA

GE Industrial Dept.

Mobile Home-Motor Home Adapter - Adapts 50A, 120/240V AC to NEMA 14-30R configuration to 15/20A/ 120V AC NEMA 5-20R plug. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533499-C	AD5020	Rv Adapter	1/0/10	.200	9.99 EA

BREAKERS

ELECTRICAL

Cutler Hammer

Air Conditioner Disconnect - Nonfused, 60A air conditioner disconnect for residential and commercial use. Also used for heat pump disconnect. Unfused pull-out. 10 HP rating AC. 5-1/8" W. x 7-3/8" H. x 2-1/2" D. NEMA 3R rainproof enclosure. 60A/240V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528334-C	DPU222RP	60a Ac Nonfus Disconnect	1/0/5	3.000	15.69 EA

Cutler Hammer


AC Disconnect - 60A nonfused pull-out AC disconnect with GFI receptacle and a 20A ground fault receptacle mounted into a single (outdoor) NEMA 3R enclosure. This design eliminates the need for a separate enclosure and cover involving the receptacle. 240V circuit to feed the pull-out, 120V circuit to feed the receptacle. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
561312-B	DPU222RGF20	60a Ac Nonfus Disconnect	0/0/1	7.750	44.99 EA

Cutler Hammer


Air Conditioning Disconnect - Air conditioning disconnect, pullout, fused, 2-pole, 120/240VAC metallic, galvanized steel enclosure. 9" x 5.5" x 3". NEMA 3R, rainproof, 1 year warranty. CSA approved, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
563307-C	DPF221RP	30A, 1.5 HP at 120V, 3 HP at 240V	0/0/1	3.250	17.49 EA
527987-C	DPF222RP	60A, 3 HP at 120V, 10 HP at 240V	1/0/5	3.000	17.49 EA

Cutler Hammer

Utility Power Outlet - GFI protected temporary power outlet for RV use. 50A rated with 1-30A and 1-20A circuit breaker. 1-30A NEMA 10-30R outlet and 1-20A GFI duplex outlet. 6-5/8" W. x 13-5/8" H. x 4-3/4" D. NEMA 3R rainproof enclosure. Rainproof hub required. 50A/120V AC. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
519316-C	CHU4N7NS	50a Utility Power Outlet	0/0/1	10.000	124.99 EA

Square D Co.

Circuit Breaker - QO single pole circuit breaker for QO load centers. Plug-on type, 1 space required. 120/240V AC only. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528192-A	QO115	15A	1/0/10	.290	7.99 EA
528209-A	QO120	20A	1/10/100	.290	7.99 EA
528218-A	QO130	30A	1/0/10	.290	7.99 EA
532631-B	QO115C	15A, carded	1/6/30	.300	8.99 CD
532640-B	QO120C	20A, carded	1/6/30	.300	8.99 CD
532659-B	QO130C	30A, carded	1/6/30	.300	8.99 CD

Square D Co.

Circuit Breaker - QO double pole circuit breaker for QO load centers. Plug-on type, 2 spaces required. Common trip, 120/240V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528254-B	QO215	15A	1/0/5	.580	19.99 EA
528263-B	QO220	20A	1/0/5	.580	19.99 EA
517895-B	QO225	25A	1/0/5	.580	19.99 EA
528272-B	QO230	30A	1/5/50	.580	19.99 EA
528281-B	QO240	40A	1/0/5	.580	19.99 EA
528290-B	QO250	50A	1/0/5	.580	19.99 EA
528307-B	QO260	60A	1/0/5	.580	19.99 EA
528316-B	QO270	70A	1/5/20	.534	42.99 EA
532677-B	QO220C	20A, carded	1/3/12	.550	19.99 CD
532686-B	QO230C	30A, carded	1/3/12	.550	19.99 CD

Square D Co.

Tandem Circuit Breaker - QO tandem circuit breaker for QO load centers with Pan Rail Slots. Single pole, 1 space required. 120/240V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528227-B	QOT1515	15/15A	1/0/10	.350	18.99 EA
528236-B	QOT2020	20/20A	1/0/10	.350	18.49 EA

ELECTRICAL

ELECTRICAL

SQUARE D

Square D Co.

Tandem Circuit Breaker - QO single pole tandem circuit breaker for use with earlier model QO load centers. Plug-on type. 1 space required, 120V AC. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
526312-B	QO1515	15A/15A	1/10/100	.320	33.99 EA
504163-B	QO2020	20A/20A	1/10/100	.388	33.99 EA

Square D Co.

Main Breaker - 1-pole, 240V/200A circuit breaker for enclosure. 10,000 AIR, Q frame. Molded case.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
505073-B	QBL22200	200a Breaker	0/0/1	1.000	99.99 EA

Square D Co.

Circuit Breaker - Double pole circuit breaker for QO load centers. Plug-on type, common trip. 100A, 2 spaces. 120/240V AC. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528370-B	QO2100	100a 2p Circuit Breaker	0/0/1	.760	59.99 EA

Square D Co.

GFI Circuit Breaker - Qwick-Gard ground fault circuit interrupter. Class A ground fault and branch circuit overcurrent protection. Single pole, 120V AC. 1 space required. UL listed. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528138-B	QO115GFI	15A	1/3/12	.607	69.99 CD
528147-B	QO120GFI	20A	1/3/12	.607	69.99 CD
528156-B	QO130GFI	30A	1/3/12	.607	69.99 CD

Square D Co.

GFI Circuit Breaker - Qwick-Gard® ground fault circuit interrupter. Class A ground fault and branch circuit over-current protection. Double pole 120V AC. 50A, 2 spaces required. UL listed. Carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517232-B	QO250GFI	50a 2p Gfi Breaker	0/0/1	14.250	169.99 EA

Square D Co.

Main Breaker - Field installable main breaker for QO and newer models of Homeline™ load centers with straight in feed. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
516708-C	QOM100VH	Use with main lug panels rating 100A-125A	0/0/1	1.000	59.99 EA
516686-B	QOM2200VH	Use with main lug panels rating 200A-225A	0/0/1	2.750	109.99 EA

Square D Co.

Filler Plate - Fills opening in QO® load center covers when twist-out has been removed. 3 per pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517151-D	QOFPCP	Filler Plate Breaker	1/0/5	.025	4.99 EA

SQUARE D

Square D Co.

Handle Padlock - Used to padlock single pole QO® breakers in On or Off position.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517100-D	QO1PACP	Breaker Padlock	0/0/1	.250	5.99 EA

Square D Co.

Ground Bar Kit - For use in QO and Homeline™ load centers.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528502-D	PK3GTA1	Load centers: QO2L30S, HOM24L70F, HOM24L70F, HOM24L70S, HOM24L70RB	1/0/10	.060	4.99 EA
528511-D	PK4GTA	Load centers: QO24L70S, QO24L70RB, QO2L40RB	1/0/10	.060	5.29 EA
528520-D	PK7GTA	Load centers: QO612L100F, QO612L100S, QO612L100RB, HOM612L100F, HOM612L100S, HOM612L100RB, QO816L100F, QO816L100S, QO816L100RB	1/0/10	.090	5.99 EA
528539-D	PK9GTA	Load centers: HOM12L125C, HOM12L125RB	1/0/10	.110	6.99 EA
528815-D	PK12GTA	Load centers: HOM816L125C, HOM816L125RB, HOM816M100C, HOM816M100RB, HOM12M100C	1/0/10	.120	7.99 EA
528824-D	PK15GTA	Load centers: QO11220M100C, QO120M100C, QO120M100RB, HOM20L125RB, HOM20M100C, HOM20M100RB	1/0/10	.160	8.49 EA
528833-D	PK18GTA	Load centers: QO130M150C, QO12030M150RB, HOM30L200C, HOM30M200C, HOM30M200RB	1/0/10	.160	9.49 EA
528842-D	PK23GTA	Load centers: QO12040M200C, QO13040M200C, QO140M200C, QO12040M200RB, HOM2040M200C, HOM40M200C, HOM40M200RB	1/0/10	.200	9.99 EA

ELECTRICAL

Cutler Hammer

Cover Screw - Replacement screws for attaching load center cover. 6 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
562432-D	LCCSCS	Cover Screws	1/0/10	.070	3.19 PK

Square D Co.

Main Enclosed Breaker - For use as a separate main breaker or for circuit disconnect. 10,000 A.I.C. Rainproof, breaker included. UL listed. 100A.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529306-B	QO2100NRB	100a Enclosed Breaker	0/0/1	9.040	79.99 EA

Square D Co.

Main Enclosed Breaker - For use as a separate main breaker or where a main disconnect is required by code to be outside the structure. Outdoor raintight enclosure with factory installed 200A main breaker. Separate raintight access door to circuit breaker. Raintight enclosure accepts 3/4" through 2" type B hubs. 22,000 AIR fault rating. Accepts 100A/225A QOM2 main breakers. Convenient *hook and hang* mounting. Provisions for padlocking and sealing the enclosure separately from the breaker are standard. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529315-B	QOM2E2200NRB	200a Enclosed Breaker	0/0/1	18.000	179.99 EA

Square D Co.

Load Center - Raintight, feed-through load center. 200A main breaker included. 8 spaces for adding additional outside circuits such as a water pump circuit or a circuit feeding a storage shed. Can be expanded to 16 pole maximum capacity using QO Tandem breaker. Use bar kit model No. PK15GA-L



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
512117-B	QO1816M200FTR	200a Load Center	0/0/1	35.000	179.99 EA

ELECTRICAL

Square D Co.

Main Breaker Load Center - 50A 2 pole Homeline™ GFCI installed in a 50A outdoor center painted, zinc-coated steel outdoor enclosure. Main lug load center designed for applications up to 50A 120/240V. 10,000A short circuit current interrupting rating. Top-opening door with easy-to-remove interior trim. Cover can be padlocked.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502548-B	HOM250SPA	50a 2pole Gfi Spa Pack	0/0/1	6.000	99.99 EA

Square D Co.

Load Center Remodeler Pack - Homeline remodeler pack contains: Model No. HOM20M100C 100A 20 space/20 circuit maximum indoor load center and (5) model No. HOM120 20A single pole breakers.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502557-C	HOMVP5	100a 20sp Load Center	0/0/1	27.000	99.99 EA

Square D Co.

Enclosed Switch - Fusible light-duty enclosed switch for residential applications such as workshop, hobby room, garage, water heater/furnace, farm equipment, well pump. Has a padlocking feature that can be locked in the Off position to prevent operation. 3-wire system, 10,000 AIR. 120/240V/30A, 3HP-240V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517240-C	L211NCP	30A plug fuse	0/0/1	3.000	18.99 EA
517224-C	L221NCP	30A cartridge fuse	0/0/1	3.000	29.99 EA

Square D Co.

Fusible Safety Switch - General-duty. Designed for residential and commercial applications where economy is a prime consideration. Typical loads are lighting, air conditioning, and appliances. Fuses not included. UL listed. Fusible indoor type-NEMA 1 3-wire s/n (2 blades, 2 fuses) 120/240V AC (plug) - 240V AC (cartridge).



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529164-C	D211N	30A plug fuse	0/0/1	3.600	29.99 EA
529182-C	D221N	30A cartridge	0/0/1	3.750	39.99 EA

Square D Co.

Fusible Safety Switch - General-duty. Designed for residential and commercial applications where economy is a prime consideration. Typical loads are lighting, air conditioning, and appliances. Fuse not included. UL listed. Fusible rainproof-NEMA 3R 3-wire s/n (2 blades, 2 fuses) 120/240Vac (plug) - 240V AC (cartridge). 30A cartridge.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529191-B	D221NRB	30a Safety Switch	0/0/1	4.700	59.99 EA

Square D Co.

Air Conditioner Disconnect - Nonfused 60A air conditioner disconnect for residential and commercial use, enclosed molded case switch. 2-wire, rainproof, maximum 10 HP rating. 60A/240V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537985-C	QO200TRCP	A/c Disconnect	1/0/10	3.000	17.99 EA

SQUARE D

ELECTRICAL

Square D Co.

Circuit Breaker - Homeline™ single pole circuit breaker. 1 space required, 120/240V AC only. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513636-B	HOM115	15A	1/0/10	.340	4.59 EA
513644-B	HOM120	20A	1/10/100	.340	4.59 EA
513628-B	HOM130	30A	1/0/10	.340	4.59 EA
506214-B	HOM115C	15A	1/0/6	.400	4.99 CD
505765-B	HOM120C	20A	1/0/6	.400	4.99 CD
505757-B	HOM130C	30A	1/0/6	.400	4.99 CD

Square D Co.

Circuit Breaker - Homeline™ double pole circuit breaker. 2 spaces required, 120/240V AC only. UL listed.

Bulk



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513660-B	HOM215	15A	1/0/5	.686	10.99 EA
513679-B	HOM220	20A	1/0/5	.686	10.99 EA
513687-B	HOM230	30A	1/5/50	.686	10.99 EA
515108-B	HOM240	40A	1/0/5	.686	10.99 EA
515116-B	HOM250	50A	1/0/5	.686	10.99 EA
515132-B	HOM260	60A	1/0/5	.686	10.99 EA
504599-B	HOM270	70A	1/0/5	.780	27.99 EA
505730-B	HOM220C	20A	1/0/3	.780	11.99 CD
505706-B	HOM230C	30A	1/0/3	.780	11.99 CD
505439-B	HOM240C	40A	1/0/3	.780	11.99 CD
505234-B	HOM250C	50A	1/0/3	.780	11.99 CD
504904-B	HOM260C	60A	1/0/3	.780	12.99 CD

Square D Co.

Circuit Breaker - Homeline™ tandem circuit breaker. 2 single poles requiring 1 space. 120/240V AC only. Bulk tray. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
504572-B	HOMT1515	15A/15A	1/0/10	.500	10.99 EA
504505-B	HOMT2020	20A/20A	1/0/10	.500	10.99 EA

NOTE 1: Homeline™ Circuit Breaker cannot be used with Square-D QO Series equipment or any other interchangeable lines of circuit protective equipment.

Square D Co.

Circuit Breaker - Homeline™ ground fault circuit interrupter (GFI) breaker. Helps protect against dangerous electrical shock. National Electrical Code requires GFI's for bathrooms, kitchens, basements, garages and outdoor residential construction. Single pole, 1 space required. 20A/120V AC. Clam shell package. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
504580-B	HOM120GFI	20a Breaker	1/0/3	.600	44.99 EA

Square D Co.

Circuit Breaker - Homeline™ ground fault circuit interrupter (GFCI) double pole breaker. Helps protect against dangerous electrical shock. National Electric Code requires GFCIs for bathrooms, kitchens, basements, garages, spas, and outdoor residential construction. Double pole, 2 spaces required. 50A/120V AC. Clam shell package. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
553832-B	HOM250GFI	50a 2p Gfi Breaker	0/0/1	1.000	139.99 EA

Square D Co.

Main Breaker - Homeline™ main breaker. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513709-C	HOM2100	100A, can also be used for branch circuit	0/0/1	1.780	39.99 EA
513695-B	HOM2200	200A, main breaker only	0/0/1	1.780	99.99 EA

NOTE 1: Homeline™ Circuit Breakers cannot be used with Square-D QO Series equipment, but can be used with all interchangeable lines of circuit protective equipment.

ELECTRICAL

SQUARE D

Cutler Hammer

Spa Panel - 50A electrical disconnect with GFI protection. For use with hot tubs and spas. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
560553-B	BR2B50RPGFI	50a Spa Disconnect	0/0/1	5.000	134.99 EA

Square D Co.

Filler Plate - Fills opening in Homeline™ load center covers when twist-out has been removed. 3 per pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
516120-D	HOMFPCP	Filler Plate Breaker	1/0/5	.275	5.49 EA

NOTE 1: Homeline™ Circuit Breakers cannot be used with Square-D QO Series equipment, but can be used with all interchangeable lines of circuit protective equipment.

Square D Co.

Main Lug Load Center - Homeline™, main lugs only. Can be used when spaces for more circuits are needed, as a secondary or add on load center connected to the main disconnect load center. Single-phase, 3-wire. Cover included, ground bar kits must be ordered separately. Accepts only Homeline™ circuit breakers. 120V/240V, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
504491-B	HOM24L70F	70a Load Center	0/0/1	3.080	14.99 EA
504432-B	HOM24L70S	70a Load Center	0/0/1	3.600	14.99 EA
504335-B	HOM24L70RB	70a Load Center	0/0/1	5.110	25.99 EA
516163-B	HOM612L100F	100a Load Center	0/0/1	7.640	21.99 EA
503967-B	HOM612L100S	100a Load Center	0/0/1	7.000	21.99 EA
503789-B	HOM612L100RB	100a Load Center	0/0/1	9.600	32.99 EA
503053-C	HOM816L125C	125a Load Center	0/0/1	14.730	32.99 EA
544531-B	HOM816L125RB	125a Load Center	0/0/1	19.000	47.99 EA
503118-C	HOM12L125C	125a Load Center	0/0/1	12.000	42.99 EA
544507-C	HOM12L125RB	125a Load Center	0/0/1	19.000	58.99 EA
515922-B	HOM1224L125TC	125a Load Center	0/0/1	16.900	45.99 EA
544515-B	HOM20L125RB	125a Load Center	0/0/1	25.000	89.99 EA
544523-B	HOM30L200C	200a Load Center	0/0/1	29.000	99.99 EA

No.	Amp Capacity	Mount	Spaces	Maximum Poles	Type	Circuit Breaker-Type	Bar Kit
HOM24L70F	70A	Flush	2	4	Indoor	HOM/HOMT	PK3GTA-1

Continued Next Column

Continued From Previous Column

HOM24L70S	70A	Surface	2	4	Indoor	HOM/HOMT	PK3GTA-1
HOM24L70RB	70A	RB	2	4	Raintight	HOM/HOMT	PK3GTA-1
HOM612L100F	100A	Flush	6	12	Indoor	HOM/HOMT	PK7GTA
HOM612L100S	100A	Surface	6	12	Indoor	HOM/HOMT	PK7GTA
HOM612L100RB	100A	RB	6	12	Raintight	HOM/HOMT	PK7GTA
HOM816L125C	125A	Combina-tion	8	16	Indoor	HOM/HOMT	PK12GTA
*HOM816L125RB	125A	RB	8	16	Raintight	HOM/HOMT	PK12GTA
HOM12L125C	125A	Combina-tion	12	12	Indoor	HOM	PK9GTA
**HOM12L125RB	125A	RB	12	12	Raintight	HOM	PK9GTA
***HOM1224L125TC	125A	Combina-tion	12	24	Indoor	HOM/HOMT	INSTALLE D
**HOM20L125RB	125A	RB	20	20	Raintight	HOM	PK15GTA
****HOM30L200C	200A	Combina-tion	30	30	Indoor	HOM	PK18GTA

Square D Co.


Meter Breaker Panel - QO ring type outdoor meter main. Overhead and underground feed. Main circuit breaker factory installed. Surface mount, rainproof. Single phase 240V maximum 10,000 AIR. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
555940-B	CQRB100CP	100A main circuit breaker	0/0/1	16.000	83.99 EA
555959-B	CQRA200	200A main circuit breaker	0/0/1	29.000	189.99 EA

Square D Co.

Value Pack Main Breaker Load Center - Homeline™ Value Pack offers a value mix of products for a load center project. Includes model No. HOM340M200TC 200A, 30 space, 40 pole maximum main breaker load center with equipment ground bar kit, 5 model No. HOM120 single pole 20A circuit breakers, and 1 model No. HOM230 double pole 30A circuit breaker. Single phase, 3-wire, 10,000 A.I.C. combination mount, indoor use only. Cover included. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
525871-B	HOMVP1	200a Load Center	0/0/1	37.000	169.99 EA

SQUARE D

Square D Co.

Main Breaker Load Center - Homeline™, for mobile home use, with feed-through provisions. Main breaker installed. Single-phase, 3-wire, 10,000 A.I.C. Cover included, ground bar kit must be ordered separately. Accepts only Homeline™ breakers. 120V/240V, UL listed. 200A capacity. Raintight, RB mount. 8 spaces, with a maximum of 16 poles. HOM circuit breaker type. Use bar kit model No. PK15GTA-L.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
524204-C	HOM816M200FT RB	200a Load Center	0/0/1	29.000	174.99 EA

Easy Heat Inc.

Pipe Heating Cable - Cable installs fast and easy. Each package contains grounded plug, built-in thermostat and instructions. Cable has weather-resistant PVC outer jacket and inner insulation. Keeps water flowing down to -40° F. Features *power indicator light*, 3-wire grounded cord, and plug. 7W per foot, 120V. Approved for rigid plastic and metal pipe. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
549851-C	AHB013	3'	1/0/10	.600	25.99 EA
549878-C	AHB016	6'	1/0/10	.700	27.99 EA
549886-C	AHB019	9'	1/0/10	.900	28.99 EA
549894-C	AHB112	12'	1/0/10	1.000	29.99 EA
549908-C	AHB115	15'	1/0/10	1.100	31.99 EA
549916-C	AHB118	18'	1/0/5	1.400	32.99 EA
549924-C	AHB124	24'	1/0/5	1.600	34.99 EA
549932-C	AHB130	30'	1/0/5	1.800	37.99 EA

Wrap-On

Pipe Wrap - Vinyl backed fiberglass insulation eliminates the need for a separate vapor barrier. 1" thick, long fiber material provides excellent 3.7 R value and high tensile strength. 3" x 25'.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
534933-C	16509	1x3"x25' Pipe Wrap	1/0/12	.500	5.49 EA

Wrap-On


Insulation - Made from top grade fiberglass, vapor seal included. 1/2" thick. Suitable for use on hot and cold water pipes.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514875-C	16525	3" x 25'	1/0/24	.417	3.29 EA
516757-C	16503	3" x 35'	1/0/12	.500	4.99 EA
510262-C	16506	6" x 35'	1/0/6	1.275	8.99 EA

Easy Heat Inc.

Pipe Heating Cable - Freeze® Free self-regulating heating cable produces only the heat that is needed, where and when it is needed, to prevent pipe freeze-up. Protects plastic and metal water pipes to -60° F. Do not use where cable can get wet or on buried pipes. Easy-to-install, use with Freeze® Free fused plug kit. Can be cut to exact length your customers need. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
544744-C	2102	100' spool	0/0/1	5.000	219.99 SPL
544752-C	2302	300' spool Available Only At Cape, Dixon, Medina, Waco, Woodburn, Montgomery, Mesquite	0/0/1	13.000	599.99 SPL



Portable Fan - Convenient 2-speed adjustment - low for gentle air movement and high for intense air flow. Runs on 2 "D" cell batteries or a 3V AC-DC adaptor (not included) for use with 120V AC electrical outlets. Powerful air flow, ultra quiet operation. 2.8 to 6.5" H. x 5" W. x 6.3" D. 1 year limited warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
540595-C	2003W	White	1/0/12	1.317	9.99 EA

LASKO

Wall Oscillating Fan - 16" 3-speed wall-mount fan with full 90° oscillation or directional cooling. Rotary or pull switch speed control. Grounded cordset. Rear cord storage area. Zinc-plated steel safety grills will not rust or corrode. 22-5/8" L. x 18" W. x 14-1/2" H. 72W/120V, 60 Hz. White/gray. Plastic front and rear. UL listed. **Made in U.S.A.**




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
516929-B	3016	16" Wall Oscillating Fan	0/0/1	10.500	59.99 EA

ELECTRICAL

FANS



Fan - 6" personal fan has 2-speed, easy-grip rotary control that provides quiet, efficient air movement in areas too tight for larger fans. Head tilts vertically to put air where you want it. Durable, impact-resistant plastic construction. 7-7/8" L. x 6-7/16" W. x 9-1/4" H. CFMs: Low-488, high-566. 120V, 60 Hz, 13W. White. UL listed. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
523488-C	2002W	6" Wht Personal Fan	1/0/6	3.000	12.99 EA



Oscillating Fan - 3-speed oscillating fan with rotary control. Full 90° oscillation or stationary cooling. Adjustable 6-position pivot for directing air flow. Plastic blades and grills. 2-tone neutral white finish. 120V. UL listed. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
516524-B	2500	12"; 18-1/2" L. x 14-1/4" W. x 11-1/2" H., CFMs: Low-1020, high-1554; 40W.	0/0/1	7.400	19.99 EA
530651-C	2506	16"; 23-1/4" L. x 18" W. x 11" H., CFMs: Low-1922, high-2628; 73W.	0/0/1	10.300	24.99 EA




Fan - The whisper quiet 20" Wind Tunnel™ fan has a full 360° adjustable rotation, positions that securely lock into place, and a 3-speed permanently lubricated motor. Safety grills, 2-toned design with pearl finish fan. Durable impact-resistant plastic construction. CFMs: Low-2960, medium-3890, high-4750. 23-1/2" x 6-1/2" x 23-3/4", 120V AC, 165W, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531340-C	3300	20" 3-speed Fan	0/0/1	12.000	34.99 EA



High Velocity Fan - 18" pivoting floor fan with quick mount wall system. 3-speeds, pivots to direct air flow. 1-piece wall bracket can be mounted on 16" or 24" wall studs, hardware included. To return to floor use, simply lift (no tools required). Wall bracket can be used for storage. Durable steel construction, carrying handle, rubber pads, metal blades, and steel fan guards comply with OSHA regulations. Rust-resistant powder-coated grills. 9' grounded cordset. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
556521-C	2518QM	18" High Velocity Fan	0/0/1	15.000	79.99 EA



Pedestal Fan - 16" pedestal fan is whisper quiet, ideal for homes and offices. Plastic front and rear grills snap together. 3 energy efficient speeds with whisper-quiet power. Full 90° oscillation or stationary cooling. Full tilt-back head to direct air where needed. Full adjustable heights (37" to 53") for maximum versatility. 54-3/4" L. x 15-3/8" W. x 18" H. CFMs: Low-2000, medium-2355, high-2681. 120V, 50W, 60 Hz. White. UL listed. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
511560-B	2526	16" Pedestal Fan	0/0/1	13.800	24.99 EA




Oscillating Industrial Pedestal Fan - 30" industrial grade air circulator for commercial use. Meets OSHA requirements. All metal construction, height adjusts from 64" to 92". Motor head adjusts 15° up or down. 1/4 HP, 3-speed motor with thermal protection. 10', 16/3 cord with 3-prong 15A grounded plug. 26" diameter base. 30-1/2" L. x 33" W. x 90" H. CFMs: Low-5925, medium-7003, high-8205. 1 year warranty. Black. UL listed. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500712-A	3135	30" Ped Oscillating Fan	0/0/1	79.000	199.99 EA



Box Fan - 20" Wind Ring™ box fan provides powerful air delivery. Larger body size allows more air into the 5 paddle blades. Wind Ring™ in grill focuses air into blades. 3-speed quiet operation, energy efficient. Durable steel body with plastic safety grills. Convenient carry handle, easy assembly. 22-1/2" L. x 21-3/8" W. x 5-3/8" D. UL listed. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
520109-A	3723	20" 3-speed Box Fan	0/0/1	14.700	16.99 EA



Box Fan - Heavy-duty aluminum 20" 3-speed box fan with heavy-duty motor, 3 aluminum blades. Rotary dial switch, 3-wire grounded 8' cord. 22" H. x 22" W. x 6.25" D. Gray with white. UL listed. Meets OSHA standard.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
541230-B	P-25	20" Deluxe Box Fan	0/0/1	16.000	59.99 EA

FANS

LASKO

Window Fan - Ultra Force 12" window fan with Comfort Dial™ controls: 3 speeds, electrically reversible intake or exhaust, Comfort Watch™ thermostat senses room temperature and turns fan On or Off automatically. Lighted comfort level indicator, concealed rear cord wrap. Fits window widths from 24" to 37". E-Z-CLICK™ expander panels hold the fan in place for a safe, custom fit. Durable impact-resistant construction. 23-3/8" W. x 5-11/16" D. x 14-3/16" H. CFMs: Low- 1490, high-2410. 58W/120V. UL listed. 2-tone neutral white finish. **Made in U.S.A.**



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
544426-C	1200	12" Wht Window Fan	0/0/1	8.500	49.99 EA

LASKO

Twin Window Fan - 9" twin window fan provides high volume air movement. Use as a floor/table, or window fan (snap on feet included). Lightweight, comfort-grip handle, fits windows from 25" to 35". E-Z-Click™ side panels for safe, custom fit. Whisper quiet 2-speed manually reversible motor. No assembly required for window installation. Durable impact-resistant construction. 24-1/2" L. x 5-1/5" W. x 11-7/8" H. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
544418-B	2136	9" Twin Window Fan	0/0/1	7.100	29.99 EA

LASKO

High-Velocity Blower Fan - The high-velocity blower floor fan has the power of a 20" high-velocity floor fan in a streamlined body. Features include ultra quiet motor, easy-to-use top mounted controls, and 3 powerful speeds. Directional louvers for precision air delivery, optional oscillation for broad room coverage, and easy-to-grip carry handle. Fully assembled for immediate use. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506884-C	4924	High Velocity Fan	1/0/12	1.417	79.99 EA

Kaz/ Honeywell Fans

Tower Fan - Oscillating space saver fan. Sleek vertical design saves floor space and provides high-volume air movement. Fan can oscillate or remain stationary to direct air. 3 speeds and easy push-button controls. Recessed carrying handle. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507026-B	DY-012	30" 3-speed Tower Fan	0/0/1	7.050	29.99 EA

ELECTRICAL

Lakewood

High-Velocity Fan - Whole house air circulator is fully directional, adjusts 360°. Exhaust or intake for direct or indirect cooling. All metal construction, easy-clean removable guards. Quiet, vibration-free operation. Convenient carry handle, 3-speed comfort control. 110V. 10 year warranty. UL listed. 14", CFM: High-1458, Medium-1241, Low-982, chrome.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503525-C	HV-14C	14" 3-speed Chrome Fan	0/0/1	11.510	44.99 EA

The Holmes Group/Patton

High-Velocity Fan - Whole house air circulator is fully directional, adjusts 360°. Exhaust or intake for direct or indirect cooling. All metal construction, easy-clean removable guards. Quiet, vibration-free operation. Convenient carry handle, 3-speed comfort control. 110V. 10 year warranty. UL listed. 18", CFM: High-2841, Medium-2604, Low-2237, chrome.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
501158-B	U2-1803-UC	18" 3-speed Chrome Fan	0/0/1	16.690	54.99 EA

The Holmes Group

Commercial Fan - Extreme high velocity 20" floor fan with 3-speed settings. High-impact polymer housing. Steel impact cage. Integrated control handle with oversized controls. Wall mountable. Pivoting head back 90°, 3-wire grounded cord. CFM: H 3632, M 2701, L 2008. 10 year limited warranty. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
559768-B	PX405-U	High Velocity Fan	0/0/1	30.800	99.99 EA

The Holmes Group/Patton

Commercial Fan - 20" industrial grade high-velocity air circulator with 3-speed comfort control. All metal construction, chrome guards, 360° tilt adjustment, 3-wire grounded cord. CFM: H 3263, M 3169, L 3000. 25-1/4" H. x 25-3/4" W. x 11-1/2" D. 1 year warranty. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
529141-B	U2-2003-UC	20" 3-spd Commercial Fan	0/0/1	22.000	59.99 EA



Desk Fan - Century™ is a 12" high-performance oscillating fan.

Features include whisper-quiet motor for maximum air flow with minimum noise, the aerodynamic blade design for maximum air flow with minimum noise, smooth oscillation for an 85" range of air movement, 3 speeds, heavy-duty metal housing for vibration-free operation.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506811-B	90021	Brushed nickel	0/0/1	13.000	59.99 EA
506820-B	90022	Black	0/0/1	13.000	59.99 EA

Lakewood

Drum Fan - 24", 2-speed, direct drive portable cooler. Features include 2-speed motor, 115V deluxe heavy-duty high-velocity, permanently lubricated motor with metal blades. The guards are epoxy-coated steel spiral that are connected with SMS fasteners. Plastic wheels with rubber tread. 10', 3 conductor, grounded SJT type cord. Compliant with UL and OSHA requirements.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507231-B	MC24	24" Drum Fan	0/0/1	42.000	159.99 EA

The Holmes Group

Pedestal Fan - Turbine CVT (controlled velocity technology) pedestal air circulator. High-impact polymer housing resists damage and corrosion. Oversized knobs and controls, pivoting head, 3 speed settings, GE motor. CFM: H 3632, M 2701, L 2008. Limited 10 year warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
562807-C	PX405PED-U	20" Pedestal Fan	0/0/1	45.000	149.99 EA

The Holmes Group/Patton

Outdoor Patio Fan - Built to be used and stored outside, this tough guard weather protective finish fan helps keep bugs away. Adjustable-tilt fan head, motorized oscillation, and 3 speed settings. 18" power blade, 10' heavy guard grounded power cord, and solid wrought iron base design. Tan and black.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506688-C	HPF651-U	Outdoor Patio Fan	0/0/1	40.000	129.99 EA



52" Outdoor Ceiling Fan - Sea Air® is a 52" white outdoor ceiling fan with 5 white plastic blades. Made with tarnish-resistant finish and hardware and a high-performance motor, this fan is UL listed for outdoor locations.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
506740-C	23566	52" Wh Outdr Ceiling Fan	0/0/1	21.150	119.99 EA



52" Ceiling Fan With Light - 5 blade Vista™ ceiling fan with high performance 3-speed reversible motor that provides energy cost saving by cooling in the summer and reclaiming heat in the winter. Blades reverse to show desired finish. Installers Choice® mounting systems allows for 3 types of installation: Flush to ceiling, standard, or angle mount. Hands-free™ canopy system. 100W globe light fixture. CFM: High 8500, medium 4900, low 2700. Housing diameter 11.88". From ceiling to bottom of light fixture is 18.25". Lifetime warranty. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
530522-B	20531	Brushed nickel with maple/cherry blades	0/0/1	23.610	149.99 EA
550647-C	20536	White with white/light oak blades	0/0/1	23.610	149.99 EA
553506-C	20538	Iron with cherry/dark walnut blades	0/0/1	23.610	149.99 EA

CEILING FANS PARTS

Westinhouse Ceiling Fans

56" Industrial Ceiling Fan - This is a 3 blade industrial ceiling fan with white finish and white steel blades. Includes 5-speed surface-mounted wall switch with ball hanger installation system. This fan is designed for large, open spaces with high ceilings. Limited 10 year warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
508891-C	78127	56" White Ceiling Fan	0/0/1	15.060	44.99 EA

ELECTRICAL PRODUCTS


4" Round Ceiling Fan and Fixture Box - Side Saddle box, unique L-shaped design allows box to mount on any single/double joist or manufactured I-beam. Designed for ceiling fans or heavy lighting fixtures, maximum weight 70 lb. for ceiling fans and 210 lb. for lighting fixtures. Built-in integrated mud shield protects screw heads from drywall mud and paint. Hinged opening allows for easy access. Captured mounting and fan/fixture hardware hidden behind protective shield. 2 cable clamps. Very large, 27.0 cu. in. allows for easy wiring. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
500005-C	7126-1	Ceiling Fan Box	1/0/24	.313	6.79 EA

Thomas & Betts

4" Round Vapor Barrier Box - Saddle Box, designed for ceiling fans or heavy lighting fixtures. Maximum weight 70 lb. for ceiling fans and 210 lb. for lighting fixtures. Unique U shaped design allows mounting on any 1-1/2" wide joist. Unique gasketing material seals all openings to prevent air or vapor penetration. For use where codes require an air and vapor barrier. Meets the Minnesota Residential Energy code. 2 clamps. 12.5 cu. in. Recommended for earthquake areas. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
564141-D	CFB16F	Ceiling Fan Box	1/0/50	.258	6.99 EA

Westinghouse Lighting

Ceiling Fan Light Kit - Plain white schoolhouse globe, 9" diameter. Uses up to one 60W fan bulb, not included. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
562343-C	77300	White fitter	1/0/4	2.000	10.49 EA
534149-C	77301	Bright brass fitter	1/0/4	2.000	10.49 EA
534130-C	77302	Antique brass fitter	1/0/4	2.000	10.49 EA

ELECTRICAL

Westinghouse Lighting

Ceiling Fan Light Kit - Plain white round opal globe, 8" diameter. Uses up to one 60W fan bulb, not included. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
534158-C	77306	Bright brass fitter	1/0/4	2.000	10.49 EA
523749-C	77307	Antique brass fitter	1/0/4	2.000	10.49 EA

LEVITON


Do it Best® Fan Speed Control - Ideal for paddle fans and other fans used in the home. Solid state, variable speed, ultra-quiet. Replaces standard switch. 5A/120V AC, 60 Hz only. 1 per clamshell.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
532178-B	8776616I	Ivory	1/0/5	.338	9.99 CD
526983-B	8786616W	White	1/0/5	.338	9.99 EA

HUNTER

Ceiling Fan Control Switch - Wall mounted dual slide control provides 3 fan speeds and full range light dimming. Installs in 3-wire single gang wall box. Rocker switch plate not included. Unit will operate all brands of ceiling fans. Rated for fan 1.6A, light 300W. White. 1 year limited warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531626-C	27182	Wht Fan/light Switch	1/0/6	.333	29.99 EA

Westinghouse Lighting

Remote Fan Speed Control - Hand-held remote control provides 3-speed fan control and variable light dimming. Operates up to a distance of 50'. Compact design conceals in fan canopy, installs easily on any new or premounted ceiling fan. Adjustable frequency setting eliminates interference. Silent operation. Wall mounting bracket included. Uses one 9V battery (not included). UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
538345-B	77870	Control Ceiling Fan	1/0/4	.800	46.49 EA

ELECTRICAL



Ceiling Fan Light Remote Control - Hand held control that provides separate buttons for 3 fan speeds, full range light dimming and instant off feature. Manual light operation with wall switch access plate. Unique switch plate holder included. Unit will operate all brands of ceiling fans. Fan 1A, light 300W. White. 1 year warranty.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
550620-B	27185	Wht Fan/light Remote	1/0/6	.433	49.99 EA

Westinghouse Lighting

Pull Chain - Wooden knob with 12" brass bead chain.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514527-D	77013	Walnut finish	1/6/72	.052	1.29 CD
514543-D	77014	White finish	1/6/72	.052	1.29 CD

Westinghouse Lighting

Pull Chain - Beaded chain with connector.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514519-D	77012	12", polished brass finish	1/6/72	.041	.99 CD
540994-D	77049	3', stainless steel	1/6/72	.127	1.79 CD
541001-D	77050	3', polished brass finish	1/6/72	.127	1.49 CD
541028-D	77051	3', white finish	1/0/6	.127	1.49 CD
562173-D	77238	3', brushed pewter	1/0/6	.800	1.49 EA

CEILING FAN PARTS

Westinghouse Lighting

Ceiling Fan Switch - Replacement 3-speed fan switch with pull chain for ceiling fans with 4 wires going into the switch. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
540943-D	77021	Ceiling Fan 3-spd Switch	1/6/72	.071	2.99 CD

Westinghouse Lighting

Ceiling Fan Switch - Replacement 3-speed fan switch with pull chain for ceiling fans with 8 wires going into the switch. Switch has multi-levels for speed and light control. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
541079-D	77075	Ceiling Fan 3-spd Switch	1/0/6	.106	3.49 CD

Westinghouse Lighting

Ceiling Fan Light Switch - Replacement ceiling fan light switch with pull chain. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
540951-D	77023	Single pole	1/6/72	.074	3.29 CD
550280-D	77052	3-way, 3-wire	1/6/72	.168	4.79 CD

GB Electrical

Pull Chain Switch - 2-speed, easy pull switch for ceiling fans. Off/On/On. 3 stab-type wiring slots for 18-gauge soldered stranded wire or solid wire, for ceiling fans. 72" white cotton pull cord to attach to the switch pull chain included. 3A/250V AC; 6A/125V AC. UL listed. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513725-D	GSW-33	2speed Pull Chain Switch	1/0/5	.098	7.99 CD

CEILING FAN PARTS

GB Electrical


3-Speed Switch - Multi-speed, easy pull switch for ceiling fans. 4 stab-type wiring slots for 18-gauge soldered stranded wire or solid wire, for ceiling fans. 1.5A/250V ACL; 3A/250V AC and 6A/125V AC. ULlisted. 3-speed, Off/On/On/On. 1 per card.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
513733-D	GSW-34	3speed Pull Chain Switch	1/0/5	.100	8.99 CD

Westinghouse Lighting

16" Ceiling Medallion - For use with ceiling fans and light fixtures. Helps cover hole cut for electrical box or for decorative enhancement. 2-piece design, 16". 4-1/2" center opening. Can be painted to match room decor. White.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514608-D	77034	16" Ceiling Medallion	1/0/6	1.250	13.49 CD

Westinghouse Lighting

Ceiling Medallion - For use with ceiling fans and light fixtures. Helps cover hole cut for electrical box, or for decorative enhancement. 1-piece design, install at same time as fixture or fan for best results. Can be painted to match room decor. White.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
514594-D	77037	10"	1/0/6	.490	9.29 CD
540978-D	77035	16"	1/0/6	1.300	11.49 EA

Westinghouse Lighting

Ceiling Fan Down Rod - 1/2" I.D. down rod for use with Westinghouse ceiling fans. Threaded on both ends, mounting hole on both ends, ground screw hole on one end. Shrink wrapped.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
503711-D	77241	12", antique brass	1/0/6	.133	5.29 EA
503738-D	77242	12", polished brass	1/0/6	.593	5.29 EA

Continued Next Column

ELECTRICAL

Continued From Previous Column

Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
528544-D	77240	12", white	1/0/6	.133	4.49 EA
503746-D	77244	24", antique brass	1/0/6	.273	8.29 EA
503754-D	77245	24", polished brass	1/0/6	.302	8.29 EA
528536-D	77243	24", white	1/0/6	.273	7.79 EA
541214-D	77247	36", antique brass	1/0/6	1.813	12.99 EA
541222-D	77248	36", polished brass	1/0/6	1.813	12.99 EA
541206-D	77246	36", white	1/0/6	1.813	12.79 EA



Ceiling Fan Down Rod - 3/4" I.D. for use with Hunter ceiling fans. Tapered end to help ensure tighter fit. Threaded on both ends, mounting hole on both ends.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
533920-D	22719	12", antique brass	1/0/6	.767	5.49 EA
533882-D	22713	12", bright brass	1/0/6	.767	5.49 EA
533912-D	22717	12", white	1/0/6	.767	5.49 EA
533904-C	26319	24", antique brass	1/0/6	2.000	8.99 EA
533874-C	26313	24", bright brass	1/0/3	2.000	8.99 EA
533890-D	26317	24", white	1/0/6	2.000	8.99 EA

Westinghouse Lighting

Ceiling Fan Saf-T-Box® - For new construction or attic accessibility. Steel, 4" octagon box. Comes with 10-24 screws for fans and heavy fixtures. 8-32 screws in ears for cover plates and lightweight fixtures. Wire clips also provided. 100 lb. maximum load rating for light fixtures 70 lb. maximum load rating for ceiling fans. Meets UL standard regarding threads exposed inside the box. 15.5 cu. in. Fits all ceiling fans. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
540935-D	010500	Ceiling Fan Box	1/0/12	.721	5.49 EA

Thomas & Betts

Ceiling Fan Box Kit - Contains 4" octagon box with all necessary hardware to mount a ceiling fan when a cross member brace is used. 15.5 cu. in. 1-1/2" deep. Maximum fixture weight is 150 lb., maximum fan weight is 70 lb. Exceeds National Electrical code requirements. Recommended for earthquake areas.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
517860-E	54151CFB	Ceiling Fan Box Kit	1/0/10	.875	6.99 EA

ELECTRICAL

Some prices shown may vary due to market fluctuations, and are to be used as estimates.

ELECTRICAL

Thomas & Betts

Ceiling Fan Installation Kit - Designed for new construction.

Kwik-Brace slides apart to accommodate joists of 14-1/8" to 22-1/2". Nailing spurs allow for easy brace positioning. Outlet box can be positioned in any location along the length of the brace. (5) 1/2" knockouts. Simple fastener for tightening outlet box and brace. Easy-to-follow instructions and mounting hardware included. Maximum fixture weight is 90 lb., maximum fan weight is 70 lb. Exceeds National Electrical code requirements. Recommended for earthquake areas.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
559164-C	54151CFBBHL	Ceiling Fan Install Kit	1/0/10	2.167	9.99 EA

Broan-Nutone

Bath Exhaust Fan - Ceiling or wall fan features self-locking and unbreakable grille, 9" x 9-1/4" plug-in motor, and quiet dependable operation. Damper/duct connector fits standard 3" round duct. Slim 7-1/4" x 7-1/2" x 3-5/8" housing fits easily between studs or joists. Represents an outstanding retail value. 50 CFM. 4.0 sones. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531687-A	N688	Bath Exhaust Fan	0/0/1	3.500	12.49 EA

Broan-Nutone


Bath Exhaust Fan - Ceiling or wall fan features slim, steel housing only 7-1/4" x 7-1/2" x 3-5/8" fits easily between studs or joists. Matte-white grille 9-1/2" x 9". Damper/duct connector fits 3" round duct. Rated 70 CFM. 6.0 sones. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531696-D	N671	Bath Exhaust Fan	0/0/1	3.900	33.99 EA

Broan-Nutone

Bath Exhaust Fan - Utilizes 4-pole permanently lubricated motor, centrifugal blower wheel. Equipped with built-in mounting ears and a durable damper preventing cold backdrafts. Housing is 8" x 8-1/4" x 5-3/4". White polymeric grille. 10-5/8" x 11-1/8", 80 CFM, UL listed for use above baths and showers when connected to a GFI protected branch circuit. 2.5 sones.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537136-B	684	Bath Exhaust Fan	0/0/1	6.500	62.99 EA

EXHAUST FANS

Broan-Nutone

Exhaust Fan - Q7® series fan with high-efficiency centrifugal blower provides virtually silent performance. White polymeric 11-1/2" square grill. Permanently lubricated motor with polymeric blower wheel. Rugged steel 9-5/8" x 9-3/4" x 7-5/8" housing accommodates 2" x 8" ceiling joists. Includes 4" round duct connector. Durable damper quietly eliminates backdrafts. 110 CFM, 1.5 sones. For bathrooms up to 100 sq. ft. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
542016-B	QTR110	Bath Exhaust Fan	0/0/1	10.400	114.99 EA

Broan-Nutone

Bath Exhaust Fan - Fan/light combination features tough, matte-white plastic 10-1/4" x 9-1/2" grill with unbreakable Lexan lens. 8" x 8-1/4" x 5-3/4" housing fits joists as small as 6". Includes 4-point adjustable mounting brackets, with 24" span. Damper/duct connector fits 4" round duct. Uses up to 100W bulb (not included). 50 CFM. 2.5 sones. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531712-C	N678	Bath Exhaust Fan	0/0/1	5.800	46.49 EA

Broan-Nutone

Exhaust Fan - Fan/light combination features white polymeric 10-5/8" x 11-1/8" x 2" grill with built-in light diffusing lens. Plug-in permanently lubricated motor with polymeric blower wheel. Rugged steel 8" x 8-1/4" x 5-3/4" housing finished with electrically bonded epoxy paint. Has key-holed mounting brackets for quick installation, tapered polymeric duct fitting for positive 4" round duct connection and no metallic clatter. Uses up to one 100W bulb (not included). 70 CFM, 3.5 sones. UL listed. IC rated.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
542032-C	N679	Bath Exhaust Fan	0/0/1	6.500	59.99 EA

Broan-Nutone

Bath Exhaust Fan - Fan/light combination features a rich looking 11" square self-adjusting solid oak grill with light honey oak finish, 9-1/8" x 8-1/2" x 6-1/2". Squirrel-cage blower, durable quiet damper prevents cold backdrafts-no metallic clatter, fits 4" round duct. Snap-in housing bracket speeds installation, torsion spring grill mounting-no tools required. Use up to one 100W bulb (not included), has unbreakable light lens, type IC, UL listed for residential use only. 70 CFM, 3.5 sones.




Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502804-B	N707	Bath Exhaust Fan	0/0/1	6.900	99.99 EA

EXHAUST FANS

Broan-Nutone


Exhaust Fan - Q7® series fan/light/night light with high-efficiency centrifugal blower provides virtually silent performance. White polymeric 11-1/2" square grill. Permanently lubricated motor with polymeric blower wheel. Rugged steel 9-5/8" x 9-3/4" x 7-5/8" housing accommodates 2" x 8" ceiling joists. Includes 4" round duct connector. Durable damper quietly eliminates backdrafts. Uses up to one 75W and 7W night light bulbs (not included). 110 CFM, 1.5 sonas. UL Listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
541990-B	QTR110L	Bath Exhaust Fan	0/0/1	10.800	169.99 EA

Broan-Nutone

Exhaust Fan - Fan/light combination features a white polymeric 10-5/8" x 11-1/8" x 2" grill with built-in light diffusing lens. Plug-in permanently lubricated motor with polymeric blower wheel. Rugged steel 8" x 8-1/4" x 5-3/4" housing finished with electrically bonded epoxy paint. Has key-holed mounting brackets for quick installation, tapered polymeric duct fitting for positive 4" round duct connection and no metallic clatter. Uses up to one 100W incandescent bulb (not included). 100 CFM, 4.0 sonas. UL listed. IC rated.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
534293-C	N680	Bath Exhaust Fan	0/0/1	7.000	89.99 EA

Broan-Nutone

Exhaust Fan - Decorative glass light fixture/exhaust fan combination, adds dramatic detail to the room. High-efficiency centrifugal motor provides virtually silent performance. Permanently lubricated motor with polymeric blower wheel. Rugged steel housing measures 5-3/4" x 8" x 8-1/4". Light fixture features a 13" diameter frosted melon glass globe. 3.5 sonas.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
534501-C	N741BR	Corrosion-resistant polished brass finish base	0/0/1	11.700	114.99 EA
534420-C	N741WH	Corrosion-resistant gloss white finish base	0/0/1	11.700	114.99 EA

Broan-Nutone

Bath Exhaust Fan - Designer series exhaust fan with light and built-in night light. Plug-in permanently lubricated motor, centrifugal blower wheel for high performance at low sound levels. Durable quiet damper to prevent cold backdrafts, no metallic clatter. Polymeric duct connector with long tapered sleeve for easy, positive ducting. Rugged 8" x 8-1/4" x 5-3/4" steel housing with adjustable mounting brackets that span up to 24". Uses up to one 100W bulb, has glass lens with low-profile grille assembly. Convenient 7W night light (bulb not included). Control with P66 series switch (not included). Type IC, 100 CFM, 3.5 sonas. UL listed. Soft white painted aluminum grille, 14-7/8" diameter. UL listed for use over bathtubs and showers when connected to a GFI protected branch circuit. Soft white painted aluminum grille, 14-1/8" diameter.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537128-B	N750	Bath Exhaust Fan	0/0/1	12.500	124.99 EA

Broan-Nutone


Bath Exhaust Fan - Designer series exhaust fan with light and built-in night light. Plug-in permanently lubricated motor, centrifugal blower wheel for high performance at low sound levels. Durable quiet damper to prevent cold backdrafts, no metallic clatter. Polymeric duct connector with long tapered sleeve for easy, positive ducting. Rugged 8" x 8-1/4" x 5-3/4" steel housing with adjustable mounting brackets that span up to 24". Uses up to one 100W bulb, has glass lens with low-profile grille assembly. Convenient 7W night light bulb (not included). Control with P66 series switch (not included). Type IC, 100 CFM, 3.5 Sonas. UL listed. Soft white painted aluminum grille, 14-7/8" diameter. Polished brass finish grille, 15-1/8" diameter solid oak frame.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
502448-B	721	Bath Exhaust Fan	0/0/1	13.500	144.99 EA

Broan-Nutone

Bath Heater Fan - Fan/light/heater unit combines instant infrared warmth and ventilation in 1 unit. Ventilator has molded centrifugal blower wheel, 10-1/4" x 15-5/8" grille. Housing dimensions: 11-5/8" x 14-1/4" x 6-3/8" high. Uses two 250W infrared bulbs (not included). Exhaust capacity HVI certified at 70 CFM, 3.5 Sonas. Suitable for use with insulation. Control with P68 series switch (not included). UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537039-B	164	Bath Heater Fan	0/0/1	8.560	54.99 EA

ELECTRICAL

EXHAUST FANS

Broan-Nutone

Exhaust Fan - 8" automatic wall fan has a permanently lubricated motor, steel housing, polymeric fan blade. Built-in damper minimizes back-drafts. Built-in rotary On/Off switch. 11-1/4" square white polymeric grille can be painted to match surrounding walls. 8-3/8" adjusts to fit walls 4-1/2" to 9-1/2" thick diameter sleeve, 14-1/4" square outside flange 180 CFM. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531703-C	N509S	Exhaust Fan	0/0/1	13.400	77.99 EA

Broan-Nutone

Exhaust Fan - Provides powerful, efficient ventilation for kitchen, laundry room, rec room, or workshop. Designed for vertical ceiling installation only, has removable easy-to-clean permanently lubricated motor and blade assembly. Durable damper quietly eliminates backdrafts. Adjustable mounting brackets with keyhole slots span up to 24" to install easily between ceiling joists. Fits 8" round duct, 7" x 8" diameter steel housing. 11-1/4" square white polymeric grille can be painted to match any decor. HVI certified at 180 CFM, 5.0 Sones. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537071-B	N505	Exhaust Fan	0/0/1	7.250	59.99 EA

Broan-Nutone

Bath Heater Fan - Fan/light/heater unit has quiet aluminum squirrel cage blower wheel and 2-motor system with individual controls for fan, heater, and light. White plastic 10-1/4" x 15-1/2" grille, Lexan light lens. 8-1/4" x 14-1/4" x 5-3/4" housing, fits joists as small as 6". 4 adjustable mounting brackets have 24" span. Uses up to one 100W bulb (not included). Control with P66 series switch (not included). 70 CFM, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531721-C	N655X	Bath Fan/light/heater	0/0/1	12.500	97.99 EA

Broan-Nutone


Ceiling Heater - Low profile surface-mount ceiling heater delivers 1250W of heat. Has automatic overheat protection and a permanently lubricated motor. Anodized chrome construction, satin finish aluminum grille, chrome alloy heat element measures 11" x 2-3/4". Fits standard 3-1/4" round, 4" octagon, or 3-1/2" round box. Operated by a wall switch (not included). UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537055-B	154	Ceiling Heater	0/0/1	3.000	41.49 EA

Broan-Nutone

Wall Heater - Fan forced wall heater is perfect for bathrooms or other areas where quick heat is needed. Built-in thermostat maintains desired temperature. Designed for easy, recessed installation or surface mounting (requires model No. 84 surface mount kit). Designer-styled white grill with rounded corners. Manual-reset thermal overload protector. Permanently lubricated motor. Housing dimensions: 10-1/4" x 7-3/4" x 3-3/4". Grill dimensions: 12" x 9-1/4" x 1/2". Wattage/voltage options: 1500/750W, 120V/ 1125W, 208V/1500W/240V. UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537047-B	N174	Wall Heater	0/0/1	7.500	72.99 EA

Broan-Nutone

Wall Ventilator - Through-the-wall ventilator can be installed in outside walls from 5-1/4" to 10" thick. Quick, easy installation. Includes polymeric interior grille, exterior louvered wall cap, fan, flexible aluminum ducting, and built-in bird screen. Housing 6" diameter, grill 8" diameter. 70 CFM, UL listed.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
537101-B	512M	Wall Ventilator	0/0/1	3.000	52.99 EA

Broan-Nutone


Fan Control Switch - Broan® brand, time control switch operates heater or fan continuously or for any set period up to 60 minutes. Fits 2-3/4" single gang box. Use with model No. N505, N509, N688, N671, N673, N676, N678, N161, N163, and N155. UL listed. Blister pack.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
531785-C	P59V	Ivory	1/0/4	.500	29.49 EA
508128-C	P59W	White	1/0/4	.500	29.49 EA

Broan-Nutone

Fan Control Switch - Multi-function switch controls each of 3 functions separately, fits single gang electrical box. For use with model No. N655X, N712X, and N721X. UL listed. Blister carded.



Product No.	Mfg. No.	Description	Order Mult.	Weight	Unit Cost
507059-C	P66V	Ivory	1/0/4	.500	17.49 EA
508101-C	P66W	White	1/0/4	.500	17.49 EA