

PC 4500		Steel			Drop-In Anchors		Zinc Plated
Cat. No.	UPC	Anchor Size	Drill Size	Installation	Unit	Std.	
DA25	27600	1/4"	3/8"	AT25	100	1000	
DA38	27605	3/8"	1/2"	AT38	50	500	
DA50	27610	1/2"	5/8"	AT50	50	500	
DA58	27615	5/8"	7/8"	AT58	25	—	
DA75	27620	3/4"	1"	AT75	25	—	

**AT-Tool must be used for proper installation.
AT Tools NOT PROVIDED!**



PC 4310		Drop-In Anchors			Stainless Steel		
Cat. No.	UPC	Anchor Size	Drill Size	Installation	Unit	Std.	
DAS25	70260	1/4"	3/8"	AT25	100	1000	
DAS38	70262	3/8"	1/2"	AT38	50	500	
DAS50	70264	1/2"	5/8"	AT50	50	500	
DAS58	70266	5/8"	7/8"	AT58	25	—	
DAS75	70268	3/4"	1"	AT75	25	—	

**AT-Tool must be used for proper installation.
AT Tools NOT PROVIDED!**


Special Order Non-Returnable

PC 4510		"AT" Tools for DA Anchors				
Cat. No.	UPC	Use for	Size	Unit	Std.	
AT25	27630	DA25/DAS25	1/4"	1	10	
AT38	27635	DA38/DAS38	3/8"	1	10	
AT50	27570	DA50/DAS50	1/2"	1	10	
AT58	27575	DA58/DAS58	5/8"	1	10	
AT75	27580	DA75/DAS75	3/4"	1	10	

AT-Tool (NOT PROVIDED) must be used for proper installation.



PC 4550		Hex Head			Sleeve Anchors		Zinc Plated
Cat. No.	UPC	Anchor Dia. & Drill Bit Size	Effective Anchor Length	Min. Embedment	Bolt Dia. Thread Per Inch	Max Material Thickness	Unit
SA14 138	59330	1/4"	1-3/8"	1-1/8"	3/16"-24	1/4"	100
SA14 214	59332	1/4"	2-1/4"	1-1/8"	3/16"-24	1-1/8"	100
SA516 112	59334	5/16"	1-1/2"	1-1/4"	1/4"-20	1/4"	100
SA516 212	59336	5/16"	2-1/2"	1-1/4"	1/4"-20	1-1/4"	100
SA38 178	59338	3/8"	1-7/8"	1-1/2"	5/16"-18	3/8"	50
SA38 300	59340	3/8"	3"	1-1/2"	5/16"-18	1-1/2"	50
SA12 214	59342	1/2"	2-1/4"	1-7/8"	3/8"-16	3/8"	25
SA12 300	59344	1/2"	3"	1-7/8"	3/8"-16	1-1/8"	25
SA12 400	59346	1/2"	4"	1-7/8"	3/8"-16	2-1/4"	25

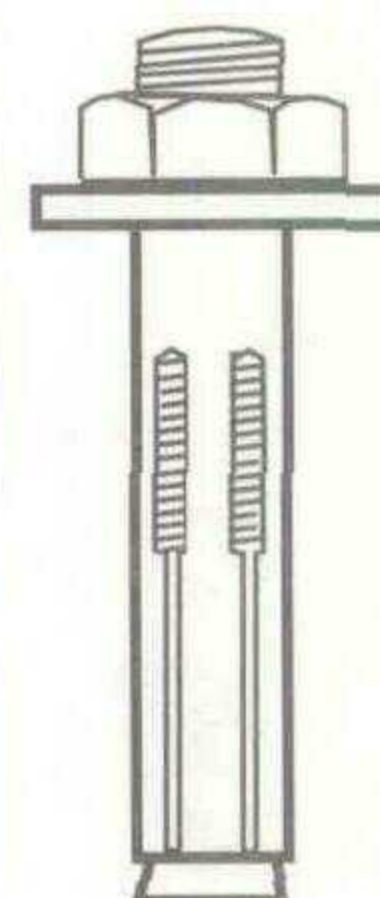

Sleeve Anchors

The Sleeve Anchor is similar to the Wedge Anchor (page B6) except it can be used in soft concrete because its compressive load can be distributed over a longer length. It consists of four parts: a nut, a washer, a tapered cone, and threads with a stud and sheet metal sleeve.

