





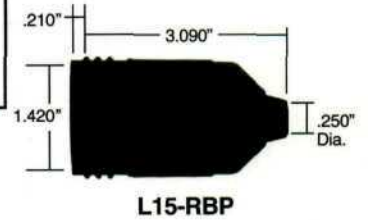


# Turnlok® Devices Protective Accessories

Pass & Seymour  
**legrand**

Turnlok® Devices

Catalog Number	Description
<b>Protective Accessories</b>	
L15-RBC	Weatherproof Boot, 15A Locking Connector
L15-RBP	Weatherproof Boot, 15A Locking Plug
L2030-RBC	Weatherproof Boot, 20/30A Locking Connector
L2030-RBP	Weatherproof Boot, 20/30A Locking Plug
CRL2030-RBC	Weatherproof Boot, 20/30A Locking Connector, Corrosion Resistant
CRL2030-RBP	Weatherproof Boot, 20/30A Locking Plug, Corrosion Resistant
CR7716-N	Weatherproof Boot, 50A Locking Connector, Corrosion Resistant
CR7717-N	Weatherproof Boot, 50A Locking Plug, Corrosion Resistant
7770	Weatherproof Cover for 50A Locking Receptacle, Thermoplastic
DC1	Dust Cover – Plug & Connector Replacement
WPG1	Weatherproof Cover, Flanged Inlet/Outlet – 15A Turnlok
WPG2	Weatherproof Cover, Flanged Inlet/Outlet – 20/30A Turnlok
PSLD	Lockout Device 15A/20A/30A/50A Turnlok Plug & Connector

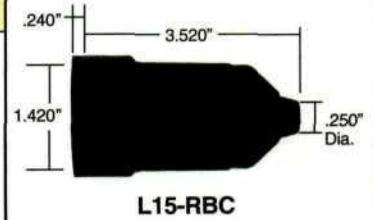


Protective Accessories


Turnlok® Devices

Receptacles, Connectors, Plugs, Inlets


4 Wire Grounded 50A, 125/250V; 50A 3ø, 250V; 50A, 250VDC 600VAC




Corrosion Resistant Receptacle



Corrosion Resistant Connector



Corrosion Resistant Plug




Corrosion Resistant Flanged Inlet

Catalog Number	Rating A. V.	Description	Cord Diameter	3rd Party Compliance		
				UL498	FSUL WC596	CSA
<b>Receptacles</b>						
CR6369	50 125/250	Corrosion Resistant		•		•
CS6369	50 125/250	California Standard		•		•
CS8369	50 3ø, 250	California Standard		•		•
CS8169	50 3ø, 480	California Standard		•		•
3769	50 250VDC, 600VAC	Corrosion Resistant		•		•
*7379	50 250VDC, 600VAC	Corrosion Resistant		•		•
<b>Connectors</b>						
CR6364	50 125/250	Corrosion Resistant	.680"-1.125"	•		•
CS6364	50 125/250	California Standard	.680"-1.125"	•		•
CS8364	50 3ø, 250	California Standard	.680"-1.125"	•		•
CS8164	50 3ø, 480	California Standard	.680"-1.125"	•		•
3764	50 250VDC, 600VAC	Corrosion Resistant	.680"-1.125"	•		•
*7764	50 250VDC, 600VAC	Corrosion Resistant	.680"-1.125"	•		•
<b>Plugs</b>						
CR6365	50 125/250	Corrosion Resistant	.680"-1.125"	•		•
CS6365	50 125/250	California Standard	.680"-1.125"	•		•
CS8365	50 3ø, 250	California Standard	.680"-1.125"	•		•
CS8165	50 3ø, 480	California Standard	.680"-1.125"	•		•
3765	50 250VDC, 600VAC	Corrosion Resistant	.680"-1.125"	•		•
*7765	50 250VDC, 600VAC	Corrosion Resistant	.680"-1.125"	•		•
<b>Flanged Inlets</b>						
CR6375	50 125/250	Corrosion Resistant		•		•
CS6375	50 125/250	California Standard		•		•
CS8375	50 3ø, 250	California Standard		•		•
CS8175	50 3ø, 480	California Standard		•		•
3775	50 250VDC, 600VAC	Corrosion Resistant		•		•
*7958	50 250VDC, 600VAC	Corrosion Resistant		•		•

\*Devices for replacement use only in existing installations.

Catalog Number	Description
<b>Accessories</b>	
7770	Weatherproof Cover for 50A Locking Receptacles, Thermoplastic
CR7716-N	Weatherproof Boot, 50A Locking Connector
CR7717-N	Weatherproof Boot, 50A Locking Plug
S750	Stainless Steel Plate for 50A Locking Receptacle (style 97)
PSLD	Lockout Device

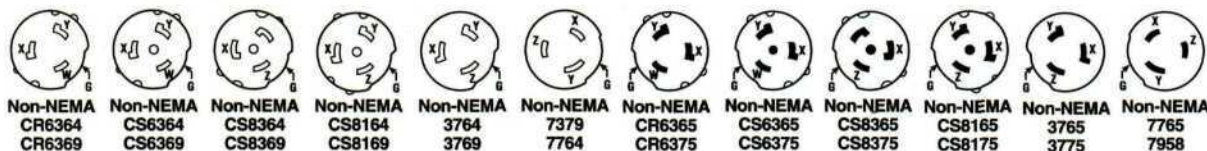



# Turnlok® Devices

## Receptacles, Connectors, Plugs, Inlets

3 Wire Grounded 50A, 125V; 50A, 250V; 50A, 250VDC 600VAC


**Pass & Seymour**  
**legrand**

Turnlok® Devices


Catalog Number	Rating A. V.	Description	Cord Diameter	3rd Party Compliance		
				UL498	FSUL WC596	CSA
<b>Receptacles</b>						
CR6370	50 125	Corrosion Resistant		•	•	
CS6370	50 125	California Standard		•	•	
CS8269	50 250	California Standard		•	•	
CS8469	50 480	California Standard		•	•	
3771	50 250VDC, 600VAC	Corrosion Resistant		•	•	
<b>Connectors</b>						
CR6360	50 125	Corrosion Resistant	.680"-1.125"	•	•	
CS6360	50 125	California Standard	.680"-1.125"	•	•	
CS8264	50 250	California Standard	.680"-1.125"	•	•	
CS8464	50 480	California Standard	.680"-1.125"	•	•	
3762	50 250VDC, 600VAC	Corrosion Resistant	.680"-1.125"	•	•	
<b>Plugs</b>						
CR6361	50 125	Corrosion Resistant	.680"-1.125"	•	•	
CS6361	50 125	California Standard	.680"-1.125"	•	•	
CS8265	50 250	California Standard	.680"-1.125"	•	•	
CS8465	50 480	California Standard	.680"-1.125"	•	•	
3763-M	50 250VDC, 600VAC	Corrosion Resistant	.680"-1.125"	•	•	
<b>Flanged Inlets</b>						
CR6377	50 125	Corrosion Resistant		•	•	
CS6377	50 125	California Standard		•	•	
CS8275	50 250	California Standard		•	•	
CS8475	50 480	California Standard		•	•	
3777	50 250VDC, 600VAC	Corrosion Resistant		•	•	




California Standard Receptacle

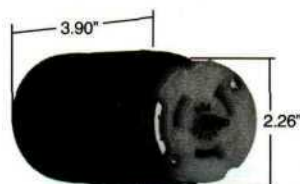

California Standard Connector




California Standard Plug



California Standard Flanged Inlet

Catalog Number	Description
<b>Accessories</b>	
7770	Weatherproof Cover for 50A Locking Receptacles, Thermoplastic
CR7716-N	Weatherproof Boot, 50A Locking Connector
CR7717-N	Weatherproof Boot, 50A Locking Plug
S750	Stainless Steel Plate for 50A Locking Receptacle (style 97)
PSLD	Lockout Device

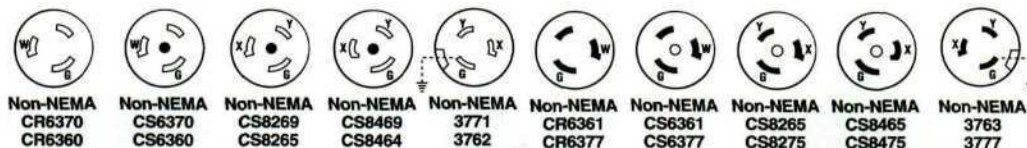

Non-NEMA CR6370 CR6360   
 Non-NEMA CS6370 CS6360   
 Non-NEMA CS8269 CS8265   
 Non-NEMA CS8469 CS8464   
 Non-NEMA 3771 3762   
 Non-NEMA CR6361 CR6377   
 Non-NEMA CS6361 CS6377   
 Non-NEMA CS8265 CS8275   
 Non-NEMA CS8465 CS8475   
 Non-NEMA 3763 3777

Receptacles, Connectors, Plugs, Inlets