





Table of Contents

Colour Codes	
Printable Markers	
Wire Marker Books	
Wire Marker Cards – Vinyl Cloth	
Wire Marker Cards – Vinyl Self-Laminating	
Wire Marker Dispenser	E15
Vinyl Sleeve Markers	
Stainless Steel Sleeve Markers	E20
I.D. Tagging System	E21-E22
Accessories	E23-E24
T&B Express	E25-E27
E-Z-CODER	E28
Packaging Options	E29
Labels Overview	E30
Conduit & Voltage Marker Cards	E31
Electrical Safety Labels	E32
Lockout Labels	E33-E35
Machine Warning Labels	E36-E40
Write-On Control Markers	
Industrial Markers	
Pictogram Labels	E45
Custom Label Express	E46
Custom Tag Express	E47
Signs Overview	
Electrical Protection Signs	
Operational Machine and Safety Signs	
Personal Protection Signs	
Maintenance and Safety Signs	
Visual Warning Tapes Overview	
Colour-Coded I.D. Tapes, Floor Tapes	
Barricade and Burial Tapes	
Identification Tape	
MTX-MK9-USB.	
MTX-MK10-KIT1	
MTX-MK1 Miniplotter	
MTX-MK3	
MTX-MK20-SP2000	E87-E92
Printers Comparative Table	
WinSign	
PF/PFA	
PM	
PTPLUS	







Colour Codes







E2





Printable Markers

Print your own markers to your requirements!

Laser Printable

- Self-laminating markers have a clear overlay of polyester that protects the legend against oils, grease, water, chemicals, and foreign matter
- Markers feature a strong adhesive for maximum adhesion to the wire and are available in a variery of sizes, both as standard and specials

Marker

Size

(in.)

1 x 1-1/2

1 x 2-1/4

1/2 x 1-1/2

1/2 x 2-1/4

1/2 x 3

1 x 3

1 x 5

2 x 1-1/2

2 x 2-1/4

2 x 3

2 x 5

Markers

per Sheet

48

32

96

64

48

24

16

24

16

12

8

Print Area

WxL

(in.)

1/2 x 1

1 x 3/4

1/2 x 1/2

1/2 x 3/4

1/2 x 1

1 x 1

2-1/2 x 2

2 x 3/4

2 x 1

Max.

Wire Dia.

(in.)

5/16

15/32

5/16

15/32

7/8

1-1/4

5/16

15/32

7/8

1-1/4

- 1 Mil Polyester (same material as WPR rolls)
- Test template included with each 25 pack
- · Sizes to suit most applications

Sheet

Size

(in.)

8-1/2 x 11

Add suffix A for 500 sheets, B for 1,000 sheets.

WLP labels may be used on any standard laser printer.

Cat. No.

WLP-1112

WLP-1214

WLP-12112

WLP-12114

WLP-12300

WLP-1300

WLP-1500

WLP-2112

WLP-2214

WLP-2300

WLP-2500

//				attent with	14.00	E-Z-Code*
		nar mar nar	ман	The stor		3104
	/ ~ m	No 3401	100 100	- 10		1
	10 Mar 10	Har no .	Mar A	• Mar		

Dot-Matrix Printer Labels

Cat. No.	Sheet Size (in.)	Markers per Sheet	Marker Size W x L (in.)	Print Area W x L (in.)	Max. Wire Dia. (in.)
WES-12112		64	1/2 x 1-1/2	1/2 x 1/2	
WES-1112	9-1/2 x 8	32	1 x 1-1/2	1 x 1/2	5/16
WES-2112		16	2 x 1-1/2	2 x 1/2	
WES-12214		48	1/2 x 2-1/4	1/2 x 3/4	
WES-1214		24	1 x 2-1/4	1 x 3/4	15/32
WES-2214	0.1/00	12	2 x 2-1/4	2 x 3/4	
WES-12334	9-1/2 x 9	32	1/2 x 3-3/4	1/2 x 1	
WES-1334		16	1 x 3-3/4	1 x 1	7/8
WES-2334		0	2 x 3-3/4	01	
WES-2512	9-1/2 x 12	8	2 x 5-1/2	2 x 1	1-1/2
WES-2128	9-1/2 x 9	3	2-1/2 x 8-1/2	2-1/2 x 2	2

Order in multiples of 25 sheets.

WES labels may be used on any standard dot matrix printer.

Laser Printable

Order in multiples of 25 sheets.

Cat. No.	Sheet Size (in.)	Markers per Sheet	Marker Size W x L (in.)	Print Area W x L (in.)	Max. Wire Dia. (in.)
WES-12112		64	1/2 x 1-1/2	1/2 x 1/2	
WES-1112	9 x 8	32	1 x 1-1/2	1 x 1/2	5/16
NES-2112		16	2 x 1-1/2	2 x 1/2	
NES-1214		24	1 x 2-1/4	1 x 3/4	45/00
NES-2214	0.0	12	2 x 2-1/4	2 x 3/4	15/32
NES-1334	9 x 9	16	1 x 3-3/4	1 x 1	7/0
NES-2334		8	2 x 3-3/4	2 x 1	7/8



F3





Wire Marker Books

Easy to Use!

Markers that withstand oil, water and humidity!

Vinyl Cloth, Standard Books

- Choose the numbers or letters you need
- Wide selection of sizes and legends
- Size 3 in. x 5 in. (76 mm x 146 mm)
- Material: vinyl cloth
- · Cover keeps markers clean
- Books are 3 in. x 5-1/2 in. pocket size
- 10 pages per book

Pocket pack wire marker books are easy to carry and easy to use. The material is an all-purpose vinyl coated cloth tape exclusively designed to resist abrasion, oil, water and dirt.

From Thomas & Betts you get the one-piece wire marker and terminal marker. A slight die-cut enables you to easily remove the terminal.



Cat. No.	Number of Markers and Legends
WM-0 thru 9	40 markers each: 0 thru 9; 10 markers each: T1, T2, T3, L1, L2, L3, WM-0 thru -9
WM-0-9M	46 markers each page; full page of 1, full page of 2, etc.
WM-0-45	10 markers each: 0 thru 45
WM-46-90	10 markers each: 46 thru 90
WM-A-Z	10 markers each: A thru Z, +, -, and 0 thru 15
WM-123	150 markers each: 1, 2, 3
WM-ABC	150 markers each: A, B, C
WM-A-33	10 markers each: 1 thru 33, A, B, C, +, -, T1, T2, T3, L1, L2, L3
WM-A-90	6 markers each: 0 thru 15; 4 markers each: 1
WM-0 thru WM-9	2 markers each; 6 thru 90, A thru Z 460 markers each of any number 0 thru 9
WM-A, -B, -C, -D, -E, -F, -G, -L, -N, -P, -R, -S, -T, or X	460 markers each of any letter: -A, -B, -C, -D, -E, -F, -G, -L, -N, -P, -R ,-S, -T or -X
WM-GRD	120 markers 7/16 in. X 2-1/2 in. or 240 markers 7/16 in. x 1-1/4 in. "GRD" legend
WMLC-1	24 legends, 2 legends each per page, 480 markers per book for house wiring and circuit breakers; 5/8 in. x 13/32 in. (16 mm x 10 mm)

Cat. No.	Number of Markers and Legends
WM-T3	10 pages T1, T2, T3; 140 markers ea.; Total 420
WM-L3	10 pages L1, L2, L3; 140 markers ea.; Total 420
WM-9T	3 pages 1, 2, 3; 42 markers ea.; 3 pages A, B, C; 42 markers ea.; 2 pages T1, T2, T3; 28 markers ea.; 2 pages L1, L2, L3; 28 markers ea.; Total 140
WM-1-30	10 Pages 1-30; 14 markers ea.; Total 140
WM-12	8-2/3 Pages A-Z, 14 markers ea.; Blank Write-Ons 1 Page, 22 markers; Plus & Minus 1/3 Page, 7 markers ea.;Total 393
WM-13	Plus & Minus, AC, DC, 1 Page ea., 46 markers ea.; Pos. Neg. Gnd. 1 Page ea., 28 markers ea.; Spare, Neut. 1 Page ea., 22 markers ea.; Blank Write-Ons 1 Page ea., 22 markers ea.; Total 256
WM-0-90	5 pages, 0–45; 5 markers ea.; 5 pages, 46–90; 5 markers ea.; Total 455










Wire Marker Books

A handy solution for your identification needs!




Identify and protect all in one!











• Compact books are easier to carry

Vinul agotad alath

- Bold letters/numbers, easy to apply and read
- Convenient alphanumeric and load center legends
- E-Z-Snap feature removes the entire sheet more easily from the booklet

Cat. No.	Number of Markers and Legends
WCMB-0-9	128 markers 0-9, ABC, +-/; marker size 1/4 in. x 1-1/2 in.
WCMB-LC	176 markers Load-center Labels; marker size 1-1/32 in. x 3/4 in.

Vinyl Self-Laminating Books

- Convenient alphanumeric legends
- Lamination keeps markers protected

Cat. No.	Number of Markers and Legends
WMSL 1-33, A-G	400 markers: 1/4 in. x 1-1/4 in printed area 5/8 in.; 10 markers each: 1 thru 33 and A thru 0
WMSL-0-9	40 markers each 0 thru 9; 10 markers each:T1, T2, T3, L1, L2, L3
WMSL-0-45	10 markers each 0 thru 45
WMSL-46-90	10 markers each 46 thru 90
WMSL-A-Z	10 markers each: A thru Z; +, -, and 0 thru 15
WMSL-A-90	6 markers each: 0 thru 15; 4 markers each 16 thru 90; 2 markers each A thru Z

Vinyl Self-Laminating, Blank Write-on Books

- Choose from a variety of marking area sizes
- Clear area covers print legend for extra protection
- Lamination keeps markers protected

Cat. No.	Number of Markers and Legends
WM-BW3	30 markers 1 in. x 4-7/8 in. blank write-on, self-laminating markers; marking area: 1 in. x 1 in.
WM-BW5	60 markers 1 in. x 2-3/4 in. blank write-on, self-laminating markers; marking area: 1 in. x 3/4 in.
WM-BW12	200 markers 1/2 in. x 1-1/4 in. blank write-on, self-laminating markers; marking area: 1/2 in. x 5/8 in.
WM-BW14	400 markers 1/4 in. x 1-1/4 in. blank write-on, self-laminating markers; marking area: 1/4 in. x 5/8 in.
WM-BW34	140 markers 3/4 in. x 1-1/4 in. blank write-on, self-laminating markers; marking area: 3/4 in. x 5/8 in.

Vinyl Self-Laminating, Standard Laminator Book

- Protect labels or apply over non-sticking markers
- 50, 3-1/2 in. x 5 in. clear cable laminators

Cat. No.	Number of Markers and Legends
WM-LAM	50, 3-1/2 in. x 5 in. clear cable laminators







. . .

Wire Marker Cards – Vinyl Cloth

Vinyl, Colour Coding Standard Books

- Available in two sizes
- Colour your wires for coding and other applications

Cat. No.	Nombre de marqueurs et légendes
WM-COL14	460 Markers each: 1/4 in. x 1-1/4 in. 1 page Jaune and blue; 2 pages red, Blanc, green, and black
WM-COL1	50 Markers each: 1 in. x 2-1/4 in. 1 page Jaune and blue; 2 pages red, Blanc, green and black

	 		+
			Т
			T
			T
			T
			T
			t
	Image: Constraint of the second sec		








Wire Marker Cards – Vinyl Cloth

Marker Cards repel oil, water, and humidity!

Catalogue Numbering System

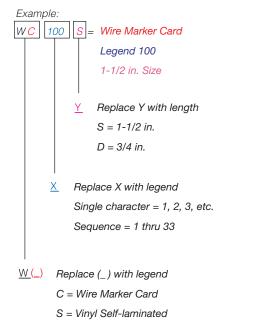

- · Select from a variety of number and letter combinations and sizes
- Material vinyl cloth
- Standard length 1-1/2 in.
- Available in 3/4 in. length

Numbers in Sequence

		601	601	601	602	602	602	602	60
						602			
	60	71	601	601	602	602	602	602	60
60						602			
						602			
601	601	601	601	601	602	602	602	602	60

Cat No.	Laward	Marker/Card			
Cat. No.	Legend	1-1/2 in. (38 mm)	3/4 in. (19 mm)*		
WC1 thru 33S	1–33				
WC34 thru 66S	34–66	33	66		
WC67 thru 99S	67–99				
WC100 thru 124S	100-125	05	50		
WC125 thru 149S	125-149	25	50		
WC974 thru 999S	974-999				

Order in multiples of 25 cards.

*When 3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WC1 thru 33S would become WC1 thru 33D.

.

Solid Numbers

.

Numbers in Sequence Repeated



Cat No.	Lawand	Marker/Card			
Cat. No.	Legend	1-1/2 in. (38 mm)	3/4 in. (19 mm)*		
WCZEROS	0				
WC1S, WC2S thru WC99S	1, 2,99	36	72		
WC101S, WC102S thru WC600S	101, 102,600	25	50		

Order in multiples of 25 cards.

* When 3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WC1S would become WC1D.

Cat Na	Logond	Marker/Card			
Cat. No.	Legend	1-1/2 in. (38 mm)	3/4 in. (19 mm)*		
WC1 thru 3S	1–3	00	72		
WC1 thru 4S	1–4	36			
WC1 thru 5S	1–5	35	70		
WCO thru 10S	0–10	33	66		
WC1 thru 12S	1–12				
WC1 thru 18S	1–18	36	72		
WC19 thru 36S	19–36				

Order in multiples of 25 cards.

*When 3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WC1 thru 3S would become WC1 thru 3D.








Wire Marker Cards – Vinyl Cloth

Paired Numbers in Sequence



	Laward	Marker/Card			
Cat. No.	Legend	1-1/2 in. (38 mm)	3/4 in. (19 mm)*		
WC1 thru 16PS	1–16				
WC17 thru 32PS	17-32	16	32		
WC33 thru 48PS	33-48				

Order in multiples of 25 cards. *When 3/4 in. length markers are required, substitute the last S in the Cat. No. with a D, i.e. WC1 thru 16PS would become WC1 thru 16PD.

Suffix Numbers

 Use to extend numbers or to make alphanumeric codes (i.e. adding suffix 05 to ABC = ABC05)

		05	05	05	05	05	05	05	05	05	05	05	05
	_	05							05				
	05								05				
05	N								05				
	05												
05	05	05	05	05	05	05	05	þ5	05	05	05	05	05


Oat Na	Mark		er/Card		
Cat. No.	Legend	1-1/2 in. (38 mm)	3/4 in. (19 mm)*		
WCOOS	00	00	70		
WC01S, WC02S thru WC09S	0, 02–09	36	72		
WC0009S	00-09	30	60		

Cat. No. WC0009S has three sequences of 00...09 on a card. WC0009D has six sequences of 00...09 on a card. Order in multiples of 25 cards. *When 3/4 in. length markers are required, substitute the last S in the Cat. No. with a D, i.e. WC00S would become WC00D.

Suffix Numbers


.

 Blue, green and red markers have white legends; orange and yellow markers have black legends



		Dookaround	Marker/Card		
Cat. No.	Legend	Background Couleur	1-1/2 in. (38 mm)	3/4 in. (19 mm)*	
WCBLZEROS	0	Dhue			
WCBL1SWCBL50S	150	Blue			
WCGRZEROS	0	0			
WCGR1SWCGR50S	150	Green			
WCORZEROS	0	0	00	70	
WCOR1SWCOR50S	150	Orange	36	72	
WCRDZEROS	0	P. I			
WCRD1SWCRD50S	150	Red			
WCYLZEROS	0	launa.			
WCYL1SWCYL50S	150	Jaune			

Order in multiples of 25 cards. *When 3/4 in. length markers are required, substitute the last S in the Cat. No. with a D, i.e. WCBLZER0S would become WCBLZER0D.





Oct No.	Lanand	Marker/Card			
Cat. No.	Legend	1-1/2 in. (38 mm)	3/4 in. (19 mm)*		
On Black, Blanc Chara	icters				
WCBK1 thru 33S	1–33				
WCBK34 thru 66S	34–66	33	66		
WCBK67 thru 99S	67–99				
WCBK100 thru 124S	100-124	25	50		
On Blue, Blanc Charac	ters				
WCBL1 thru 33S	1–33				
WCBL34 thru 66S	34-66	33	66		
WCBL67 thru 99S	67–99				
WCBL100 thru 124S	100-124	25	50		
On Brown, Blanc Char	acters				
WCBR1 thru 33S	1–33				
WCBR34 thru 66S	34–66	33	66		
WCBR67 thru 99S	67–99				
WCBR100 thru 124S	100-124	25	50		
On Green, Blanc Chara	acters				
WCGR1 thru 33S	1–33				
WCGR34 thru 66S	34-66	33	66		
WCGR67 thru 99S	67–99				
WCGR100 thru 124S	100-124	25	50		
On Red, Blanc Charac	ters				
WCRD1 thru 33S	1–33				
WCRD34 thru 66S	34–66	33	66		
WCRD67 thru 99S	67–99				
WCRD100 thru 124S	100-124	25	50		
On Orange, Black Cha	racters				
WCOR1 thru 33S	1–33				
WCOR34 thru 66S	34–66	33	66		
WCOR67 thru 99S	67–99				
WCOR100 thru 124S	100-124	25	50		
On Jaune, Black Chara	acters				
WCYL1 thru 33S	1–33				
WCYL34 thru 66S	34-66	33	66		
WCYL67 thru 99S	67–99				
WCYL100 thru 124S	100-124	25	50		

Order in multiples of 25 cards.

.


*When 3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WCBK1 thru 33S would become WCBK1 thru 33D.





Wire Marker Cards – Vinyl Cloth


Solid Letters



Oct No. Lowend		Marker/Card		
Cat. No.	Legend	1-1/2 in. (38 mm)	3/4 in. (19 mm)*	
WCAS	А			
WCBSWCZS	BZ			
WCLAS	а	36	72	
WOLRS WOLZS	h z			

Order in multiples of 25 cards. *When 3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WCAS would become WCAD.


. **Letters in Sequence**



Oct. No.	Lowend	Marker/Card			
Cat. No.	Legend	1-1/2 in. (38 mm)	3/4 in. (19 mm)*		
WCAZAJS	A thru Z plus A thru J		70		
WCAZ09S	A thru Z plus 0 thru 9	36	72		
WCLAZAJS	a thru z plus a thru j		2		

Order in multiples of 25 cards. *When 3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WCAS would become WCAD.

Letters in Sequence on a Coloured Background



Cat No.	Legend	Marker/Card			
Cat. No.	A–Z and A–J	1-1/2 in. (38 mm)	3/4 in. (19 mm)*		
WCBKA-ZS	Black (Blanc Legend)				
WCBLA-ZS	Dark Blue (Blanc Legend)				
WCBRA-ZS	Brown (Blanc Legend)				
WCGRA-ZS	Dark Green (Blanc Legend)	36	72		
WCRDA-ZS	Red (Blanc Legend)				
WCORA-ZS	Orange (Black Legend)				
WCYLA-ZS	Jaune (Black Legend)				

Order in multiples of 25 cards. *When 3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WCAS would become WCAD.

Solid Letters and Numbers



Cat. No.	Logond	Markers	per Card		
Gat. NO.	Legend	1-1/2 in. (38 mm)	3/4 in. (19 mm)*		
WCA1SWCA5S	AA5				
WCB1SWCB5S	B1B5				
WCC1SWCC5S	C1C5				
WCD1SWCD5S	D1D5				
WCE1SWCE5S	E1E5				
WCF1SWCF4S	F1F4				
WCG1SWCG4S	G1G4				
WCH1SWCH5S	H1H5				
WCJ1SWCJ4S	J1J4				
WCK1SWCK4S	K1K4				
WCL1SWCL5S	L1L5				
WCM1SWCM5S	M1M5	36	72		
WCP1SWCP4S	P1P4				
WCR1SWCR5S	R1R5				
WCS1SWCS5S	S1S5				
WCTOSWCT9S	T0T9				
WCT10SWCT15S	T10T15				
WCU1SWCU2S	U1U2				
WCV1SWCV2S	V1V2				
WCW1SWCW2S	W1W2				
WCX1SWCX4S	X1X4				
WCY1SWCY4S	Y1Y4				
WCZ1SWCZ4S	Z1Z4				

Order in multiples of 25 cards.

*When 3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WC3VS would become WC3VD.

Voltage Markers

24 V 24V 24V 24V 24V 24V 24V 24V 24V 24V									
24 V 24V 24V 24V 24V 24V 24V 24V 24V 24V		24V	2						
24 9 240 240 240 240 240 240 240 240 240 240									2
	24	_)v	24V	24V	24V	24V	24V	24V	2
									là
24V									2
24V	24V 24V	2							

.

Cat. No.	Logond	Markers	per Card	
Gal. NO.	Legend	1-1/2 in. (38 mm)	3/4 in. (19 mm)	
WC3VS	3V	36	72	
WC6VS	6V	30	12	
WC12VS	12V	25	50	
WC24VS	24V	20	50	
WC110VS	110V			
WC115VS	115V			
WC120VS	120V			
WC125VS	125V			
WC180VS	180V			
WC220VS	220V			
WC230VS	230V	22	44	
WC240VS	240V			
WC270VS	270V			
WC280VS	280V			
WC440VS	440V			
WC460VS	460V			
WC480VS	480V			

1

*When 3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WC3VS would become WC3VD.

Thomas&Betts

A Member of the ABB Group

E9





Wire Marker Cards – Vinyl Cloth

Solid – Miscellaneous Electrical Symbols

		Marke	er/Card	
Cat. No.	Legend	1-1/2 in.		
WCPLSS	+	36	72	
WCMINS	-	30	12	
WCAPLSS	A±			
WCAMINS	A-			
WCBPLSS	B+	25	50	
WCBMINS	B-	20	50	
WCPOSS	POS			
WCNEGS	NEG			
WCPHS	Phase			
WCPHAS	Phase A			
WCPHBS	Phase B			
WCPHCS	Phase C	18	36	
WC1PHS	1 Phase			
WC2PHS	2 Phase			
WC3PHS	3 Phase			
WCINS	IN	36	72	
WCOUTS	OUT		50	
WCHOTS	HOT	25		
WCGRDS	GRD			
WCNEUTS	NEUT	22	44	
WCLINES	LINE	22	44	
WCLPLS	L+	05	50	
WCLMIS	L-	25	50	
WCLOADS	LOAD	22	44	
WCPUS	PU	26	70	
WCGRCS	GRC	36	72	
WCGENS	GEN	25	50	
WCACS	AC	36	72	

	AC	Α						
	AC	А						
A	7	AC	AC	AC	AC	AC	AC	Ą
AQ)	AC	A						
AC AC	Α							
AC AC	A							

DC

COMM

BAT

BB

СВ

CT

IGN

SIG

SEC

PS

PRI

PL

ΤB

SS

SPARE

~

GRS

PE

PEN

1U

2U

1V

2V

1W

2W

Cat. No.

WCDCS

WCCOMS

WCBATS

WCBBS

WCCBS

WCCTS

WCIGNS

WCSIGS

WCSECS

WCPSS

WCPRIS

WCPLS

WCTBS

WCSSS

WCCYSS

WCGRSS

WCPENS

WC1US

WC2US

WC1VS

WC2VS WC1WS

WC2WS

WCPES

WCSPARES

Marker/Card

72

50

72

50

72

50

72

36

72

50

72

Legend 1-1/2 in. 3/4 in. (38 mm) (19 mm)*

36

25

36

25

36

25

36


18

36

25

36

Solid Machine Tool Markers



. . . .

Cat. No.	Logond	Marke	r/Card			
Gal. NO.	Legend	1-1/2 in. (38 mm)	3/4 in. (19 mm)*			
WC1L1S	1L1					
WC1L2S	1L2					
WC1L3S	1L3					
WC2L1S	2L1					
WC2L2S	2L2					
WC2L3SWC6L1S	2L36L1					
WC6L2S	6L2					
WC6L3S	6L3					
WC1T1S	1T1					
WC1T2S	1T2	25	50			
WC1T3S	1T3					
WC2T1S	2T1					
WC2T2S	2T2					
WC2T3SWC7T1S	2T37T1					
WC7T2S	7T2					
WC7T3S	7T3					
WCLL1S	LL1					
WCLL2S	LL2					
WCLL3S	LL3					

Order in multiples of 25 cards.

*When 3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WC1L1S would become WC1L1D.

Machine Tool										
			1T3	2T1	2T2	2Т3	3T1	3T2	3T3	1Т
Markers			1173	2T1	2T2	2T3	3T1	3T2	3T3	1T
in Sequence	IT)		1T3	2T1	2T2	2T3	3T1	3T2	3T3	11
in ocqueries	1T1	1T2	1T3	2T1	2T2	2Т3	3T1	3T2	3T3	1T
	1T1	1T2	1T3	2T1	2T2	2T3	3T1	3T2	3T3	1T

Order in multiples of 25 cards.

*When 3/4 in length markers are required, substitute the last S in the catalogue number with a D, i.e. WCPLSS would become WCPLSD.

Cat. No.	Lonond	Markers per Card					
Gal. NO.	Legend	1-1/2 in. (38 mm)	3/4 in. (19 mm)				
WC1T1-3T3S	1T1, 1T2, 1T3 2T1, 2T2, 2T3 3T1, 3T2, 3T3						
WC4T1-6T3S	4T1, 4T2, 4T3 5T1, 5T2, 5T3 6T1, 6T2, 6T3	27	54				
WC7T1-9T3S	7T1, 7T2, 7T3 8T1, 8T2, 8T3 9T1, 9T2, 9T3						
WCLL1-LL3S	LL1, LL2, LL3						
WCA1-S2S	A1, A2, F1 F2, S1, S2	36	72				

Order in multiples of 25 cards.

:

*When 3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WC1T1-3T3S would become WC1T1-3T3D.







Wire Marker Cards – Vinyl Cloth

Mini Markers are used to identify smaller items such as terminal blocks and small wires


Terminal Block – Mini Markers

1 2 2 2 6	3	4	5	6.	7	8	9.	10	
25 26	27	28	29	30	31	32	33	34	
1 2 25 26	3	4	5	6.	7	8	9.	10	
25 26	27	28	29	30	31	32	33	34	
1 2 25 26	3	4	5	б.	7	8	9.	10	
25 26	27	28	29	30	31	32	33	34	

Cat. No.	Legend	Marker/Card Marker Size 5/16 in. x 3/16 in.
WC1 thru 48TM	1, 2 thru 48	
WC49 thru 96TM	49, 50 thru 96	144
WCA thru ZTM	A, B thru Z	

Order in multiples of 25 cards. A thru Z Legend does not include "I" or "O".

Solid Numbers and Solid Letters — Mini Markers

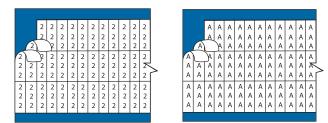

Cat. No.	Legend	Marker/Card 1/2 in. (13 mm)
Solid Numbers		
WCZEROMINWC99MIN	0, 1,99	150
WC100MINWC250MIN	100, 101250	99
Solid Letters		
WCAMIN	А	150
WCBMINWCZMIN	B, CZ	150
Order in multiples of 25 cards.		

Numbers in Sequence — Mini Markers


		2	3	4	5	6	7	8	9	10	11	12
	_	2	3	4	5	6	7	8	9	10	11	12
	1	ì	B	4	5	6	7	8	9	10	11	12
0	١	P	3	4	5	6	7	8	9	10	11	12
0	1	2	3	4	5	6	7	8	9	10	11	12
0	1	2	3	4	5	6	7	8	9	10	11	12
0	1	2	3	4	5	6	7	8	9	10	11	12
0	1	2	3	4	5	6	7	8	9	10	11	12
0	1	2	3	4	5	6	7	8	9	10	11	12

Cat. No.	Legend	Marker/Card 1/2 in. (13 mm)	
WCO thru 49MIN	0, 149	150	
WC50 thru 99MIN	50, 5199	150	
WC100 thru 132MIN	100, 101132		
WC133 thru 165MIN WC463 thru 495MIN	133, 134495	99	

Order in multiples of 25 cards. Quantity of each number per card: 3.

Letters in Sequence – Mini Markers

.



Cat. No.	Legend	Marker/Card 1/2 in. (13 mm)
NCAZMIN	A, BZ	156

Thomas Betts A Member of the ABB Group






Wire Marker Cards – Vinyl Cloth

Cable markers are used to identify large conductors, electrical cables and tubing for hydraulic systems!

Solid Numbers and Solid Letters — Cable Markers

		5	5	5	5	5	5	5	5	
		5	5	5	5	5	5	5	5	
	$\langle \langle \langle \rangle \rangle$	\sum	5	5	5	5	5	5	5	
5 ^ل	لح	5	5	5	5	5	5	5	5	
5	5	5	5	5	5	5	5	5	5	
5	5	5	5	5	5	5	5	5	5	>
5	5	5	5	5	5	5	5	5	5	
5	5	5	5	5	5	5	5	5	5	
	•		-	•		-				



Oct No.	Lowend	Mark	ker/Card	
Cat. No.	Legend	3-1/2 in. (89 mm)	1-3/4 in. (45 mm)*	
Solid Letters				
WCCMAS	А			
WCCMBS	В			
WCCMCS	С	18	36	
WCCMDS	D			
WCCMES	E			
WCCMFS	F			
WCCMNS	N			
Solid Numbers				
WCCMOS	0	18	20	
WCCM1S, WCCM2SWCCM9S	1, 29	18	36	

Order in multiples of 25 cards.

*When 1-3/4 $\dot{\rm in}$.length markers are required, substitute the last S in the catalogue number with a D, i.e. WCCMAS would become WCCMAD.

Numbers or Letters in Sequence – Cable Markers

		С	D	E	F	G	Н	Ι	J	
		С	D	Е	F	G	н	1	J	
	5	\sum	D	Е	F	G	Н	I	J	
A		С	D	Е	F	G	н	1	J	
A	В	С	D	Е	F	G	н	I	J	
А	В	С	D	Е	F	G	н	1	7	>
А	В	С	D	Е	F	G	н	I	J	
A	В	С	D	Е	F	G	н	I	J	

Cat. No.	Legend	Marker/Card		
Gal. NO.		3-1/2 in. (89 mm)	1-3/4 in. (45 mm)*	
WCCM01-09S	01 thru 09	0		
WCCM1-9S	1 thru 9	2	4	
WCCM1-18S	1 thru 18			
WCCM19-36S	19 thru 36		2	
WCCM37-54S	37 thru 54	1		
WCCM55-72S	55 thru 72			
WCCM73-90S	73 thru 90			
WCCM91-99S	91 thru 99			
WCCMA-IS	A thru I	0		
WCCMJ-RS	J thru R	2	4	
WCCMS-ZS	S thru Z			

Order in multiples of 25 cards.

*When 1-3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WCCM01-09S would become WCCM01-09D.





Wire Marker Cards – Vinyl Cloth


Maintenance and Production Label Cards

Cat. No.	Wording	Blanc on Coloured Background	Labels per Card	Label Grandeur W x L (in.)
WCMP5	Accepted	Green		
WCMP1	Calibrated	Black		
WCMP26	Calibration	Green		
WCMP2	Certification	Black	14	1-1/2 x 5/8
WCMP18	Due For Inspection	Orange	14	1-1/2 X 3/0
WCMP4	Rejected	Red		
WCMP25	Tested	0		
WCMP75	Calibration	Green	9	2-3/4 x 1

Order in multiples of 25 cards.


Blank Write-On Markers

.




Cat. No.	Marker Grandeur (in.)	Markers per Card
WCBW14X34D	1/4 x 3/4	72
WCBW14X112S	1/4 x 1-1/2	36
WCBW1132X112S	1-1/32 x 1-1/2	26
WCBW12X12D	1/2 x 1/2	54
WCBW12X112S	1/2 x 1-1/2	18
WCBW58X112S	5/8 x 1-1/2	14
WCBW34X12D	3/4 x 1/2	36
WCBW34X214S	3/4 x 2-1/2	12
WCBW1X112S	1 x 1-1/2	9
WCBW112X112S	1-1/2 x 1-1/2	6

Order in multiples of 25 cards.

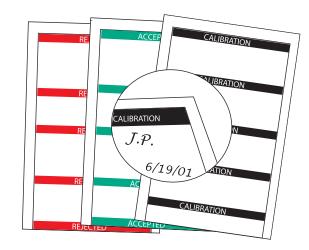

. .

Solid NEMA Colour Markers



Cot No	Coulour	Markers p	er Legend		
Cat. No.	Couleur	1-1/2 in. (38 mm)	3/4 in. (19 mm)*		
WCBLKS	Black				
WCBLDS	Blue — Dark				
WCBLLS	Blue — Light				
WCBRNS	Brown				
WCGRYS	Grey				
WCDGRS	Green — Dark				
WCGRLS	Green — Light				
WCMARS	Maroon	36	72		
WCOLIS	Olive	30	12		
WCORAS	Orange				
WCPINS	Pink				
WCPURS	Purple				
WCREDS	Red				
WCTANS	Tan				
WCWHIS	Blanc				
WCYELS	Jaune				

Order in multiples of 25 cards.


*When 3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WCBLKS would become WCBLKD.








Wire Marker Cards – Vinyl Self-Laminating

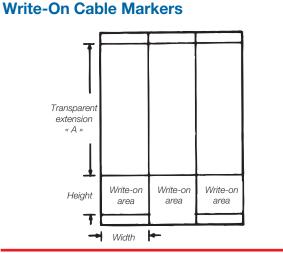

Cat. No.	Overall Marker Size (in.)	Width Height Write-On Area (in.)	Markers per Card
WSLM33	1 x 2-3/4	1 x 3/4	0
WSLM35	1 x 5	1 x 1	3
WSLM123	1-1/2 x 3	1-1/2 x 3/4	
WSLM23	2 x 3	2 x 3/4	
WSLM125	1-1/2 x 5	1-1/2 x 1	
WSLM25	2 x 5	2 x 1	0
WSLM48	2 x 8	2 x 3-3/4	2
WSLM95	2-1/4 x 5	2-1/2 x 2-1/4	
WSLM410	2 x 10	2 x 4-1/2	
WSLM415	2 x 15	2 x 7	


Blank Write-On Markers

.



Cat. No.	Write on Area (WxD) (in.)	Markers per Card 1-1/2 in. (38 mm)
WSBW14x112S	1/4 x 1-1/2	36
WSBW38x112S	3/8 x 1-1/2	26
WSBW12x112S	1/2 x 1-1/2	18
WSBW34x112S	3/4 x 1-1/2	12
WSBW1x112S	1 x 1-1/2	9
WSBW112x112S	1-1/2 x 1-1/2	6

Solid Letters



	Lawrend	Markers per Card		
Cat. No.	Legend	1-1/2 in. (38 mm)	3/4 in. (19 mm)*	
WSAS	А	00	70	
WSBSWSZS	B, CZ	36	72	

Order in multiples of 25 cards

*When 3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WSAS would become WSAD.

Solid Numbers



Cat No.	Logond	Markers	per Card	
Cat. No.	Legend	1-1/2 in. (38 mm)	3/4 in. (19 mm)*	
WSZEROS	0	00	70	
WS1SWS99S	1, 299	36	72	
WS100S	100	05	50	
WS101SWS600S	101, 102600	25	_	

Order in multiples of 25 cards.

*When 3/4 in. length markers are required, substitute the last S in the catalogue number with a D, i.e. WSZEROS would become WSZEROD.




E14





Wire Marker Dispenser

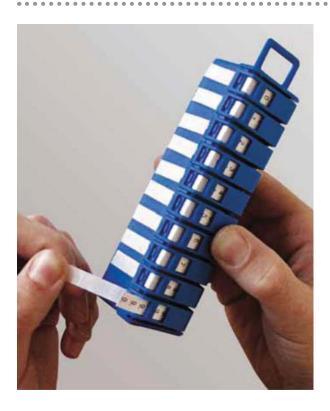

- Compact size fits in your pocket or hangs from work belt
- Unique design enables easy access to all legends during use or when refilling
- Holds 760 markers 10 rolls of 76 markers each

.

- Markers are pre-cut, 1-1/4 in.- long, oil-and water resistant polyester with acrylic adhesive
- Lifetime guarantee on dispenser

Cat. No.	Legend	Label Colour	Rolls Per Legend
WDFPR-0	0		10
WDFPR-1WDFPR-9	1, 29		10
WDFPR-0-9	09		1
WDFPR-10-19	1019		I
WDFPR-AWDFPR-Z	A, B,Z		
WDFPR-L1	L1		
WDFPR-L2	L2	White	
WDFPR-L3	L3		
WDFPR-T1	T1		
WDFPR-T2	T2		
WDFPR-T3	T3		
WDFPR-MIN	-		10
WDFPR-PLS	+		
WDFPR-YEL		Yellow	
WDFPR-WHT		White	
WDFPR-BLK		Black	
WDFPR-BRN	BLANK	Brown	
WDFPR-BLU		Blue	
WDFPR-GRN		Green	
WDFPR-RED		Red	

Polyester Tape Refills for Dispenser

Dispenser

Cat. No.	Description	Std. Pkg. Qty.
WDFP-0-9	Loaded Dispenser with Legends 0 through 9	1
WDFP-NEMA	Loaded Dispenser with 10 NEMA Colours	1
WDFP	Empty Dispenser	1






. . . .

Vinyl Sleeve Markers

Sleeve Markers Features at a Glance

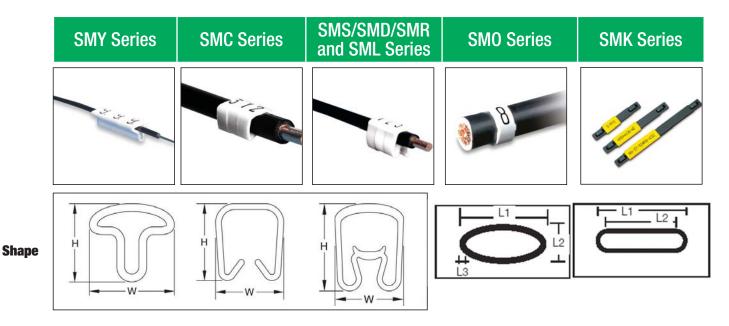

For more information, see	P. E17	P. E17	P. E17, E18	P. E19	P. E19
Style	Closed Y-shape	Open clip-on	Closed spring-action	Closed oval	Closed slotted
Application	Install on wires before connection	Install on wires before or after connection	Install on wires before connection	Install on wires before connection or on holders	Install on holders*
Wire Size Range	23-20 AWG	18-6 AWG	22-5 AWG	10-6 AWG for direct install: any size with holder*	Any size with holder*
Marker Size	0.130 in. H x 0.138 in. W	0.142 in. H x 0.146 in. W to 0.264 in. H x 0.272 in. W	0.142 in. H x 0.138 in. W to 0.650 in. H x 0.433 in. W	L1 = 11.3 mm L2 = 4.3 mm L3 = 0.75 mm	L1 = 11.3 mm L2 = 10 mm
Packaging	Reel	Strips	Strips, disc or reel Loose bag	Discs	Bags


* Holder fastens with cable ties around cable or pipe.









Vinyl Sleeve Markers

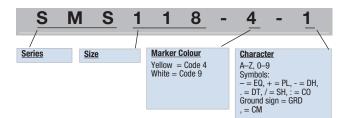

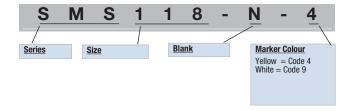

SMY Sleeve Markers






Closed combination marker. A special Y-shaped profile covers a wide diameter range of small wires. The large print surface of the marker enables excellent readability at normal reading distances.

Cat. No.	Colour	Recommended wire diameter (in.)	AWG	Std. Pkg.
SMY079-4-*	Yellow	0.000 0.070		1001 D 1/1000
SMY079-9-*	White	0.039 – 0.079	23–20	1001 = Reel/1000

SMS Sleeve Markers



Type Designation	Height (H) (in.)	Width (B) (in.)	Text Height (in.)
SMS118	3.6	3.5	0.0
SMS196	5.5	4.2	2.6
SMS394	9.5	6.6	4.0
SMS630	16.5	11.0	4.0

Closed combination marker, permanent grip and adjustable marking sleeve for as yet unconnected wires. Unique profile with spring-action bellows covers a wide diameter range. Twist-protection for secure combination marking.

Cat. No.	Colour	Recommended wire diameter (in.)	AWG	Std. Pkg.
SMS118-4-*	Yellow	0.051 0.110	00.10	
SMS118-9-*	White	0.051 – 0.118	22-16	
SMS196-4-*	Yellow	0.050 0.107	10 10	1 = BAG/250
SMS196-9-*	White	0.059 – 0.197	16-10	10 Strips of 25 Markers
SMS394-4-*	Yellow	0.157 0.004	40.4	
SMS394-9-*	White	0.157 – 0.394	13-4	
SMS630-4-*	Yellow	0.045 0.000	-	4 040/00
SMS630-9-*	White	0.315 – 0.630	5	1 = BAG/20

SML Sleeve Markers - 200 in a Bag



Cat. No.	Colour	Recommended wire diameter (in.)	AWG	Std. Pkg.
SML118-4-*	Yellow	0.051 - 0.118	22-16	Lassa Dag 1000
SML196-4-*	Yellow	0.059 - 0.197	16-10	Loose Bag 1200









.

Vinyl Sleeve Markers

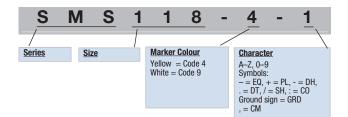

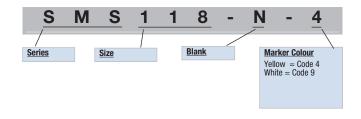

SMD Sleeve Markers – Markers on a Compact Disc



Cat. No.	Colour	Recommended wire diameter (in.)	AWG	Std. Pkg.
SMD118-4-*	Yellow	0.051 0.110	00.10	
SMD118-9-*	White	0.051 – 0.118	22–16	1 0
SMD196-4-*	Yellow	0.050 0.107	10 10	1 = Compact Disc/500
SMD196-9-*	White	0.059 – 0.197	16–10	
SMD394-4-*	Yellow	0.457 0.004	10.4	4 0
SMD394-9-*	White	0.157 – 0.394	13-4	1 = Compact Disc/250
SMDP394-9-*	White	Recommended for use with RG6 & RG59 coaxial cable	12–4	1 = Compact Disc/250


*Replace with character required.

.

SMR Sleeve Markers – 1000 **Continuous Markers on a Reel**



SMC Sleeve Markers – Clip-On Markers



Type Designation	Height (H) mm	Width (B) mm	Text Height mm
SMC118	3.6	3.7	2.6
SMC157	4.2	4.5	2.0
SMC197	5.5	5.7	4.0
SMC244	6.7	6.9	4.0

Recommended wire Cat. No. Colour AWG Std. Pkg. diameter (in.) SMR118-4-* Yellow 0.051 - 0.118 22-16 SMR118-9-* White 1 = Reel / 1000 SMR196-4-* Yellow 0.059 - 0.19716–10 SMR196-9-* White *Replace with character required.

Open marker sleeve for already connected wires. Securely positioned with help of barbs. Fast snap installation.

Cat. No.	Colour	Recommended wire diameter (in.)	AWG	Std. Pkg.
SMC118-4-*	Yellow	0.004 0.110	10.10	
SMC118-9-*	White	0.094 - 0.118	18–16	_
SMC157-4-*	Yellow	0.110 0.157	10 14	
SMC157-9-*	White	0.118 – 0.157	16–14	1 = BAG/200
SMC197-4-*	Yellow	0.157 – 0.197 12–10	10 10	(10 strips x 20 pcs)
SMC197-9-*	White		12-10	
SMC244-4-*	Yellow	0.107 0.044	0.0	
SMC244-9-*	White	0.197 – 0.244	8–6	


*Replace with character required.









Vinyl Sleeve Markers

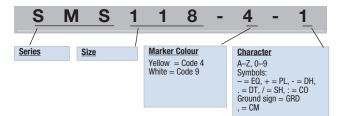

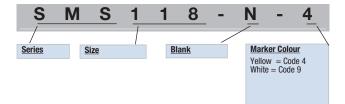


SMO and SMK Sleeve Markers – 500 Markers on a Compact Disc and Bag of 100





D D



Туре	Dia. Range	Dimensions in mm (nominal)		
Designation	in.	L1 mm	L2 mm	L3 mm
SMO	0.197-0.256	11.3	4.3	0.75
SMK	-	11.3	10.0	-

SMK TYPE

The SMK type is a combination marker for cable and pipe marking. Installed quickly onto SMKH or SMOH holder which is fastened with cable ties around the cable. Made of cadmium and silicone free rigid PVC. **SMO type can also be used with SMKH or SMOH holders or directly on cable.**

.

Cat. No.	Colour	Recommended wire dia. (in.)	Holders	AWG	Std. Pkg.
SM0256-4-*	Yellow	0.147 – 0.256		10–6	1 = Compact
SM0256-9-*	White	0.197 - 0.256	Use with	10-0	Disc/500
SMK244-4*	Yellow		holders SMKH or SMOH		1 040/100
SMK244-9-*	White			-	1 = BAG/100


*Replace with character required.

Cat. No.	Colour	Holds a	Holds a max. of		
	Colour	SMO	SMK	Std. Pkg.	
SMOH07-0		7	8		
SMOH12-0		12	13		
SMOH18-0	Divit	18	19	4 Dec (400 Haldes	
SMOH30-0	Black	30	31	1 = Bag/100 Holders	
SMKH10-0		10	10		
SMKH20-0*		20	20		

*Made of Polyamide 6/6 resistant to organic solvents with limited resistance against acids and alkalis. Recommended Ty-Rap® cable tie is TY524MX. Other colours available. Consult your Regional Sales Office. * Halogen free

Cat. No.	Width (W1) mm (in)	Width (W2) mm (in)	Thickness (T1) mm (in)	Thickness (T2) mm (in)	Raised Bridge (H) mm (in)	Length (L1) mm (in)	Writeable (L2) mm (in)	Packaging	Cat. No. Fixture	Capacity No./Fixture
SMOH-07Ø						60.0 (2.36)	27.0 (1.06)			
SMOH-12Ø	0.0.(0.000)	0 5 (0 074)	10(004)	0.0 (0.105)		82.0 (3.24)	50.0 (1.97)			
SMOH-18Ø	8.2 (0.323)	8.2 (0.323) 9.5 (0.374) 1.0 (0.04) 3.2 (0.125)	6.0 (0.236)	110.0 (4.33)	75.0 (2.95)	400				
SMOH-30Ø				152.0 (5.98)			b) 124.0 (4.88) 100 MTX-MK1-	100	MTX-MK1–P0H7	3x2
SMKH110-0	9.8 (0.385)	10.0 (0.470)	1.0.(0.05)	2.2 (0.120)	-	70.0 (2.76)	60.0 (2.36)			
SMKH20-0Ø	9.0 (0.354)	12.0 (0.472)	1.2 (0.05)	3.3 (0.130)	-	100.0 (3.94)	90.0 (3.54)			

 \emptyset 0 = Black, 4 = Yellow, 9 = White. Material: Hard PVC. Example: SMOH07-4 = Yellow, 60 mm











. . . .

Stainless Steel Sleeve Markers

Letters, numbers, and symbols – create easy-to-use custom identifications!

 Slip tags over carriers or strips (below) and attach to your cable or hose with a variety of Thomas & Betts Stainless Steel Cable Ties

Cat. No.	Description	Length (in./mm)	Width (in./mm)	Wt. Per 100	Pkg.
Stainless S	teel I.D. Tag				
ER010	А				
ER011	В				
ER012	С				
ER013	D				
ER014	E				
ER015	F				
ER016	G				
ER017	Н				
ER018	I/1				
ER019	J				
ER020	К				
ER021	L/7				
ER022	M / W				
ER023	N				
ER024	0 / 0				
ER025	Р				
ER026	Q				
ER027	R				
ER028	S				
ER029	Т				
ER030	U	0.45/2.00	0.38/9.65	0.31	100
ER031	V				
ER032	W				
ER033	Y				
ER034	Z				
ER018	1/1				
ER037	2				
ER038	3				
ER039	4				
ER040	5				
ER041	6				
ER021	7/L				
ER042	8				
ER041	9				
ER024	0/0				
ER035	Minus/Hyphen (-)				
ER036	Blank ()				
ER046	Plus (+)				
ER047	Earth ()				
ER048	Sine (~)				
ER049	Slash (/)				
	0.000.07				

Character size: .218" Material: .025" 316 stainless steel.

Thomas&Betts

A Member of the ABB Group

I.D. Tag Kit contains 50 of each letter, number, symbol, carrier,
and strip in a handy carrying case

•

Cat. No.	Description	Length (in./mm)	Width (in./mm)	Wt. Per 100	Pkg.	
S.S. I.D. Tag S	Strips/Carriers					
ER043	6-Character Carrier	3.64/92.46		0.73		
ER044	10-Character Carrier	5.14/130.56		1.25		
ER045	16-Character Carrier	7.39/187.71	0.00/0.05	1.47	100	
ER050	Short Strip	4.25/107.95	0.38/9.65	0.98	100	
ER051	Medium Strip	5.75/146.05		1.33		
ER052	Long Strip	8.00/203.20		1.85		
ER060-100	I.D. Tag Kit	_	_	_	1	

Easy Read Kit ER060-100

EASY	EASY	EASY	EASY	EASY	EASY	EASY	EASY	EASY	EASY	EASY
"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	"I"	"J"	"K"
ER010	ER011	ER012	ER013	ER014	ER015	ER016	ER017	ER018	ER019	ER020
EASY	EASY	EASY	EASY	EASY	EASY	EASY	EASY	EASY	EASY	EASY
"L"	"M"	"N"	"0"	"P"	"Q"	"R"	"S"	"T"	"U"	"V"
ER021	ER022	ER023	ER024	ER025	ER026	ER027	ER028	ER029	ER030	ER031
EASY "W" ER022	EASY "X" ER032	EASY "Y" ER033	EASY "Z" ER034	EASY "_" ER035	EASY "BLANK" ER036	EASY "+" ER046	EASY "_" ER035	EASY ER047	EASY "~" ER048	EASY "/" ER049
EASY	EASY	EASY	EASY	EASY	EASY	EASY	EASY	EASY	EASY	
"1"	"2"	"3"	"4"	"5"	"6"	"7"	"8"	"9"	"0"	
ER018	ER037	ER038	ER039	ER040	ER041	ER021	ER042	ER041	ER024	
	EASY CARRIER 16 ER045			EAS	SY CARRIER Ero44	10	EAS	SY CARRIER ER043	16	
	EASY STRIP LONG ER052			EASY	strip mei Ero51	DIUM	EAS	y strip sh Er050	ORT	

I.D. Tag Kit contains 100 of each letter, number, symbol, carrier, and strip in a handy carrying case.



E20





I.D. Tagging System

Cat. No.	Designation	Max. No. of Single Character Markers	Quantity Per Pack	Length (L)	Width (W)	Slot Width (SW)
SSM*	SINGLE-CHARCTER MARKER	-	50 (5x10) PCS	5.5	10.9	4.8
PKS10040FQ ◊	47 MM CARRIER STRIP	6	5.5	47.0	10.3	4.8
PKS10060FQ ◊	65 MM CARRIER STRIP	9	5.5	65.0	10.3	4.8
PKS10080FQ ◊	87 MM CARRIER STRIP	13	5.5	87.0	10.3	4.8
PKS10100FQ ◊	107 MM CARRIER STRIP	17	5.5	109.0	10.3	4.8
PKS10120FQ ◊	128 MM CARRIER STRIP	20	5.5	128.0	10.3	4.8

 $\diamond = (S = RAISED BRIDGES), (H = HOLES)$ * = CHARACTERS

CARRIER STRIP FOR SINGLE-CHARACTER MARKERS OR READY-MARKED MULTI-CHARACTER MARKING.

NOTE: PKS10040-PKS10120 not stamped with text can be used as carrier strips for single-character markers. The carrier strips can also be pre-stamped and combined with single character markers. Customized markers are mounted on tape.



SINGLE-CHARACTER MARKERS.

Identify your cable bundles with permanent, Type 304 stainless steel imprinted tags applied with stainless steel cable ties

- After imprinting tags, simply slip a tie through slots in the tag and fasten with a cable tie installation tool
- Tie down with 1/4 in. wide ties
- Type 304 Stainless Steel

Cat Na	Wid	th	Le	ength
Cat. No.	In.	mm	In.	mm
SSID100	0.75	19.05	2.0	51
SSID101	1.50	38.10	2.5	63
SSID102	0.75	19.05	3.5	89

Packaging Quantity: 100/box .015 in. (.254mm) Thickness.

NOTE: Customized pre-embossed tags are available. Please consult Regional Sales Office for details. Add suffix (316) for 316 Stainless Steel.











.

I.D. Tagging System

Imprints Thomas & Betts stainless steel I.D. tags

I.D. Tag Imprinter

- Includes special tag holder that provides quick, accurate positioning of tag
- Comes with a 3/32 in. character imprinting wheel

Cat No.	Description	Weight		
Cat. No.	Description	lb.	kg	
WTID200	I.D. Tag Imprinter	29.5	13.41	
WTID290	3/32 in. Caractères imprinting wheel	-	-	
WTID281	1/8 in. Caractères imprinting wheel	-	-	
WTID283	3/16 in. Caractères imprinting wheel	-	-	
WTID300	I.D. Marking Kit			
WTID204	(Kit) WTID200 and WTID283			



Customized Stainless Steel Tape Embossing System



After making your tag, apply with stainless steel cable ties.

Cat. No.	Description	Weight			
Gal. NO.	Description	lb.	kg		
WTID400	Hand-held tool for embossing S.S. I.D. Tape	2.57	1.17		
WTID405	Replacement S.S. tape (21 ft. long, 1/2 in. wide)	0.18	0.01		

304 Stainless Steel

Packaging Quantity: 1/box Note: The embossing tool comes complete with two rolls of stainless steel tape.









Accessories

SMMK Installation Magazine for SMS Sleeves Complete marking kit for marking on site



Cat. No.	Colour	Recommended wire diameter (in.)	AWG	Std. Pkg.		
SMMK118-4	Yellow	0.051 0.110	22-16	1 = Bags of 20 Wands		
SMMK118-9	White	0.051 – 0.118		20 Wands of 25 Markers		
SMMK196-4	Yellow	0.000 0.100	10 10	0–9, L, R, S, T, Neutral, Ground, Blu		
SMMK196-9	White	0.098-0.196	16–10	-, Red +, Grey Neutral		

Consult your Regional Sales Office for other kit combinations. Refill markers order SMS118 or SML096 Series, see page E17.

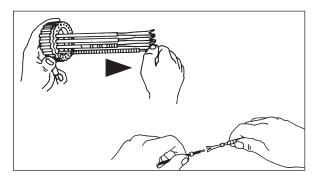

....

SMCB Sleeve Marker Compartment Case

.



Cat. No.	Contents	Marker Qty./ Compartment	Std. Marker Pkg. per Case
SMCB12-E	-	0/12	Empty case
SMCB12-118-4	SMS118 Series	1000 pec/10	Yellow/Black = 0-9 Red/White = + Blue/White = -
SMCB12-118-9	22–16 AWG	1000 pcs/12	White/Black = 0-9 Red/White = + Blue/White = -
SMCB18-E	-	0/18	Empty case
SMCB18-196-4			Yellow/Black = 0-9 Red/White = + Blue/White = -
SMCB18-196-9	SMS196 Series 16–11 AWG	200 pcs/18	White/Black = 0-9 Red/White = + Blue/White = - Yellow/Green = White = neutral Grey = neutral White/Black = R,S,T

SMCB12 is a 12 compartment transparent case in Polystyrene. SMCB18 is a 18 compartment with a transparent lid.








Accessories


SMS Sleeve Markers – Application Tool



Cat. No.	Material	Recom. wire dia. (in.)	AWG	Std. Pack.	Use With
SMAT118	Teflon	0.051 – 0.118	22–16	1 Teal	SMS118
SMAT196	Coated Stainless Steel	0.098 - 0.196	16–10	1 Tool	SMS196



Magazine Dispenser – Feeds Left or Right



The magazine dispenses SMS sleeves, it has two identical lids, linked by a hinge on one side. The outer sides of the lids have grooves for storing SMS Series markers strips.

Material: Polystyrene

Cat. No.	Colour	AWG	Marker Type	Std. Pack.	Includes Tool
SMMDT118-E	-	_	_	-	
SMMDT118-9-0-9	White	00.40	SMS118	1 = 20 strips of 25 Markers/dispenser 0-9	SMAT118
SMMDT118-4-0-9	Yellow	22–16			
SMMDT196-E	-	-	-	-	
SMMDT196-9-0-9	White	10.10	0110100	1 = 20 strips of 25 Markers/dispenser 0-9	SMAT196
SMMDT196-4-0-9	Yellow	16–10	SMS196		

Refill markers order SMS118 or SML196 Series, see page E17.








T&B Express

Multi-Character Marking (Customized Orders)


Multi-character markings allows you to order markers already printed with the combinations of characters required, in accordance with customers specifications, direct from T&B with a 5 to 10 day delivery for orders under 10,000 markers. The information is transferred via e-mail in an Excel format. Purchase order is matched with the Excel file and is sent to Customer Service. We even offer heat shrink markers. Value of customized marking order must be equal to or greater than \$100.

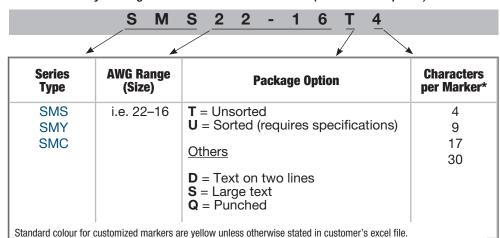

Please consult your Regional Sales Offices for a Quote (Min. order required)

*To complete catalogue number, add maximum number of characters required.

SMY and SMS Series





With unique patented grooves for easier mounting and flat top for excellent readability.

Cat. No.	AWG	Max. Number of Characters
SMY24-19T*	24-19	4, 9, 17
SMS22-16T*	22-16	
SMS18-14T*	18-14	
SMS16-11T*	16-11	
SMS13-5T*	13-5	4, 9, 17, 30
SMS5-T*		
SMS5-T*	5	
SMS5-T*		

* Replace asterisk by the number of characters desired. SMS5 can be delivered with 1 or 2 line text.

Cat. No.	AWG	Max. Number of Characters	
SMC22-16T*	22-16		
SMC16-12T*	16-12		
SMC12-11T*	12-11	4, 9, 17	
SMC11-10T*	11-10		
SMC7-5T*	7-5		

* Replace asterisk by the number of characters desired.











.

T&B Express

Multi-Character Marking (Customized Orders)

Catalogue No. Construction						
Туре	Package Option	Characters per Marker*				
SMK2	T = Unsorted	4				
	QT = Punched unsorted	7				
		9				
		10				
		17				
		30				
Standard colour fo	r customized markers are yellow unless otherwise stated	l in customer's excel file.				

*To complete catalogue number, add maximum number of characters required.

SMK2T and SMK2Q Series






Cat. No.	AWG	Max. Number of Characters
SMK2T*	Use with SMKH and SMOH holders	4, 9, 17, 30
SMK2QT10	Use with	10
SMK2QT07	TY524MX	7

*Replace asterisk by the number of characters desired. SMK can be delivered with 1 or 2 line text.

Consult your Regional Sales Office for more information.

SMOH Series Holders





Cat. No.	AWG	Max. Number of Characters
SMOHT7 SMOHT12		10
	11-12-21-4	18
SMOHT18	Unlimited	28
SMOHT30		28+







.



T&B Express

Multi-Character Marking (Customized Orders)

	Catalogue No. Construction								
Туре	Max. Dia. (in.)	Package Option	Characters per Marker*						
SMO	i.e. 0.063	T = Unsorted	4						
HSZ		U = Sorted	9						
		(requires specifications)	17						
			30						

Standard colour for customized markers are yellow unless otherwise stated in customer's excel file.

*To complete catalogue number, add maximum number of characters required.

SMO Oval Series: Oval marking profile










Cat. No.	Dia. (in.) min/max	AWG	Max. Number of Characters
SM0071T*	0.051/0.071	23–20	
SM0087T*	0.067/0.087	20-18	
SM0098T*	0.079/0.098	18–17	
SM0110T*	0.087/0.110	17–15	
SM0138T*	0.106/0.138	15–13	
SM0157T*	0.126/0.157	13–11	
SM0185T*	0.150/0.185	12–9	
SM0217T*	0.181/0.217	9–7	
SM0276T*	0.220/0.276	7–5	
SM0315T*	0.256/0.315	5–3	
SM0374T*	0.276/0.374	4–3	4, 9, 17, 30
SM0384T*	0.295/0.394	4–2	
SM0472T*	0.374/0.472	1/0	
SM0551T*	0.453/0.551	1/0-2/0	
SM0630T*	0.531/0.630	2/0-3/0	
SM0709T*	0.610/0.709	3/0-4/0	
SM0787T*	0.689/0.787	4/0	
SM0866T*	0.788/0.866	4/0-5/0	
SM0945T*	0.846/0.945	5/0-6/0	
SM01104T*	0.947/1.104	6/0-7/0	

HSZ Series

Flexible zero halogen thin wall polyolefin heat shrink tubing for marking on site.

- Excellent properties of fire safety
- Low smoke generation and evolution of acid gases
- Flexible and easy mounted on cables and wires
- 2 : 1 shrink ratio

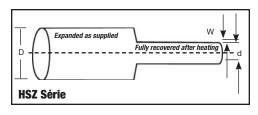

		nal Dia. Internal Dia. ax.) D (max.) d			Wall Thick. (nom.) W		AWG	Max. Number	
	in.	mm	in.	mm	in.		of Characters		
HSZ063T*	1.6	1/16	0.8	1/32	0.45	0.015	-		
HSZ093T*	2.4	3/32	1.2	3/64			-		
HSZ125T*	3.2	1/8	1.6	1/16	0.51	0.51	0.020	24–30	
HSZ187T*	4.8	3/16	2.4	3/32			14–22		
HSZ250T*	6.4	1/4	3.2	1/8			10–16		
HSZ375T*	9.5	3/8	4.8	3/16	0.64	0.025	6–12	4, 9, 17, 30	
HSZ500T*	12.7	1/2	6.4	1/4			1–6		
HSZ750T*	19	3/4	9.5	3/8	0.79	0.030	4/0-2		
HSZ1000T*	25.4	1	12.7	1/2	0.89	0.035	350-2/0		
HSZ1500T*	38.1	1-1/2	19	3/4	1.02	0.040	750–3/0 kcmil		
HSZ2000T*	50.8	2	25.4	1	1.14	0.045	250–600 kcmil		







E-Z-CODER

Items included in the E-Z-CODER

36 reels of 500 x SMO markers from 1 to 9, A thru Z including the "-" symbol (order suffix DH). To replenish your reels of markers, order a reel of catalogue no. SM0256-4* and to select your legend, just replace the asterisk with your choice of characters i.e.: A, 3, . (for dot symbol, order suffix DT). For other legends or symbols, contact your Thomas & Betts Regional Sales Office.

The carrying case also includes one bag (100 pieces) of SMKH10-0 "short" cable tag holders for up to 10 characters and one bag (100 pieces) of SMKH20-0 "long" cable tag holders for up to 20 characters. To complete this kit, 100 x TY5253MX Ty-Rap[®] cable ties are supplied to install and secure your cable tag holders.



Cat. No.	Contents	Legend	Reels/Bags	Items per reel/bag
	SMO Markers	1 to 9 A to Z	36	500
Partex-EZCoder	SMKH10-0	Short holder	1	100
	SMKH20-0	Long holder	1	100
	TY5253MX	Ty-Rap® cable ties	1	100

Example: How to order replenishment component parts		
1 x	SM0256-4-GRD	Ground 🛓 symbol
2 x	SM0256-4-0	Letter 0 or number zero
1 x	SMKH10-0	Short cable marker holder
100 x	TY5253MX	Ty-Rap [®] cable ties











Packaging Options

Packaging options for customized order



Unsorted in a loop in sequential manner based on how markers are on customer Excel file.

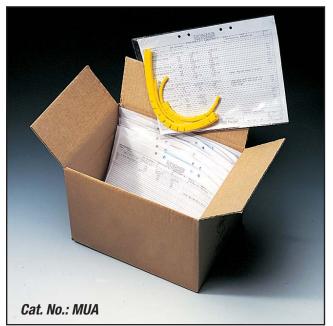

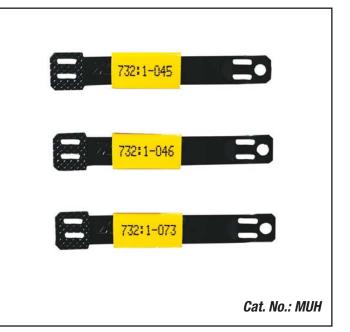

Sorted marking sleeves packed entirely according to customer requirements, in packs with sorting designations.





Labels Overview

Stick to safety with E-Z-Code® Labels

All kinds of dangers exist with high-voltage equipment and industrial machinery. Warn your employees of hazards and keep them safe with E-Z-Code[®] Labels. Place the self-adhesive labels where they need to be seen for on-the-spot identification and instruction and to help you comply with workplace health and safety regulations.

ARNING

Arc Flash Labels

Avoid accidents and OSHA fines by clearly marking electrical equipment with potential for arc flash hazards with E-Z-Code® Arc Flash Labels. They're designed to meet the latest ANSI standards for safety labels and help you comply with both Canadian Electrical Code

and National Electrical Code[®] standards.
Made of pressure-sensitive vinyl with aggressive acrylic adhesive

- Made of pressure-sensitive virgit with
 For more information, see p. E33
- For more information, see **p. E33**

Conduit and Voltage Markers

Positively identify voltage on conduit, load centers, circuit breakers, switches and other electrical equipment to allow faster, safer repair.



- High-contrast black type on safety-orange background for visibility
- For more information, see p. E31

Electrical Safety Labels

Positively identify voltage on conduit, load centers, circuit breakers, switches and other electrical equipment to allow faster, safer repair.

- Made from rugged, self-sticking vinyl adheres to most surfaces
- High-contrast black type on safety-orange background for visibility
- For more information, see p. E32

Lockout Labels

Compliant with both Canadian and US lockout/tagout requirements, E-Z-Code[®] Lockout Labels are designed to help you develop, implement and update a lockout/tagout program for your facility.

- Made from pressure-sensitive vinyl with polyester overlaminate
- Adhere to almost any clean, dry surface rough or smooth
- Use in indoor or outdoor applications
- For more information, see **p. E33 to E35**

Pictogram Labels

Use these labels featuring universal symbols to communicate hazards to anyone, regardless of literacy or language.

Made from self-adhesive vinyl

E30

• For more information, see **p. E45**



Machine Warning Labels

Machine Warning Labels help you prevent injuries and reduce downtime. They also comply with ASME (ANSI Z535), CSA standard Z462 and OSHA 1910.145 requirements to use safety and compliance signs to indicate hazards that may lead to accidents, injury and property damage.



DANGER indicates an immediate hazard with a strong potential for death or severe injury

WARNING indicates hazardous situations that may result in death or severe injury

CAUTION warns against potential hazards or unsafe practices

- Made from pressure-sensitive vinyl with polyester overlaminate and permanent acrylic adhesive
- Use indoors or outdoors temperature range of -40°C to 180°C
- 5-year durability
- For more information, see p. E36 to E40

Write-On Control Markers

A quick and simple way to keep on-the-spot records, write-on control markers are easy to carry and dispense as needed.

- Made from pressure-sensitive, imprintable matte vinyl
- Adhere to clean, flat, dry, smooth surfaces
- Resists grease, oil and moisture
- Accepts pen, pencil, felt-tip marker, typewriter or rubber stamp
- For more information, see p. E41, E42

Industrial Markers



Individual letters and numbers are ideal for fast, generalpurpose marking of bins, shelves, poles, panels, switches and equipment.

- · Made from plastic-coated vinyl cloth with high-tack adhesive
- Rated for indoor use
- Available in 4 sizes with character height ranging from 5/16 in. to 2 in.
- Reflective letters and numbers also available for high visibility in dark or dimly lit areas
- For more information, see p. E44

Custom Labels

Need labels you don't see in this catalogue? No problem we welcome custom orders. Please refer to the form on **p. E46, E47** for guidance, and don't hesitate to contact your Regional Sales Office for ordering assistance.










Conduit & Voltage Marker Cards

Identify electrical systems, including load centers, circuit breakers, switches or any other vital electrical equipment!

- Helps prevent mistakes and trial and error searching during electrical service work
- Manufactured of rugged Self-Sticking Vinyl with high-contrast black printing on safety orange background
- OSHA compliant



Style A: 2-1/4 in. x 9 in. (1 marker per card) Character Height 1-7/8 in.



Style B: 1-1/8 in. x 4-1/2 in. (4 markers per card) Character Height 7/8 in.



Style C: 2-1/4 in. x 1/2 in. (18 markers per card) Character Height 5/16 in.

Style A 2-1/4 in. x 9 in.	Style B 1-1/8 in. x 4-1/2 in.	Style C 2-1/4 in. x 1/2 in.	Legend
WJT-5030	WDT-5030	WAT-5030	7,200 volts
WJT-5059	WDT-5059	WAT-5059	12,000 volts
WJT-5060	WDT-5060	WAT-5060	13,000 volts
WJT-5047	WDT-5047	WAT-5047	13,200 volts
WJT-5031	WDT-5031	WAT-5031	13,800 volts
WJT-5032	WDT-5032	WAT-5032	AC
WJT-5043	WDT-5043	WAT-5043	Air Conditioning
WJT-5052	WDT-5052	WAT-5052	Circuit Breaker
WJT-5051	WDT-5051	WAT-5051	Circuit #
WJT-5038	WDT-5038	WAT-5038	DC
WJT-5050	WDT-5050	WAT-5050	Electric Out of Servic
WJT-5033	WDT-5033	WAT-5033	Emergency Service
WJT-5039	WDT-5039	WAT-5039	Exit Lights
WJT-5040	WDT-5040	WAT-5040	Fire Alarm
WJT-5053	WDT-5053	WAT-5053	Fuse Box
WJT-5041	WDT-5041	WAT-5041	Heating Circuit
WJT-5037	WDT-5037	WAT-5037	Lights
WJT-5042	WDT-5042	WAT-5042	Light & Power
WJT-5048	WDT-5048	WAT-5048	On/Off
WJT-5036	WDT-5036	WAT-5036	Power
WJT-5034	WDT-5034	WAT-5034	Single Phase
WJT-5055	WDT-5055	WAT-5055	Spare
WJT-5056	WDT-5056	WAT-5056	Telephone
WJT-5035	WDT-5035	WAT-5035	Three Phase
WJT-5054	WDT-5054	WAT-5054	volts



Style A 2-1/4 in. x 9 in.	Style B 1-1/8 in. x 4-1/2 in.	Style C 2-1/4 in. x 1/2 in.	Legend
WJT-5010	WDT-5010	WAT-5010	110 volts
WJT-5011	WDT-5011	WAT-5011	115 volts
WJT-5012	WDT-5012	WAT-5012	120 volts
WJT-5045	WDT-5045	WAT-5045	120/208 volts
WJT-5013	WDT-5013	WAT-5013	208 volts
WJT-5014	WDT-5014	WAT-5014	220 volts
WJT-5015	WDT-5015	WAT-5015	230 volts
WJT-5016	WDT-5016	WAT-5016	240 volts
WJT-5017	WDT-5017	WAT-5017	250 volts
WJT-5018	WDT-5018	WAT-5018	277 volts
WJT-5046	WDT-5046	WAT-5046	277/480 volts
WJT-5057	WDT-5057	WAT-5057	380 volts
WJT-5044	WDT-5044	WAT-5044	415 volts
WJT-5019	WDT-5019	WAT-5019	440 volts
WJT-5020	WDT-5020	WAT-5020	460 volts
WJT-5021	WDT-5021	WAT-5021	480 volts
WJT-5022	WDT-5022	WAT-5022	550 volts
WJT-5023	WDT-5023	WAT-5023	600 volts
WJT-5024	WDT-5024	WAT-5024	2,200 volts
WJT-5025	WDT-5025	WAT-5025	2,300 volts
WJT-5026	WDT-5026	WAT-5026	2,400 volts
WJT-5027	WDT-5027	WAT-5027	4,160 volts
WJT-5028	WDT-5028	WAT-5028	4,800 volts
WJT-5058	WDT-5058	WAT-5058	5,000 volts
WJT-5029	WDT-5029	WAT-5029	6,900 volts

Order in multiples of 25 cards.







Electrical Safety Labels

"Mr. Ouch" — NEMA Safety Labels

- Use on pad-mounted transformers located in public areas
- Meets NEMA, UL and CSA standards
- Made of tamper-resistant film to prevent defacing and vandalism
- Permanent pressure-sensitive adhesive makes removal virtually impossible
- Orange WARNING label goes on outside of enclosure
- Red DANGER label goes on inside of enclosure





.

Cat. No.	Label Size	Cat. No.	Label Size
WUT-0366	4-1/2 in. x 8 in.	WUT-0367	4-1/2 in. x 8 in.

Self-Sticking Polyester Safety Labels



Cat. No.	Label Size
WJA-1100	2-1/4 in. x 9 in.
WQA-1100	5 in. x 14 in.

		11/	\mathbf{n}	ΤΛ.	
_	IGł		111	1 //	
	11 7 6	1 V	ιп		
		I V	VL	1/1	

Cat. No.	Label Size
WJA-0076	2-1/4 in. x 9 in
WQA-0076	5 in. x 14 in.



Cat. No.	Label Size
WHF-0076	2-1/4 in. x 4-1/2 in.

Cat. No.	Label Size
LB86871	3-1/2 in. x 5 in.

Cat. No.	Label Size
LB86877	3-1/2 in. x 5 in







Cat. No.	Label Size
LB86860	3-1/2 in. x 5 in.

A DANGER High voltage inside.	4

Cat. No.	Label Size
LB86861	3-1/2 in. x 5 in.







Lockout Labels

Nothing's shocking when you warn service personnel of potential arc flash hazards

Arc Flash Labels


- Use on switchboards, panelboards, industrial control panels, motor control centers and other electrical equipment and components to identify potential arc flash hazards
- Post where clearly visible to qualified persons before they service, adjust or perform maintenance on equipment
- Designed to meet the latest ANSI standards for safety labels
- Made of durable, pressure-sensitive vinyl with aggressive acrylic adhesive

CEC, Rule 2-306, NEC Article 110.16 — **Flash Protection.** Electrical equipment, such as switchboards, panelboards, industrial control panels, meter socket enclosures and motor control centers, that are in other than dwelling occupancies, and are likely to require examination, adjustment, servicing or maintenance while energized shall be field marked to warn qualified persons of potential electric arc flash hazards.

The marking shall be located so as to be clearly visible to qualified persons before examination, adjustment, servicing or maintenance of the equipment.

NEC Informational Note No. 1 : NFPA 70E-2004, *Standard for Electrical Safety in the Workplace*, provides assistance in determining severity of potential exposure, planning safe work practices, and selecting personal protective equipment.

NEC Informational Note No. 2 : ZNSI A535.4-1998, *Product Safety Signs and Labels*, provides guidelines for the design of safety signs and labels for application to products.

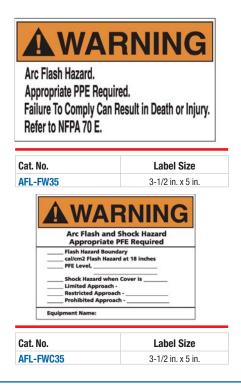









Lockout Labels

Stick'em up for greater workplace safety

Lockout Labels


- Prevent accidents and protect employees
- Comply with Canadian and US lockout/tagout requirements
- Made from pressure-sensitive vinyl with polyester overlaminate to protect graphics
- Adhere to almost any clean, dry surface rough or smooth
- Use in indoor or outdoor applications



Cat. No.	Label Size
LL-40	3-1/2 in. x 5 in.
LL-44	3-1/2 in. x 5 in.

REMOVE ALL DOUBT

Cat. No.	Label Size
L-23	2-1/4 in. x 4-1/2 in.
USE LOCKOUT DEVICE DURING MAINTENANCE	
Cat. No.	Label Size
L-31A	2-1/4 in. x 4-1/2 in.
ALL SOURCES TO THE MAC BE TAGGED O	
LOCKING	WITH A
LOCKING	WITH A
LOCKING Cat. No.	WITH A DEVICE.
LOCKING Cat. No.	Label Size
LOCKING	Label Size
LOCKING Cat. No. L-54	WITH A DEVICE. Label Size 3-1/2 in. x 5 in. A DANGER Lockout equipment
LOCKING Cat. No. L-54 ACAUTION Cat. Follow Iockout procedures LL-63	WITH A DEVICE.
LOCKING Cat. No. L-54	WITH A DEVICE. Label Size 3-1/2 in. x 5 in. A DANGER M DANGER Lockout equipment before servicing LL-65

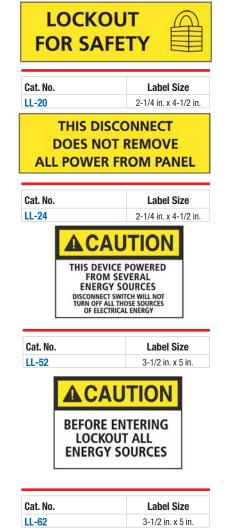

LOCKOUT HERE Cat. No. Label Size LL-22 2-1/4 in. x 4-1/2 in. **USE LOCKOUT** DEVICE DURING MAINTENCANCE OR ANY OPERATOR ADJUSTMENT Cat. No. Label Size LL-53 3-1/2 in. x 5 in USE LOCKOUT DURING MAINTENANCE **OR ANY OPERATOR** ADJUSTMENT Cat. No. Label Size LL-55 3-1/2 in. x 5 in.

LOCKOUT

BEFORE SERVICING

Cat. No.

LB86871LL-21

餾

Label Size 2-1/4 in. x 4-1/2 in.


Order in multiples of 25 labels.







Lockout Labels

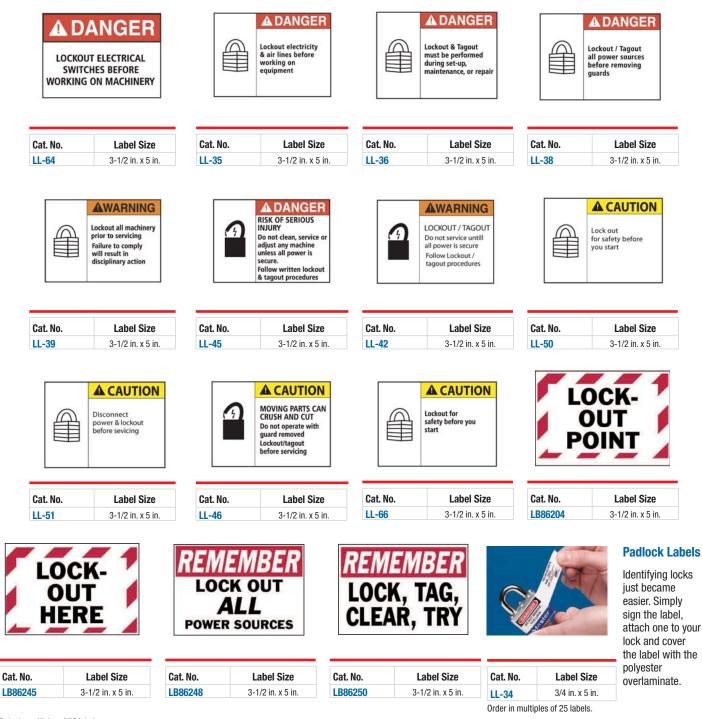

.

. .









Machine Warning Labels

Prevent injuries at your industrial location

Guide to Label Headers • Help prevent accidents and reduce downtime Comply with ASME (ANSI Z535), DANGER indicates an immediate CSA Standard Z462 and OSHA 1910.145 requirements A DANGER hazard with a strong potential for Made from pressure-sensitive vinyl with polyester death or severe injury overlaminate and permanent acrylic adhesive • Use in indoor or outdoor applications Temperature range of -40°C to 180°C **WARNING** indicates hazardous WARNING 5-year durability situations that may result in death or severe injury **CAUTION** warns against potential **A** CAUTION hazards or unsafe practices **DANGER A DANGER** All drivers must chock wheels Caustic Label Size Cat. No. Label Size Cat. No. MWL-1523 3-1/2 in. x 5 in. **MWL-1524** 3-1/2 in. x 5 in. **A DANGER** DANGER Electrical Hazard Electrical Hazard Do not touch Authorized personnel only C



Cat. No.	Label Size
MWL-1529	3-1/2 in. x 5 in.
Order in multiples of 5 labels.	

Irder in multiples of 5 labels.

Cat. No.	Label Size
MWL-1527	3-1/2 in. x 5 in.
A DANC	GER



Cat. No.	Label Size
MWL-1530	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1522	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1525	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1528	3-1/2 in. x 5 in.
	DANGER

Flammable No matches or open lights

Cat. No.	Label Size
WWL-1531	3-1/2 in. x 5 in.







Machine Warning Labels



Cat. No.	Label Size
MWL-1532	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1535	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1538	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1541	3-1/2 in. x 5 in.



.

Cat. No.	Label Size
MWL-1533	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1536	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1539	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1542	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1534	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1537	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1540	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1543	3-1/2 in. x 5 in.









Cat. No.	Label Size
MWL-1544	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1547	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1550	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1553	3-1/2 in. x 5 in.



Machine Warning Labels

Cat. No.	Label Size
MWL-1545	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1548	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1551	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1554	3-1/2 in. x 5 in.



.

Cat. No.	Label Size
MWL-1546	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1549	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1552	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1555	3-1/2 in. x 5 in.

Order in multiples of 5 labels.







Machine Warning Labels



Cat. No.	Label Size
MWL-1556	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1559	3-1/2 in. x 5 in.



.

Cat. No.	Label Size
MWL-1557	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1560	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1558	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1561	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1562	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1565	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1563	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1566	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1564	3-1/2 in. x 5 in.



Cat. No.	Label Size
MWL-1567	3-1/2 in. x 5 in.

Order in multiples of 5 labels.







.

Label Size

3-1/2 in. x 5 in.

Label Size

3-1/2 in. x 5 in.

Label Size

3-1/2 in. x 5 in.

DANGER EQUIPMENT

BEING

SERVICED

DO NOT

OPERATE

Cat. No.

MG66008

MG66009

NOTICE

 ∞

Safety glasses required beyond his point.

DANGER

High voltage. Disconnect power before servicina.

WARNING

Electrical hazard. Authorized rsonnel only

DO

NOT

OPERATE

Label Size

3-1/2 in. x 5 in.

5 in. x 7 in.

Cat. No.

MG66006

MG66005

		Machine	e Warning L	abels
This r	ARNING	ſ	ARNING Arespirator area.	• • • • • • • • • • •
Cat. No. MWL-1568	Label Size 3-1/2 in. x 5 in.	Cat. No. MWL-1569	Label Size 3-1/2 in. x 5 in.	Cat. No. MWL-1570
Pick u	p and return glasses here.	Hot sur Do not	AUTION Trace. touch. Label Size	Cat. No.
High V	3-1/2 in. x 5 in.	Do not	3-1/2 in. x 5 in.	MWL-1573
Cat. No. MWL-1574 Order in multiples of 5 lab	Label Size 3-1/2 in. x 5 in. els.	Cat. No. MWL-1575	Label Size 3-1/2 in. x 5 in.	Cat. No. MWL-1576
Order in multiples of 5 lab Magnetic Si CAUTI	gns	DANGER	DANGER	

BREAKERS

LOCKED

OUT

Label Size

3-1/2 in. x 5 in.

5 in. x 7 in.

Cat. No.

MG66004

MG66005

- els



3-1/2 in. x 5 in.

5 in. x 7 in.



Label Size

3-1/2 in. x 5 in.

5 in. x 7 in.

THIS MACHINE

MUST BE

LOCKED OUT

PRIOR TO

SERVICING

Cat. No.

MG66002

MG66003

E40





Write-On Control Markers

The handy markers for frequent identification jobs

• A quick and easy way to keep on-the-spot records

• Adheres to clean, flat, dry, smooth surfaces

• Easy to carry and dispense as needed

· Resists grease, oil and moisture

- Made from pressure-sensitive, imprintable matte vinyl
- Accepts marking by pen, pencil, felt-tip marker, typewriter or rubber stamp
- Standard marker size is 1-1/2 in. W x 5/8 in. H with 14 markers per card
- Some markers available in extra-large 2-1/2 in. W x 1 in. H size with 9 markers per card

. . .

CHE	CKED
DATE	BY

Cat. No.	Marker Size	Marker/ card
WCMP16	1-1/2 in. x 5/8 in.	14

CERT	<i>IFICATION</i>
BY	DATE
DUE	

Cat. No.	Marker Size	Marker/ card
WCMP9	1-1/2 in. x 5/8 in.	14



Cat. No.	Marker Size	Marker/ card
WCMP22	1-1/2 in. x 5/8 in.	14

MAI	NTENA	ICE
BY		
DATE		

Cat. No.	Marker Size	Marker/ card
WCMP21	2-1/2 in. x 1 in.	9

INSPECTED DATE INITIALS

Cat. No.	Marker Size	Marker/ card
WCMP29	1-1/2 in. x 5/8 in.	14

INVE	NTORY
NO.	DATE
COUNT	BY

Cat. No.	Marker Size	Marker/ card
WCMP20	1-1/2 in. x 5/8 in.	14

EMERGENCY	
FIRE	
POLICE	_
MEDICAL	_
MAINTENANCE	-

Cat. No.	Marker Size	Marker/ card
WCMP7	2-1/2 in. x 1 in.	9

Order in multiples of 25 signs.

CAUT	ION	

Cat. No.	Marker Size	Marker/ card
WCMP6	1-1/2 in. x 5/8 in.	14



Cat. No.	Marker Size	Marker/ card
WCMP3	1-1/2 in. x 5/8 in.	14

REJECTED	
BY	DATE
REASON	

Cat. No.	Marker Size	Marker/ card
WCMP24	2-1/2 in. x 1 in.	9







Write-On Control Markers

The handy markers for frequent identification jobs (cont'd)

ACCEPTED		
BY	DATE	

Cat. No.	Marker Size	Markers Per Card
WCMP5	1-1/2 in. x 5/8 in.	14

CALIBRATED	
BY	DATE
DUE	

Cat. No.	Marker Size	Markers Per Card
WCMP1	1-1/2 in. x 5/8 in.	14

CALIBRATION	
BY	DATE
DUE	

. . .

Cat. No.	Marker Size	Markers Per Card
WCMP26	1-1/2 in. x 5/8 in.	14

CERTIFICATION		
BY	DATE	
DUE		

Cat. No.	Marker Size	Markers Per Card
WCMP2	1-1/2 in. x 5/8 in.	14

DU	FOR INSPECTION
_	
	DO NO REMOVE

Cat. No.	Marker Size	Markers Per Card
WCMP18	1-1/2 in. x 5/8 in.	14

REJECTED		
BY	DATE	
REASON		

Cat. No.	Marker Size	Markers Per Card
WCMP4	1-1/2 in. x 5/8 in.	14

TESTED	
DATE	INITIALS

Cat. No.	Marker Size	Markers Per Card	
WCMP25	1-1/2 in. x 5/8 in.	14	

CALIBRATION		
BY	DATE	
DUE		

Cat. No.	Marker Size	Markers Per Card
WCMP75	2-1/4 in. x 1 in	9

Order in multiples of 25 signs.







. . .




Write-On Control Markers

Polyolefin Pocket Pack Markers

Stay ready for quality control!

- Easy to carry marker books fit in shirt pocket
- Easy to use just peel the marker from the page
- Clean and convenient markers are tabbed so fingers never touch the adhesive

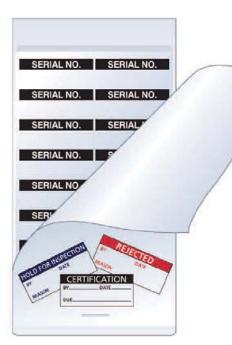

Cat. No.	Legend	Labels Per Book
WTMP-1B	CALIBRATED (black)	
WTMP-2B	CERTIFICATION (black)	
WTMP-3B	MAINTENANCE (blue)	
WTMP-4B	REJECTED (red)	
WTMP-5B	ACCEPTED (green)	
WTMP-6B	HOLD (red)	
WTMP-7B	RETURN TO VENDOR (orange)	
WTMP-8B	REWORK (black)	
WTMP-9B	HOLD FOR INSPECTION (blue)	
WTMP-11B	CAUTION (black)	
WTMP-16B	DATE INSTALLED (black)	240
WTMP-18B	DUE FOR INSPECTION (orange)	240
WTMP-19B	DO NOT USE AFTER (red)	
WTMP-20B	INSPECTED (black)	
WTMP-21B	BLANK HEADING	
WTMP-22B	REPAIRED BY (orange)	
WTMP-24B	SCRAPPED (orange)	
WTMP-25B	TESTED (green)	
WTMP-26B	CALIBRATION (green)	
WTMP-52B	PROPERTY TAG (black)	
WTMP-53B	SERIAL NO. (black)	
WTMP-55B	TOOL NO. (blue)	

15 pages per book, 16 markers per page. Each label is 1-1/2 in. x 5/8 in. Each book contains 240 identical labels.








.

Industrial Markers

Easy to read and available in a variety of configurations!

Numbers and Letters

- High-contrast, self-sticking, vinyl cloth markers make numbering and coding quick and easy
- Rated for indoor use
- Select character heights ranging from 5/16 in. to 3-3/4 in.




Series 003 78 markers per card.

Marker size: 3/8 in. x 1/2 in. Character Height: 5/16 in.



Series 100 10 markers per card. Marker size: 7/8 in. x 1-1/2 in. Character Height: 1 in.



Series 063 32 markers per card. Marker size: 9/16 in. x 3/4 in. Character Height: 5/8 in.



10 markers per card. Marker size: 7/8 in. x 2-1/4 in. Character Height: 2 in.

Description	Legend	Series 003	Series 063	Series 100	Series 200
LETTERS	A-Z	WCNL003AWCNL003Z	WCNL063AWCNL063Z	WCNL100AWCNL100Z	WCNL200AWCNL200Z
NUMBERS	0	WCNL003ZER0	WCNL063ZER0	WCNL100ZER0	WCNL200ZER0
NUMBERS	1-9	WCNL0031WCNL0039	WCNL0631WCNL0639	WCNL1001WCNL1009	WCNL2001 WCNL2009
LETTERS IN SEQUENCE	A-Z	WCNL003AZ	WCNL063AZ	N/A	N/A
LETTERS IN SEQUENCE	A-J	N/A	N/A	WCNL100AJ	WCNL200AJ
LETTERS IN SEQUENCE	K-T	N/A	N/A	WCNL100KT	WCNL200KT
LETTERS IN SEQUENCE	U-Z	N/A	N/A	WCNL100UZ	WCNL200UZ
NUMBERS IN SEQUENCE	0-9	WCNL00309	WCNL00369	WCNL10009	WCNL20009

Order in multiples of 5 cards.







Pictogram Labels

Don't let words get in the way of hazard information

Pictogram labels

- Universal symbols communicate hazards to anyone, regardless of literacy or language
- Made from self-adhesive vinyl
- Label size is 2 in. x 2 in.





Cat. No.	Label Size
PTG-101	2 in. x 2 in.



Cat. No.	Label Size
PTG-104	2 in. x 2 in.



•40.000	
PTG-107	2 in. x 2 in.

Order in multiples of 100 labels.



.

Cat. No.	Label Size
PTG-102	2 in. x 2 in.



Cat. No.	Label Size
PTG-105	2 in. x 2 in.



Cat. No.	Label Size
PTG-108	2 in. x 2 in.



Cat. No.

PTG-100



Cat. No.	Label Size
PTG-103	2 in. x 2 in.



Cat. No.	Label Size
PTG-106	2 in. x 2 in.

6	6		
(*	C.	¥)	
	16		

Cat. No.	Label Size
PTG-109	2 in. x 2 in.







609

additional volume discounts.

THIS DEVICE POWERED FROM SEVERAL ENERGY SOURCES

LOCK-

OUT POINT

Custom Label Express Order Form

This Custom Label Order Form is for the convenience of you and your authorized Thomas & Betts Distributor. To help expedite your order, please copy this form and fax a completed copy to us. For guestions about ordering Custom Labels, call your Regional Sales Office. Fax your order to 450-357-3556, Attn.: Product Line Coordinator.

Label Types and Available Sizes

Please check the appropriate boxes to choose English or French and the size.

Е Е 3-1/2 in. x 5 in. 2-1/2 in. x 4-1/2 in. 2-1/4 in. x 9 in. 3-1/2 in. x 6 in. 3-1/2 in. x 5 in. Arc Flash Hazard. Appropriate PPE Required. Failure To Comply Can Result in Death or Injury. Refer to NFPA 70 E. F F 3-1/2 in. x 10 in. 5 in. x 7 in. High voltage. 4-1/2 in. x 8 in. 4-1/2 in. x 10-3/4 in 5 in. x 14 in. **Electrical Safety** Arc Flash REMEMBER **A**CAUTION 3-1/2 in. x 5 in. Е 2-1/4 in. x 4-1/2 in. Е 3/4 in. x 5 in. Е 3-1/2 in. x 5 in. 0 LOCK OUT ALL F F F **POWER SOURCES** Padlock Machine Warning Lockout Legend: Materials: **Quantity:** Please print your message clearly in the box below. Please check one box. Vinyl No minimum order. Orders for 50+ tags are welcome. Call for delivery and

High-Volume Blank Printer Labels:

Please complete all portions.

Your Printer technology	Label Size	Colour	Label Material
Thermal	• Use fractional inches, not decimals.	White	SL Self-Laminating Vinyl N Nylon
Laser	 For labels on a cassette, check the C box to indicate continuous 	Yellow	VC Vinyl Cloth HS Heat Shrink
Dot Matrix	measurement in feet and indicate length next to the box.		P Polyester PM Polyamide
Ink Jet	Width Height		
Portable	C Length ft.	Quantity:	No minimum order. Orders for 50+ tags are welcome. Call for delivery and additional volume discounts.

Other-

Distributor Billing Location:

Shipping Location:

Distributor Name: Distributor Address:	Your Name/Title: Company Name: Attn:	
P.O. Number:	Address: Province: Postal Code: City: Province: Postal Code: Phone/Fax Number: P.O. Number:	







Custom Tag Express Order Form

This **Custom Tag Order Form** is for the convenience of you and your authorized Thomas & Betts Distributor. To help expedite your order, please copy this form and fax a completed copy to us. For questions about ordering Custom Tags, call your Regional Sales Office. Fax your order to 450-357-3556, Attn.: Product Line Coordinator.

. .

Materials and Available Sizes

Please check the appropriate boxes for material and size

Material	Available Sizes			
Vinyl	3-1/4 in. x 6 in. 3-1/4 in. x 5-1/2 in.			
Other	Other			



Tag Type:

Please check one of the options below for English or French language.

F	CAUTOON BY DEVENT Not the Caution Caution	E	DANGER DO NOT REMOV THE TAS SICONNEXE SICONNEXE MO FRIMOVER ESTA TRAJETA MO CONNOVER ESTA TRAJETA MO CONNOVER ESTA TRAJETA MO CONNOVER SICONNOVER SICONNOVER	F	DANGER A DANGER DO NOT OPERATE	No mi tags a	nimum order. Orders fo re welcome. Call for de dditional volume discou	livery
F	Inspection and	E F Pro	READY FOR SERVICE	Bla	Ink (No Message)	Blank Tag co Dark Gree Red		Orange Yellow
	Material Control age, Tag Fror rint your message clea		x below.		Bras Please Numb Prote		boxes for number and Available Sizes I/4 in. UV Protection	size Other
Distributor Distributor	Address:				To disc Ship Your Nan Company Attn:	ping Location ne/Title: Name:	Perfor- mance our Regional Sales offic	
					Address:			

Address:			
City:	Province:	Postal Code:	
Phone/Fax Number:			
P.O. Number:			

P.O. Number:	
Contact Name:	
Phone Number:	
Fax Number:	







Signs Overview

Prevent injuries and reduce downtime with $\text{E-Z-Code}^{\circledast}$ safety and compliance signs

Industry Standards

ASME (ANSI Z535) and OSHA 1910.145 require the use of safety and compliance signs to indicate hazards that may lead to accidents, injury and property damage. E-Z-Code[®] signs comply with all current OSHA and ANSI standards and will help you create a safer workplace for both employees and visitors.

Guide to Label Headers



a strong potential for death or severe injury **CAUTION** warns against potential hazards

DANGER indicates an immediate hazard with

or unsafe practices

NOTICE provides general information to prevent confusion

FETY SAFETY FIRST offers information about health, housekeeping and general safety

Materials

Self-Sticking (SS)

- Made from pressure-sensitive vinyl with permanent acrylic adhesive
- Indoor and outdoor applications
- Temperature range of -40°C to 82°C (-40°F to 180°F)
- 2- to 3-year durability

Plastic (PL)

- Made from durable linear polyethylene
- · Fade- and crack-resistant
- Indoor and outdoor applications

Aluminum (AL)


- Made from aluminum with baked finish and screen-printed graphics
- (-10°F to 176°F)5- to 8-year durability

Indoor and outdoor applications

8- to 10-year durability

Temperature range of -23°C to 80°C







Sizes

- Most signs available in your choice of 7 in. x 10 in. or 10 in. x 14 in. sizes
- Bilingual English/Spanish signs available in larger

10 in. x 14 in. size only







Electrical Protection Signs

Avoid potential catastrophes by clearly marking hazard areas

A DANGE	R
CABLE BURIED HEI	RE

Cat. No.	Description	Sign Size
SS-1181-710	Self-Sticking	7 in. x 10 in.
SS-1181-1014		10 in. x 14 in.
PL-1181-710	Plastic	7 in. x 10 in.
PL-1181-1014		10 in. x 14 in.
AL-1181-710	Aluminum	7 in. x 10 in.
AL-1181-1014		10 in. x 14 in.

A DANGER	
HIGH VOLTAGE AUTHORIZED PERSONNEL ONLY	

Cat. No.	Description	Sign Size
SS-1186-710	Calf Chieleine	7 in. x 10 in.
SS-1186-1014	Self-Sticking	10 in. x 14 in.
PL-1186-710	DI	7 in. x 10 in.
PL-1186-1014	Plastic	10 in. x 14 in.
AL-1186-710		7 in. x 10 in.
AL-1186-1014	Aluminum	10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-1189-710	Self-Sticking	7 in. x 10 in.
SS-1189-1014		10 in. x 14 in.
PL-1189-710	Plastic	7 in. x 10 in.
PL-1189-1014		10 in. x 14 in.
AL-1189-710	Aluminum	7 in. x 10 in.
AL-1189-1014		10 in. x 14 in.

Order in multiples of 1 sign.

HAZARD KEEP OUT				
Cat. No.	Description	Sign Size		
SS-1182-710	0.11 0111111	7 in. x 10 in.		
00 4400 4044	Self-Sticking	401. 441.		

SS-1182-710	Self-Sticking	7 in. x 10 in.
SS-1182-1014		10 in. x 14 in.
PL-1182-710	Plastic	7 in. x 10 in.
PL-1182-1014		10 in. x 14 in.
AL-1182-710	Aluminum	7 in. x 10 in.
AL-1182-1014		10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-1187-710	Self-Sticking	7 in. x 10 in.
SS-1187-1014		10 in. x 14 in.
PL-1187-710	Plastic	7 in. x 10 in.
PL-1187-1014		10 in. x 14 in.
AL-1187-710	Aluminum	7 in. x 10 in.
AL-1187-1014		10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-1190-710	Calf Oliabian	7 in. x 10 in.
SS-1190-1014	Self-Sticking	10 in. x 14 in.
PL-1190-710	Plastic	7 in. x 10 in.
PL-1190-1014		10 in. x 14 in.
AL-1190-710		7 in. x 10 in.
AL-1190-1014	Aluminum	10 in. x 14 in.

A DANGER	
HIGH VOLTAGE	

Cat. No.	Description	Sign Size
SS-1184-710	Self-Sticking	7 in. x 10 in.
SS-1184-1014		10 in. x 14 in.
PL-1184-710	Plastic	7 in. x 10 in.
PL-1184-1014		10 in. x 14 in.
AL-1184-710	Aluminum	7 in. x 10 in.
AL-1184-1014		10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-1188-710	Self-Sticking	7 in. x 10 in.
SS-1188-1014		10 in. x 14 in.
PL-1188-710	Plastic	7 in. x 10 in.
PL-1188-1014		10 in. x 14 in.
AL-1188-710	Aluminum	7 in. x 10 in.
AL-1188-1014		10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-1191-710	Self-Sticking	7 in. x 10 in.
SS-1191-1014		10 in. x 14 in.
PL-1191-710	Plastic	7 in. x 10 in.
PL-1191-1014		10 in. x 14 in.
AL-1191-710	Aluminum	7 in. x 10 in.
AL-1191-1014		10 in. x 14 in.







Electrical Protection Signs

NOTICE

NO STORAGE PERMITTED ELECTRICAL CLOSET

Cat. No.	Description	Sign Size
SS-1198-710		7 in. x 10 in.
SS-1198-1014	Self-Sticking	10 in. x 14 in.
PL-1198-710	Disalia	7 in. x 10 in.
PL-1198-1014	Plastic	10 in. x 14 in.
AL-1198-710		7 in. x 10 in.
AL-1198-1014	Aluminum	10 in. x 14 in.

A DANGER HIGH VOLTAGE WITHIN KEEP OUT

Cat. No.	Description	Sign Size
	Description	01911 0120
SS-6095-710	Colf Cticking	7 in. x 10 in.
SS-6095-1014	Self-Sticking	10 in. x 14 in.
PL-6095-710	Diastia	7 in. x 10 in.
PL-6095-1014	Plastic	10 in. x 14 in.
AL-6095-710	Aluminum	7 in. x 10 in.
AL-6095-1014	Aluminum	10 in. x 14 in.

Order in multiples of 1 sign.



HIGH VOLTAGE DO NOT ENTER THIS ENCLOSURE

Cat. No.	Description	Sign Size
SS-1200-710	Calf Otializa	7 in. x 10 in.
SS-1200-1014	Self-Sticking	10 in. x 14 in.
PL-1200-710	District	7 in. x 10 in.
PL-1200-1014	Plastic	10 in. x 14 in.
AL-1200-710	. .	7 in. x 10 in.
AL-1200-1014	Aluminum	10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-6096-710	Calf Chieleine	7 in. x 10 in.
SS-6096-1014	Self-Sticking	10 in. x 14 in.
PL-6096-710	Distribution	7 in. x 10 in.
PL-6096-1014	Plastic	10 in. x 14 in.
AL-6096-710	AL	7 in. x 10 in.
AL-6096-1014	Aluminum	10 in. x 14 in.



.

AREA IN FRONT OF THIS ELECTRICAL PANEL MUST BE KEPT CLEAR FOR 36 INCHES OSHA-NEC REGULATIONS

Cat. No.	Description	Sign Size
SS-1201-710	Self-Sticking	7 in. x 10 in.
SS-1201-1014		10 in. x 14 in.
PL-1201-710	Plastic	7 in. x 10 in.
PL-1201-1014		10 in. x 14 in.
AL-1201-710	Aluminum	7 in. x 10 in.
AL-1201-1014		10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-6097-710	Self-Sticking	7 in. x 10 in.
SS-6097-1014		10 in. x 14 in.
PL-6097-710	Plastic	7 in. x 10 in.
PL-6097-1014		10 in. x 14 in.
AL-6097-710	Aluminum	7 in. x 10 in.
AL-6097-1014		10 in. x 14 in.









Operational Machine and Safety Signs

Keep your machine shop, factory floor or construction site safe by posting these signs

KE	DANG EEP HANDS A FROM MOVI EQUIPMEN	WAY NG
Cat. No.	Description	Sign Size
SS-1353-710	Calf Otialian	7 in. x 10 in.
SS-1353-1014	Self-Sticking	10 in. x 14 in.
PL-1353-710	Plastic	7 in. x 10 in.
PL-1353-1014	FIDSUC	10 in. x 14 in.
AL-1353-710	Aluminum	7 in. x 10 in.
AL-1353-1014		10 in. x 14 in.
Р	DANG ROTECTI	VE

Cat. No.	Description	Sign Size
SS-1357-710	Calf Otializat	7 in. x 10 in.
SS-1357-1014	Self-Sticking	10 in. x 14 in.
PL-1357-710	Plastic	7 in. x 10 in.
PL-1357-1014		10 in. x 14 in.
AL-1357-710	Aluminum	7 in. x 10 in.
AL-1357-1014		10 in. x 14 in.

REQUIRED



Cat. No.	Description	Sign Size
SS-6022-710		7 in. x 10 in.
SS-6022-1014	Self-Sticking	10 in. x 14 in.
PL-6022-710	Plastic	7 in. x 10 in.
PL-6022-1014		10 in. x 14 in.
AL-6022-710		7 in. x 10 in.
AL-6022-1014	Aluminum	10 in. x 14 in.

Order in multiples of 1 sign.

www.tnb.ca

DANGER

KEEP HANDS CLEAR

Cat. No.	Description	Sign Size
SS-1354-710	Self-Sticking	7 in. x 10 in.
SS-1354-1014		10 in. x 14 in.
PL-1354-710	Plastic	7 in. x 10 in.
PL-1354-1014		10 in. x 14 in.
AL-1354-710	A	7 in. x 10 in.
AL-1354-1014	Aluminum	10 in. x 14 in.

A DANGER THIS UNIT STARTS AUTOMATICALLY

Cat. No.	Description	Sign Size
SS-1358-710	Self-Sticking	7 in. x 10 in.
SS-1358-1014		10 in. x 14 in.
PL-1358-710	Plastic	7 in. x 10 in.
PL-1358-1014		10 in. x 14 in.
AL-1358-710	Aluminum	7 in. x 10 in.
AL-1358-1014		10 in. x 14 in.

A CAUTION KEEP HANDS OFF

Cat. No.	Description	Sign Size
SS-6623-710	Calf Chielden	7 in. x 10 in.
SS-6623-1014	Self-Sticking	10 in. x 14 in.
PL-6623-710	Plastic	7 in. x 10 in.
PL-6623-1014		10 in. x 14 in.
AL-6623-710		7 in. x 10 in.
AL-6623-1014	Aluminum	10 in. x 14 in.

A DANGER

MOVING MACHINERY

Cat. No.	Description	Sign Size
SS-1355-710	Self-Sticking	7 in. x 10 in.
SS-1355-1014		10 in. x 14 in.
PL-1355-710	Plastic	7 in. x 10 in.
PL-1355-1014		10 in. x 14 in.
AL-1355-710	Aluminum	7 in. x 10 in.
AL-1355-1014		10 in. x 14 in.

A CAUTION DO NOT OPERATE WITHOUT GUARDS

Cat. No.	Description	Sign Size
SS-6020-710	Self-Sticking	7 in. x 10 in.
SS-6020-1014		10 in. x 14 in.
PL-6020-710	Plastic	7 in. x 10 in.
PL-6020-1014		10 in. x 14 in.
AL-6020-710	Aluminum	7 in. x 10 in.
AL-6020-1014		10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-6624-710	Self-Sticking	7 in. x 10 in.
SS-6624-1014		10 in. x 14 in.
PL-6624-710	Plastic	7 in. x 10 in.
PL-6624-1014		10 in. x 14 in.
AL-6624-710	Aluminum	7 in. x 10 in.
AL-6624-1014		10 in. x 14 in.





Operational Machine and Safety Signs

HOT KEEP AWAY	

Cat. No.	Description	Sign Size
SS-6032-710	Self-Sticking	7 in. x 10 in.
SS-6032-1014		10 in. x 14 in.
PL-6032-710	Plastic	7 in. x 10 in.
PL-6032-1014		10 in. x 14 in.
AL-6032-710	Aluminum	7 in. x 10 in.
AL-6032-1014		10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-6042-710	Self-Sticking	7 in. x 10 in.
SS-6042-1014		10 in. x 14 in.
PL-6042-710	Plastic	7 in. x 10 in.
PL-6042-1014		10 in. x 14 in.
AL-6042-710	Aluminum	7 in. x 10 in.
AL-6042-1014		10 in. x 14 in.

A DANGER

OPERATION BY AUTHORIZED **PERSONNEL ONLY**

Cat. No.	Description	Sign Size
SS-6061-710	Self-Sticking	7 in. x 10 in.
SS-6061-1014		10 in. x 14 in.
PL-6061-710	Plastic	7 in. x 10 in.
PL-6061-1014		10 in. x 14 in.
AL-6061-710		7 in. x 10 in.
AL-6061-1014	Aluminum	10 in. x 14 in.

Order in multiples of 1 sign.



Cat. No.	Description	Sign Size
SS-6045-710	0.11.01.11.1	7 in. x 10 in.
SS-6045-1014	Self-Sticking	10 in. x 14 in.
PL-6045-710	Dist	7 in. x 10 in.
PL-6045-1014	Plastic	10 in. x 14 in.
AL-6045-710	Al	7 in. x 10 in.
AL-6045-1014	Aluminum	10 in. x 14 in.

ACAUTION

OVERHEAD

WORK

Description

Self-Sticking

Plastic

Aluminum

ACAUTION

WEAR GOGGLES

OR FACE SHIELD

WHILE OPERATING THIS MACHINE

Sign Size

7 in. x 10 in.

10 in. x 14 in.

7 in. x 10 in.

10 in. x 14 in.

7 in. x 10 in.

10 in. x 14 in.

Cat. No.

SS-6038-710

SS-6038-1014

PL-6038-710

PL-6038-1014

AL-6038-710

AL-6038-1014



Cat. No.	Description	Sign Size
SS-6072-710	Calf Chielden	7 in. x 10 in.
SS-6072-1014	Self-Sticking	10 in. x 14 in.
PL-6072-710	Plastic	7 in. x 10 in.
PL-6072-1014		10 in. x 14 in.
AL-6072-710		7 in. x 10 in.
AL-6072-1014	Aluminum	10 in. x 14 in.

DA	NG	ER

DO NOT START THIS MACHINE

Cat. No.	Description	Sign Size
SS-6041-710	Self-Sticking	7 in. x 10 in.
SS-6041-1014		10 in. x 14 in.
PL-6041-710	Plastic	7 in. x 10 in.
PL-6041-1014		10 in. x 14 in.
AL-6041-710	Aluminum	7 in. x 10 in.
AL-6041-1014		10 in. x 14 in.

A DANGER

EYE AND EAR PROTECTION REOUIRED WHILE OPERATING THIS EQUIPMENT

Cat. No.	Description	Sign Size
SS-6052-710	0.16.011.11.1	7 in. x 10 in.
SS-6052-1014	Self-Sticking	10 in. x 14 in.
PL-6052-710	Plastic	7 in. x 10 in.
PL-6052-1014		10 in. x 14 in.
AL-6052-710	Aluminum	7 in. x 10 in.
AL-6052-1014		10 in. x 14 in.

SAFETY FIRST KEEP HANDS OUT OF MOVING MACHINERY

Cat. No.	Description	Sign Size
SS-6073-710	Self-Sticking	7 in. x 10 in.
SS-6073-1014		10 in. x 14 in.
PL-6073-710	Plastic	7 in. x 10 in.
PL-6073-1014		10 in. x 14 in.
AL-6073-710	Aluminum	7 in. x 10 in.
AL-6073-1014		10 in. x 14 in.







Personal Protection Signs

Cover up for protection — these signs warn people to safeguard their head, eyes and ears

	A DANGER	
	HARD HAT AREA	
Cat. No.	Description	Sign Size
SS-1141-710	Self-Sticking	7 in. x 10 in.
SS-1141-1014		10 in. x 14 in.
PL-1141-710	Plastic	7 in. x 10 in.
PL-1141-1014		10 in. x 14 in.
AL-1141-710	Aluminum	7 in. x 10 in.
AL-1141-1014		10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-1147-710	Self-Sticking	7 in. x 10 in.
SS-1147-1014		10 in. x 14 in.
PL-1147-710	Plastic	7 in. x 10 in.
PL-1147-1014		10 in. x 14 in.
AL-1147-710	Aluminum	7 in. x 10 in.
AL-1147-1014	Aluminum	10 in. x 14 in.

NOTICE EAR PROTECTION REQUIRED BEYOND THIS POINT

Cat. No.	Description	Sign Size
SS-1157-710	Self-Sticking	7 in. x 10 in.
SS-1157-1014		10 in. x 14 in.
PL-1157-710	Plastic	7 in. x 10 in.
PL-1157-1014		10 in. x 14 in.
AL-1157-710	Aluminum	7 in. x 10 in.
AL-1157-1014		10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-1173-710	Calf Otializa	7 in. x 10 in.
SS-1173-1014	Self-Sticking	10 in. x 14 in.
PL-1173-710	Plastic	7 in. x 10 in.
PL-1173-1014		10 in. x 14 in.
AL-1173-710	Aluminum	7 in. x 10 in.
AL-1173-1014		10 in. x 14 in.

HAZARDOUS AREA	

A DANGER

.

Cat. No.	Description	Sign Size
SS-1142-710		7 in. x 10 in.
SS-1142-1014	Self-Sticking	10 in. x 14 in.
PL-1142-710	Plastic	7 in. x 10 in.
PL-1142-1014		10 in. x 14 in.
AL-1142-710	Aluminum	7 in. x 10 in.
AL-1142-1014		10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-1151-710		7 in. x 10 in.
SS-1151-1014	Self-Sticking	10 in. x 14 in.
PL-1151-710	District	7 in. x 10 in.
PL-1151-1014	Plastic	10 in. x 14 in.
AL-1151-710	AL	7 in. x 10 in.
AL-1151-1014	Aluminum	10 in. x 14 in.



REQUIRED

Cat. No.	Description	Sign Size
SS-1164-710	Calf Chielden	7 in. x 10 in.
SS-1164-1014	Self-Sticking	10 in. x 14 in.
PL-1164-710	Plastic	7 in. x 10 in.
PL-1164-1014		10 in. x 14 in.
AL-1164-710	A	7 in. x 10 in.
AL-1164-1014	Aluminum	10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-1174-710	Calf Chielden	7 in. x 10 in.
SS-1174-1014	Self-Sticking	10 in. x 14 in.
PL-1174-710	Dist	7 in. x 10 in.
PL-1174-1014	Plastic	10 in. x 14 in.
AL-1174-710	Al	7 in. x 10 in.
AL-1174-1014	Aluminum	10 in. x 14 in.



HARD HATS REQUIRED BEYOND THIS POINT

Cat. No.	Description	Sign Size
SS-1143-710	0.11 011111	7 in. x 10 in.
SS-1143-1014	Self-Sticking	10 in. x 14 in.
PL-1143-710	Plastic	7 in. x 10 in.
PL-1143-1014		10 in. x 14 in.
AL-1143-710	Aluminum	7 in. x 10 in.
AL-1143-1014		10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-1155-710	Calf Chieline	7 in. x 10 in.
SS-1155-1014	Self-Sticking	10 in. x 14 in.
PL-1155-710	Plastic	7 in. x 10 in.
PL-1155-1014		10 in. x 14 in.
AL-1155-710	Aluminum	7 in. x 10 in.
AL-1155-1014	Aluminum	10 in. x 14 in.

A DANGER
SAFETY
GLASSES
REQUIRED

Cat. No.	Description	Sign Size		
SS-1171-710	Colf Chicking	7 in. x 10 in.		
SS-1171-1014	Self-Sticking	10 in. x 14 in.		
PL-1171-710	Plastic	7 in. x 10 in.		
PL-1171-1014	Plastic	10 in. x 14 in.		
AL-1171-710	Aluminum	7 in. x 10 in.		
AL-1171-1014	Aluminum	10 in. x 14 in.		

Order in multiples of 1 sign.





Maintenance and Safety Signs

Standard safety signs that will help keep people on their feet

	ON
KEEP AREA CLEAR	

A	CA	UT	10	Ν

SLIPPERY WHEN WET



WATCH YOUR STEP

Cat. No.	Description	Sign Size	
SS-1293-710	Calf Chieleine	7 in. x 10 in.	
SS-1293-1014	Self-Sticking	10 in. x 14 in.	
PL-1293-710	Diastia	7 in. x 10 in.	
PL-1293-1014	Plastic	10 in. x 14 in.	
AL-1293-710	Al	7 in. x 10 in.	
AL-1293-1014	Aluminum	10 in. x 14 in.	

Cat. No.	Description	Sign Size
SS-1294-710	Calf Chieline	7 in. x 10 in.
SS-1294-1014	Self-Sticking	10 in. x 14 in.
PL-1294-710	Plastic	7 in. x 10 in.
PL-1294-1014		10 in. x 14 in.
AL-1294-710	A.L	7 in. x 10 in.
AL-1294-1014	Aluminum	10 in. x 14 in.

Cat. No.	Description	Sign Size
SS-1298-710	0.16.011111	7 in. x 10 in.
SS-1298-1014	Self-Sticking	10 in. x 14 in.
PL-1298-710	Dirette	7 in. x 10 in.
PL-1298-1014	Plastic	10 in. x 14 in.
AL-1298-710	A	7 in. x 10 in.
AL-1298-1014	Aluminum	10 in. x 14 in.

Order in multiples of 1 sign.





Maintenance and Safety Signs

Standard safety signs that will help keep people on their feet

NOTICE
PROTECTIVE CLOTHING REQUIRED IN THIS AREA



.

KEEP THIS AREA CLEAR

SAFETY FIRST KEEP AISLES CLEAR

Cat. No.	Description	Sign Size
SS-1307-710	Colf Chielden	7 in. x 10 in.
SS-1307-1014	Self-Sticking	10 in. x 14 in.
PL-1307-710	Plastic	7 in. x 10 in.
PL-1307-1014		10 in. x 14 in.
AL-1307-710	Aluminum	7 in. x 10 in.
AL-1307-1014		10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-1312-710	Self-Sticking	7 in. x 10 in.
SS-1312-1014		10 in. x 14 in.
PL-1312-710	Plastic	7 in. x 10 in.
PL-1312-1014		10 in. x 14 in.
AL-1312-710	Aluminum	7 in. x 10 in.
AL-1312-1014		10 in. x 14 in.



Cat. No.	Description	Sign Size
SS-6199-710	Calf Otializa	7 in. x 10 in.
SS-6199-1014	Self-Sticking	10 in. x 14 in.
PL-6199-710	Plastic	7 in. x 10 in.
PL-6199-1014		10 in. x 14 in.
AL-6199-710	Al	7 in. x 10 in.
AL-6199-1014	Aluminum	10 in. x 14 in.

Order in multiples of 1 sign.







Visual Warning Tapes Overview

E-Z-Code[®] Visual Warning Tapes make identification and warning easier

Colour-Coded Vinyl I.D. Tapes

• Use to indicate traffic patterns or identify equipment

.

- Made from self-sticking vinyl
- Available in 4 widths and 11 colours
- For more information, see p. **E57**

Barricade Tapes

- Suitable for indoor or outdoor use
- Available with a variety of CAUTION legends on yellow tape or DANGER on red and white striped tape
- For more information, see p. E59, E60

Buried Utility Tapes

- Warn equipment operators that a utility cable or pipe is buried below — before damage occurs
- Designed for direct burial 12 in. to 18 in. below ground surface, directly above cable or pipe
- Legends for electric, water, telephone, gas, sewer, high voltage and fiber optic lines
- Black printing on bright, fade-resistant coloured backgrounds
- Available in 3 in. and 6 in. widths
- For more information, see p. E59, E60

Detectable Buried Utility Tapes

- Use to identify buried lines so that you can easily find them in the future
- Metallic-backed tape, when buried up to 18 in. below ground, can be detected by common metal detectors
- Legends for electric, water, telephone, gas, oil, sewer, high voltage, cable TV and fiber optic lines
- Black printing on bright coloured background
- Available in 3 in. and 6 in. widths
- For more information, see p. E60





.











Colour-Coded I.D. Tapes, Floor Tapes

Save time and money over painting!

Colour-Coded Vinyl I.D. Tape

- Effectively warns or identifies equipment, traffic and housekeeping items
- Choose from different widths
- Many colours available



1 in. Wide Cat. No.	2 in. Wide Cat. No.	3 in. Wide Cat. No.	4 in. Wide Cat. No.	Colour
AA-1121	BA-1121	CA-1121	NA-1121	Silver
AA-1122	BA-1122	CA-1122	NA-1122	Black
AA-1123	BA-1123	CA-1123	NA-1123	Blue
AA-1124	BA-1124	CA-1124	NA-1124	Brown
AA-1125	BA-1125	CA-1125	NA-1125	Green
AA-1126	BA-1126	CA-1126	NA-1126	Orange
AA-1127	BA-1127	CA-1127	NA-1127	Purple
AA-1128	BA-1128	CA-1128	NA-1128	Red
AA-1129	BA-1129	CA-1129	NA-1129	White
AA-1130	BA-1130	CA-1130	NA-1130	Yellow
AA-1131	BA-1131	CA-1131	NA-1131	Clear

60 yards per roll.

Reflective Roll Tape



2 in. Wide Cat. No.	3 in. Wide Cat. No.	4 in. Wide Cat. No.	Colour
AZ-3108	BZ-3108	CZ-3108	Black & Yellow Stripe
AZ-3110	BZ-3110	CZ-3110	Red & White Stripe







Colour-Coded I.D. Tapes, Floor Tapes

Save time and money over painting!

Self-Sticking Vinyl Cloth Tape



2 in. Wide Cat. No.	3 in. Wide Cat. No.	4 in. Wide Cat. No.	Colour
AZ-1100	BZ-1100	CZ-1100	Black & Yellow Stripe
AZ-1102	BZ-1102	CZ-1102	Red & White Stripe
AZ-1303	BZ-1303	CZ-1303	Magenta & Yellow Stripe & Radiation Symbol

30 yards per roll.

Laminated Vinyl Tape



2 in. Wide Cat. No.	3 in. Wide Cat. No.	4 in. Wide Cat. No.	Colour
AZ-2104	BZ-2104	CZ-2104	Black & Yellow Stripe
AZ-2106	BZ-2106	CZ-2106	Red & White Stripe

2-Sided Foam Mounting Tape

Cat. No.	Description
NA-0365	2-Sided Foam Mounting Tape
9 yards per roll.	







. . .

Barricade and Burial Tapes

Mark off hazardous or off-limit areas quickly and easily!

Protect-A-Line[™] Barricade and Burial Tapes

Cat. No.	Description	Colour
Surveyors Tape 1-1/2 in.	x 1,000 ft.	
NA-0200		Yellow
NA-0201		Red
NA-0202	No Legend, No Printing	Green
NA-0203		Blue
NA-0204		Orange
Barricade Tape 3 in. x 1,0	00 ft.	
NA-0250	Caution	
NA-0253	Caution Construction Area	
NA-0254	Caution Do Not Enter	
NA-0256	Caution Hard Hat Area	Yellow
NA-0257	Caution High Voltage	
NA-0258	Caution Men Working	
NA-0261	Caution Open Trench	
NA-0267	Danger, on Stripes	Red & White

Cat. No.	Description	Colour
Buried Utility Tape 3 in. x 1,0	000 ft.	
NA-0600	Electric Line	Red
NA-0608	Electric Line	Yellow
NA-0601	Water Line	Blue
NA-0602	Telephone Line	Orange
NA-0603	Gas Line	Yellow
NA-0605	Sewer Line	Green
NA-0606	High Voltage Line	Red
NA-0609	Fiber Optic Cable	Orange
Buried Utility Tape 6 in. x 1,0)00 ft.	
NA-0700	Electric Line	Red
NA-0708	Electric Line	Yellow
NA-0701	Water Line	Blue
NA-0702	Telephone Line	Orange
NA-0703	Gas Line	Yellow
NA-0706	High Voltage Line	Red
NA-0709	Fiber Optic Cable	Orange

NOTE: All barricade and utility tapes are 4 MIL polyethylene and are not self sticking. All legends are printed in black. Standard package is 1 roll.



Barricade Tape

- Inexpensive and easy to handle
- Convenient and reusable
- For indoor and outdoor use



Buried Utility Tape

- Protect against costly utility dig-ins
- Place 1 to 1-1/2 feet below the ground surface directly above pipeline or cable below
- Bright, fade-resistant colours warn equipment operators that a vital pipeline or cable is buried below, before damage occurs
- Black text on a bright background







.

Barricade and Burial Tapes



Foil-Backed Detectable Buried Utility Tape

- Features a metallic backing designed to be detectable under normal earthen surfaces up to 18 in. with common metal detectors
- Simple and fast method for relocating lines, cables and conduit for future renovation
- Black text on a bright background

Protect-A-Line[™] Barricade and Burial Tapes (cont'd)

Cat. No.	Description	Colour
Foil-Backed Detectable B	uried Utility Tape 3 in. x 1,000 ft.	
NAF-0600		Red
NAF-0608	Electric Line	Yellow
NAF-0601	Water Line	Blue
NAF-0602	Telephone Line	Orange
NAF-0603	Gas Line	Yellow
NAF-0604	Oil Line	Yellow
NAF-0605	Sewer Line	Green
NAF-0606	High Voltage Line	Red
NAF-0607	Cable TV Line	0
NAF-0609	Fiber Optic Cable	Orange
Foil-Backed Detectable B	uried Utility Tape 6 in. x 1,000 ft.	
NAF-0700	Electric Line	Red
NAF-0708		Yellow
NAF-0701	Water Line	Blue
NAF-0702	Telephone Line	Orange
NAF-0703	Gas Line	Yellow
NAF-0704	Oil Line	Yellow
NAF-0705	Sewer Line	Green
NAF-0706	High Voltage Line	Red
NAF-0707	Cable TV Line	0
NAF-0709	Fiber Optic Cable	Orange

NOTE: All barricade and utility tapes are 4 MIL polyethylene and are not self sticking. All legends are printed in black. Standard package is 1 roll.








Identification Tape



Foam mounting tape - 2-sided

Cat. No.	Description
NA-0365	2-sided foam mounting tape
Length per roll:	9 yards.



Warning tape for direct buried lines

Cat. No.	Description		0.1		
	Width (in.)	Length (ft.)	Colour	Weight per 100	
RT3	3		D. I	500	
RT6	6		Red	1000	
ҮТ З	3	1000		500	
YT6	6	1000	M-II-	1000	
YT3BL	3		Yellow	500	
YT6BL	6	-		1000	







MTX-MK9-USB

What is ProMark?



- USB 2.0 connection
- Backlit screen
- Produces up to one marker a second

The Partex ProMark concept consists of small, portable marking machines that solve most smaller marking needs.

ProMark should be seen as your own small marker factory that enables fast and cost effective complementary marking.



MTX-MK9-USB

- Portable printer for complementary marking and production of smaller series of markers
- "A small marker factory" that writes cable, wire, component and terminal block markers
- Uses ink ribbons for printing and is close to maintenance free
- High wear resistance on print
- Printer is controlled by a computer or by its own keyboard (excellent when producing single markers or short numerical series)

WinSign Software

- Lets you control the whole printing process i.e. boldness of print, length of the marker, printing speed, text size, etc.
- Pre-programmed default values get you ready in no time
- Easy to import files from Excel. Just copy and paste
- Database function for easy saves and loadings of files and projects
- Number generator function









MTX-MK9-USB

ProMark

MTX-MK9-USB PRINTER

- · Compact, portable printer for cable, wire and component marking on site
- Feeds, prints and cuts bulk Partex profiles and self adhesive labels
- Stores and imports marker files with a USB-PC connection, or by USB memory
- Choose between English, German or French language for printer display
- A cost effective identification system for use in panel building and electrical installations

Facts

Thermotransfer printing 300 dpi print resolution Printing speed 35.0 mm/s in standard mode 20.0 mm/s in low temperature mode **Text heights** 2, 3, 4 or 6 mm Maximum rows that can be printed 1 or 2 row in tube mode and 1 to 3 rows in tape mode **PC** connection USB 2.0 connection and WinSign software or USB memory and WinSign software **Power** AC adapter 100 ~ 240V (50-60Hz) Power consumption: 20W **CE** Certified Measurements (L x W x H) 290 x 300 x 95 Weight 2 kg **Temperature range** Operating temperature: +10°C to 35°C Storage temperature: 0°C to +40°C To obtain the best printing results, the temperature of the profile should not be lower then +25°C







General information

Design

A third generation printer the ProMark MTX-MK9-USB is a flexible thermal transfer printer, ideal for fast, on site complementary work. The marking machine is equipped with a USB 2.0 connection to a PC for fast transfer of marking files. It is also possible to save/load marker files on a USB memory.

The MTX-MK9-USB has several librairies of symbols that can be imported onto the markers. It is equipped with an international keyboard; therefore you have to import unique European letters from a library of European letters.

Features

High production speed Backlit display Extended memory USB 2.0 connection Partex WinSign 5.5 software is included








.

.

MTX-MK9-USB

Improvements to the MTX-MK9-USB!

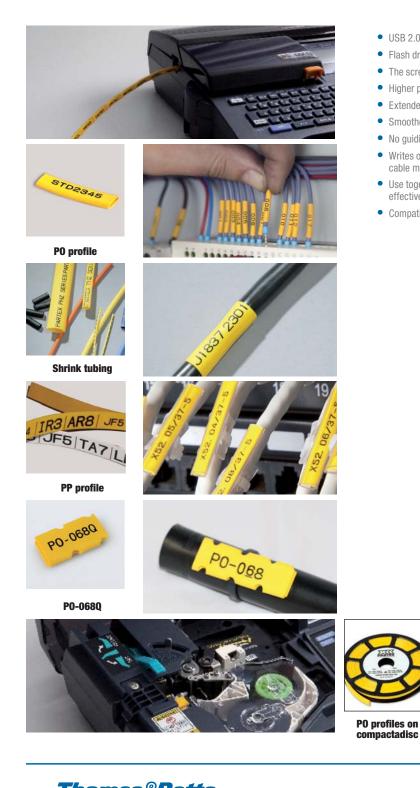

- USB 2.0 direct PC connection
- Flash drive is replaced with USB memory
- The screen has higher resolution and is backlit
- Higher production speed, both in low temperature and standard mode
- Extended internal memory
- Smoother more quiet feed of profiles
- No guiding cassette needed to print on PO-068 profile

PO profiles on

DN-reel

- Writes on PO-068Q a profile with pre-punched holes for fast and reliable cable marking
- Use together with a DN reel when producing smaller series for cost effective marker production
- Compatible with a new, updated version of Partex WinSign software



Thomas Betts A Member of the ABB Group

E64



MTX-MK9-USB


The ProMark MK9 System Concept



MTX-MK9-USB



The MTX-MK9-USB is delivered in a case with room for manuals, AC adapter and other accessories.



MTX-MK9-USB



.

Easy loading of ribbon into ribbon holder. 50 meter black ribbon and 30 meter white ribbon.



Cutting and printing unit.



MTX-MK9-USB prints profiles on DN reels.

Transfer data files with marking information


between the PC and the printer by using the USB 2.0 PC/printer connection or a USB

memory.

00



Printing on PO profiles.



Profile guide cassette for profiles such as PP-046.









MTX-MK9-USB

Applications



PP profile on compactadisc



Tape cassette



PP profile inside PTC sleeve



PP profile



PP profile inside PT+ sleeves



PO-068Q profile for cable marking




Compactadisc with PO profiles



PO-068TW for cable marking on SMOH



PP profiles mounted on terminal block



PO profiles on DN reel







MTX-MK9-USB

Product and Ordering Information

Cat. No.	Description	Pack unit (MO		
Printer and accessori	es			
MTX-MK9-USB	MTX-MK9-USB includes: Carrying case, power cord, MTX-MK9-RC software and quick start guide	1 pce		
MTX-MK9-CU-YW	Cutting unit (yellow) for MK9-USB	2 pcs		
MTX-MK9-RB	Black ribbon 50 m	5 pcs (250 m)		
NTX-MK9-RW	White ribbon 30 m	5 pcs (250 m)		
MTX-MK9-RC	Ribbon cassette holder	1 pce		
MTX-MK9-CAS46	Profile guide cassette for PP-046	1 pce		
MTX-MK9-CAS63	Profile guide cassette for PP-063	1 pce		
MTX-MK9-CAS90	Profile guide cassette for PP-090 and PPA-090	1 pce		
NTX-MK9-RS	Reel stand	1 pce		
Tape cassettes				
VK9-PL050CN4	Tape cassette 5 mm x 8 m, yellow	1 pce		
VK9-PL050CN9	Tape cassette 5 mm x 8 m, White	1 pce		
MK9-PL050CNT	Tape cassette 5 mm x 8 m, transparent	1 pce		
VK9-PL090CN4	Tape cassette 9 mm x 8 m, yellow	1 pce		
MK9-PL090CN9	Tape cassette 9 mm x 8 m, white	1 pce		
MK9-PL090CNT	Tape cassette 9 mm x 8 m, transparent	1 pce		
MK9-PL120CN4	Tape cassette 12 mm x 8 m, yellow	1 pce		
MK9-PL120CN9	Tape cassette 12 mm x 8 m, white	1 pce		
PO Profile				
PO-02000SNØ	P0-profile 0,5 mm ² . Diam 1,7-2,2 mm	5,0 m / Compactadisc		
PO-02000DNØ	P0-profile 0,5 mm ² . Diam 1,7-2,2 mm	60,0 m / DN-reel		
PO-03000SNØ	P0-profile 0,75 mm ² Diam 2,0-2,5 mm	4,5 m / Compactadisc		
PO-03000DNØ	P0-profile 0,75 mm ² Diam 2,0-2,5 mm	50,0 m / DN-reel		
PO-04000SNØ	PO-profile 1,0 mm ² Diam 2,2-2,8 mm	4,5 m / Compactadisc		
PO-04000DNØ	PO-profile 1,0 mm ² Diam 2,2-2,8 mm	50,0 m / DN-reel		
PO-05000SNØ	PO-profile 1,5 mm ² Diam 2,7-3,5 mm	4,0 m / Compactadisc		
PO-05000DNØ	PO-profile 1,5 mm ² Diam 2,7-3,5 mm	40,0 m / DN-reel		
PO-06000SNØ	P0-profile 2,5 mm ² Diam 3,2-4,0 mm	3,5 m / Compactadisc		
PO-06000DNØ	P0-profile 2,5 mm ² Diam 3,2-4,0 mm	40,0 m / DN-reel		
PO-068TWBNØ	P0-068TW profile with thin wall Diam 6,8-7,0 mm	50,0 m / Big Reel		
PO-068TWSNØ	P0-068TW profile with thin wall Diam 6,8-7,0 mm	4,5 m / Compactadisc		
PO-068Q10BNØ	P0-068Q profile punched, 10 mm between the punched holes	50,0 m / Big Reel		
PO-06Q10SNØ	P0-profile punched, 10 mm between the punched holes	3,5 m / Compactadisc		
PO-07000SNØ	PO-profile 4,0 mm ² Diam 3,8-4,7 mm	3,5 m / Compactadisc		
PO-07000DNØ	PO-profile 4,0 mm ² Diam 3,8-4,7 mm	30,0 m / DN-reel		
POZ02000SNØ	POZ-profile Zerex 0,5 mm ² Diam. 1,7-2,2 mm	5,0 m / Compactadisc		
POZ03000SNØ	POZ-profile Zerex 0,75 mm ² Diam 2,0-2,5 mm	4,5 m / Compactadisc		
POZ04000SNØ	POZ-profile Zerex 1,0 mm ² Diam 2,2-2,8 mm	4,5 m / Compactadisc		
POZ05000SNØ	POZ-profile Zerex 1,5 mm ² Diam 2,7-3,5 mm	4,0 m / Compactadisc		
POZO6000SNØ	POZ-profile Zerex 2,5 mm ² Diam 3,2-4,0 mm	3.5 m / Compactadisc		
POZO7000SNØ	POZ-profile Zerex 4,0 mm ² Diam 3,8-4,7 mm	3.5 m / Compactadisc		
PRZ07100SNØ	PRZ-profile Zerex, can be mounted on PKH/SMOH holders	9,0 m / Cardboard disc		

.

Standard USB cables available at most electronic retail stores. Notes:

Following Partex products can be combined with ProMark consumables:

- PM-10/20/24 transparent sleeves with ProMark PP-046/090 insert tags and MK9-PL090/120 self adhesive labels.
- 2. PT+02/10/20/30 transparent sleeves combined with PP-046 insert tag profile.
- 3. PTC10/20/30/50 transparent sleeves are combined with PP-046 insert tag profile
- 4. PKH and SMOH carrier strips are combined with PO-068TW / PRZ071 cable

marking profiles.

For detailed information, please contact your Regional Sales Office.

 \emptyset = 4 Yellow profile, 9 White profile, other colours on request Zerex sleeves and carrier strips are halogen free





.

MTX-MK9-USB

Product and Ordering Information (Cont'd)

Cat. No.	Description	Pack unit (MOQ)	
Marker tag profile			
PP-04600SNØ	PP marker tag profile H = 4.6 mm, for PT+, PTC and PM-10	15,0 m / Compactadisc	
PP-09000SNØ	PP marker tag profile H = 9.0 mm, for PM-20	18,0 m / Compactadisc	
Cabinet and Compo	nent markers		
PPA09000SNØ	PP-profile with adhesive for component markers etc.	10,0 m / Compactadisc	
PP-06300SN9	PP-profile H = 6.3 mm, for Phoenix terminal blocks (UT2.5, UTTB2.5, ST4, DT2.5, QTC, DTI2.5)	15,0 m / Compactadisc	
PP-10000SN9	PP-profile H = 10.2 mm, for Entrelecs terminal blocks	15,0 m / Compactadisc	
PP-11000SN9	PP-profile H = 11.0 mm, for Wagos TopJobs terminal blocks	12,0 m / Compactadisc	
Heat shrink tubing			
PHZ20032MNØ	Heat Shrink , Diam 3.2 mm, shrink ratio 2:1, Zerex	15,0 m / Minibox	
PHZ20048MNØ	Heat Shrink , Diam 4.8 mm, shrink ratio 2:1, Zerex	12,0 m / Minibox	
PHZ20064MNØ	Heat Shrink , Diam 6.4 mm, shrink ratio 2:1, Zerex	12,0 m / Minibox	

Following Partex products can be combined with ProMark consumables:

1. PM-10/20/24 transparent sleeves with ProMark PP-046/090 insert tags and

MK9-PL090/120 self adhesive labels.

2. PT+02/10/20/30 transparent sleeves combined with PP-046 insert tag profile.

3. PTC10/20/30/50 transparent sleeves are combined with PP-046 insert tag profile

4. PKH and SMOH carrier strips are combined with PO-068TW / PRZ071 cable

marking profiles.

For detailed information, please contact your Regional Sales Office.

 $\mathbf{0} = 4$ Yellow profile, 9 White profile, other colours on request Zerex sleeves and carrier strips are halogen free










MTX-MK10-KIT1

Thermal Transfer Printer

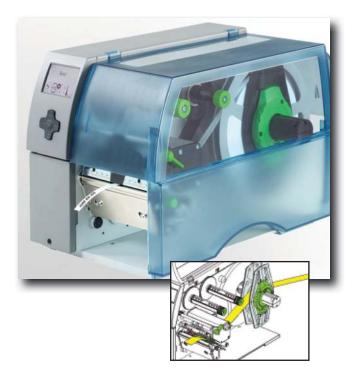

Specification - Printer Data

MTX-MK10-K1T1 is a modern thermal transfer printer for PARTEX PO profiles for all needs of wire and cable marking with high production speed (up to 125 mm/sec).

MTX-MK10-KIT1 has a direct connection to any computer by means of a USB cable and is controlled by Partex WinSign software.

It prints on profiles directly from a reel and semi detaches the marker at desired lengths with the built-in cutting unit.

In addition to PO profile, the MTX-KM10-KIT1 prints on heat shrink tubing and PARTEX component marker PPA profile.

Production on site

- Compact heavy duty printer for high demand production for wire, cable and component marking
- Feeds, prints and cuts bulk cable markers (P0), heat shrink (PHZ) profiles and self adhesive profiles
- MTX-MK10-KIT1 is a very cost effective identification system for use in panel building and electrical installations
- USB connection, controlled by Partex software WinSign

Specification – General

Thermal transfer printing 300 dpi print resolution

Printing speed 125 mm/sec.

Printer head width 105 mm

PC connection USB 2.0 connection and PARTEX software WinSign

Power supply

100 - 240 V (50-60Hz) Power consumption: max. 300 W CE Certified

Measurements (L x W x H): 446 x 242 x 275 mm

Weight 9 kg

Cutter Perforation cutter

Operation data

Operating temperature: $+10^{\circ}$ C to $+35^{\circ}$ C Humidity: 30 - 85% not condensing To obtain the best printing result, the temperature of the profile should not be lower then $+25^{\circ}$ C







.

MTX-MK10-KIT1

Product and Ordering Information

Cat. No.	Description	Pack unit (MOQ)
Printer and accessories		
MTX-MK10-KIT1	Printer MK10, Cutting unit, Software WinSign, Ribbon (MK10-RBR7125) and USB cable	1 pce
MTX-MK10-RBBK2020-40	MK10, ink ribbon, 40 mm for: POZ, PP+, PKZ, and PHZ (F), 300 m	1 pce
MTX-MK10-RBBK2020-80	MK10, ink ribbon, 80 mm for: POZ, PP+, PKZ, and PHZ (F), 300 m	1 pce
MTX-MK10-RB-BK510-40	Black ink ribbon, Type 510 (for PO) 40 mm wide, 300 m	1 pce
MTX-MK10-RB-BK510-55	Black ink ribbon, Type 510 (for PO) 55 mm wide, 300 m	1 pce
MTX-MK10-RB-BK510-83	Black ink ribbon, Type 510 (for PO) 83 mm wide, 300 m	1 pce
MTX-MK10-CU	Cutting unit (Included in MK10-KIT1)	1 pce
MTX-MK-RS	Reel stand	1 pce
PLA77020WSNT	Software: LabelSoft (English)	1 pce
PLA77070WSNT	Software: LabelSoft (French)	1 pce
PLA77120WSNT	Software: LabelSoft (German)	1 pce
Marker tag profile		
PP-04600SN*	PP-marker tag profile $H = 4.6$ mm, for PTPLUS, PTC, PTM10 and PM-10	15.0 m / Compactadisc
PP-09000SN*	PP-marker tag profile $H = 9.0$ mm, for PTM20 and PM-20	18.0 m / Compactadisc
Cabinet and Component m		
PPA09000SN*	PP-profile with adhesive for component markers, etc.	10.0 m / Compactadisc
PP-0600SN*	PP-profile $H = 4.6 \text{ mm}$, for Wagos TopJobs terminal blocks	15.0 m / Compactadisc
PP-06300SN9	PP-profile H = 6.3 mm, for Phoenix terminal blocks (UT2.5, UTTB2.5, ST4, DT2.5, QTC, DT12.5)	15.0 m / Compactadisc
PP-10000SN9	PP-profile $H = 10.2 \text{ mm}$, for Entrelecs terminal blocks (012.8, 0112.8, 014, 012.8, 014, 012.8)	15.0 m / Compactadisc
PP-11000SN9	PP-profile $H = 11.0 \text{ mm}$, for Wagos TopJobs terminal blocks	12.0 m / Compactadisc
Heat Shrink Tubing		12.0 117 001104044030
PHZ20032BN*	Heat Shrink , Diam 3.2 mm, shrink ratio 2:1, Zerex	100 m / Reel
PHZ20032BN PHZ20048BN*	Heat Shrink , Diam 4.8 mm, shrink ratio 2:1, Zerex	100 m / Reel
PHZ20040BN*	Heat Shrink , Diam 6.4 mm, shrink ratio 2:1, Zerex	75 m / Reel
		75 m / Reel
PHZ20095BN*	Heat Shrink , Diam 9.5 mm, shrink ratio 2:1, Zerex	
PHZ20127BN*	Heat Shrink , Diam 12.7 mm, shrink ratio 2:1, Zerex	100 m / Reel
PHZF20191BN*	Flat Heat Shrink , Diam 19.1 mm, shrink ratio 2:1, Zerex	50 m / Reel
PHZF20254BN*	Flat Heat Shrink , Diam 25.4 mm, shrink ratio 2:1, Zerex	50 m / Reel
PHZF20381BN*	Flat Heat Shrink , Diam 38.1 mm, shrink ratio 2:1, Zerex	25 m / Reel
PHZF20504BN*	Flat Heat Shrink , Diam 50.4 mm, shrink ratio 2:1, Zerex	25 m / Reel
PO-profile		
P0-01000BN*	PO-profile 0.25 mm ² . Diam 1.3-1.8 mm	250 m / Reel
P0-02000BN*	PO-profile 0.5 mm ² . Diam 1.7-2.2 mm	250 m / Reel
PO-03000BN*	PO-profile 0.75 mm ² Diam 2.0-2.5 mm	250 m / Reel
PO-04000BN*	PO-profile 1.0 mm ² Diam 2.2-2.8 mm	200 m / Reel
PO-05000BN*	PO-profile 1.5 mm ² Diam 2.7-3.5 mm	200 m / Reel
PO-06000BN*	PO-profile 2.5 mm ² Diam 3.2-4.0 mm	200 m / Reel
PO-068TWBN*	P0-068TW profile with thin wall Diam 6.8-7.0 mm	50 m / Reel
PO-07000BN*	PO-profile 4.0 mm ² Diam 3.8-4.7 mm	100 m / Reel
PO-08000BN*	PO-profile 6.0 mm ² . Diam. 4.6-5.5 mm	100 m / Reel
PO-09000BN*	PO-profile 10.0 mm ² Diam 5.6-7.0 mm	50 m / Reel
P0Z01000KN*	POZ-profile Zerex 0.25 mm ² . Diam 1.3-1.8 mm	250 m / Carton
P0Z02000KN*	POZ-profile Zerex 0.5 mm ² . Diam. 1.7-2.2 mm	250 m / Carton
P0Z03000KN*	POZ-profile Zerex 0.75 mm ² Diam 2.0-2.5 mm	250 m / Carton
P0Z04000KN*	POZ-profile Zerex 1.0 mm ² Diam 2.2-2.8 mm	200 m / Carton
P0Z05000KN*	POZ-profile Zerex 1.5 mm ² Diam 2.7-3.5 mm	200 m / Carton
P0Z06000KN*	POZ-profile Zerex 2.5 mm ² Diam 3.2-4.0 mm	200 m / Carton
P0Z07000KN*	POZ-profile Zerex 4.0 mm ² Diam 3.8-4.7 mm	100 m / Carton
POZ08000KN*	POZ-profile Zerex 6.0 mm ² . Diam. 4.6-5.5 mm	100 m / Carton
P0Z09000KN*	POZ-profile Zerex 10.0 mm ² Diam 5.6-7.0 mm	50 m / Carton
Cable Markers		
PKZ20KN	PKZ20 profile Zerex	100 m / Carton
		TUU III / Galloli

PKZ20 profile punched, 10mm between the punched holes, Zerex

- Includes a complete system with a wide range of products and is user friendly
- Features a printer with high production speed, a perforation cutter and solid construction
- Uses software that allows the printer to be directly connected to a PC via USB and is controlled by the Partex WinSign software which supports different font sizes



PP/PPA Inlay tags / Component markers



P0/P0Z Wire / Cable markers



SM0Z Cable markers



PKZ20QKN



100 m / Carton



MTX-MK10-KIT1

Product and Ordering Information

Thermal Transfer Labels, Polyester

Printing with thermal transfer printer, waste removed, rounded corners

Material: S0-5 and S7 Series polyester, matte yellow S0, white S3, silver S1 and security film S5, S2 polyester silver gloss, S4 white gloss

Package: 1 roll. Core 38 or 76 mm (1.496 or 2.992 in.)

Polyester labels, 1-track or 3-track, core diameter 38 mm (1.496 in.), perforated, 5 rolls/box



Cat. No.	Cat. No. S4 White Glossy	Cat. No. S5 Security	S	Size		Quantity / Dal
S2 Silver Glossy			mm	in.	Row of labels	Quantity / Roll
PLT8K101S28-4/3	PLT8K101S49-5/3	PLT8K101S58-6/3	15 x 6	0.591 x 0.236	3	10000
PLT8K102S28-4/3	PLT8K102S49-5/3	PLT8K102S58-6/3	18 x 6.5	0.709 x 0.256	3	10000
PLT8K103S28-4/3	PLT8K103S49-5/3	PLT8K103S58-6/3	18 x 9	0.709 x 0.354	3	10000
PLT8K106S28-4/3	PLT8K106S49-5/3	PLT8K106S58-6/3	20 x 8	0.787 x 0.315	3	10000
PLT8K105S28-4	PLT8K105S49-5	PLT8K105S58-6	25.4 x 12.7	1 x 0.5	1	2000
PLT8K105S28-4/3	PLT8K105S49-5/3	PLT8K105S58-6/3	25.4 x 12.7	1 x 0.5	3	10000
PLT8K108S28-4	PLT8K108S49-5	PLT8K108S58-6	26 x 10	1.024 x 0.394	1	2000
PLT8K108S28-4/3	PLT8K108S49-5/3	PLT8K108S58-6/3	26 x 10	1.024 x 0.394	3	10000
PLT8K109S28-4/3	PLT8K109S49-5/3	PLT8K109S58-6/3	26.5 x 17.5	1.043 x 0.689	1	5000
PLT8K104S28-4	PLT8K104S49-5	PLT8K104S58-6	30 x 20	1.181 x 0.787	3	2000
PLT8K104S28-4/3	PLT8K104S49-5/3	PLT8K104S58-6/3	30 x 20	1.181 x 0.787	1	6000
PLT8K111S28-4	PLT8K111S49-5	PLT8K111S58-6	32 x 9.5	1.260 x 0.374	3	2000
PLT8K111S28-4/3	PLT8K111S49-5/3	PLT8K111S58-6/3	32 x 9.5	1.260 x 0.374	1	10000
PLT8K115S028-4	PLT8K115S49-5	PLT8K115S58-6	38 x 19	1.496 x 0.748	1	2000
PLT8K121S28-4	PLT8K121S49-5	PLT8K121S58-6	45 x 23	1.772 x 0.906	1	2000
PLT8K130S28-4	PLT8K130S49-5	PLT8K130S58-6	50 x 23	1.969 x 0.906	1	2000
PLT8K134S28-4	PLT8K134S49-5	PLT8K134S58-6	60 x 36	2.362 x 1.417	1	1000
PLT8K135S28-4	PLT8K135S49-5	PLT8K135S58-6	65 x 35	2.559 x 1.378	1	1000
PLT8K133S28-4	PLT8K133S49-5	PLT8K133S58-6	65 x 53	2.559 x 2.087	1	750
PLT8K136S28-4	PLT8K136S49-5	PLT8K136S58-6	70 x 48	2.756 x 1.890	1	1000
PLT8K139S28-4	PLT8K139S49-5	PLT8K139S58-6	89 x 82	3.504 x 3.228	1	500
PLT8K140S28-4	PLT8K140S49-5	PLT8K140S58-6	101.6 x 23	4 x 0.906	1	2000
PLT8K137S28-4	PLT8K137S49-5	PLT8K137S58-6	101.6 x 48	4 x 1.890	1	1000
PLT8K138S28-4	PLT8K138S49-5	PLT8K138S58-6	101.6 x 74	4 x 2.913	1	500
PLT8K141S28-4	PLT8K141S49-5	PLT8K141S58-6	101.6 x 150	4 x 5.906	1	300

Self-laminating write-on cable markers with write-on-field Material: S7 transparent polyester film Package: Rolls with 3 and 5 rows depending on label size

Cat. No.		Size			Write-on Field		
Yellow	White	mm	in.	Row Track	mm	in.	Labels/Roll
PLT81400S74	PLT81410S79	17.8 x 34	0.701 x 1.339	5	16 x 13	0.629 x 0.511	3000
PLT81440S74	PLT81430S79	22.8 x 55	0.898 x 2.165	3	21 x 16	0.629 x 0.511	2400
PLT81390S74	-	25.0 x 35.0	0.984 x 1.378	3	25 x 14	0.984 x 0.551	4500
PLT81450S74	PLT81460S79	25.0 x 76.0	0.984 x 2.992	3	23 x 19	0.905 x 0.748	1800
PLT81420S74	-	25.0 x 140.0	0.984 x 5.512	3	25 x 25	0.944 x 0.984	1050
PLT81470S74	PLT81480S79	35.6 x 93.0	1.402 x 3.661	3	34 x 25	1.388 x 0.984	1500







.

MTX-MK10-KIT1

Product and Ordering Information


Thermal Transfer Labels, Polyester (cont'd)

Printing with thermal transfer printer, waste removed, rounded corners

Material: S0-5 and S7 Series polyester, matte yellow S0, white S3, silver S1 and security film S5, S2 polyester silver gloss, S4 white gloss Package: 1 roll. Core 38 or 76 mm (1.496 or 2.992 in.)

Polyester labels, 1-track or 3-track, core diameter 38 mm (1.496 in.), perforated, 5 rolls/box

Cat. No. S0 Yellow Matte	Cat. No. S1 Silver Matte	Cat. No. S3 White Matte	S	lize	Track Row of labels	Quantity / Roll
			mm	in.		
PLT8K101S04-1/3	PLT8K101S18-3/3	PLT8K101S39-2/3	15 x 6	0.591 x 0.236	3	10000
PLT8K102S04-1/3	PLT8K102S18-3/3	PLT8K102S39-2/3	18 x 6.5	0.709 x 0.256	3	10000
PLT8K103S04-1/3	PLT8K103S18-3/3	PLT8K103S39-2/3	18 x 9	0.709 x 0.354	3	10000
PLT8K106S04-1/3	PLT8K106S18-3/3	PLT8K106S39-2/3	20 x 8	0.787 x 0.315	3	10000
PLT8K105S04-1	PLT8K105S18-3	PLT8K105S39-2	25.4 x 12.7	1 x 0.5	1	2000
PLT8K105S04-1/3	PLT8K105S18-3/3	PLT8K105S39-2/3	25.4 x 12.7	1 x 0.5	3	10000
PLT8K108S04-1	PLT8K108S18-3	PLT8K108S39-2	26 x 10	1.024 x 0.394	1	2000
PLT8K108S04-1/3	PLT8K108S18-3/3	PLT8K108S39-2/3	26 x 10	1.024 x 0.394	3	10000
PLT8K109S04-1/3	PLT8K109S18-3/3	PLT8K109S39-2/3	26.5 x 17.5	1.043 x 0.689	1	5000
PLT8K104S04-1	PLT8K104S18-3	PLT8K104S39-2	30 x 20	1.181 x 0.787	3	2000
PLT8K104S04-1/3	PLT8K104S18-3/3	PLT8K104S39-2/3	30 x 20	1.181 x 0.787	1	6000
PLT8K111S04-1	PLT8K111S18-3	PLT8K111S39-2	32 x 9.5	1.260 x 0.374	3	2000
PLT8K111S04-1/3	PLT8K111S18-3/3	PLT8K111S39-2/3	32 x 9.5	1.260 x 0.374	1	10000
PLT8K115S04-1	PLT8K115S18-3	PLT8K115S39-2	38 x 19	1.496 x 0.748	1	2000
PLT8K121S04-1	PLT8K121S18-3	PLT8K121S39-2	45 x 23	1.772 x 0.906	1	2000
PLT8K130S04-1	PLT8K130S18-3	PLT8K130S39-2	50 x 23	1.969 x 0.906	1	2000
PLT8K134S04-1	PLT8K134S18-3	PLT8K134S39-2	60 x 36	2.362 x 1.417	1	1000
PLT8K135S04-1	PLT8K135S18-3	PLT8K135S39-2	65 x 35	2.559 x 1.378	1	1000
PLT8K133S04-1	PLT8K133S18-3	PLT8K133S39-2	65 x 53	2.559 x 2.087	1	750
PLT8K136S04-1	PLT8K136S18-3	PLT8K136S39-2	70 x 48	2.756 x 1.890	1	1000
PLT8K139S04-1	PLT8K139S18-3	PLT8K139S39-2	89 x 82	3.504 x 3.228	1	500
PLT8K140S04-1	PLT8K140S18-3	PLT8K140S39-2	101.6 x 23	4 x 0.906	1	2000
PLT8K137S04-1	PLT8K137S18-3	PLT8K137S39-2	101.6 x 48	4 x 1.890	1	1000
PLT8K138S04-1	PLT8K138S18-3	PLT8K138S39-2	101.6 x 74	4 x 2.913	1	500
PLT8K141S04-1	PLT8K141S18-3	PLT8K141S39-2	101.6 x 150	4 x 5.906	1	300

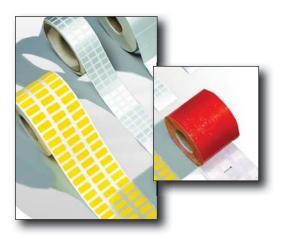

Order in multiples of 25 tags.









MTX-MK1 Miniplotter













.

MTX-MK1 Miniplotter



• Provides complete customized marking on site for cables, wires, terminal blocks and components



 Easy to use keyboard, display unit and pre-programmed product modules



 Saves time and money when small production and additional markings are carried out, combined with rapid, customized deliveries from PARTEX



• Designed for on site marking of small and medium marking volumes



E74





MTX-MK1 Miniplotter

Miniplotter Marking System Specifications

Design

The MTX-MK1 marking system contains a plotter and inlays intended for Partex neutral wire, cable, component and terminal block markings. The marking information is transferred to the plotter through a MTX-MK1-Cable (RS232) input from the keyboard. The marker inlays are quickly loaded either with individual cut markers or strips of markers. Flexible on site operation with battery pack. MTX-MK1 is controlled from a program cassette through an RS232 (MTX-MK1-Cable) interface to a PC computer.

Power

120 / 240 V

Keyboard

North American Industrial Stardard

Text Height and Width

Three text heights small, medium and large and three text widths narrow, standard and wide. The height of text is automatically adapted to match type of profile and number of lines chosen. The number of characters possible on a line is shown in the display. The program makes it possible to decrease or increase the size of the text.

Plotter Pens

Refill pens (etching ink), for marking on Partex products. Fibre-tip pen, for testing. On Zerex sleeve please use only drawing tip 0.25 mm with Partex Zerex ink.

Resistance

The products intended for MK1 are tested by the Swedish National Test and Research Institute according to the Partex Product Test Program.







MTX-MK1 Miniplotter

Applications



Terminal blocks with PP profiles



PP profile in a PTC sleeve mounted on a CAT 5 cable



. . . .

PPA profile mounted on a component

Product and Ordering Information

Cat. No.	Profile	Profile Width	Compactadisc Pack Unit
PP-04600SN	Flat profile, fits PT+, PTC and PTM sleeves	4.6 mm	15 m
PP-09000SN	Flat profile, fits PM sleeves	9.0 mm	18 m
PP-06300SN9	Flat profile, fits Phoenix terminal blocks UT2.5, UTTB2.5, ST4, DT2.5, QTC, DT12.5	6.3 mm	15 m
PP-10000SN9	Flat profile, fits Entrelecs terminal blocks.	10.2 mm	15 m
PP-11000SN9	Flat profile, fits Wagos Topjobs terminal blocks	11.0 mm	12 m
PPA09000SN	Flat profile with adhesive	9.0 mm	10 m

Technical Data - Adhesive Tape (PPA) Peel Adhesion on Different Surfaces

Material	Immediately N/cm	After 14 Days N/cm			
Steel	13.5	14.8			
Aluminum	9.4	12.4			
ABS	10.9	13.7			
PC	13.5	13.8			
PS	10.5	12.2			
PET	9.4	10.7			
PVC	9.3	13.5			
РР	6.9	8.7			
PE	5.5	5.8			
Temperature Resistance	Value				
Short term use	70°C				
Long term use	60°C				
Mechanical Properties	Value				
Tensile strength	57.5 N/15 mm				
Elongation	20 - 55%				







MTX-MK1 Miniplotter

Accessories



Portable Printer

Operates on battery for up to 2 hours on one charge Recharging time: 2 hours



.

Weight and Dimensions Printer: 2.2 kg (378 x 190 x 65 mm) Cable: 3.5 m Total weight (bag & kit): 6 kg (540 x 440 x 120 mm)

Cat. No.	Description	Size / Product
MTX-MK1	Plotter	The MTX-MK1 basic kit includes plotter, case, MTX-MK1-Refill, MTX-Pen-035, power unit and manual on CD
MTX-MK1-PEN-FIBER	Fiber tip pen for testing	0.30 mm
MTX-MK1-PEN-018		0.18 mm
MTX-MK1-PEN-025		0.25 mm
MTX-MK1-PEN-035		0.35 mm
MTX-MK1-PEN-050	Plotter Pen	0.50 mm
MTX-MK1-PEN-070		0.70 mm
MTX-MK1-PEN-100		1.00 mm
	5	
MTX-MK1-INK MTX-MK1-REFILL	Etching ink Ink refill cartridge	30 ml 5 x 1 ml
	ink tenni caluluye	5.7.1 m
MTX-MK1-CF	Cleaning solvent	10 ml
MTX-MK1-CK	Cleaning kit (MTX-MK1-CF + MTX-MK1-CU)	-
MTX-MK1-CF	Cleaning cartridge	2 x 10 ml
MTX-MK1-CUP	Cleaning cup	_
MTX-MK1-CP	Calibration plate zero-point	_
MTX-MK1-PAPLUS02		PAPLUS02/PAZPLUS02
MTX-MK1-PAPLUS02ST		PAPLUS02 STRIPS
MTX-MK1-PAZPLUS02ST		PAZPLUS02 STRIPS
MTX-MK1-PAPLUS10	A	PAPLUS1/PAZPLUS1
MTX-MK1-PAPLUS1ST		PAPLUS1 STRIPS
MTX-MK1-PAZPLUS1ST		PAZPLUS1 STRIPS
MTX-MK1-PA20L		PAPLUS2/PAZPLUS2
MTX-MK1-PA30	FIFE FEFE	PA3/PAZ3
MTX-MK1-PK2		PK2
MTX-MK1-PK2ST		PK2 STRIPS
MTX-MK1-PKZ2		PKZ
MTX-MK1-PC10		PC10
MTX-MK1-PC20		PC20
MTX-MK1-PC30		PC30
MTX-MK1-PC40		PC40
MTX-MK1-PC50		PC50
	Product Inlay (Fixture)	PFC
MTX-MK1-PFC		
MTX-MK1-PN		PN
MTX-MK1-POH		POH
MTX-MK1-PS		PS TV 202004
MTX-MK1-TX		TX-96XXX
MTX-MK1-TX61		TX-61051
MTX-MK1-P001-04ST		P001/02/03/04 STRIPS
MTX-MK1-P005-07ST		P005/06/07 STRIPS
MTX-MK1-P008-10ST		P008/09/10 STRIPS
MTX-MK1-P012ST		P012 STRIPS
MTX-MK1-P014ST		P014 STRIPS
MTX-MK1-P016ST		P016 STRIPS
MTX-MK1-P018ST		P018 STRIPS
MTX-MK1-P020ST		P020 STRIPS
MTX-MK1-P022-24ST		P022/24 STRIPS
MTX-MK1-P026-28ST		P026/28 STRIPS
MTX-MK1-PGM-USB		-
MTX-MK1-PGM-PFC.V1	Program cassette	PFC
MTX-MK1-PGM-PO.USB	-	PO
MTX-MK1-PGM-FU	Data file upgrade	-
MTX-MK1-ACCU	Battery	PP60
MTX-MK1-ACCO	Data cable	RS232
	Butt outro	







.

MTX-MK1 Miniplotter

MTX-MK1 – Wire Marking: PAPLUS, PAZPLUS



"AN" Cut Markers



Strip Carton Pack "PN"

Cat. No. Neutral (blank) Marking Sleeves	AWG	Length (mm)	Capacity of Markers per Fixture	Packaging	Fixture	
PAPLUS02015ANØ		15				
PAPLUS02021ANØ	22-16	21			MTXMK102	
PAPLUS02027ANØ		27	10	000 <i>/</i> han		
PAPLUS10015ANØ		15	18	200/bag		
PAPLUS10021ANØ	16-11	21			MTXMK110	
PAPLUS10027ANØ		27				
PAPLUS20015ANØ		15			MTXMK120	
PAPLUS20021ANØ		21				
PAPLUS20027ANØ	13-5	27	11	100/bag		
PAPLUS20036ANØ		36				
PAPLUS20042ANØ		42				
PAPLUS30015ANØ		15				
PAPLUS30021ANØ	5-	21	9	20/bag	MTXMK130	
PAPLUS30027ANØ		27				

 $\ensuremath{\emptyset}$ = Sleeve colour according to the international colour code

A = Cut markers.

N = Neutral

Halogen free available by changing PAPLUS prefix to PAZPLUS

Example: PAPLUS02015AN4 = 15 mm length yellow, neutral (blank) cut markers

Cat. No. Neutral (blank) Marking Sleeves	AWG	Length per Strip	Strips x Markers = Qty per Fixture	Strips x Markers = Qty per carton	Fixture	
PAPLUS02015PNØ		12 x 15 = 180	4 x 12 = 48	CT/84 X 12 = 1008		
PAPLUS02021PNØ		9 x 21 = 189	4 x 9 = 36	CT/1 12 X 9 = 1008		
PAPLUS02027PNØ	22-16	7 x 27 = 189	4 x 7 = 28	CT/143 X 7 = 1001	MTX-MK1-PAPLUS02ST*	
PAPLUS02036PNØ		5 x 36 = 180	4 x 5 = 20	CT/150 X 5 = 750		
PAPLUS02042PNØ		4 x 42 = 168	4 x 4= 16	CT/150 X 4 = 600		
PAPLUS10015PNØ		12 x 15 = 180	4 x 12 = 48	CT/84 X 12 = 1008		
PAPLUS10021PNØ		9 x 21 = 189	4 x 9 = 36	CT/112 X 9 = 1008		
PAPLUS10027PNØ	16-11	7 x 27 = 189	4 x 7 = 28	CT/130 X 7 = 910	MTX-MK1-PAPLUS1ST*	
PAPLUS10036PNØ		5 x 36 = 180	4 x 5 = 20	CT/130 X 5 = 650		
PAPLUS10042PNØ		4 x 42 = 168	4 x 4= 16	CT/130 X 4= 520		

* We recommend drawing tip 0.25 mm on Zerex

K = Carton, P = Strip, N = Neutral, A = Cut markers in bags PA international colour code. PAZ halogen free in yellow and white. Other colours, please contact your Regional Sales Office. Material: PAPLUS = Soft PVC, PAZPLUS = Soft Zerex

Halogen free available by changing PAPLUS prefix to PAZPLUS

Example: PAPLUS02015PN4 = A strip of 12 x 15 mm markers, yellow, neutral (blank) markers







MTX-MK1 Miniplotter

MTX-MK1 – Cable Marking: PK, PKZ



. . . .



Cat. No.	Sleeve length mm	Capacity Qty/Fixture	Packaging	Cat. No. Fixture	Suitable Partex Holder System
PK-20015ANØ	15				
PK-20021ANØ	21				Use with SMOH Holders (see page E19)
PK-20027ANØ	27	10	20	MTX-MK1-PK2	(366 page £13)
PK-20Q25ANØ	25				Use with cable tie
PK-20Q40ANØ	40				(see page E19)
PK-20021PNØ	21	3 x 9 = 27	9 x 50		
PK-20027PNØ	27	3 x 7 = 21	7 x 50	MTV MI/1 DI/OCT	
PK-20036PNØ	36	3 x 5 = 15	5 x 50	MTX-MK1-PK2ST	Use with SMOH Holders (see page E19)
PK-20057PNØ*	57	3 x 3 = 9	3 x 50		(See page L19)
PK-20084PNØ**	84	3 x 2 = 6	2 x 50	MTX-MK1-PKZ2	

Ø Profile colour, 4 = Yellow, 9 = White. Other colours, please contact your Regional Sales Office * Strips = 3 PCS semi cut sleeves ** Strips = 2 PCS semi cut. Material: PK = soft PVC (PKZ = soft Zerex)

For halogen free, change prefix PK to PKZ **Example:** PK20021AN4 = 21 mm length, yellow

MTX-MK1 – Wire Marking: PC

- Open marker sleeve for already connected wires
- Securely positioned with help of strong barbs
- Fast snap on installation
- Tools available for non-easy access installation



Cat. No.	AWG	Sleeve length mm	Capacity Qty/Fixture	Packaging	Cat. No. Fixture
PC10015ANØ		15			
PC10021ANØ	22–16	21			MTX-MK1-PC10
PC10027ANØ	22-10	27			WITA-WIKT-FGTU
PC10036ANØ		36			
PC20015ANØ		15			
PC20021ANØ	16–12	21			MTX-MK1-PC20
PC20027ANØ	10-12	27		100/bag	WITA-WKT-PG20
PC20036ANØ		36			
PC30015ANØ		15	18		
PC30021ANØ	12–11	21			MTX-MK1-PC30
PC30027ANØ	12-11	27			WITA-WIKT-F030
PC30036ANØ		36			
PC40015ANØ	_	15			
PC40021ANØ	11–10	21			MTX-MK1-PC40
PC40027ANØ	11-10	27			WITA-WIKT-F 040
PC40036ANØ		36			
PC50015ANØ		15			
PC50021ANØ	10–7	21			MTX-MK1-PC50
PC50027ANØ	10-7	27			WITX-WINT-P000
PC50036ANØ		36			

Ø Profile colour, 4 = Yellow, 9 = White

Example: PK20021AN4 = 21 mm length, yellow







.

MTX-MK1 Miniplotter

MTX-MK1 – Cable Marker or Holder: SMOH



	† 	T1 ➡
	SMOH Type	
	L1	
W1		W2
t t	L2	I
	SMOH Type	

. .

• Holder for PO/POZ/PK/PKZ markers

- No tools needed for installation
- Easy to install with Ty-Rap[®] cable ties
- SMOH holders can be used as on site cable markers using Ty-Rap $^{\ensuremath{\$}}$ marking pen WT163M-1 (black)

Cat. No.	Width (W1) mm (in.)	Width (W2) mm (in.)	Thickness (T1) mm (in.)	Thickness (T2) mm (in.)	Raised Bridge (H) mm (in.)	Length (L1) mm (in.)	Writeable (L2) mm (in.)	Std. Pkg.	Cat. No. Fixture	Capacity No./Fixture
SMOH-07Ø						60.0 (2.36)	27.0 (1.06)			3 x 2
SMOH-12Ø		9.5 (0.374)	1.0 (0.04)	3.2 (0.125)	6.0 (0.236)	82.0 (3.24)	50.0 (1.97)		MTX-MK1-POH	
SMOH-18Ø						110.0 (4.33)	75.0 (2.95)			
SMOH-30Ø	8.2 (0.323)					152.0 (5.98)	124.0 (4.88)	100		
SMKH-10-0										
SMKH-20-0Ø					-			-		

 \emptyset 0 = Black, 4 = Yellow, 9 = White. Material: Hard PVC **Example:** SMOH07-4 = Yellow, 60 mm

Recommended Ty-Rap® Cable Ties

Cat. No.	Bulk Cat. No.	Body Width (in.)	Length (in.)	Max Wire Bundle Dia. (in.)	Millitary Standard Part No.	Tensile Strength (lb.)	Std. Pkg.	Bulk Pkg.
Standard Ny	Ion 6/6 Cable 1	Fies						
TY523M	TY23M	0.093	3.62	0.625	MS3367-4			
TY52315M	TYB2315M	0.092	7.00	1.500		18		
TY5232M	TY232M	0.086	8.00	2.000	-	10		
TY5234M	TY234M	0.060	14.00	4.000				
TY524M	TY24M		5.50	1.125	MS3367-5	40		
TY5242M	TY242M	0.140	8.19	2.000		40	100	1000
TY526M	TY26M	0.140	11.10	3.000	-	30		
TY5244M	TY244M		14.50	4.000		30		
TY525M	TY25M	0.185	7.31	1.750	MS3367-1			
TY5253M	TY253M	0.187	11.6	3.000	MS3367-7	50		
TY528M	TY28M	0.187	14.20	4.000	MS3367-2			
Nylon 6/6 We	eather Resista	nt						
TY523MX	TY23MX	0.093	3.62	0.625	MS3367-4			
TY52315MX	TYB2315MX	0.092	7.00	1.500		18		
TY5232MX	TY232MX	0.086	8.00	2.000	-	10		
TY5234MX	TY234MX	0.060	14.00	4.000				
TY524MX	TY24MX		5.50	1.125	MS3367-5	40		
TY5242MX	TY242MX	0.140	8.19	2.000		40	100	1000
TY526MX	TY26MX	0.140	11.10	3.000	-	30		
TY5244MX	TY244MX		14.50	4.000		30		
TY525MX	TY25MX	0.185	7.31	1.750	MS3367-1			
TY5253MX	TY253MX	0.187	11.6	3.000	MS3367-7	50		
TY528MX	TY28MX	0.167	14.20	4.000	MS3367-2			








E80





MTX-MK1 Miniplotter

MTX-MK1 – Terminal Block Marking: TX

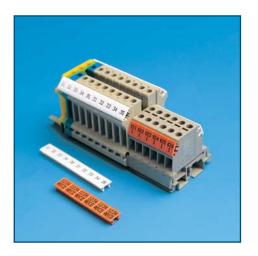

Design

Terminal block marking with strong hooks for safe snap mounting. (TX-96 matches Phoenix, Entrelecs, Wagos and TX-61051 matches Weidmüller, Conta-Clip and others with similar design)

Material

Cadmium free, stiff PVC material of Partex formula

Colours White or orange

Temperature Range

Shape permanence between -30°C and +60°C (-22°F to +140°F) (PVC)



Cat. No.	Intended for Terminal Block (B1)	Height (H)	Markers / Strip	Strips / Inlay	Length (B2) 10 markers	Cat. No. Fixture
TX-96050PNØ	5.0				50.0	
TX-96052PNØ	5.2				52.0	
TX-96060PNØ	6.0				60.0	
TX-96062PNØ	6.2				62.0	
TX-96073PNØ	7.3		9.6		73.0	
rx-96080pnø	8.0	0.6			80.0	
rx-96082pnø	8.2	9.6		1 x 10	82.0	MTX-MK1-TX
TX-96100PNØ	10.0				100.0	
X-96102PNØ	10.2				102.0	
FX-96120PNØ	12.0				72.0 (6 markers)	
FX-96141PNØ	14.1		3		84.5 (6 markers)	
FX-96151PNØ	15.1		3		90.6 (6 markers)	
TX-61051PNØ	5.1	6.1	15		51.0	MTX-MK1-TX61

Material: TX = hard PVC

P = Strip of 10 markers, N = Neutral (blank)

Ø Colours: 3 = Orange, 9 = White

Example: TX-96050P9 = 5.0 mm, White

TX-96 Series matches Phoenix, Entrelecs and Wagos terminal blocks.

TX-61051 Series matches Weidmüller, Conta-Clip and others with similar design.







MTX-MK1 Miniplotter

MTX-MK1 – X-Card Marking System: PFC

- Fast mounting, easy breakoff cards with precut or moulded marker tags
- Easily detachable tags are put directly into various tag holder systems
- The hard tags can be rapidly mounted, before or after connecting the wires and cables





Cat. No.	Description	Marker Tag Length x Height mm	Marker Tags per Card	Marker Tags per Box	Material	Suitable Holder System
PFC04212KAØ		12 x 4.2				
PFC04215KAØ	Marker Tag – Wire	15 x 4.2	21	525		
PFC04218KAØ		18 x 4.2	21	525	ABS	PTPLUS (refer to page E103)
PFC04221KAØ		21 x 4.2				
PFC04230KAØ		30 x 4.2	14	350		
PFC07533KAØ	Marker Tag – Cable	33 x 7.5	9	225		PM24 (refer to page E101)
PFC09518KAØ	Marker Tag – Component / Cable	18 x 9.5	20	500		
PFC09540KAØ	Marker Tag Cable Marking	40 x 9.5	8	200	Dolyomid / DA11	Ty-Rap [®] Cable Tie Mounting (refer to page E80)
PFC09580KAØ	Marker Tag – Cable Marking	80 x 9.5	4	100	Polyamid / PA11	(rerer to page Eou)

Ø Colours: 4 yellow, 9 white.

Dimensions in mm (nominal)

Cat. No.	AWG	Length	Width	Height
PTPLUS02	22-16		~	5
PTPLUS10	16-11	10/15/10/01/00	5	7
PTPLUS20	13–5	12/15/18/21/30	6	10
PTPLUS30	5		10	19
PTPLUS40	0	15/21/30	N/A	N/A











MTX-MK3










.

MTX-MK3

X-Card Marking System



 Prints various marker tags on credit card type format (Type PFC) that also accommodates project and mounting information directly on the card

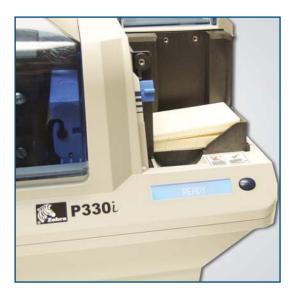

• Printing on site with PC controlled thermotransfer printer in monochrome or colour



• Cable, wire and component X-Card marking system for more efficient and versatile marking on site



• A user friendly compact system with high production capacity







MTX-MK3

Specifications – Production on Site

General

The MTX-MK3 printer is a high resolution, high speed production thermotransfer printer for both monochrome and colour printout. Loaded with a number of cards in a feeder magazine, the printer feeds the cards one by one through the printer, where all the individual tags are printed row by row. The printed cards are automatically fed to an output magazine. Different marking file formats can be imported.

System Layout

The X-Card system is comprised of the MTX-MK3 printer, winSign software and marker tag cards type PFC for cable, wire and component marking. Some PFC cards are used together with Partex holder systems PTPLUS, PTZPLUS, PTC, PM10, PM20, PM24 and PS20T. Other cards are used for direct marking and are attached with Ty-Rap[®] cable ties.

Thermotransfer

300 dpi Resolution

Printing Speed

4 seconds per card for resin black ink 25 seconds per card four full colour single sided (YMCKO)

Communication Interface USB 1.1 cable included

Power Connection

110 VAC-240 VAC, 50 – 60 Hz FCC Class B, CE, UL and cUL approved

Measurements

(L x W x H): 462 x 239 x 256 mm

Weight

7 kg

Temperature Range

Operating temperature range: Operating humidity: Storage temperature: +15°C to +70°C (60°F to 86°F) 20% to 65% non-condensing -5°C to 70°C (23°F to 158°F)







.

MTX-MK3

Applications



Product and ordering information

Cat. No.	Description	Contents
MTX-MK3	MTX-MK3 Thermal Printer type P330	Printer + WinSign + USB Cable
MTX-MK3-USB	MTX-MK3 Interface Printer Cable	
MTX-MK3-CLEANKIT	Cleaning Kit for MTX-MK3-P330	Swab + Cleaning Cards + Rollers
MTX-MK3-CR	Cleaning Roller for MTX-MK3	To Remove Dust from the Card Before Printing
MTX-MK3-F301E	Printer Ribbon F301 Black	
MTX-MK3-RC330	Printer Ribbon RC330 Colour	



- The MTX-MK3-P330 system contains several different card types that cover the need for cable, wire and component markers
- With the MTX-MK3-P330, it is now possible to print in colour. This can only be done if you have the latest version of WinSign

Product and ordering information

Cat. No.	Description	Marker Tag Length x Height mm (in)	Marker Tags per Card	Marker Tags per Box	Material	Suitable Partex Holder System	
PFC04212KAØ	Marker Tag – Wire	12 x 4.2		525			
PFC04215KAØ		15 x 4.2	21		ABS	PTPLUS type (refer to page E103)	
PFC04218KAØ		18 x 4.2	21				
PFC04221KAØ		21 x 4.2			ADO		
PFC07533KAØ	Marker Tag – Cable	33 x 7.5	9	225		PM type (refer to page E101)	
PFC09518KAØ	Marker Tag – Component / Cable	18 x 9.5	20	500			
PFC09540KAØ	Marker Tag Cable Marking	40 x 9.5	8	200	Polyamid / PA11	Cable ties (refer to page E80)	
PFC09580KAØ	Marker Tag – Cable Marking	80 x 9.5	4	100			

 $\emptyset = Card Colours, 4 = Yellow, 9 = White$







MTX-MK20-SP2000









MTX-MK20-SP2000

Automatic Marking System

- Compact heavy duty machine for high demand production of wire, cable and component marking
- PC link connection or stand alone mode with an optional standard keyboard
- Printing of large diameter sleeves and tubes ranging up to 28 mm 0D or 45 mm flattened
- Improved mechanism for quality printing on hardened tubes in low temperature environment
- Sleeves can be completely or partly cut off





• MTX-MK20-SP2000 connected to a PC



 MTX-MK20-SP2000 as a stand alone unit with a PC Keyboard connected







MTX-MK20-SP2000

Specifications

Design

MTX-MK20-SP2000 is a complete marking production machine unit with automatic feeding of marker profiles, printing and partial or complete cutting function. Output magazine for ease of random pick of printed markers when mounting onto wires and cables. The machine is controlled by either a connected PC with Partex WinSign software or an optional standard computer keyboard working as a stand alone unit.

Sleeve Length

0 mm to 999.9 mm

Diameter Range

0.D. 2.0 to 28 mm (or flat folded width to 45 mm) 0.2 mm to 0.7 mm in thick

Cutting

Three choices are available: 1) No cut 2) Partly cut off 3) Completely cut off

Thermotransfer Printing

300 dpi print resolution

Production Capacity

About 4,500 pcs per hour (5 digits, 1-line marker on 20 mm long sleeve)

Character Sizes and Orientation

Height x width 2.4 x 2.4 horizontal and vertical 2.0 x 1.2 horizontal and vertical 3.0 x 2.4 horizontal and vertical 5.0 x 3.0 horizontal 1.8 x 1.8 horizontal and vertical 1.8 x 0.9 horizontal and vertical 2.7 x 2.1 horizontal 2.4 x 1.2 horizontal and vertical

Kind of Characters 96: 0–9, A–Z, +, -, /, *, signs, etc.

Data Storage

Max. 1000 lines can be stored in the memory of the machine, backed up by an internal rechargeable battery.

Marking Data from WinSign

Marker data files created directly in WinSign can be transferred to the MTX-MK20-SP200. Data from other software can only be transferred as text files to WinSign and then to the machine.

Power Supply

110 - 220 VAC, 50/60 Hz

Dimensions (L x W x H): 435 x 290 x 290 mm

Weight 15 kg







. . .

MTX-MK20-SP2000

Automatic Marking System



Cat. No.	Description
MTX-MK20-SP2000	Marking machine incl. manual, service tool kit and data cable for connection to PC (MTX-MK20-SP2000-CABLE)
MTX-MK20-SP2000-CKN	Cutter knife kit
MTX-MK20-SP2000-CBP	Cushion for knife
MTX-MK20-SP2000-CABLE	Data cable for connection to PC (COM-PORT)
SP1W-STV	Optional unwinding reel stand
MTX-SP1W-S611-20	Black ribbon 200M for PO products
MTX-SP1W-S619-20	Black ribbon 200M for POZ OCH PH products
MTX-SP1W-S625-20	White ribbon 200M for PO products
MTX-SP1W-S629-20	White ribbon 100M for POZ OCH PH products
MTX-SP1W-S631-20	Red ribbon 200M for PO products

Oval Marking Profile



- Oval marking profile with sizes for big cable diameter range
- Very fast one hand mounting onto the cable or wire
- Built-in spring action retains sleeve shape with excellent grip
- Permanent marking but still adjustable on cable or wire
- Efficient on site marking with Partex marking machines and WinSign software
- Also delivered halogen free with a UL94-V0 rating



Cat. No.	Dia. mm min. / max.	Area mm ²	Dia. / inch min. / max.	AWG	Pkg. Meter
PO-01000BNØ	~1.3/1.8	~0.25	0.051/0.071	23–20	
PO-02000BNØ	~1.7/2.2	~0.5	0.067/0.087	20-18	250
PO-03000BNØ	~2.0/2.5	~0.75	0.079/0.098	18–17	
PO-04000BNØ	~2.2/2.8	~1.0	0.087/0.110	17–15	
PO-05000BNØ	~2.7/3.5	~1.5	0.106/0.138	15–13	200
PO-06000BNØ	~3.2/4.0	~2.5	0.126/0.157	13–11	
PO-07000BNØ	~3.8/4.7	~4.0	0.150/0.185	11–9	100
PO-08000BNØ	~4.6/5.5	~6.0	0.181/0.217	9–7	100
PO-08000BNØ	~5.6/7.0	~10.0	0.220/0.276	7–5	50
PO-10000BNØ	~6.5/8.0	~16.0	0.256/0.315	5–3	50
PO-11000BNØ	~7.0/9.5	~18.0	0.276/0.374	4–3	
PO-12000BNØ	~7.5/10.0	~20.0	0.295/0.394	4–2	5x10
PO-14000BNØ	~9.5/12.0	~25.0	0.374/0.472	1/0	
PO-16000BNØ	~11.5/14.0	~35.0	0.453/0.551	1/0-2/0	
PO-18000BNØ	~13.5/16.0	~50.0	0.531/0.630	2/0-3/0	
P0-20000BNØ	~15.5/18.0	~70.0	0.610/0.709	3/0-4/0	
P0-22000BNØ	~17.5/20.0	~95.0	0.689/0.787	4/0	2x5
P0-24000BNØ	~19.5/22.0	~120.0	0.768/0.866	4/0-5/0	
PO-26000BNØ	~21.5/24.0	~150.0	0.846/0.945	5/0-6/0	
P0-28000BNØ	~24.0/28.0	~185.0	0.947/1.104	6/0-7/0	

BN=Packing on reels for P0-01 to P0-10 and loop layers in cartons for P0-11 to P0-28. \vee Values for area in mm² and AWG are approximate and for guidance only. \emptyset 4 = Yellow, 9 = White







MTX-MK20-SP2000

PHZ2 Halogen Free Heat Shrinkable Tubing



- PHZ2 is a flexible zero halogen thin wall polyolefin tubing with ideal printability
- Low smoke generation and evolution of acid gases
- Flame redardant
- 2: 1 shrink ratio
- Reduced overall assembly and marking costs on site when using Partex marking machines
- JIT ready marked customized PHZ2 tubes can also be delivered






Carton Reel

Cat. No.	Min. Expanded Diameter (D)		Max. Recovered Diameter (W)		After Shrinking Wall Thickness (D1)		Qty. per
	(mm)	(in.)	(mm)	(in.)	(mm)	(in.)	Reel/Minibox
PHZ20012BNØ	1.20	0.047	0.060	0.024	0.41	0.016	
PHZ20016BNØ	1.60	0.063	0.80	0.031	0.43	0.017	100
PHZ20024BNØ	2.40	0.094	1.20	0.047			
PHZ20032BNØ	0.00	0.105	1.00	0.000			100
PHZ20032MNØ	3.20	0.125	1.60	0.063	0.51	0.020	15
PHZ20048BNØ	4.00	0.400	0.40	0.005		-	100
PHZ20048MNØ	4.80	0.189	2.40	0.095			12
PHZ20064BNØ	0.40	0.050		0.400			75
PHZ20064MNØ	6.40	0.252	3.20	0.126	0.05	0.000	12
PHZ20095BNØ	9.50	0.374	4.70	0.185	0.65	0.026	75
PHZ20127BNØ	12.70	0.500	6.40	0.251			50
PHZ20190BNØ	19.10	0.752	9.50	0.375	0.77	0.030	
PHZ20254BNØ	25.40	1.000	12.70	0.500	0.89	0.035	50
PHZ20380BNØ	38.10	1.500	19.10	0.750	1.00	0.039	05
PHZ20510BNØ	50.80	2.000	25.40	1.000	1.10	0.040	35

Ordering example: 2 PCS PHZ20016BN* = 2 PCS reels 150 M each. BN = Reel Ø 0 = Black 4 = Yellow, 9 = White

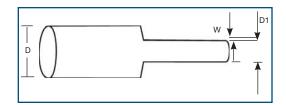







.

MTX-MK20-SP2000

Tests on PHZ2 Halogen Free Heat Shrink Tubing

Specifications	Standard Colours	Non Standard Colours		
British Standards 6853: 1999	Black, Yellow, White			
Physical Properties	Physical Properties			
Tensile strength	Test Method	13 N/mm ²		
Elongation at break	ASTM D 638	400%		
Longitudinal change	ASTM D 2671	+5%, -10% maximum		
Water absorption	ASTM D 570	max. 0.15%		
Specific gravity	ASTM D792	1.35 gr/cm3		
Thermal Properties		Values		
Continuous operating temperature		-40°C to 105°C		
Minimum shrink temperature		> 110°C		
Heat shock 4 hours at 225°C	ASTM D 2671	No dripping, craking or flowing		
Heat ageing 168 hours at 150°C	ASTM D 638	Elongation 250%		
Low temperature flexibility -40°C	ASTM D 2671 C	No cracking		
Flammability	ASTM D 2671	Pass		
Chemical Properties		Values		
Fungus resistance	AMS-DTL-7444	Inert		
Chemical resistance	AMS-DTL-23053/5	Cand		
Copper corrosion	ASTM D 2671 B	Good		
Oxygen index	ASTM D 2863	34%		
Electrical Properties		Values		
Dielectric strength	ASTM D 2671	20 kV/mm ²		
Volume resistivity	ASTM D 257	1014 ohm cm		

The Heat-Shrink tubing meets the requirements of the European directives: 2002/96/EG and 2003/11/E









Printers Comparative Table

	MTX-MK10	MTX-MK9	MTX-MK20-SP2000	MTX-MK3-P330	MTX-MK1
	Compact Heavy Duty Printer	Thermotransfer Printer	Automatic Marking System	Thermotransfer Printer	Miniplotter
				PFC	PAPLUS
					PAZPLUS
					PO
MARKERS	PO	PHZ			POZ
	POZ	PO	РО		РК
	PHZ	POZ	PHZ2		PKZ
	PP	РР			PC
	SMOZ	MK9-PL			PFC
	PLT				PA
					ТХ

.









.

WinSign

WinSign Software



• Winsign software is ideal for project handling, production and printout of customized marking products on site



 Software in Windows environment with database handling adapted to import/export on text files

Cat. No.	Information
WSG-NG-UPGRADE	Ugrade your older version to the latest one

Medium-Wall Heat Shrinkable Tubing

System demands		Can run under these environments
Processor type:	Min. Pentium II	Windows 98 SE (Second Edition)
RAM memory:	64 MB	Windows NT with at least Explorer 4.0x
Hard drive:	At least 10 MB free space	Windows ME
CD-reader:	Yes	Windows 2000
		Windows XP

We recommend a more powerful computer because it will execute the processes quicker.









WinSign

Specifications – Marking Methods

What can WinSign do?

WinSign software is ideal for project handling, production and printout of Partex customized marking products on site. The software operates under a Windows platform and can import files from Excel-, CAD or pure text files. The information that is created in WinSign is saved in a database format. All this is controlled by the software's database engine.

WinSign makes it possible to print only the markers you need right away when you are installing a cabinet, etc. This means the information will be accessible quickly for production which reduces the lead time.

WinSign controls almost all marking machines.

Structure


You can work in two ways with WinSign. You can create a whole project with traceability so that you can search for information etc. or you can easily type information in the "Direct Marking" mode to print markers right away.

When creating a project, a Project Manager using WinSign can type in all the marking information for all the different cabinets and machines when he still is at his office. If the electrician has access to this WinSign file he can print out the information on site only for the cabinet he is working on. If he has any questions he can call the Project Manager, because you can see in WinSign who has created the file and his/her phone number.

The "Direct Marking" mode is similar to the Project mode. In "Direct Marking" you don't need to type in any information that can be traced later on. You can print the information right away on any of the Partex marking machines.

Some WinSign functions:

- Imports both marking information and number of markers required from Excel
- Imports information from EPLAN and ELPRO CAD (contact your Regional Sales Office for more information)
- Number generator: ordinary and alphanumeric
- Unique production windows for each printer/machine
- The marker information is typed in a grid that looks like Excel
- · Updates and downloads are available on www.tnb-id.ca









WinSign

Printers/Machines that can be controlled by WinSign

MTX-MK1 Mini Plotter

A marking system suited for smaller production. It is excellent to use when you have a revision and used multi character Partex markers for the earlier installation. It's easy to use, portable and can be operated from its own keyboard or from a computer.

Inlay fixtures for MTX-MK1 for marking of:

- Wires
- Positions and components
- Cables
- Terminal blocks

MTX-MK3 X-Card Printer

Card printer for thermal transfer printout of marking tags out of a card in a credit card format. The tags are easily mounted into various holder systems.

Production of:

- Wire markers
- Cable markers
- · Components markers

The systems also have cards with various labels sizes. The printer must be used with Partex WinSign software included when you buy an MTX-MK3-P330.

ProMark MTX-MK9-USB

A marking system suited for smaller production. It is excellent to use when you have a revision and used multi character Partex markers for the earlier installation. It's easy to use, portable and can be operated from its own keyboard or from a computer.

Inlay fixtures for MTX-MK1 for marking of:

- Wires
- Positions and components
- Cables
- Terminal blocks

MTX-MK20-SP2000 Marking System

A marking machine for profiles MTX-MK20-SP2000 feeds, prints and automatically cuts sleeves to the desired length. Controlled from own keyboard or from a PC with WinSign. High production capacity.

Production of:

- Wire markers
- Cable markers
- Heat shrink markers






.....



















PF/PFA

PF Label Material

- · Label material for cables, wires, cabinets and components
- For holder systems PTPLUS, PTZPLUS, PM
- · Easy to separate in rigid polyester foil, specially pre-processed for printing
- Halogen free
- Print-out by matrix or laser printer (HP2100/2200)
- A low cost 2-component solution for marking before and after connection of wires and cables



Specifications

Design

The PF labels come on a perforated sheet with tractor feed. Individual labels are detachable or picked in any order to facilitate mounting and overview. This enables simplified sheet feeding through a laser printer. Special top coating allows multiple laser printer feedings of same sheet. The PF marking labels are intended to be mounted in PTPLUS, PTZPLUS, PTC or PM holders to enable wire, cable and component marking.

Material

Polyester foil, specially pre-processed for printing.

Colours

Sheet is white on one side, yellow on the other side.

Print / Text

WinSign for your own choice of readability, number of characters and lines required.

Printing Equipment

Industrial matrix printer for PF labels. Laser printer with straight feed of sheets for PF marker labels. Printout with Partex WinSign software.

Temperature Range

From -30°C to +120°C (-22°F to +248°F) N.B.: Withstands laser printing.

Durability Withstands most solvents.

For application in hostile environments, please contact your Regional Sales Office for informaton.

For label holder systems see separate product data sheets!










.

PF/PFA

Applications

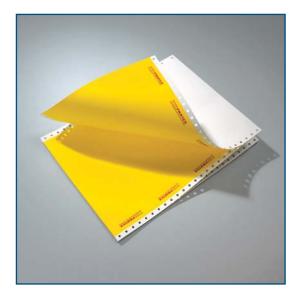



Dimensions in mm (nominal)

Cat. No.	Height (H)	Length (L)
PF-10015KT49	4.6	15.0
PF-10021KT49		21.0
PF-20018KT49	9.5	17.5
PF-07533KT49	7.6 - 7.8	33.0



.

Size and Packaging

Cat. No.	Number of labels per sheet	Number of sheets per pack	Number of labels per pack	Colour	Sheet format
PF-10015KT49	66 x 12		7920		
PF-10021KT49	66 x 9	10	5940	Yellow / White	
PF-20018KT49	32 x 11	10	3520		A4 width, 12 in. length
PF-07533KT49	25 x 4		1000	White	

PF-Tractor feed sheets for matrix printer are coloured yellow on one side and white on the other and printable on both sides and only applicable for PF10 OCH PF-20. One order = 10 sheets







PF/PFA

Specifications – PF Label Material

- Halogen-free self-adhesive label on sheet for direct marking of components in control cabinets
- Label modules pre-perforated in standardized 17.5 mm units
- Print-out by laser printer
- Installation time can be 4 times faster than label combination systems



Design

Perforated self-adhesive display material with adhesive on paper base. Folded sheets A4 width and tractor feed. 12 in. sheet length with tear initiation. The PFA label is intended for component marking with the standardized width of 17.5 mm.

Material

Self-adhesive polyester foil, specially pre-processed for printing.

Colours

White or yellow.

Temperature Range


From -30°C to +120°C (-22°F to +248°F) N.B.: Withstands laser printing.

Durability

Withstands most solvents.

For application in hostile environments, please contact Regional Sales Office for informaton.

Cat. No.	Height	Length
PFA20018KT	9.5	17.5



Cat. No.	Number of labels (lines x columns)	Number of 12 in. Sheets/Pack	Total number of Labels/Pack	
PFA20018KTØ	32 x 11	10	3520	
$\emptyset = 4$ Yellow; 9 White One order = 10 sheets				







PM

PM Cable Marking For PF Labels

- Transparent holder for cable marking with Partex marking labels, tapes and tags for series PF, PL, PP or PFC
- Four lengths, three widths cover most cable marking demands
- Fitting and fastening with Ty-Rap[®] cable ties (recommend TY524MX)
- The label is easily inserted into the holder providing fast installation and protection of the marking



Specifications

Design

Holder for marker tags with punched holes for mounting with cable ties. Two standard lenghts in two sizes 9 mm and 12 mm widths.

Suitable marker labels and tags are PF on a A4 size sheet and tags on PFC X-cards in credit card formats. ProMark PP profile tags and PL tapes can also be used. The labels or tags are easily pushed into the holder and will be protected from dust, oil etc.

Material

Cadmium and silicon free soft PVC according to special formula.

Colours

Transparent

Temperature Range

Shape permanence from -30°C to + 60°C (-22°F to +140°F)

Resistance

The product is tested by the Swedish National Test and Research Institute according to the Partex Product Test program and has the following test properties:

- Flammability resistance: UL94-V0
- Resistance to UV radiation: corresponds to 1 year outdoors in the south of Sweden
- Chemical resistance: meets Partex Product test and aging Program criteria
- Thermal resistance: meets norms of Partex Product Test Program standards.

For application in hostile environments, please contact your Regional Sales Office for information.







PM

Marking methods

Dimensions in mm (nominal)

Cat. No.	Length (L)	Width (B1)	Thickness (T)	Size of Holes (S)	Width (B2)
PM-10033AN		6	1.5	3	5
PM-20033AN	33	11.3	2.2	3	10
PM-24033AN		13.9	2.5	3.9	12.5
PM-20045AN	45	11.0	2.2	3	10
PM-20066AN	66	11.3			
PM-24066AN	66	13.9	2.5	3.9	12.5
PM-24094	94				
PM-20KNT		11.3	2.2	-	-
PM-20QKNT	0014			3	10
PM-24KNT	20M	13.9	2.5	-	-
PM-24QKNT				3.9	12.5
PM-20SNT		11.3	2.2	-	_
PM-20QSNT	5M			3	10
PM-24SNT			10.0	-	_
PM-24QSNT	4M	13.9	13.9	3.9	10





QKNT = KNT =

.

Profiles ready-punched at 10 mm's intervals, 20 meters per carton. Unpunched profiles, 20 meters per carton. Cut marker holders in standard lengths. Profiles ready-punched at 100 mm intervals, mounted on compactadisc.

AN = QSNT = SNT =


Unpunched profile on compactadisc.




Cat. No.	Description	Number/Pack	
PM-10033AN	PM10/33 transparent holder 33 mm cut loose in bag		
PM-20033AN	PM20/33 transparent holder 33 mm cut loose in bag	100 PCS	
PM-24033AN	PM20/45 transparent holder 45 mm cut loose in bag		
PM-20066AN	PM20/66 transparent holder 66 mm cut loose in bag	50 PCS	
PM-24033AN	PM24/33 transparent holder 33 mm cut loose in bag	100 PCS	
PM-24066AN	PM24/66 transparent holder 66 mm cut loose in bag	50 000	
PM-240094AN	PM24/94 transparent holder 94 mm cut loose in bag	50 PCS	
PM-20KNT	I-20KNT PM20 profile transparent		
PM-20QKNT	PM20 profile punched transparent in carton	00.14	
PM-24KNT	PM24 profile transparent in carton	20 M	
PM-24QKNT	PM24 profile punched transparent in carton		
PM-20SNT	PM20 profile transparent	5 M	
PM-20QSNT PM20 profile punched transparent on compacta		5 M	
PM-24SNT	PM24 profile transparent on compactadisc	4.64	
PM-24QSNT	PM24 profile punched transparent on compactadisc	4 M	

Accessories

Cat. No.	Suitable Marking Label	Label Height mm
PM-10033AN	PF10021, PP-04200SN	4.2
PM-20033AN		
PM-20045AN		
PM-24033AN	PF20018 1 pce, PFC09518KA	12.0
PM-20066AN PF20018; 1, 2 or 3 modules, PFC09518KA, ProMark PP-09000SN, MK9-PL090CN, MK8-PL090CN		9.0
PM-24066AN MK9-PL012CN PF20018; 1, 2 or 3 modules, PFC09518KA		12.0
PM-24094AN	M-24094AN MK9-PL090CN	





Thomas&Betts E101 A Member of the ABB Group







PTPLUS

PTPLUS Wire Marker Holder For PF Labels

- Improved holder similar to PA profile with oval shaped pocket for marker labels and tags
- The marker pocket's resilient design protects and fastens marker tag
- Fast and easy assembly of marker by applying pressure once on marker pocket
- The flexible bellows design of the holder allows rapid and adaptable mounting on wires and cables

Specifications

Design

PTPLUS is a closed marker holder of improved bellows design with a pocket to hold marker tags of types PF, PFC or PP. The new bellows design with grooves decreases the friction up to 50% when the sleeve is pushed on the wire. The holder is transparent and is mounted directly on the cable or wire before assembly. The marker tag can be affixed before or after assembly. The holder does not require much space, PTPLUS02 and PTPLUS10 fit wires to 5 mm terminal block widths.

Material

Cadmium and silicon free soft PVC according to Partex formula.

Colours

Transparent.


Temperature Range

Shape permanence from -30° C to $+ 60^{\circ}$ C (-22° F to $+ 140^{\circ}$ F) N.B.: Only the sleeve.

Resistance

The product is tested by the Swedish Test and Research institute according to the Partex Product Test Program and has the following test properties:

- Flammability resistance: UL94-V0
- Resistance to UV radiation: corresponds to 1 year outdoors in the south of Sweden
- Chemical resistance: meets Partex Product Test Program criteria (except for battery acid)
- Thermal and aging resistance: meets Partex
 Product Test Program standards









PTPLUS

Application



W

.



Н

Dimensions in mm (nominal)

Cat. No.	AWG	Length	Width	Height
PTPLUS02	22-16		-	5
PTPLUS10	16-11	12/15/18/21/30	5	7
PTPLUS20	13-5		6	10
PTPLUS30	5-		10	19
PTPLUS40	0	15/21/30	N/A	N/A

Size and Packaging

Cat. No.	Diameter mm	Intended for Marker size (in.)	Area mm ²	AWG	Qty. Pack	Suitable PF Labels	Suitable PFC Tags	Suitable PP Profile
PTPLUS02012A	~1.3 - 3.0	0.051 - 0.118	~0.25 - 1.5	~ 22 - 16	200 DCC		PFC04212	
PTPLUS10012A	~2.5 - 5.0	0.098 - 0.196	~1.5 - 4.0	~ 16 - 11	200 PCS			
PTPLUS20012A	~4.0 - 10.0	0.157 - 0.393	~2.5 - 15.0	~ 13 – 5	100 PCS	-		
PTPLUS30012A	~8.0 - 16.0	0.314 - 0.629	~16.0 - 70.0	~ 5 - 3/0	50 PCS			
PTPLUS02015A	~1.3 - 3.0	0.051 - 0.118	~0.25 - 1.5	~ 22 - 16	200 PCS			
PTPLUS10015A	~2.5 - 5.0	0.098 - 0.196	~1.5 - 4.0	~ 16 - 11	200 PCS		PFC04215	PP-04600SN
PTPLUS20015A	~4.0 - 10.0	0.157 - 0.393	~2.5 - 15.0	~ 13 - 5	100 PCS	PF-10015		
PTPLUS30015A	~8.0 - 16.0	0.314 - 0.629	~16.0 - 70.0	~ 5 - 3/0	F0 D00			
PTPLUS40015A	~16.0 - 22.0	-	~ 50.0 - 150.0	~ 0	50 PCS			
PTPLUS02018A	~1.3 - 3.0	0.051 - 0.118	~0.25 - 1.5	~ 22 - 16	200 PCS		PFC04218	
PTPLUS10018A	~2.5 - 5.0	0.098 - 0.196	~1.5 - 4.0	~ 16 - 11	200 PGS			
PTPLUS20018A	~4.0 - 10.0	0.157 - 0.393	~2.5 - 15.0	~ 13 – 5	100 PCS			
PTPLUS30018A	~8.0 - 16.0	0.314 - 0.629	~16.0 - 70.0	~ 5 - 3/0	50 PCS			
PTPLUS02021A	~1.3 - 3.0	0.051 - 0.118	~0.25 - 1.5	~ 22 - 16	000 000		PFC04221	
PTPLUS10021A	~2.5 - 5.0	0.098 - 0.196	~1.5 - 4.0	~ 16 - 11	200 PCS			
PTPLUS20021A	~4.0 - 10.0	0.157 - 0.393	~2.5 - 15.0	~ 13 - 5	100 PCS	PF-10021		
PTPLUS30021A	~8.0 - 16.0	0.314 - 0.629	~16.0 - 70.0	~ 5 - 3/0	F0 D00			
PTPLUS40021A	~16.0 - 22.0	-	~ 50.0 - 150.0	~ 0	50 PCS			
PTPLUS02030A	~1.3 - 3.0	0.051 - 0.118	~0.25 - 1.5	~ 22 - 16	000 000		PFC04230	
PTPLUS10030A	~2.5 - 5.0	0.098 - 0.196	~1.5 - 4.0	~ 16 - 11	200 PCS			
PTPLUS20030A	~4.0 - 10.0	0.157 - 0.393	~2.5 - 15.0	~ 13 – 5	100 PCS			
PTPLUS30030A	~8.0 - 16.0	0.314 - 0.629	~16.0 - 70.0	~ 5 - 3/0	F0 D00			
PTPLUS40030A	~16.0 - 22.0	0.629 - 0.866	~ 50.0 - 150.0	~ 0	50 PCS			



