


ARROW/HART™

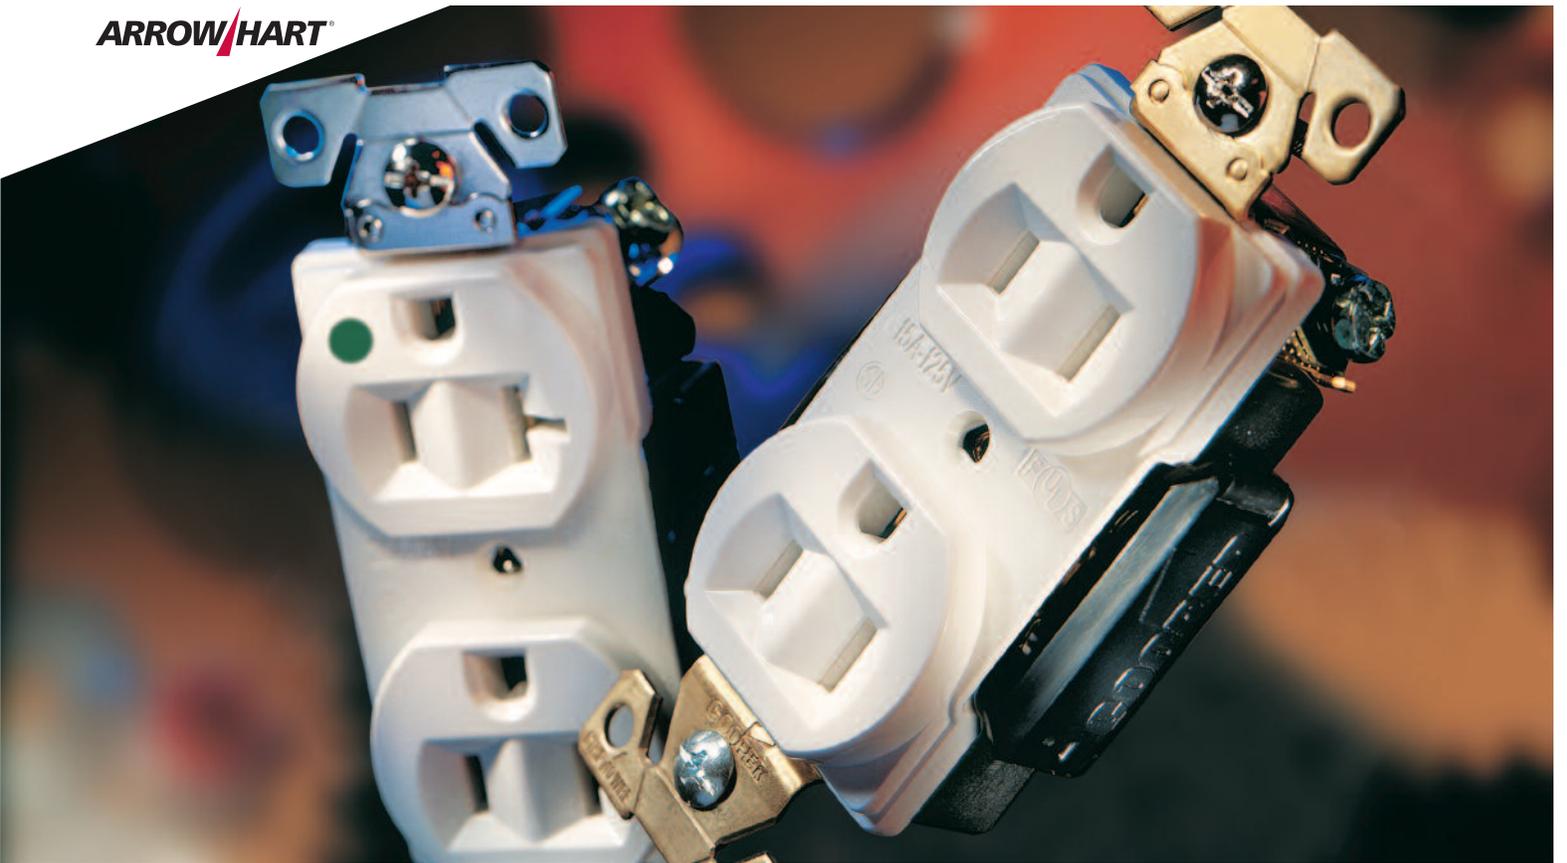

# Specification Grade Straight Blade Receptacles

Quality solutions that provide reliable  
connectivity in all applications.

**COOPER** Wiring Devices



# Arrow Hart® Straight Blade Receptacles

## Arrow Hart – deep roots of more than a century of wiring device solutions

When Gerald W. Hart began manufacturing wiring devices in 1890, he set the standards for what would become Arrow Hart, a brand recognized throughout the electrical industry for performance, durability and reliability.

### Table of Contents

Hospital Grade Straight Blade Receptacles . . . . .	3
2-Pole, 3-Wire Grounding	
15A 125V, 15A 250V	
20A 125V, 20A 250V	
Industrial Specification Grade Receptacles . . . . .	5
2-Pole, 3-Wire Grounding	
15A 125V, 15A 250V	
20A 125V, 20A 250V	
Construction Specification Grade Receptacles . . . . .	7
2-Pole, 3-Wire Grounding	
15A 125V, 15A 250V	
20A 125V, 20A 250V	



### ARROW/HART® Application Guide

- Hospital Grade – challenged with some of the most demanding environments to provide a consistent, reliable means of connectivity with critical consequences.
- Industrial Grade – continually confronted with environments that test the integrity of the device, where down time is not an option.
- Construction Grade – require durability features combined with ease of installation to meet the requirements of the professional installer.
- ArrowLink™ Option – combines installation speed with the heavy-duty features of our devices. ArrowLink options include our core receptacles, as well as GFCI, TVSS, IG, Single Receptacles and Switches.




*Hospital Specification Grade  
Compact Duplex Receptacles*




*Industrial Specification Grade  
Duplex Receptacles*

**Solutions for YOUR application**


Meeting the needs of every environment from commercial office buildings to hospitals and steel mills in one product line. Arrow Hart the right solution - any application.

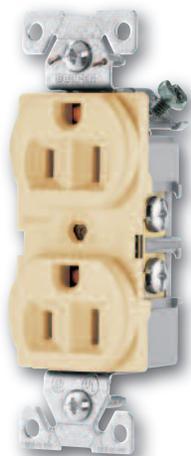

*Construction Specification Grade Duplex Receptacles*

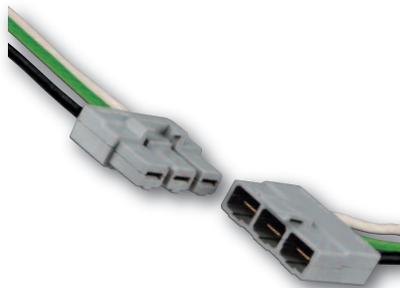

*ArrowLink™ Modular Specification Grade Receptacles*

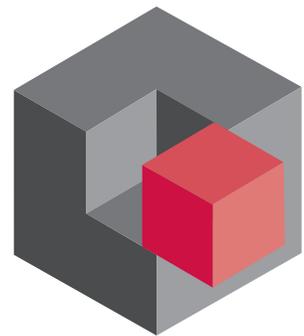

**BUILD-TO-SPEC**  
CUSTOM CONFIGURED DEVICES

**ARROW/HART®**

# Hospital Specification Grade Receptacles

**When down time  
can be critical**

## Application

Arrow Hart Hospital Grade receptacles are specially designed for use in all AC single phase branch circuits and equipment in hospitals and other health-related facilities as required by NEC® Article 517.

Their structural integrity and unique safety features, like screw terminal guards and low heat, 5-leaf line contacts, provide the highest level of performance for long term durability under the most demanding conditions.


Arrow Hart Hospital Specification Grade Receptacles are available in Premium and Compact styles; ArrowLink™ Modular, Tamper Resistant or Build-To-Spec custom configured versions are also available.

Arrow Hart Hospital Grade receptacles provide a consistent, reliable means of connectivity where “Try another outlet!” is not an option.



**Discover the Arrow Hart® Difference:**

### Premium AH8300 Hospital Receptacle

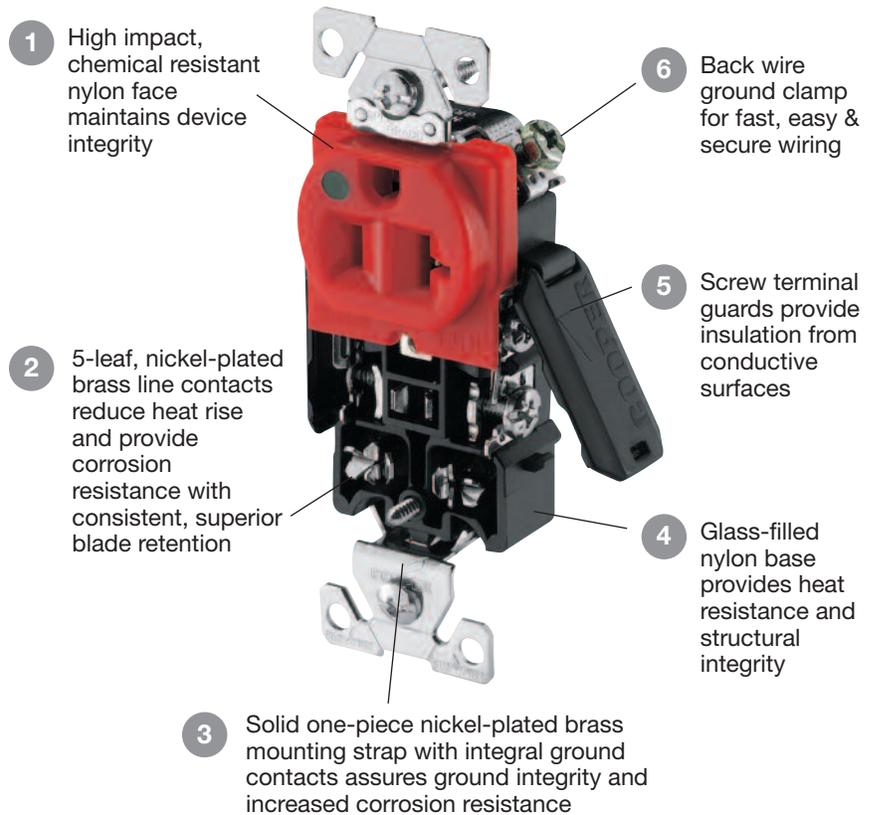

**Hospital Specification Grade Receptacles are also available in:**

**ARROWLINK™**  
Modular Wiring Devices

Patent-pending ArrowLink modular plugs and connectors provide a high quality means of connectivity while reducing overall installation time.



**BUILD-TO-SPEC**  
CUSTOM CONFIGURED DEVICES

**No ears?  
No mounting screws?  
No problem!**

Get custom configured devices for your unique application with our Build-To-Spec program.



Hospitals & Trauma Centers




Emergency & Critical Care Areas

# Hospital Specification Grade Receptacles

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

## ARROW/HART® Straight Blade Receptacles

2-Pole, 3-Wire Grounding  
15A 125V, 15A 250V  
20A 125V, 20A 250V

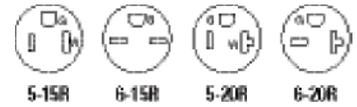

### Premium Hospital Grade Duplex & Single Receptacles

Back Wire and Side Wire				UL	F	UL	S	SP	NOM	426
Rating	A	V	NEMA	Description	Catalog No.	Available Colors				
15	125	5-15R	● Duplex Receptacle	□ AH8200__+	B, BK, GY, RD, V, W					
			● Duplex Illuminated Receptacle	□ AH8200LT__+	RD, V, W					
			● Single Receptacle	□ 8210__+	B, GY, RD, V, W					
15	250	6-15R	● Duplex Receptacle	□ AH8600__+	V, W					
			● Single Receptacle	□ 8610__	V, W					
20	125	5-20R	● Duplex Receptacle	□ AH8300__+	B, BK, GY, LA, RD, V, W					
			● Duplex Illuminated Receptacle	□ AH8300LT__+	RD, V, W					
			● Single Receptacle	□ 8310__+	B, GY, RD, V, W					
20	250	6-20R	● Duplex Receptacle	□ AH8400__+	B, GY, RD, V, W					
			● Single Receptacle	□ 8410__	B, GY, RD, V, W					

\* For ArrowLink Modular Wiring option, use suffix M (example AH8200WM)

For ordering, include Cat. No. followed by the color code: B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

NAFTA Compliant

Back Wire and Side Wire				UL	F	UL	S	SP	NOM	426
Rating	A	V	NEMA	Description	Catalog No.	Available Colors				
15	125	5-15R	● Decorator Duplex Receptacle	□ 8262__+	B, BK, GY, RD, V, W					
			● Decorator Duplex Illuminated Receptacle	□ 8262LT__+	GY, RD, V, W					
20	125	5-20R	● Decorator Duplex Receptacle	□ 8362__+	B, BK, GY, RD, V, W					
			● Decorator Duplex Illuminated Receptacle	□ 8362LT__+	GY, RD, V, W					

\* For ArrowLink Modular Wiring option, use suffix M (example 8262WM)

For ordering, include Cat. No. followed by the color code: B (Brown), BK (Black), GY (Gray), RD (Red), V (Ivory), W (White)

NAFTA Compliant

### Compact Hospital Grade Duplex Receptacles

Back Wire and Side Wire				UL	F	UL	S	SP	NOM	426
Rating	A	V	NEMA	Description	Catalog No.	Available Colors				
15	125	5-15R	● Compact Duplex Receptacle	□ 8200__+	B, GY, RD, V, W					
			● Tamper Resistant Compact Duplex Receptacle	□ TR8200**+	B, GY, RD, V, W					
20	125	5-20R	● Compact Duplex Receptacle	□ 8300__+	B, GY, RD, V, W					
			● Tamper Resistant Compact Duplex Receptacle	□ TR8300**+	B, GY, RD, V, W					

\*\* cULus Certified

\* For ArrowLink Modular Wiring option, use suffix M (example 8200WM)





For ordering, include Cat. No. followed by the color code: B (Brown), GY (Gray), RD (Red), V (Ivory), W (White)

NAFTA Compliant

Tamper Resistant

#### TESTING & CODE COMPLIANCE

- Listed to UL 498, file no. E15058.
- UL verified to Federal Spec. WC-596G.
- CSA Certified to C22.2, no. 42, file no. 6914 (6233-01).
- NOM Certified.
- ArrowLink: Plug & connector cULus Listed to UL2459 file no. E325188; combined cULus Listed wiring assembly, UL file no. E326691.

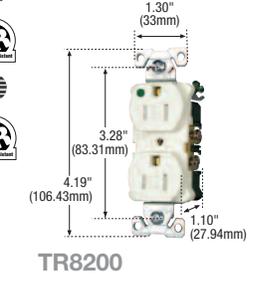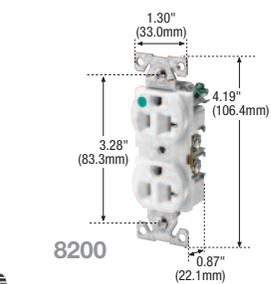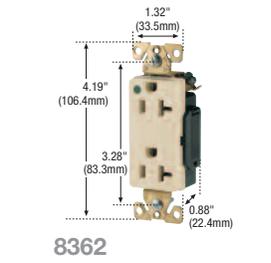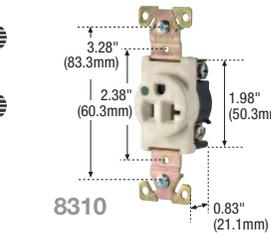

# Industrial Specification Grade Receptacles

**When down time  
can be costly**

## Application

Arrow Hart Industrial Grade receptacles provide the safest, most reliable means of connectivity for the most rugged environments.

Packed with features to assure continued functionality, like the one piece solid brass mounting strap with integral ground contacts for enhanced continuity, 5-leaf line contact design to reduce potential heat build-up and a glass filled nylon base for additional heat resistance, these receptacles were designed to deliver performance.


Arrow Hart Industrial Specification Grade Receptacles are available in Premium and Compact styles; ArrowLink™ Modular or Build-To-Spec custom configured versions are also available.

Arrow Hart Industrial Grade receptacles for long lasting durability in the most rugged environments.



**Discover the Arrow Hart® Difference:**

**Premium AH5362 Industrial Receptacle**

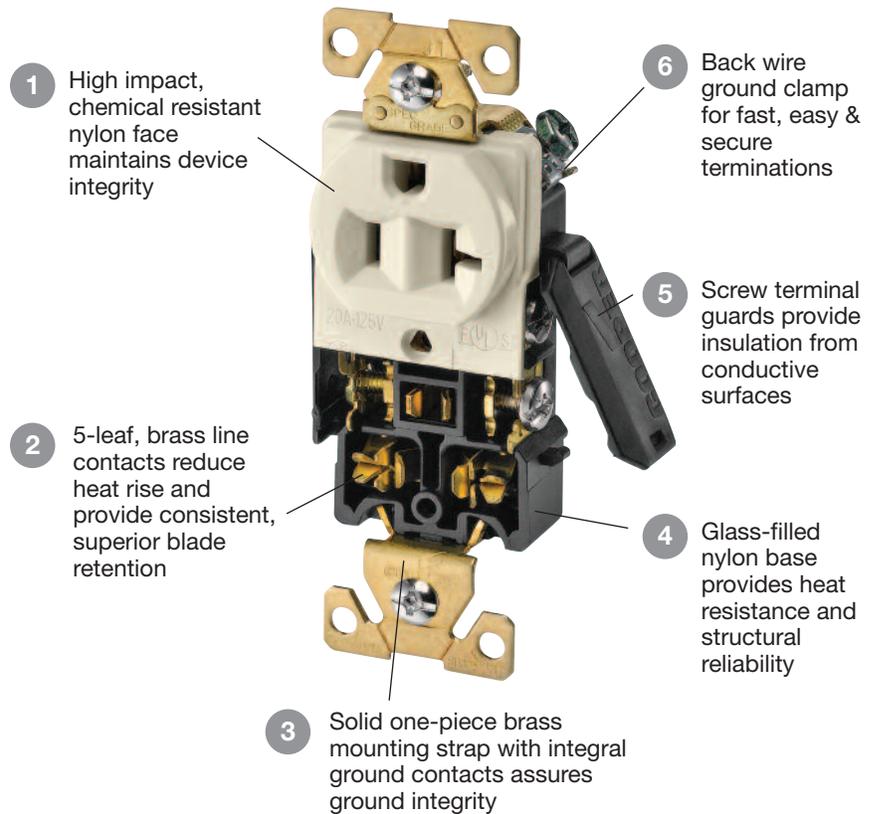

*Manufacturing Environments*



*Rough Service Areas*

**Industrial Specification Grade Receptacles are also available in:**

**ARROWLINK™**  
Modular Wiring Devices

Patent-pending ArrowLink modular plugs and connectors provide a high quality means of connectivity while reducing overall installation time.



**BUILD-TO-SPEC**  
CUSTOM CONFIGURED DEVICES

**No ears?  
No mounting screws?  
No problem!**


Get custom configured devices for your unique application with our Build-To-Spec program.

# Industrial Specification Grade Receptacles

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

## ARROW/HART® Straight Blade Receptacles

2-Pole, 3-Wire Grounding  
15A 125V, 15A 250V  
20A 125V, 20A 250V

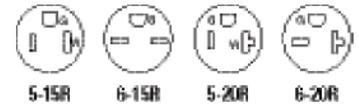

### Premium Industrial Grade Duplex & Single Receptacles


#### Back Wire and Side Wire




Rating A V	NEMA	Description	Catalog No.	Available Colors
15 125	5-15R	Duplex Receptacle	□ AH5262__+	B, BK, GY, RD, V, W
		Single Receptacle	□ 5261__+	B, GY, V, W
15 250	6-15R	Duplex Receptacle	□ AH5662__+	B, GY, V, W
		Single Receptacle	□ 5661__	B, V, W
20 125	5-20R	Duplex Receptacle	□ AH5362__+	B, BK, GY, LA, RD, V, W
		Single Receptacle	□ 5361__+	B, BK, GY, RD, V, W
20 250	6-20R	Duplex Receptacle	□ 5462__+	B, GY, V, W
		Single Receptacle	□ 5461__	B, BK, GY, V, W

\* For ArrowLink Modular Wiring option, use suffix M (example 5262WM)

For ordering, include Cat. No. followed by the color code: B (Brown), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

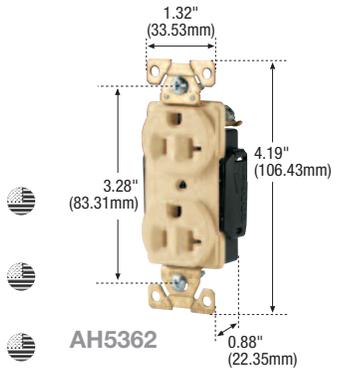

AH5362

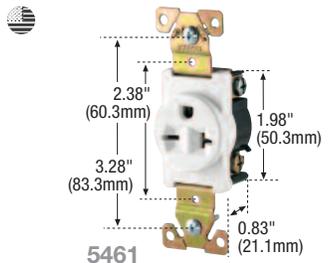

5461


#### Back Wire and Side Wire



Rating A V	NEMA	Description	Catalog No.	Available Colors
15 125	5-15R	Decorator Duplex Receptacle	□ 6262__+	B, BK, GY, LA, RD, V, W
15 250	6-15R	Decorator Duplex Receptacle	□ 6662__	B, GY, V, W
20 125	5-20R	Decorator Duplex Receptacle	□ 6362__+	A, B, BK, GY, LA, RD, V, W
20 250	6-20R	Decorator Duplex Receptacle	□ 6462__	B, GY, V, W

\* For ArrowLink Modular Wiring option, use suffix M (example 6262WM)

For ordering, include Cat. No. followed by the color code: B (Brown), BL (Blue), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

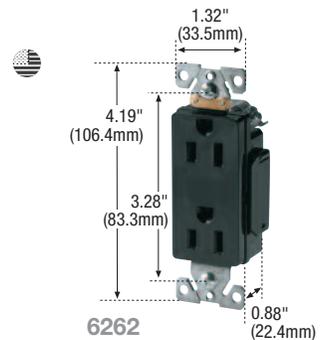

6262

### Compact Industrial Grade Duplex


#### Back Wire and Side Wire



Rating A V	NEMA	Description	Catalog No.	Available Colors
15 125	5-15R	Compact Duplex Receptacle	□ 5252__+	A, B, BK, BL, GY, LA, RD, V, W
20 125	5-20R	Compact Duplex Receptacle	□ 5352__+	A, B, BK, BL, GY, LA, RD, V, W

\* For ArrowLink Modular Wiring option, use suffix M (example 5252WM)

For ordering, include Cat. No. followed by the color code: B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

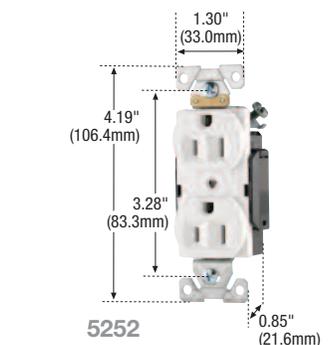

5252

#### TESTING & CODE COMPLIANCE

- UL Listed to UL498, file no. E15058.
- UL verified to Federal Spec. WS-596G.
- CSA Certified to C22.2, no. 42, file no. 6914, class 6233-01.
- NOM Certified.

- ArrowLink: Plug & connector cULus Listed to UL2459 file no. E325188; combined cULus Listed wiring assembly, UL file no. E326691.

# Construction Specification Grade Receptacles

## For ease of installation

Arrow Hart Construction Grade receptacles are designed to provide a dependable user interface while increasing speed and efficiency during installation.

## Application

Arrow Hart Construction Specification Grade receptacles are engineered for safe, reliable performance in all types of applications, while offering features like one-piece triple wipe brass line contacts for better plug retention, an extra long/wide mounting strap for reaching larger panel cut-outs, and a Screw-Catch™ feature to speed wallplate mounting.


All these features provide a more efficient means of installation in the field, to aid in the ultimate goal of finishing a job on time.

Arrow Hart Construction Specification Grade Receptacles are available in standard, ArrowLink™ Modular, Tamper Resistant or Build-To-Spec custom configured versions are also available.



## Discover the Arrow Hart® Difference:

### 5362 Construction Receptacle

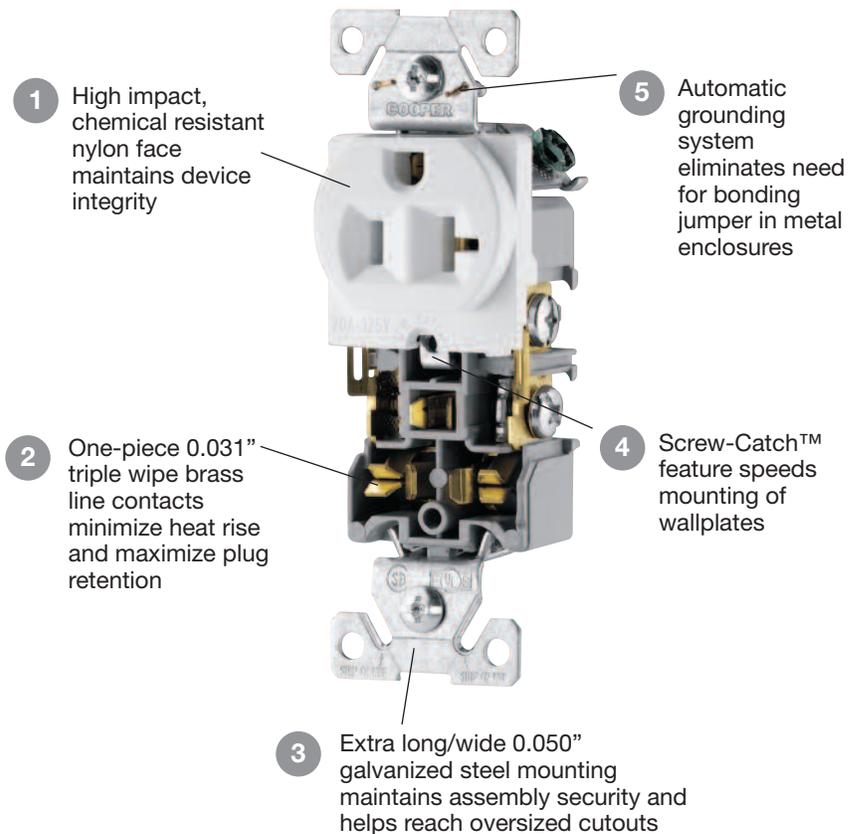

Commercial Developments



Meeting Rooms & Classrooms

Construction Specification Grade Receptacles are also available in:

## ARROWLINK™ Modular Wiring Devices

Patent-pending ArrowLink modular plugs and connectors provide a high quality means of connectivity while reducing overall installation time.



BUILD-TO-SPEC  
CUSTOM CONFIGURED DEVICES

No ears?  
No mounting screws?  
No problem!


Get custom configured devices for your unique application with our Build-To-Spec program.

# Construction Specification Grade Receptacles

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

## ARROW/HART® Construction Grade Straight Blade Receptacles

2-Pole, 3-Wire Grounding  
15A 125V, 15A 250V  
20A 125V, 20A 250V

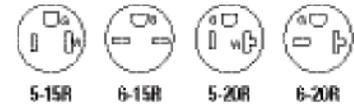

### Construction Grade Duplex & Single Receptacles

#### Back Wire and Side Wire



Rating A V	NEMA	Description	Catalog No.	Available Colors
15 125	5-15R	Duplex Receptacle	□ 5262__+	B, GY, LA, V, W
15 125	5-15R	Tamper Resistant Duplex Receptacle	□ TR5262__+	B, GY, LA, V, W
20 125	5-20R	Duplex Receptacle	□ 5362__+	B, BK, GY, LA, V, W
20 125	5-20R	Tamper Resistant Duplex Receptacle	□ TR5362__+	B, BK, GY, LA, V, W
15 250	6-15R	Duplex Receptacle	□ 5662C__	B, BK, GY, RD, V, W
20 250	6-20R	Duplex Receptacle	□ 5462C__	B, V, W

\* For ArrowLink Modular Wiring option, use suffix M (example AH8200WM)

For ordering, include Cat. No. followed by the color code: B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

NAFTA Compliant

Tamper Resistant

#### Back Wire and Side Wire




Rating A V	NEMA	Description	Catalog No.	Available Colors
15 125	5-15R	Decorator Duplex Receptacle	□ 6252__	A, B, BK, GY, LA, V, W
		Decorator Single Receptacle	□ 6250__	A, B, BK, GY, LA, RD, V, W
15 250	6-15R	Decorator Single Receptacle	□ 6650__	A, B, V, W
20 125	5-20R	Decorator Duplex Receptacle	□ 6352__	A, B, BK, GY, LA, V, W
		Decorator Single Receptacle	□ 6350__	A, B, BK, GY, LA, RD, V, W
20 250	6-20R	Decorator Single Receptacle	□ 6450__	A, B, V, W

\* For ArrowLink Modular Wiring option, use suffix M (example AH8200WM)


For ordering, include Cat. No. followed by the color code: B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

NAFTA Compliant


Tamper Resistant

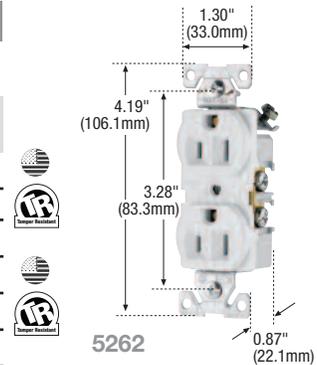

5262

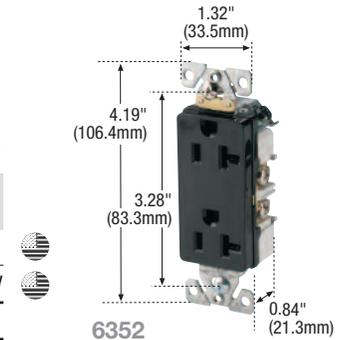

6352

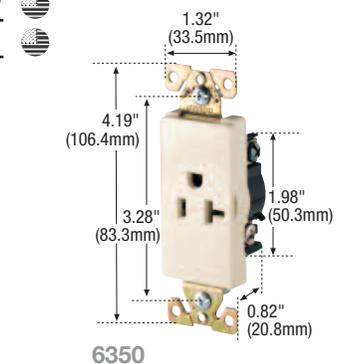

6350

### TESTING & CODE COMPLIANCE

- UL Listed to UL498, file no. E15058.
- UL verified to Federal Spec. WS-596G.
- CSA Certified to C22.2, no. 42, file no. 6914, class 6233-01.
- Decorator: NOM Certified.
- ArrowLink: Plug & connector cULus Listed to UL2459 file no. E325188; combined cULus Listed wiring assembly, UL file no. E326691.


# Arrow Hart® Build-To-Spec Program

## Custom Configured wiring devices built to your specifications

It's easy to order exactly what you need – just start with the standard Cooper Wiring Devices catalog number and choose the suffix for the feature you need:

If you were to install 300 receptacles at a job site, you would save significant time and money each step of the customization process.

**SAVE AS MUCH AS 6.6 HOURS**

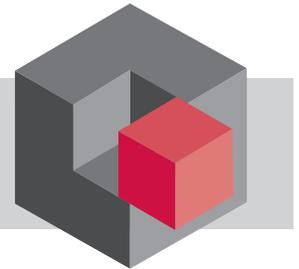

**BUILD-TO-SPEC**  
CUSTOM CONFIGURED DEVICES




## Catalog Ordering Matrix

### Sample Number:

**5362WXZG =**  
Arrow Hart 20A 125V NEMA 5-20 white duplex receptacle, without mounting screws, ears, and grounding clip.

<b>GFCI Duplex</b> VGF15 VGF20		<b>Premium Single</b> 8210 8310 8410 8610	
<b>Backwire Duplex</b> 5262 5362		<b>Tamper Resistant Backwire Decorator Duplex</b> TR6252 TR6352	

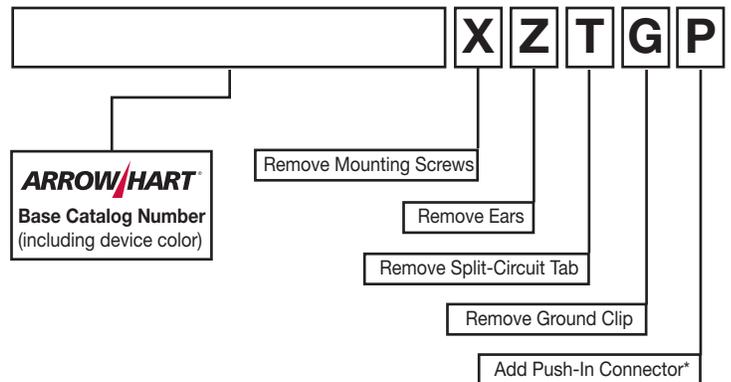

*\*For use with leaded or pigtailed devices only*

*All items are available for quick-shipment within 5 days for quantities up to 500. For quantities over 500, consult factory for lead times.*

*50 Piece minimum order*

*All product is bulk packed*

Consult factory for full line of Arrow Hart devices available in our Build-To-Spec program.

		Premium Hospital Grade	Compact Hospital Grade	Premium Industrial Grade	Compact Industrial Grade	Construction Grade
		AH8200 AH8300 AH8400 AH8600	8200 8300 8400 8600	AH5262 AH5362 AH5460 AH5662	5252 5352 5452 5652	5262 5362 5462C 5662C
5-leaf line contact	Contact Design	●		●		
Triple-wipe line contact			●		●	●
Brass mounting strap	Strap Material	●		●		
Steel mounting strap			●		●	●
Integral ground contacts assembly	Grounding System	●		●		
1-piece brass ground shunt					●	
Rivited ground contact				●		●
Impact & chemical resistant nylon face	Body Materials	●	●	●	●	●
Glass-filled nylon base		●			●	
PVC base			●			●
Screw terminal guards	Specialty Features	●		●	●	
Back wire ground terminal		●		●		
Tri-combo screws		●	●	●	●	●
Screw-Catch™ feature		●	●	●	●	●
Tamper resistant option available				●*		●
Hospitals & critical care units	Ideal for these environments	●	●			
Doctor's offices & clinic environments		●	●			
Extreme temperature areas				●		
Industrial facilities & heavy use areas				●	●	
Commercial & retail environments				●	●	●
Municipal buildings & schools				●	●	●
Hotels & resorts				●	●	●

All models can be supplied with Arrow Link and Build-To-Spec capabilities

### Cooper Wiring Devices

United States  
203 Cooper Circle  
Peachtree City, GA 30269  
P: 866-853-4293  
F: 800-329-3055

Canada  
5925 McLaughlin Road  
Mississauga, Ontario, L5R 1B8  
P: 800-267-1042  
F: 800-761-5748

Mexico  
Carr. Tlalnepantla –  
Cuautitlan Km 17.8 s/n  
Col. Villa Jardin esq.  
Cerrada 8 de Mayo  
Cuautitlan, Mexico CP 54800  
P: +525558999190  
F: +525526207116  
[www.cooperwiringdevices.com.mx](http://www.cooperwiringdevices.com.mx)

[www.cooperwiringdevices.com](http://www.cooperwiringdevices.com)  
email: [custserv@cooperwiringdevices.com](mailto:custserv@cooperwiringdevices.com) • [cwmktg@cooperindustries.com](mailto:cwdmarketing@cooperindustries.com)

Cooper Wiring Devices, Arrow Hart, and ArrowLink are valuable trademarks of Cooper Industries in the U.S. and other countries. You are not permitted to use the Cooper Trademarks without the prior written consent of Cooper Industries. ©2009 Cooper Industries, Ltd.

**Your Authorized Cooper Wiring Devices Distributor is:**

Cooper Industries, Ltd.  
600 Travis, Ste. 5600  
Houston, TX 77002-1001  
P: 713-209-8400  
[www.cooperindustries.com](http://www.cooperindustries.com)