


RE-S1

915+ Spread Spectrum Radio Repeater



Operator's Manual

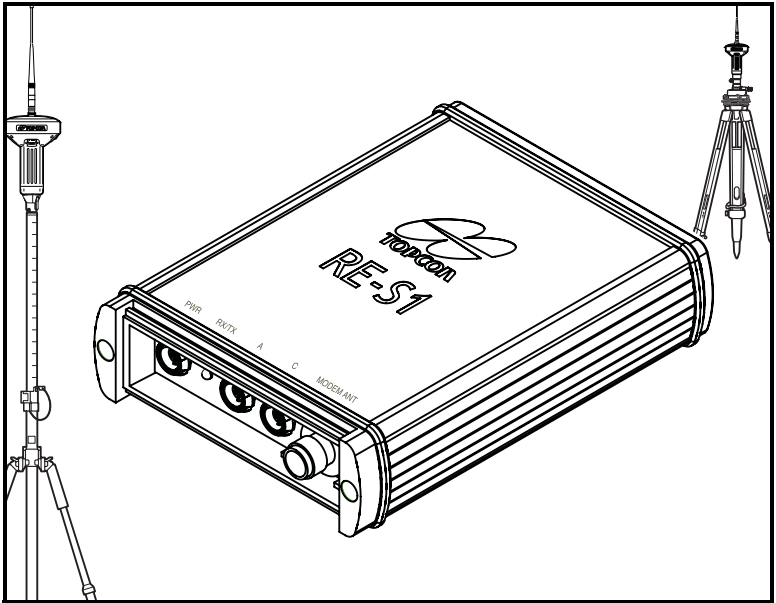

RE-S1 Operator's Manual

Part Number 7010-0780

Rev. A

©Copyright Topcon Positioning Systems, Inc.
September, 2006

Terms and Conditions

Thank you for buying this Topcon product. This document has been prepared to assist you with the care and operation of the product and its use is subject to these Terms and Conditions and those more fully set forth in the Operator's, User's, Instruction, or Reference Manual.

Copyrights and Trademarks

The information in this manual is a copyright of Topcon and is for use only with the product. HiPer, RE-S1, and Topcon are trademarks or registered trademarks of Topcon Positioning Systems, Inc.

Other product and company names mentioned herein may be trademarks of their respective owners.

Disclaimer of Warranty and License Agreement

Please see the Operator's/User's/Instruction/Reference Manual for detailed information on warranties and the license agreement which may apply to the Product.

EXCEPT FOR SUCH WARRANTIES AND LICENSES, THIS MANUAL AND THE PRODUCT ARE PROVIDED "AS-IS". TOPCON AND ITS DISTRIBUTORS SHALL NOT BE LIABLE FOR TECHNICAL OR EDITORIAL ERRORS OR OMISSIONS CONTAINED HEREIN; NOR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE FURNISHING, PERFORMANCE OR USE OF THIS MATERIAL OR THE PRODUCT.

Use of any computer programs or software supplied by Topcon or downloaded from the Topcon website in connection with the product implies acceptance of the Terms and Conditions here and in the Operator's, User's, Instruction, or Reference Manual.

Introduction

The RE-S1 is a 1W radio extension system using 915+ spread spectrum technology. The RE-S1 can be used to enhance the following survey-related systems:

- As a stand-alone repeater to increase the range between a Base and Rover in spread spectrum systems, such as with the GR-3 or HiPer Lite+ GPS systems.
- As a transmit/receive external 915+ radio for any Base system, such as with the GB or Legacy series GPS receiver.

Obstructions—such as buildings, terrain, trees, etc—greatly affect the usability and range of a spread spectrum system. The RE-S1 provides radio repeater capabilities and increase the operational range and effectivity of the system in unfavorable environments.



The RE-S1 simply extends the operational range of a spread spectrum system. It does not increase range beyond the system's OAF limitations.

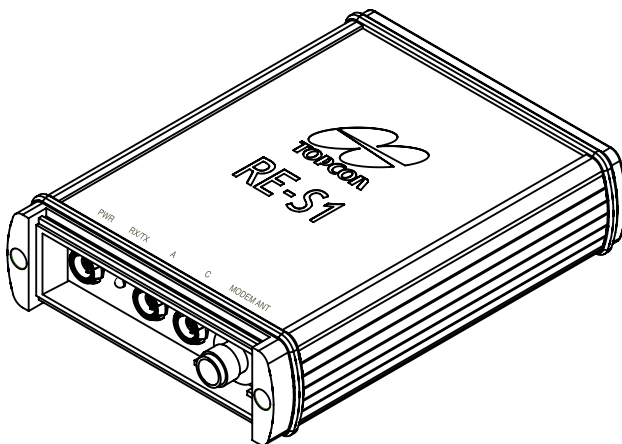


Figure 1-1. RE-S1

Getting Acquainted

The RE-S1 is a transmit/receive/repeat 915+ spread spectrum radio modem. The RE-S1 is compatible with existing Topcon spread spectrum radio systems (some older HiPer models may need a radio modem upgrade), as well as Topcon base stations. Simple features allow the RE-S1 to be easily adaptable to any situation, and make it easy to use.

RX/TX LED

The RX/TX LED provides the following indications for the modem:

- Green flashes – modem is in receive mode and is searching for radio link.
- Green solid – radio link established.
- Green solid with Red flash – modem is receiving.
- Red solid – modem is in transmit mode.
- Red flashes – improper configuration.

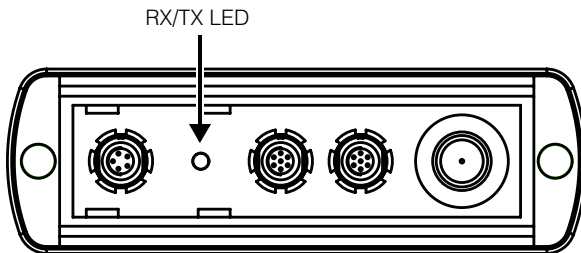


Figure 1-2. RE-S1 Receive/Transmit LED

LED notes: The RX/TX LED will be solid green with a red flash when the Base receiver is within radio range of the repeater system. The red flash indicates the following:

- A data packet has been received from the Base.
- A data packet has been transmitted from the repeater system.

If the RX/TX LED flashes green for an extended period of time, check the following:

- The repeater's distance from the Base.

- The channel of the RE-S1, Base, and Rover.
- The protocol of the RE-S1, Base, and Rover (FH915 Plus).

Data and Power Ports

The RE-S1 has the following ports:

- Power – used to connect the repeater an an external power source.
- Serial Ports A and C – used for communication between the repeater and an external device (computer or controller).

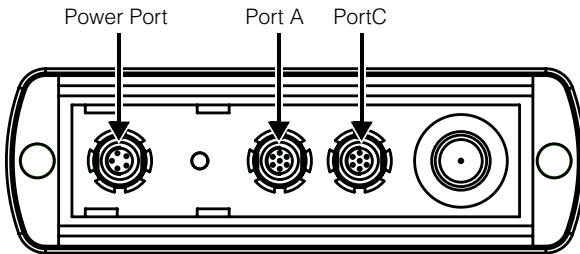


Figure 1-3. RE-S1 Ports

Radio Modem Antenna Port and Antenna

A spread spectrum reverse TNC radio antenna is required to receive/transmit a radio signal. The antenna connects to the antenna port on the end of the RE-S1.

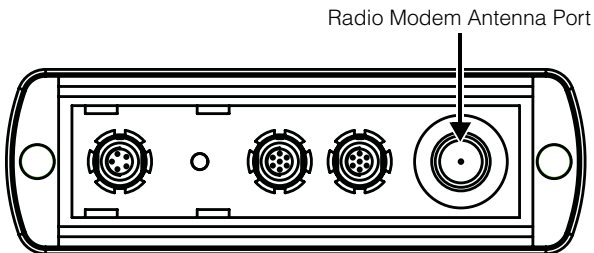


Figure 1-4. RE-S1 Radio Antenna Port

The spread spectrum modem antenna is a reverse polarity TNC RF connection (p/n 30-030012-01).

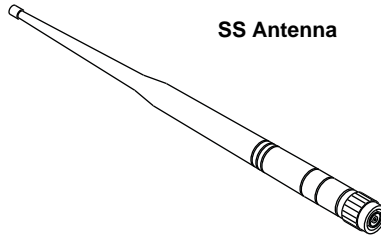


Figure 1-5. Modem Antenna



Standard Kit Cables and Power Supply

The standard RE-S1 package includes communication and power cables for configuring the repeater and providing a power source to the repeater. Table 1-1 lists the cables included in the package.

Table 1-1. RE-S1 Standard Package Cables

Cable Description	Cable Illustration
<p>Power/charging cable Connects the repeater and the power supply unit via SAE connectors for battery charging. Body of connector is red. p/n 14-008016-03</p>	
<p>Alligator clips-to-SAE cable Connects the repeater to a mobile external power source. p/n 14-008025-01</p>	

Table 1-1. RE-S1 Standard Package Cables (Continued)

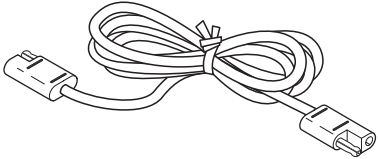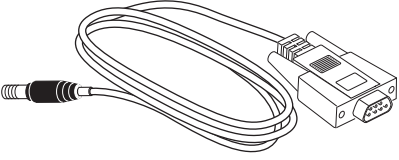Cable Description	Cable Illustration
<p>SAE-to-SAE extension cable Connects the SAE ends of two cables together. For example from the alligator clips to the charging cable. p/n 14-008022-01</p>	
<p>Serial cable Connects the repeater to an external device (controller or computer) for modifying the configuration. Body of connector is black. p/n 14-008005-03</p>	

Configuration and Usage

Once the RE-S1 is configured, it simply needs to be connected to a power source to begin operating.

Installing Modem-TPS

Modem-TPS is a configuration program for the radio modem board inside the receiver. Modem-TPS is available from the TPS website or on the GPS+ CD.

Computer requirements for Modem-TPS are: Windows® 98 or newer and an RS-232C port. Use Modem-TPS version 2.0 or newer to correctly configure the RE-S1.

1. Navigate to the location of the Modem-TPS program and double-click the **Setup.exe icon**.
2. Keep the default installation location or select a new location. Click **Finish** (Figure 2-1).

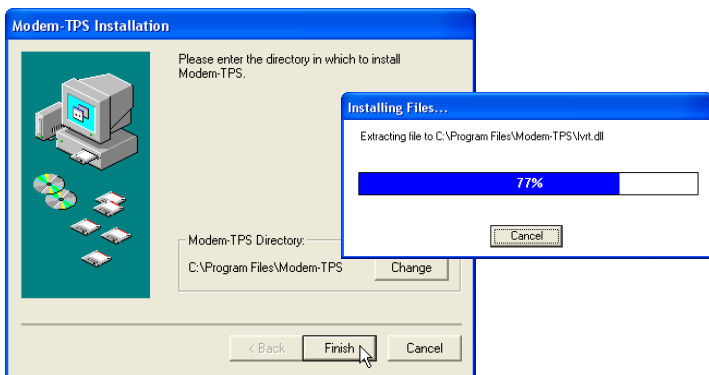


Figure 2-1. Select Modem-TPS Installation Location and Install

3. Click **OK** to complete the installation (Figure 2-2).
4. If desired, create a shortcut on the computer's desktop for quick access to Modem-TPS (Figure 2-2).

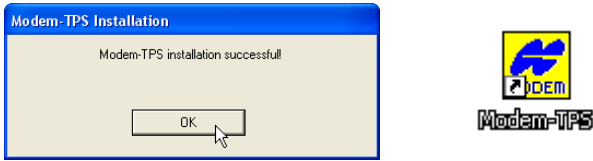


Figure 2-2. Installation Complete and Shortcut

To uninstall Modem-TPS, use the Start menu on your computer:

Click **Start ▶ Programs ▶ Modem-TPS ▶ Uninstall Modem-TPS**, and click **Yes** at the prompt. Then click **OK** when the uninstall completes.

Configuring the RE-S1 as a Repeater

After being configured as a repeater, the RE-S1 will pick up any radio signal on the same channel and forward it to another radio modem. All modems connected to the repeater must use the same protocol and channel.

1. Connect the power cable to the RE-S1 and to a power source.
2. Using the RS-232 serial cable, connect port A of the RE-S1 to a computer.
3. Open Modem-TPS and click Connect.
4. Select the protocol: FH915 Plus.



The Base, Rover, and Repeater must use the same protocol.

5. Select your location: United States or Australia.
6. Select the operation mode: Repeater.
7. Select the output power: 1W or 250mW.

8. Select the channel: 1–5.



The Base, Rover, and Repeater must use the same channel.

9. Click Apply.

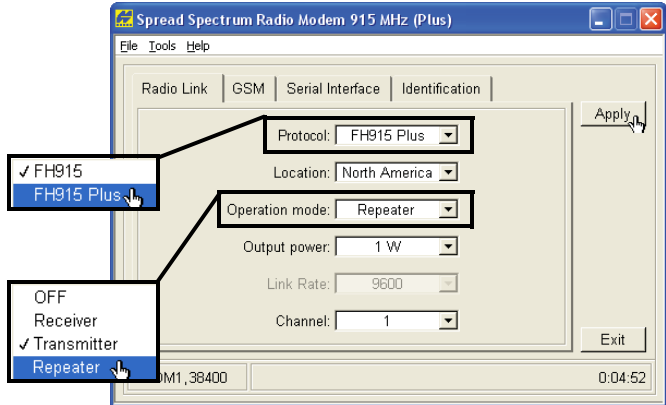


Figure 2-3. Configure the RE-S1 using Modem-TPS

Regulatory Information and Warnings

The following sections provide information on this product's compliance with government regulations for use, and some guidelines on the safe use of the product.

FCC Compliance

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in residential installations. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause interference to radio or television equipment reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Move the equipment away from the receiver.

- Plug the equipment into an outlet on a circuit different from that to which the receiver is powered.
- Consult the dealer or an experienced radio/television technician for additional suggestions.



Any changes or modifications to the equipment not expressly approved by the party responsible for compliance could void your authority to operate such equipment.

Canadian Emissions Labeling Requirements

This Class B digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations.

Cet appareil numérique de la classe B respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.

Community of Europe Compliance

The product described in this manual is in compliance with the R&TTE and EMC directives from the European Community.

WEEE Directive

Following information is for EU-member states only:

The use of the symbol indicates that this product may not be treated as household waste. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. For more detailed

information about the take-back and recycling of this product, please contact your supplier where you purchased the product or consult.



Safety and Usage Warnings



To comply with RF exposure requirements, maintain at least 20cm between the user and the radio modem.



If this product has been dropped, altered, transported or shipped without proper packaging, or otherwise treated without care, erroneous measurements may occur.

The owner should periodically test this product to ensure it provides accurate measurements.

Inform TPS immediately if this product does not function properly.



Only allow authorized TPS warranty service centers to service or repair this product.



Topcon Positioning Systems, Inc.
7400 National Drive, Livermore, CA 94551
800-443-4567 www.topcon.com



**ISO 9001:2000
FM 68448**

RE-S1 Operator's Manual
P/N: 7010-0780 Rev A 09/06 30
©2006 Topcon Corporation All rights reserved. No unauthorized duplication.