

4C

EDS / EFS Series Control Stations

Cl. I, Groups C & D
Cl. II, Groups E, F & G
Cl. III
Enclosure 3, 5 & 12

DSD-SR Series Horsepower Rated Selector Switch* 30 A, 600 V; Front Operated

Ordering Information

Switch Function	Cat. #	Number of Poles	Number of Positions	Connecting Diagram
ON/OFF	DSD SR30120	1	2	
	DSD SR30220	2	2	
	DSD SR30320	3	2	
	DSD SR30420	4	2	
	DSD SR30520	5	2	
	DSD SR30620	6	2	
DOUBLE-THROW without OFF	DSD SR30121	1	2	
	DSD SR30221	2	2	
	DSD SR30321	3	2	
DOUBLE-THROW without OFF with electrically isolated contacts	DSD SR30123	1	2	
	DSD SR30223	2	2	
	DSD SR30323	3	2	
DOUBLE-THROW with OFF	DSD SR30132	1	3	
	DSD SR30232	2	3	
	DSD SR30332	3	3	
DOUBLE-THROW with OFF and electrically isolated contacts	DSD SR30134	1	3	
	DSD SR30234	2	3	
	DSD SR30334	3	3	

Electrical Specification

Voltage	Horsepower Rating	
	3PH	1PH
120	3	1.5
240	7.5	3
480	10	5
600	10	5

Maximum Current: 30 A

Heavy-duty A600 rating

Options:

Description


Lockout for 2 position switch, handle in either position

Suffix
SX178

Lockout for 3 position switch, handle in either position

S349

*For CEC applications only.

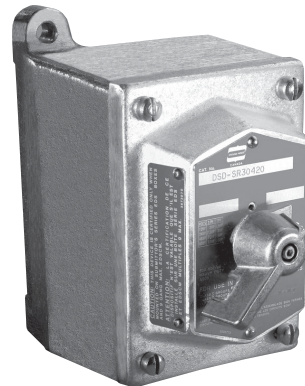

DSD-SR cover assembly shown
mounted to an EDS back box