


**WIRELESS STEREO WOODEN PANEL
SPEAKER SYSTEM
With Infrared Remote Control**

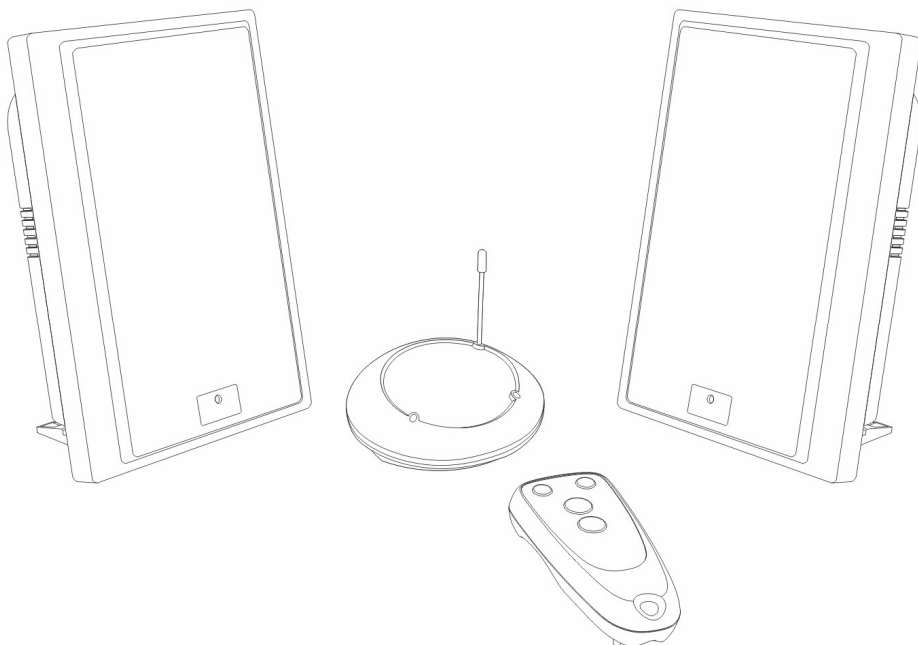

**ARKON
SP490A**

Owner's Manual
(Preliminary)

INTRODUCTION

The 900 MHz stereo wireless speaker system uses latest wireless technology that enables you to enjoy music and TV sound anywhere inside or outside your home. You can simply connect the system to any audio source such as Radio, TV, VCR, Hi-Fi and CD/MP3/VCD/DVD player. Without complicated wiring and installation with your Audio/Video equipments and rear channel amplifier, the system enables you to enjoy thrilling, lifelike sound stereo in minutes.


FEATURES

1. 900 MHz RF technology panel-like speaker system.
2. Phase Lock Loop (PLL) technology on transmitter.
3. RF technology lets you roam freely throughout your house.
4. Operating distance up to 50 Meters.
5. Remote control unit for your convenience.
6. No line of sight limitation.
7. Virtually interference free stereo quality.
8. Auto ON/OFF control.
9. Auto tuning function.
10. Bass boost function


INSTALLATION

TRANSMITTER

1. Insert the antenna tube into the antenna wire.




2. Connect the supplied AC power adaptor to an electrical wall outlet.
3. Plug the AC power adaptor in the DC jack located on the rear of the transmitter.

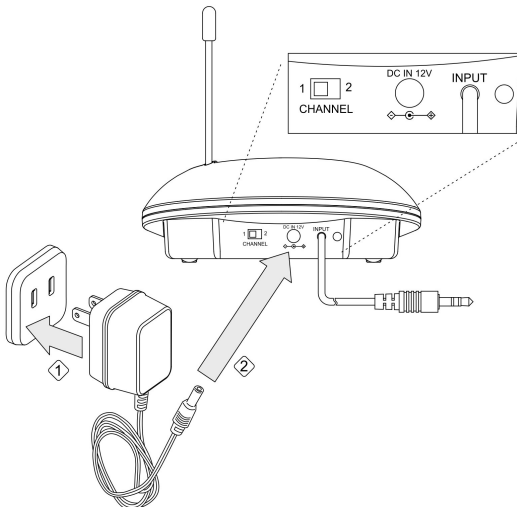


4. The rear of the transmitter has one audio cord that can be connected to audio output jack of TV, Monitor, VCR, Radio recorder, CD/MP3/VCD/DVD players or to headphone/earphone jack with the connector provided.

5. Plug the adaptor in the AC source and the green POWER LED will illuminate. If the green POWER LED does not illuminate, make sure the adaptor is plugged in properly.

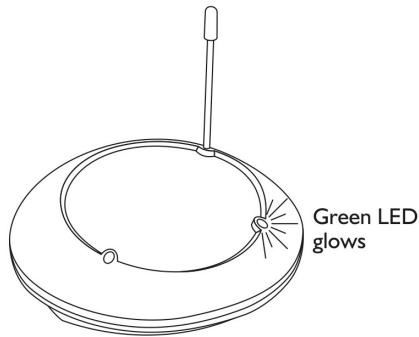


SPEAKER RECEIVER

1. Insert 6 pieces 'AA' size ALKALINE battery into the battery compartment with correct polarity at the rear of the speaker or connect the 12V power adaptor to the DC input jack on the rear of each speaker, then plug it to the wall AC outlet.

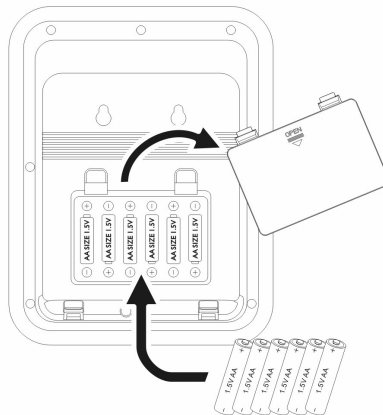


2. Switch on the speaker by pressing the POWER switch and the POWER/STEREO LED will light up in blue. Switch off the speaker by pressing the POWER switch again.

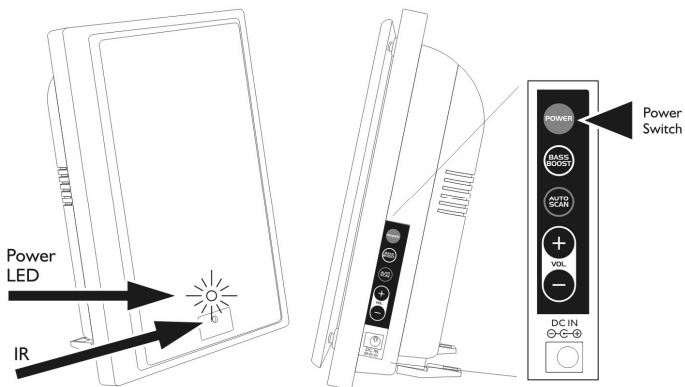


OPERATION


1. Turn on the audio source (TV or audio component) to which the transmitter is connected with. As soon as the transmitter is receiving the audio signal, the blue SIGNAL LED will illuminate




2. Select the channel 1 or 2 of the transmitter for best performance in your location.

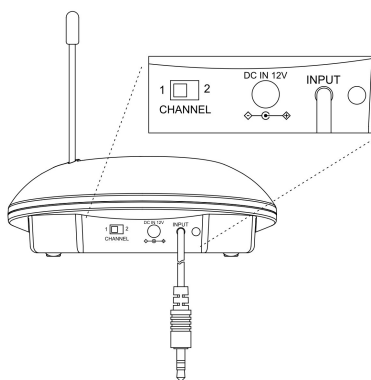

3. Press the + / - (volume level) button on the speaker and adjust the volume to the desired listening level.

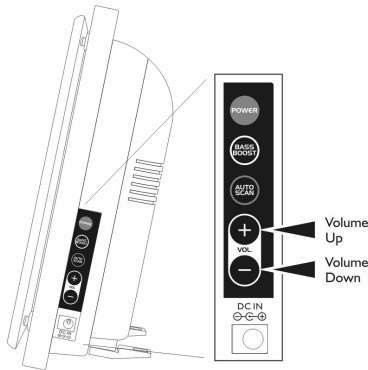


4. Push the “SCAN” auto-tuning button on the speaker or Remote Control to get the best tuning reception.

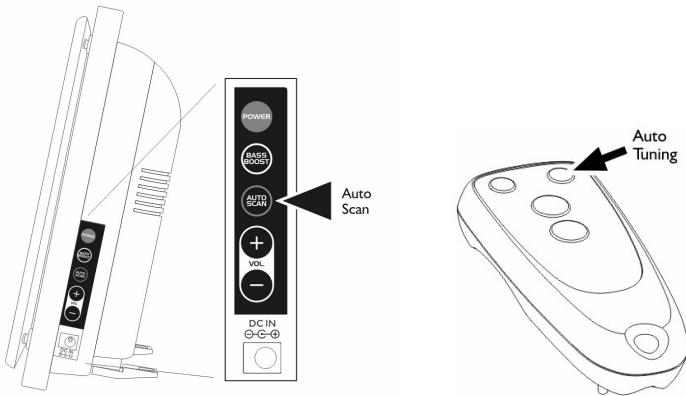

When the button is pressed, frequency tuning starts automatically and it stops when a signal is detected.

- A). Keep a distance of the speaker up to 7 meters apart from transmitter, and then press “SCAN” auto-tuning button for best tuning reception.
- B) Whenever you find frequency jam, move your channel switch from one channel to the other channel (there are two channels for selection) on the transmitter, and then press the “SCAN” auto-tuning button again.
5. The BOOST BASS button can be used to enhance the bass sound depending on your own music preferences. Turn bass/boost effect ON simply by pressing the button, and pressing it once again to OFF.

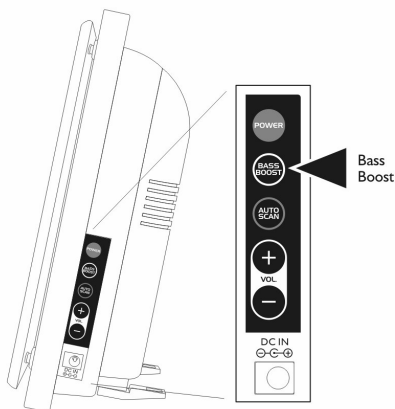

REMOTE CONTROL UNIT

1. Remove the battery cover at the rear of the remote control unit and insert 2 pieces “AAA” size batteries (included) into the battery compartment with the correct polarity.
2. Place back the cover and close the battery compartment

Note

You should now be able to place the speakers freely from room to room without disruption. If disruption should occur (signal breaks up), press the speaker’s “SCAN” auto-tuning button to maximize best reception.

If you hear interference from other components, switch the channel control of transmitter, and then move the speakers to other free location. You can re-adjust the tuning control by moving it either channel 1 or, 2 of the transmitter, then pressing “SCAN” auto-tuning button for best reception.

When transmitting / receiving over long distances, the signal from the system will become weaker.

Switching off

1. For protection of the transmitter and power saving, the transmitter will cut off automatically if there is no/weak operation input signal from audio source for 4 minutes.

In other words, if the signal comes back, the transmitter will work again automatically.

2. Press the POWER button to turn off the speaker and the blue POWER LED light will go off. If you use the remote control unit to turn off the speakers, the speakers will be at stand-by mode for 5 minutes and the LED will change from blue to yellow. You can switch on the speakers again by using the remote control unit during stand-by time. If there is no signal from the remote control unit for 5 minutes, the speakers will automatically power off.

TROUBLE SHOOTING

NO SOUND

- Ensure the AC adaptor is fully inserted into the AC outlet and the power connection input on the transmitter.
- Ensure the speaker is switch ON.
- Speaker's battery capacity is too low, replace with new batteries or connect the AC adaptors to the speakers.
- Ensure the TV or audio component is ON.
- The connected audio / video equipment is not playing. Start playing the equipment.
- The volume of speaker is too low, adjust the volume to an appropriate level.

DISTORTED

- Press the "SCAN" button on the speakers or remote control unit until matching the frequency of the transmitter.
- Change the position of the channel selector on the transmitter. You must then press the SCAN button on the speaker.
- Battery capacity is too low. Replace with the new battery.
- Ensure the volume level of speakers is adjusted properly.
- The speaker is too far from transmitter, move closer.
- The input level of the audio signal is too low. Turn up the volume of the audio source equipment.

SPECIFICATIONS

Transmission Mode	:	UHF stereo
Carrier Frequency	:	900 MHz (CH-1: 912.00 MHz / CH-2: 913.00 MHz)
Operation Voltage	:	Transmitter, DC 12V 200mA Speaker, 6 X 'AA' size Alkaline batteries (not included) or DC 12V 600mA adaptor Remote Control Unit, 2X 'AAA' size batteries (not included)
Frequency Response	:	40Hz - 12KHz
Distortion	:	<1.5%
S/N Ratio	:	70dB
Channel Separation	:	60dB
Operation Distance	:	Up to 50M (Open Area)
Output Power	:	2 x 3.0W (RMS)

Warning :

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Modification of this device to receive cellular radio-telephone service signals is prohibited under FCC rules and Federal Law.

The device must be used accompany with the provided AC/DC adapter.

The provided AC/DC adapter shall always remain readily operable.

Please use the device in normal indoor environment.

The ventilation should not be impeded by covering the ventilation openings with items such as newspapers, table-cloths, curtains, etc...

This device shall not be exposed to dripping or splashing. No objects filled with liquids, such as vases, shall be placed on this device.