



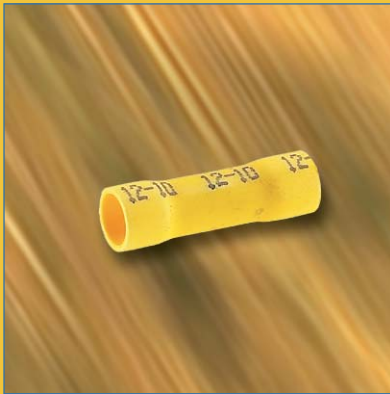

— EFFECTIVE MARCH 2007 —

Miniterms

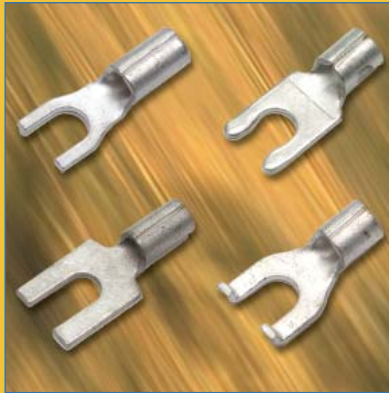

www.nsiindustries.com • Fax: 800.841.5566 • Phone: 1.800.321.5847

TORK® POLARIS™ EASY-TWIST™

Table of Contents

MINITERMS

Uninsulated Ring Terminals	1
Butt Connectors & Specialty Parts	1
Uninsulated Spade Terminals & Disconnects	2
Vinyl-Insulated Terminals	3
Nylon-Insulated Ring Terminals	3
Vinyl-Insulated & Nylon-Insulated Spade Terminals	4
Insulated Disconnects	5
Insulated Butt Connectors & Specialty Parts	6
High Temperature Ring Terminals	7
High Temperature Specialty Parts	7
Terminal Kits	7
Merchandising Display Packs (Small Packs)	8
Merchandising Display Packs (Standard Packs)	9
Miniterm Kits	10
Alligator Test Clips	10

SWITCHES

Pushbuttons & Pull Chains	11
Toggle Switches – Maintained Contact & Single Pole	12
Toggle Switches – Maintained & Momentary Contact	13
Rocker, Rotary & Miscellaneous Switches	14

INDICATOR LIGHTS

Snap-In Rectangular Indicator Lights	15
Round Indicator Lights	16
Pilot Light & Emergency Stop Button	17

COAX ACCESSORIES

“F” connectors & Splitters	18
Coax & Telephone Accessories	
“F” Type & Combination Wall Plates	19

TELEPHONE ACCESSORIES

Telephone Accessories	19
Telephone Wall Plates	20

THE FINE PRINT

Alphanumeric Index	21
How to Reach Us	21
Terms and Conditions	21



UNINSULATED RING TERMINALS



Other sizes and styles available. Please contact NSi for price and delivery on your requirements. Rated 600 volts, 149°C.

CAT. NO.	UPC CODE	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.
R22-6	07200	22-18	6	.614	.315	100
R22-8	07201	22-18	8	.614	.315	100
R22-10	07202	22-18	10	.614	.315	100
R22-14	07203	22-18	1/4	.795	.472	100
R22-56	07204	22-18	5/16	.795	.472	100
R22-38	07205	22-18	3/8	.984	.650	100
R16-6	07206	16-14	6	.500	.256	100
R16-8	07207	16-14	8	.630	.315	100
R16-10	07208	16-14	10	.630	.315	100
R16-14	07209	16-14	1/4	.846	.472	100
R16-56	07210	16-14	5/16	.846	.472	100
R16-38	07211	16-14	3/8	.965	.590	50
R16-50	07212	16-14	1/2	1.122	.748	50
R12-6	07213	12-10	6	.768	.374	50
R12-8	07214	12-10	8	.768	.374	50

UNINSULATED BUTT CONNECTORS



CAT. NO.	UPC CODE	WIRE SIZE	TAB SIZE	CTN. QTY.
B22	07950	22-18	.591	100
B16	07951	16-14	.591	50
B12	07952	12-10	.591	50
B8	07953	8	.827	25

SPECIALTY PARTS

See page 7 for high temperature specialty parts.

CAT. NO.	UPC CODE	DESCRIPTION	CTN. QTY.
250-3MFM	08050	.250 x .032 male/female adapter	100
250-3-Z	08052	.250 x .032 male/female adapter	100
FCT12-250-3	07919	.250 x .032 12-8 AWG compressor terminal	50

CAT. NO.	UPC CODE	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.
R12-10	07215	12-10	10	.768	.374	50
R12-14	07216	12-10	1/4	.906	.472	50
R12-56	07217	12-10	5/16	1.102	.591	40
R12-38	07218	12-10	3/8	1.102	.591	40
R12-50	07219	12-10	1/2	1.280	.756	40
R8-10	07220	8	10	.925	.472	25
R8-14	07221	8	1/4	.925	.472	25
R8-56	07222	8	5/16	1.161	.591	25
R8-38	07223	8	3/8	1.161	.591	25
R6-14	07224	6	1/4	1.083	.472	15
R6-56	07225	6	5/16	1.280	.630	15
R6-38	07226	6	3/8	1.280	.630	15
R6-50	07227	6	1/2	1.626	.866	15
R4-14	07228	4	1/4	1.311	.649	15
R4-56	07229	4	5/16	1.311	.649	15
R4-38	07230	4	3/8	1.429	.689	15
R4-50	07231	4	1/2	1.665	.866	15
R2-14	07232	2	1/4	1.535	.602	10
R2-56	07233	2	5/16	1.535	.602	10
R2-38	07234	2	3/8	1.535	.602	10
R2-50	07235	2	1/2	1.665	.866	10

CAT. NO.	UPC CODE	DESCRIPTION	CTN. QTY.
DMT-250-3	08053	.250 x .032 male/female adapter	100
SF16-187-2	08100	.187 x .020 16 AWG female flag	100
SF16-250-3	08101	.250 x .032 16 AWG female flag	100
SF12-250-3	08102	.250 x .032 12 AWG female flag	100

UNINSULATED SPADE TERMINALS



Locking Spade
Suffix "L"



Block Spade
Suffix "B"



Flange Spade
Suffix "F"

CAT. NO.	UPC CODE	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.
S22-4	07400	22-18	4	.630	.228	100
S22-6	07401	22-18	6	.630	.224	100
S22-6-L	07451	22-18	6	.551	.252	100
S22-6-B	07501	22-18	6	.630	.244	100
S22-6-F	07551	22-18	6	.531	.303	100
S22-8	07402	22-18	8	.646	.276	100
S22-8-L	07452	22-18	8	.630	.280	100
S22-8-B	07502	22-18	8	.551	.303	100
S22-8-F	07552	22-18	8	.551	.303	100
S22-10	07403	22-18	10	.689	.378	100
S22-10-L	07453	22-18	10	.669	.331	100
S22-10-B	07503	22-18	10	.551	.303	100
S22-10-F	07553	22-18	10	.551	.303	100
S22-14	07404	22-18	1/4	.787	.433	100
S16-6	07405	16-14	6	.622	.252	100
S16-6-L	07455	16-14	6	.551	.252	100
S16-6-B	07505	16-14	6	.551	.303	100
S16-6-F	07555	16-14	6	.551	.303	100
S16-8	07406	16-14	8	.630	.315	100
S16-8-L	07456	16-14	8	.630	.280	100
S16-8-B	07506	16-14	8	.551	.303	100
S16-8-F	07556	16-14	8	.551	.303	100
S16-10	07407	16-14	10	.630	.315	100
S16-10-L	07457	16-14	10	.669	.331	100
S16-10-B	07507	16-14	10	.551	.303	100
S16-10-F	07557	16-14	10	.551	.303	100
S16-14	07408	16-14	1/4	.787	.472	100
S12-6	07409	12-10	6	.717	.354	50
S12-6-L	07459	12-10	6	.717	.311	50
S12-8	07410	12-10	8	.717	.354	50
S12-8-L	07460	12-10	8	.717	.311	50
S12-10	07411	12-10	10	.717	.354	50
S12-10-L	07461	12-10	10	.717	.311	50
S12-14	07412	12-10	1/4	.992	.354	50
S8-10	07830	8	10	.945	.472	25
S8-14	07831	8	1/4	.945	.472	25

Rated 600 volts, 149°C. Other sizes and styles available.
Please contact NSi for price and delivery on your requirements.

UNINSULATED FEMALE DISCONNECTS



CATALOG NO.	UPC CODE	WIRE SIZE	TAB SIZE	CTN. QTY.
F22-110-2	06900	22-18	.110 x .020	100
F22-110-3	06901	22-18	.110 x .032	100
F22-187-2	06902	22-18	.187 x .020	100
F22-187-3	06903	22-18	.187 x .032	100
F22-250-3	06904	22-18	.250 x .032	100
F16-110-2	06905	16-14	.110 x .020	100
F16-110-3	06906	16-14	.110 x .032	100
F16-187-2	06907	16-14	.187 x .020	100
F16-187-3	06908	16-14	.187 x .032	100
F16-250-3	06909	16-14	.250 x .032	100
F12-250-3	06910	12-10	.250 x .032	50

UNINSULATED MALE DISCONNECTS

CAT. NO.	UPC CODE	WIRE SIZE	TAB SIZE	CTN. QTY.
M22-250-3	06911	22-18	.250 x .032	100
M16-187-2	06912	16-14	.187 x .020	100
M16-250-3	06913	16-14	.250 x .032	100
M12-250-3	06914	12-10	.250 x .032	50

FEMALE PLUGS .157 DIA.

CAT. NO.	UPC CODE	WIRE SIZE	LENGTH	CTN. QTY.
PF22-157	08000	22-18	.630	100
PF16-157	08001	16-14	.630	100
PF16-197	08002	16-14	.630	100

MALE PLUGS .157 DIA.

CAT. NO.	UPC CODE	WIRE SIZE	LENGTH	CTN. QTY.
PM22-157	08030	22-18	0.689	100
PM16-157	08031	16-14	0.689	100
PM16-197	08032	16-14	0.689	100

PIGGYBACKS

CAT. NO.	UPC CODE	WIRE SIZE	LENGTH	CTN. QTY.
P22-250-3	07930	22-18	.650	50
P16-250-3	07931	16-14	.650	50

VINYL-INSULATED RING TERMINALS



CATALOG NO.	UPC CODE	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.
R22-6V	06000	22-18	6	.831	.315	100
R22-8V	06001	22-18	8	.827	.315	100
R22-10V	06002	22-18	10	.827	.315	100
R22-14V	06003	22-18	1/4	1.008	.472	100
R22-56V	06004	22-18	5/16	1.028	.472	100
R22-38V	06005	22-18	3/8	1.217	.650	100
R16-6V	06006	16-14	6	.717	.256	100
R16-8V	06007	16-14	8	.846	.315	100
R16-10V	06008	16-14	10	.846	.315	100
R16-14V	06009	16-14	1/4	1.059	.472	100
R16-56V	06010	16-14	5/16	1.059	.472	100
R16-38V	06011	16-14	3/8	1.161	.590	50
R16-50V	06012	16-14	1/2	1.335	.748	50
R12-6V	06013	12-10	6	1.063	.374	50
R12-8V	06014	12-10	8	1.063	.374	50
R12-10V	06015	12-10	10	1.063	.374	50
R12-14V	06016	12-10	1/4	1.201	.472	50
R12-56V	06017	12-10	5/16	1.396	.591	40
R12-38V	06018	12-10	3/8	1.396	.591	40
R12-50V	06019	12-10	1/2	1.575	.756	40
R8-10V	06020	8	10	1.244	.472	25
R8-14V	06021	8	1/4	1.244	.472	25
R8-38V	06024	8	3/8	1.480	.591	25
R8-50V	06025	8	1/2	1.480	.591	25
R8-56V	06023	8	5/16	1.480	.591	25

NYLON-INSULATED RING TERMINALS



CATALOG NO.	NAED NO.	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.
R22-6N	07300	22-18	6	.831	.315	100
R22-8N	07301	22-18	8	.827	.315	100
R22-10N	07302	22-18	10	.827	.315	100
R22-14N	07303	22-18	1/4	1.008	.472	100
R22-56N	07304	22-18	5/16	1.025	.472	100
R22-38N	07305	22-18	3/8	1.217	.650	100
R16-6N	07306	16-14	6	.717	.256	100
R16-8N	07307	16-14	8	.846	.315	100
R16-10N	07308	16-14	10	.846	.315	100
R16-14N	07309	16-14	1/4	1.059	.472	100
R16-56N	07310	16-14	5/16	1.059	.472	100
R16-38N	07311	16-14	3/8	1.161	.590	50
R16-50N	07312	16-14	1/2	1.335	.748	50
R12-6N	07313	12-10	6	1.063	.374	50
R12-8N	07314	12-10	8	1.063	.374	50
R12-10N	07315	12-10	10	1.063	.374	50
R12-14N	07316	12-10	1/4	1.201	.472	50
R12-56N	07317	12-10	5/16	1.398	.591	40
R12-38N	07318	12-10	3/8	1.398	.591	40
R12-50N	07319	12-10	1/2	1.575	.756	40
R8-10N	07320	8	10	1.244	.472	25
R8-14N	07321	8	1/4	1.244	.472	25
R8-56N	07322	8	5/16	1.480	.591	25
R8-38N	07323	8	3/8	1.480	.591	25
R6-14N	07324	6	1/4	1.535	.472	15
R6-56N	07325	6	5/16	1.732	.630	15
R6-38N	07326	6	3/8	1.732	.630	15
R6-50N	07327	6	1/2	2.028	.866	15
R4-14N	07328	4	1/4	1.803	.649	15
R4-56N	07329	4	5/16	1.803	.649	15
R4-38N	07330	4	3/8	1.921	.689	15
R4-50N	07331	4	1/2	2.157	.866	15
R2-14N	07332	2	1/4	2.086	.602	10
R2-56N	07333	2	5/16	2.086	.602	10
R2-38N	07334	2	3/8	2.086	.602	10
R2-50N	07335	2	1/2	2.216	.866	10

Rated 600 volts, -40°C to 105°C.

VINYL-INSULATED SPADE TERMINALS



Locking Spade
Suffix "L"



Block Spade
Suffix "B"



Flange Spade
Suffix "F"

CATALOG NO.	UPC CODE	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.
S22-4V	06200	22-18	4	.846	.228	100
S22-6V	06201	22-18	6	.896	.224	100
S22-6V-L	06301	22-18	6	.768	.252	100
S22-6V-B	06601	22-18	6	.846	.244	100
S22-6V-F	06451	22-18	6	.768	.303	100
S22-8V	06202	22-18	8	.862	.276	100
S22-8V-L	06302	22-18	8	.847	.280	100
S22-8V-B	06602	22-18	8	.768	.303	100
S22-8V-F	06452	22-18	8	.768	.303	100
S22-10V	06203	22-18	10	.906	.378	100
S22-10V-L	06303	22-18	10	.885	.331	100
S22-10V-B	06603	22-18	10	.768	.303	100
S22-10V-F	06453	22-18	10	.768	.303	100
S22-14V	06204	22-18	1/4	1.004	.433	100
S16-6V	06205	16-14	6	.839	.252	100
S16-6V-L	06305	16-14	6	.768	.252	100
S16-6V-B	06605	16-14	6	.768	.303	100
S16-6V-F	06455	16-14	6	.768	.303	100
S16-8V	06206	16-14	8	.846	.315	100
S16-8V-L	06306	16-14	8	.846	.280	100
S16-8V-B	06606	16-14	8	.768	.303	100
S16-8V-F	06456	16-14	8	.768	.303	100
S16-10V	06207	16-14	10	.846	.315	100
S16-10V-L	06307	16-14	10	.855	.331	100
S16-10V-B	06607	16-14	10	.768	.303	100
S16-10V-F	06457	16-14	10	.768	.303	100
S16-14V	06208	16-14	1/4	1.004	.472	100
S12-6V	06209	12-10	6	1.012	.354	50
S12-6V-L	06309	12-10	6	1.012	.311	50
S12-8V	06210	12-10	8	1.012	.354	50
S12-8V-L	06310	12-10	8	1.012	.311	50
S12-10V	06211	12-10	10	1.012	.354	50
S12-10V-L	06311	12-10	10	1.012	.311	50
S12-14V	06212	12-10	1/4	1.287	.354	50


NYLON-INSULATED SPADE TERMINALS




Rated 600 volts, -40°C to 105°C. Other sizes and styles available. Please contact NSi for price and delivery on your requirements.

CATALOG NO.	UPC CODE	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.
S22-4N	07600	22-18	4	.846	.228	100
S22-6N	07601	22-18	6	.896	.224	100
S22-6N-L	07651	22-18	6	.768	.252	100
S22-6N-B	07771	22-18	6	.846	.244	100
S22-6N-F	07801	22-18	6	.768	.303	100
S22-8N	07602	22-18	8	.862	.276	100
S22-8N-L	07652	22-18	8	.847	.280	100
S22-8N-B	07772	22-18	8	.768	.303	100
S22-8N-F	07802	22-18	8	.768	.303	100
S22-10N	07603	22-18	10	.906	.378	100
S22-10N-L	07653	22-18	10	.885	.331	100
S22-10N-B	07773	22-18	10	.768	.303	100
S22-10N-F	07803	22-18	10	.768	.303	100
S22-14N	07604	22-18	1/4	1.004	.433	100
S16-6N	07605	16-14	6	.839	.252	100
S16-6N-L	07655	16-14	6	.768	.252	100
S16-6N-B	07775	16-14	6	.768	.303	100
S16-6N-F	07805	16-14	6	.768	.303	100
S16-8N	07606	16-14	8	.846	.315	100
S16-8N-L	07656	16-14	8	.846	.280	100
S16-8N-B	07776	16-14	8	.768	.303	100
S16-8N-F	07806	16-14	8	.768	.303	100
S16-10N	07607	16-14	10	.846	.315	100
S16-10N-L	07657	16-14	10	.855	.331	100
S16-10N-B	07777	16-14	10	.768	.303	100
S16-10N-F	07807	16-14	10	.768	.303	100
S16-14N	07608	16-14	1/4	1.004	.472	100
S12-6N	07609	12-10	6	1.012	.354	50
S12-6N-L	07659	12-10	6	1.012	.311	50
S12-8N	07610	12-10	8	1.012	.354	50
S12-8N-L	07660	12-10	8	1.012	.311	50
S12-10N	07611	12-10	10	1.012	.354	50
S12-10N-L	07661	12-10	10	1.012	.311	50
S12-14N	07612	12-10	1/4	1.287	.354	50
S8-10N	07832	8	10	1.264	.472	25
S8-14N	07833	8	1/4	1.264	.472	25


VINYL-INSULATED FEMALE

	CAT. NO.	UPC CODE	WIRE SIZE	TAB SIZE	CTN. QTY.
	F22-110-2V	06950	22-18	.110 x .020	100
	F22-110-3V	06951	22-18	.110 x .032	100
	F22-187-2V	06952	22-18	.187 x .020	100
	F22-187-3V	06953	22-18	.187 x .032	100
	F22-250-3V	06954	22-18	.250 x .032	100
	F16-110-2V	06955	16-14	.110 x .020	100
	F16-110-3V	06956	16-14	.110 x .032	100
	F16-187-2V	06957	16-14	.187 x .020	100
	F16-187-3V	06958	16-14	.187 x .032	100
	F16-250-3V	06959	16-14	.250 x .032	100
	F12-250-3V	06960	12-10	.250 x .032	50


NYLON-INSULATED FEMALE

	CAT. NO.	UPC CODE	WIRE SIZE	TAB SIZE	CTN. QTY.
	F22-110-2N	07100	22-18	.110 x .020	100
	F22-110-3N	07101	22-18	.110 x .032	100
	F22-187-2N	07102	22-18	.187 x .020	100
	F22-187-3N	07103	22-18	.187 x .032	100
	F22-250-3N	07104	22-18	.250 x .032	100
	F16-110-2N	07105	16-14	.110 x .020	100
	F16-110-3N	07106	16-14	.110 x .032	100
	F16-187-2N	07107	16-14	.187 x .020	100
	F16-187-3N	07108	16-14	.187 x .032	100
	F16-250-3N	70109	16-14	.250 x .032	100
	F12-250-3N	07110	12-10	.250 x .032	50


VINYL-INSULATED MALE

	CAT. NO.	UPC CODE	WIRE SIZE	TAB SIZE	CTN. QTY.
	M22-250-3V	06961	22-18	.250 x .032	100
	M16-187-2V	06962	16-14	.187 x .020	100
	M16-250-3V	06963	16-14	.250 x .032	100
	M12-250-3V	06964	12-10	.250 x .032	50




NYLON-INSULATED MALE

	CAT. NO.	UPC CODE	WIRE SIZE	TAB SIZE	CTN. QTY.
	M22-250-3N	07111	22-18	.250 x .032	100
	M16-187-2N	07112	16-14	.187 x .020	100
	M16-250-3N	07113	16-14	.250 x .032	100
	M12-250-3N	07114	12-10	.250 x .032	50


FULLY NYLON-INSULATED FEMALE

	CAT. NO.	UPC CODE	WIRE SIZE	TAB SIZE	CTN. QTY.
	IF22-110-2N	07900	22-18	.110 x .020	50
	IF22-110-3N	07901	22-18	.110 x .032	50
	IF22-187-2N	07902	22-18	.187 x .020	50
	IF22-187-3N	07903	22-18	.187 x .032	50
	IF22-250-3N	07904	22-18	.250 x .032	50
	IF16-187-2N	07905	16-14	.187 x .020	50
	IF16-187-3N	07906	16-14	.187 x .032	50
	IF16-250-3N	07907	16-14	.250 x .032	50
	IF12-250-3N	07911	12-10	.250 x .032	50


FULLY NYLON-INS. FEMALE-SLEEVED BARREL

 	CAT. NO.	UPC CODE	WIRE SIZE	TAB SIZE	CTN. QTY.
	IFS22-110-2N	07920	22-18	.110 x .020	50
	IFS22-110-3N	07921	22-18	.110 x .032	50
	IFS22-250-3N	07922	22-18	.250 x .032	50
	IFS16-250-3N	07923	16-14	.250 x .032	50
	IFS12-250-3N	07924	12-10	.250 x .032	50


FULLY NYLON-INSULATED MALE

	CAT. NO.	UPC CODE	WIRE SIZE	TAB SIZE	CTN. QTY.
	IM22-250-3N	07908	22-18	.250 x .032	50
	IM16-250-3N	07909	16-14	.250 x .032	50
	IM12-250-3N	07910	12-10	.250 x .032	50


VINYL-INSULATED PIGGYBACK

	CAT. NO.	UPC CODE	WIRE SIZE	TAB SIZE	CTN. QTY.
	P22-250-3V	07935	22-18	.250 x .032	50
	P16-250-3V	07936	16-14	.250 x .032	50

NYLON-INSULATED FLAG TERMINAL

	CAT. NO.	UPC CODE	WIRE SIZE	TAB SIZE	CTN. QTY.
	IFL12-250-3N	07912	12-10	.250 x .032	50

NYLON-INSULATED PIGGYBACK

	CAT. NO.	UPC CODE	WIRE SIZE	TAB SIZE	CTN. QTY.
	P22-250-3N	07940	22-18	.250 x .032	50
	P16-250-3N	07941	16-14	.250 x .032	50

VINYL BUTT CONNECTORS

CAT. NO.	UPC CODE	WIRE SIZE	LENGTH	CTN. QTY.
B22-V	06750	22-18	1.004	100
B16-V	06751	16-14	1.004	50
B12-V	06752	12-10	1.063	50
B8-V	06753	8	1.450	25



NYLON BUTT CONNECTORS

CAT. NO.	UPC CODE	WIRE SIZE	LENGTH	CTN. QTY.
B22-N	07960	22-18	1.004	100
B16-N	07961	16-14	1.004	50
B12-N	07962	12-10	1.063	50



NYLON FEMALE PLUG DISCONNECTS

CAT. NO.	UPC CODE	WIRE SIZE	LENGTH	CTN. QTY.
PF22-157N	08010	22-18	1.154	50
PF16-157N	08011	16-14	1.154	50



SHRINK-TUBE BUTT CONNECTORS

CAT. NO.	UPC CODE	WIRE SIZE	LENGTH	CTN. QTY.
SB22	07980	22-18	.591	25
SB16	07981	16-14	.591	25
SB12	07982	12-10	.591	25



NYLON MALE PLUG DISCONNECTS

CAT. NO.	UPC CODE	WIRE SIZE	LENGTH	CTN. QTY.
PM22-157N	08040	22-18	.906	100
PM16-157N	08041	16-14	.906	100
PM16-197N	08042	16-14	.906	100



NYLON-SLEEVED FEMALE PLUG DISCONNECTS

CAT. NO.	UPC CODE	WIRE SIZE	LENGTH	CTN. QTY.
PFS22-157N	08020	22-18	1.154	50
PFS16-157N	08021	16-14	1.154	50
PFS16-197N	08022	16-14	1.154	50



2-WAY RECEPTACLE FOR .157 MALE

CAT. NO.	UPC CODE	CTN. QTY.
DFR-157N	08043	25



PLIER TAP CONNECTORS

CAT. NO.	UPC CODE	WIRE SIZE	CTN. QTY.
PTC22-18	07990	22-18	25
PTC16-14	07991	16-14	25
PTC12-10	07992	12-10	25



VINYL-INSULATED PIN TERMINALS

CAT. NO.	UPC CODE	WIRE SIZE	CTN. QTY.
PT-22V	07985	22-18	100
PT-16V	07986	16-14	100
PT-12V	07987	12-10	50



HIGH TEMPERATURE RING TERMINALS



These nickel-plated steel alloy ring terminals are designed to perform in ambient operating temperature ranges of up to 900°F (483°C).

CATALOG NO.	UPC CODE	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.
HTR22-6	08500	22-18	6	.660	.264	100
HTR22-8	08501	22-18	8	.660	.264	100
HTR22-10	08502	22-18	10	.670	.283	100
HTR16-6	08510	16-14	6	.730	.322	100
HTR16-8	08511	16-14	8	.730	.322	100

CATALOG NO.	UPC CODE	WIRE SIZE	STUD SIZE	LENGTH	WIDTH	CTN. QTY.
HTR16-10	08512	16-14	10	.730	.322	100
HTR12-8	08520	12-10	8	.785	.385	50
HTR12-10	08521	12-10	10	.785	.385	50
HTR12-14	08522	12-10	1/4	.952	.540	50

HIGH TEMPERATURE SPECIALTY PARTS

CAT. NO.	UPC CODE	DESCRIPTION	CTN. QTY.
----------	----------	-------------	-----------



HTSF12-250-3 07914 .250 x .032
12-10 AWG female flag disconnect

Nickel-plated steel alloy performs well in ambient operating temperature ranges of up to 900°F (483°C).



HTF12-250-3 07915 .250 x .032
12-10 AWG female disconnect

Nickel-plated steel alloy performs well in ambient operating temperature ranges of up to 900°F (483°C).

CAT. NO.	UPC CODE	DESCRIPTION	CTN. QTY.
----------	----------	-------------	-----------



HTM16-187-2 07916 .187 x .020
16-14 AWG male disconnect

HTM12-250-3 07917 .250 x .032
12-10 AWG male disconnect

Nickel-plated steel alloy performs well in ambient operating temperature ranges of up to 900°F (483°C).



HTP16-250-3 07918 .250 x .032
16-14 AWG combination male/female disconnect

Nickel-plated steel alloy performs well in ambient operating temperature ranges of up to 900°F (483°C).

PUSH-ON TERMINAL KIT



CATALOG NO.	BARCODE NO.	KIT CONTAINS	CARTON QTY.	SHPG. WT. LBS./100
CTK-1	07927	kit converts screw type terminals to push-on type. contains four push-on terminal adapters, four screws	100	4

COMPRESSOR TERMINAL KIT - WITH WIRE



This NSi Compressor Terminal Kit includes three color coded #10 AWG type AWM extra flexible lead wires (10" lengths). One end has a .250" by .032" female tab 12-10 quick disconnect, and the other is stripped at 5/16".

CATALOG NO.	BARCODE NO.	KIT CONTAINS	PKG QTY.	SHPG. WT. LBS./100
NSi 33-12	06049	3 color colded wires and includes three 12-10 AWG shrink tube butt connectors	1	8
NSi 33-13	07700	1 each 8 and 10 AWG Terminaider lead, B8-V butt connector, B12-V butt connector and 4 SS screws	1	16
NSi 33-14	07701	B12-V butt connector and 2 SS screws, 10 AWG Terminaider lead	1	7
NSi 33-15	07702	8 AWG Terminaider lead, B8-V butt connector and 2 SS screws	1	9



Increase your impulse sales and profits with NSi Merchandising Product Displays. All items are priced the same and sold on a "per package" basis for ease of handling at the counter. Display boards are provided free of charge with minimal opening order. Wall display is 23 1/2" high and 20" wide. For per/pack price, please contact your NSi representative.


RING TERMINALS - VINYL INSULATED

CATALOG NO.	UPC CODE	WIRE SIZE	STUD SIZE	L	W	QTY. PER PACK
R22-6V-S*	06050	22-18	#6	0.831	0.315	25
R22-8V-S*	06051	22-18	#8	0.827	0.315	25
R22-10V-S*	06052	22-18	#10	0.827	0.315	25
R22-14V-S	06053	22-18	1/4	1.008	0.472	20
R22-56V-S	06054	22-18	5/16	1.028	0.472	20
R22-38V-S	06055	22-18	3/8	1.217	0.650	15
R16-6V-S*	06056	16-14	#6	0.717	0.256	25
R16-8V-S*	06057	16-14	#8	0.846	0.315	25
R16-10V-S*	06058	16-14	#10	0.846	0.315	25
R16-14V-S	06059	16-14	1/4	1.059	0.472	20
R16-56V-S	06060	16-14	5/16	1.059	0.472	20
R16-38V-S	06061	16-14	3/8	1.161	0.590	15
R16-50V-S	06062	16-14	1/2	1.335	0.748	15
R12-6V-S	06063	12-10	#6	1.063	0.374	15
R12-8V-S*	06064	12-10	#8	1.063	0.374	15
R12-10V-S*	06065	12-10	#10	1.063	0.374	15
R12-14V-S*	06066	12-10	1/4	1.201	0.472	15
R12-56V-S	06067	12-10	5/16	1.398	0.591	10
R12-38V-S	06068	12-10	3/8	1.398	0.591	10
R12-50V-S	06069	12-10	1/2	1.575	0.755	10



SPADE TERMINALS - VINYL INSULATED


CATALOG NO.	UPC CODE	WIRE SIZE	STUD SIZE	L	W	QTY. PER PACK
S22-6V-S*	06221	22-18	#6	0.896	0.224	25
S22-8V-S*	06222	22-18	#8	0.862	0.276	25
S22-10V-S*	06223	22-18	#10	0.906	0.378	25
S22-14V-S	06224	22-18	1/4	1.004	0.433	20
S16-6V-S*	06225	16-14	#6	0.839	0.252	20
S16-8V-S*	06226	16-14	#8	0.846	0.315	20
S16-10V-S*	06227	16-14	#10	0.846	0.315	20
S16-14V-S*	06228	16-14	1/4	1.004	0.472	20
S12-6V-S	06229	12-10	#6	1.012	0.354	15
S12-8V-S*	06230	12-10	#8	1.012	0.354	15
S12-10V-S*	06231	12-10	#10	1.012	0.354	15
S12-14V-S*	06232	12-10	1/4	1.287	0.354	12



Locking Spade
Suffix "L"



Block Spade
Suffix "B"



Flange Spade
Suffix "F"

DISCONNECTS - VINYL INSULATED

CATALOG NO.	UPC CODE	WIRE SIZE	TYPE	TAB SIZE	QTY. PER PACK
F22-110-2V-S	07000	22-18	female	.110 x .020	25
F22-110-3V-S	07001	22-18	female	.110 x .032	25
F22-187-2V-S	07002	22-18	female	.187 x .020	25
F22-187-3V-S	07003	22-18	female	.187 x .032	25
F22-250-3V-S*	07004	22-18	female	.250 x .032	25
M22-250-3V-S*	07011	22-18	male	.250 x .032	25
F16-110-2V-S	07005	16-14	female	.110 x .020	25
F16-110-3V-S	07006	16-14	female	.110 x .032	25
F16-187-2V-S	07007	16-14	female	.187 x .020	25
F16-187-3V-S	07008	16-14	female	.187 x .032	25
F16-250-3V-S*	07009	16-14	female	.250 x .032	25
M16-187-2V-S	07012	16-14	male	.187 x .020	25
M16-250-3V-S*	07013	16-14	male	.250 x .032	25
F12-250-3V-S*	07010	12-10	female	.250 x .032	15
M12-250-3V-S*	07014	12-10	male	.250 x .032	15



BUTT CONNECTORS - VINYL INSULATED

CATALOG NO.	UPC CODE	WIRE SIZE	L	COLOR	QTY. PER PACK
B22-V-S*	06760	22-18	1.004	red	25
B16-V-S*	06761	16-14	1.004	blue	20
B12-V-S*	06762	12-10	1.083	yellow	15
B8-V-S	06763	8	1.450	red	5



CLOSED END CONNECTORS

CATALOG NO.	UPC CODE	WIRE SIZE	L	H	QTY. PER PACK
C22-N-S*	06810	22-18	.228	.244	25
C16-N-S*	06811	16-14	.256	.272	25
C12-N-S*	06812	12-10	.293	.282	15
C8-N-S	06813	8	.453	.323	10



See Easy-Twist™ Catalog for Bulk and Loose

* Recommended display board items



Increase your impulse sales and profits with NSi Merchandising Product Displays. All items are priced the same and sold on a "per package" basis for ease of handling at the counter. Display boards are provided free of charge with minimal opening order. Wall display is 23 1/2" high and 20" wide. For per/pack price, please contact your NSi representative.


RING TERMINALS - VINYL INSULATED

CATALOG NO.	UPC CODE	WIRE SIZE	STUD SIZE	L	W	QTY. PER PACK
R22-6V-D*	06100	22-18	#6	0.831	0.315	100
R22-8V-D*	06101	22-18	#8	0.827	0.315	100
R22-10V-D*	06102	22-18	#10	0.827	0.315	100
R22-14V-D	06103	22-18	1/4	1.008	0.472	80
R22-56V-D	06104	22-18	5/16	1.028	0.472	80
R22-38V-D	06105	22-18	3/8	1.217	0.650	60
R16-6V-D*	06106	16-14	#6	0.717	0.256	90
R16-8V-D*	06107	16-14	#8	0.846	0.315	90
R16-10V-D*	06108	16-14	#10	0.846	0.315	90
R16-14V-D	06109	16-14	1/4	1.059	0.472	75
R16-56V-D	06110	16-14	5/16	1.059	0.472	75
R16-38V-D	06111	16-14	3/8	1.161	0.590	60
R16-50V-D	06112	16-14	1/2	1.335	0.748	50
R12-6V-D	06113	12-10	#6	1.063	0.374	60
R12-8V-D*	06114	12-10	#8	1.063	0.374	60
R12-10V-D*	06115	12-10	#10	1.063	0.374	60
R12-14V-D*	06116	12-10	1/4	1.201	0.472	50
R12-56V-D	06099	12-10	5/16	1.398	0.591	45
R12-38V-D	06118	12-10	3/8	1.398	0.591	45
R12-50V-D	06117	12-10	1/2	1.575	0.755	40



SPADE TERMINALS - VINYL INSULATED


CATALOG NO.	UPC CODE	WIRE SIZE	STUD SIZE	L	W	QTY. PER PACK
S22-6V-D*	06251	22-18	#6	0.896	0.224	100
S22-8V-D*	06252	22-18	#8	0.862	0.276	100
S22-10V-D*	06253	22-18	#10	0.906	0.378	100
S22-14V-D	06254	22-18	1/4	1.004	0.433	85
S16-6V-D*	06255	16-14	#6	0.839	0.252	85
S16-8V-D*	06260	16-14	#8	0.846	0.315	85
S16-10V-D*	06257	16-14	#10	0.846	0.315	85
S16-14V-D*	06258	16-14	1/4	1.004	0.472	80
S12-6V-D	06259	12-10	#6	1.012	0.354	60
S12-8V-D*	06260	12-10	#8	1.012	0.354	60
S12-10V-D*	06261	12-10	#10	1.012	0.354	60
S12-14V-D*	06262	12-10	1/4	1.287	0.354	50



Locking Spade
Suffix "L"



Block Spade
Suffix "B"



Flange Spade
Suffix "F"

DISCONNECTS - VINYL INSULATED

CATALOG NO.	UPC CODE	WIRE SIZE	TYPE	TAB SIZE	QTY. PER PACK
F22-110-2V-D	07052	22-18	female	.110 x .020	100
F22-110-3V-D	07064	22-18	female	.110 x .032	100
F22-187-2V-D	07053	22-18	female	.187 x .020	100
F22-187-3V-D	07065	22-18	female	.187 x .032	100
F22-250-3V-D*	07054	22-18	female	.250 x .032	100
M22-250-3V-D*	07061	22-18	male	.250 x .032	100
F16-110-2V-D	07055	16-14	female	.110 x .020	100
F16-110-3V-D	07066	16-14	female	.110 x .032	100
F16-187-2V-D	07056	16-14	female	.187 x .020	100
F16-187-3V-D	07067	16-14	female	.187 x .032	100
F16-250-3V-D*	07059	16-14	female	.250 x .032	100
M16-187-2V-D	07062	16-14	male	.187 x .020	100
M16-250-3V-D*	07063	16-14	male	.250 x .032	100
F12-250-3V-D*	07060	12-10	female	.250 x .032	70
M12-250-3V-D*	07064	12-10	male	.250 x .032	70



BUTT CONNECTORS - VINYL INSULATED

CATALOG NO.	UPC CODE	WIRE SIZE	L	COLOR	QTY. PER PACK
B22-V-D*	06770	22-18	1.004	red	100
B16-V-D*	06771	16-14	1.004	blue	80
B12-V-D*	06772	12-10	1.083	yellow	50
B8-V-D	06773	8	1.450	red	20



CLOSED END CONNECTORS

CATALOG NO.	UPC CODE	WIRE SIZE	L	H	QTY. PER PACK
C22-N-D*	06820	22-18	.228	.244	100
C16-N-D*	06821	16-14	.256	.272	100
C12-N-D*	06822	12-10	.293	.282	65
C8-N-D	06823	8	.453	.323	40



See Easy-Twist™ Catalog for Bulk and Loose

* Recommended display board items



Miniterms

MINITERM KITS/ALLIGATOR TEST CLIPS


MINITERM DELUXE KIT IN HEAVY DUTY CASE/175 PIECE ECONOMY KIT WITH TOOL



These kits have been carefully designed to include the most popular NSi miniterm terminals. The cases are made of extremely durable polypropylene. They provide the ultimate in organization and convenience. Clearly labeled on the inside lid for easy recognition. Convenient size for easy carrying and easy storing. Reusable.

CATALOG NO.	UPC CODE	KIT CONTAINS				CARTON QTY.	SHPG. WT. LBS./100		
MTK	08600	40	R22-6V	40	F22-250-3V	40	S22-6V	12	3
		40	R22-10V	35	F16-250-3V	40	S22-10V		
		30	R16-6V	20	F12-250-3V	25	S16-6V		
		30	R16-10V	35	B22-V	25	S16-10V		
		20	R12-8V	25	B16-V	15	S12-8V		
		20	R12-14V	15	B12-V	12	S12-14V		
MTK-2	08601	10	R22-6V	10	S22-8V	10	B22-V	12	1
		10	R22-8V	10	S22-10V	10	B16-V		
		10	R22-10V	10	S16-8V	10	B12-V		
		10	R16-6V	10	S16-10V	10	F22-250-3V		
		10	R16-8V	5	S12-10V	10	F16-250-3V		
		10	R16-10V	10	M22-250-3V	1	tool		
		5	R12-10V	10	M16-250-3V				

ALLIGATOR TEST CLIPS



CATALOG NO.	UPC CODE	FIG. NO.	DESCRIPTION	PACKAGING		SHPG. WT. LBS./100
				BAG	CARTON	
ATC-1R	92101	1	2 inch alligator clip with vinyl boot – red	10	100	2
ATC-1B	92102	1	2 inch alligator clip with vinyl boot – black	10	100	2
ATC-2R	92103	2	2 inch screw type alligator clip with molded handle – red	10	100	2
ATC-2B	92104	2	2 inch screw type alligator clip with molded handle – black	10	100	2
ATC-3R	92105	3	10 amp. battery clip with molded vinyl boot – red	10	100	3
ATC-3B	92106	3	10 amp. battery clip with molded vinyl boot – black	10	100	3








PUSHBUTTONS & PULL CHAINS

CATALOG NO.	UPC CODE	CIRCUIT FUNC-TIONS	POLES & THROWS	AMPS 125 VAC	RATINGS		H.P. 125-250 VAC	ACTUATOR STYLE	ACTUATOR MATERIAL	CONTACT	CONNECTION TYPE	CTN. QTY.
					AMPS 250 VAC							
 76050PS	76050	push on push off	SPST	6*	3*		–	pushbutton	brass/ nickel	maintained	screws	5
 76040PW	76040	push on push off	SPST	6	3	1/3 @125		pushbutton	brass/ nickel	maintained	wire leads	5
DIMENSIONS IN INCHES A: .437 B: .562 C: .542 D: 1.183												
 76010PW	76010	push on push off	SPST	10	5	1/4 @125		pushbutton	nylon	maintained leads	wire	5
DIMENSIONS IN INCHES A: 1.003 B: .612 C: .550 D: .993												
 76060PS	76060	push on push off	SPST	15	10		–	pushbutton	brass/ nickel	maintained	screws	5
DIMENSIONS IN INCHES A: .283 B: .562 C: .982 D: 1.125												
 76090PW	76090	on off	SPST	6	3		–	push canopy	brass	maintained	wire leads	5
 76100PW	76100	on off	SPST	6	3		–	push canopy	nickel	maintained	wire leads	5
DIMENSIONS IN INCHES A: .968 B: .313 C: D: .858												
 76020PS	76020	off (on)	SPST N.O.	3/4	1/4		–	pushbutton	nylon	momentary	screws	5
 76030PS	76030	on (off)	SPST N.C.	3/4	1/4		–	pushbutton	nylon	momentary	screws	5
DIMENSIONS IN INCHES A: .460 B: 1.070 C: .650 D: 1.950												
 76065PS	76065	off (on)	SPST N.O.	3	–		–	pushbutton	plastic	momentary	screws	5
DIMENSIONS IN INCHES A: .689 B: 1.406 C: .563 D: .875 E:												
 76070PS	76070	off (on)	SPST N.O.	15	10		–	pushbutton	brass/nickel	momentary	screws	5
76080PS	76080	on (off)	SPST N.C.	15	10		–	pushbutton	brass/nickel	momentary	screws	5
DIMENSIONS IN INCHES A: .576 B: .562 C: 1.382												
75101CW	75101	on off	SPST	6	3		–	chain w/cord	brass	–	wire leads	5
75102CW	75102	on off	SPST	6	3		–	chain w/cord	nickel	–	wire leads	5
DIMENSIONS IN INCHES A: 1.250 B: .781 C: .594												
75110CW	751103 way/2 circuit	SP3T		6	3		–	chain w/cord	brass	–	wire leads	5
75111CQ	75111	off on on on	SP3T	6	3		–	chain w/cord	brass	–	push in	5
DIMENSIONS IN INCHES A: 1.250 B: 1.125 C: .742												

* Amperage and voltage are also valid for D.C. Rating
() Indicates momentary position.

TOGGLE SWITCHES – MAINTAINED CONTACT & SINGLE POLE



CATALOG NO.	UPC CODE	CIRCUIT FUNCTIONS	POLES & THROWS	RATINGS			ACTUATOR STYLE	ACTUATOR MATERIAL	CONNECTION TYPE	CTN. QTY.	
				AMPS 125 VAC	AMPS 250 VAC	H.P. 125-250 VAC					
	78110TS	78110	on off	SPST	6	3	–	bat	brass/nickel	screws	5
	78210TS	78210	on off	SPST	20	10	3/4	bat	brass/nickel	screws	5
	78120TQ	78120	on off	SPST	20	10	3/4	bat	brass/nickel	.250 quikconnect	5
	78200TS	78200	on on	SPDT	20	10	3/4	bat	brass/nickel	screws	5
	78160TS	78160	on off on	SPDT	20	10	3/4	bat	brass/nickel	screws	5
	78060TQ	78060	on on	SPDT	20	10	3/4	bat	brass/nickel	.250 quikconnect	5
	78070TQ	78070	on off on	SPDT	20	10	3/4	bat	brass/nickel	.250 quikconnect	5
DIMENSIONS IN INCHES A: .687 B: .465 C: .670 D: .348 E: 1.134 F: .634 THREAD: 15/32-32UNS-2A KEYWAY: .072 X .038 DP											
	78140TS	78140	on off	SPST	6*	3*	–	bat	brass/nickel	screws	5
DIMENSIONS IN INCHES A: .687 B: .465 C: .560 D: .348 E: .890 F: .524 THREAD: 15/32-32UNS-2A KEYWAY: .072 X .038 DP											
	78150TW	78150	on off	SPST	10*	4*	–	bat	brass/nickel	wire leads	5
DIMENSIONS IN INCHES A: .500 B: .469 C: .685 D: 1.093 E: 1.856 THREAD: 15/32-32 STANDARD 6" WIRE LEADS											
	78020TQ	78020	on off	SPST	15*	10*	3/4	flat	poly. (amber)**	.250 quikconnect	5
	78030TQ	78030	on off	SPST	15*	10*	3/4	flat	poly. (green)**	.250 quikconnect	5
	78040TQ	78040	on off	SPST	15*	10*	3/4	flat	poly. (red)**	.250 quikconnect	5
DIMENSIONS IN INCHES A: .715 B: .379 C: .865 D: .750 E: .422 THREAD: 15/32-32UNS-2A KEYWAY: .072 X .038 DP											
	78280TS	78280	on off	SPST	16*	8*	1	bat	brass/nickel	screws	5
	78010TQ	78010	on off	SPST	20	10	1 1/2	flat	nylon	.250 quikconnect	5
	78015TS	78015	on off	SPST	20	10	–	flat	nylon	screws	5
DIMENSIONS IN INCHES A: .687 B: .280 C: .687 D: .375 E: 1.000 F: .588 KEYWAY: .072 X .038											
	78050TQ	78050	on off	SPST	20	10	3/4	bat	brass/nickel	.250 quikconnect	5
DIMENSIONS IN INCHES A: .687 B: .465 C: .585 D: .522 E: .312 THREAD: 15/32-32UNS-2A KEYWAY: .072 X .038											
	78350TS	78350	circuits 1&2 on off circuits 1 on	2 circuits	15	10	3/4@250	bat	brass/nickel	screws	5
DIMENSIONS IN INCHES A: .687 B: .465 C: .778 D: .750 E: 1.308 F: 422 KEYWAY: .072 X .038											






* Amperage and voltage are also valid for D.C. Rating

** Lighted toggle.

Poly. = Polycarbonate

TOGGLE SWITCHES – MAINTAINED & MOMENTARY CONTACT – MULTIPLE POLE



CATALOG NO.	UPC CODE	CIRCUIT FUNC-TIONS	POLES & THROWS	RATINGS			ACTUATOR STYLE	ACTUATOR MATERIAL	CONNECTION TYPE	CTN. QTY.
				AMPS 125 VAC	AMPS 250 VAC	H.P. 125-250 VAC				
	78080	on off	DPST	15	10	–	bat	brass/nickel	.250 quikconnect	5
	78220	on off	DPST	20	10	3/4	bat	brass/nickel	screws	5
	78130	on off	DPST	20	10	3/4	bat	brass/nickel	.250 quikconnect	5
	78090	on on	DPDT	15	10	–	bat	brass/nickel	.250 quikconnect	5
	78100	on off on	DPDT	15	10	1 1/2	bat	brass/nickel	.250 quikconnect	5
	78230	on off on	DPDT	20	10	3/4	bat	brass/nickel	screws	5
	78270	on on	DPDT	20	10	1/2@125.2@250	bat	brass/nickel	screws	5
	78240	off (on)	DPST	15	10	3/4	bat	brass/nickel	screws	5
	78250	on off (on)	DPDT	15	10	3/4	bat	brass/nickel	screws	5
	78260	(on) off (on)	DPDT	15	10	3/4	bat	brass/nickel	screws	5
DIMENSIONS IN INCHES A: .687 B: .465 C: .778 D: .750 E: 1.308 F: .422 THREAD: 15/32-323UNS-2A KEYWAY: .072 X .038										
	78290	on off	DPST	16*	8*	1	bat	brass/nickel	screws	5
DIMENSIONS IN INCHES A: .687 B: .465 C: .765 D: .836 E: 1.750 F: 1.764 THREAD: 15/32-323UNS-2A KEYWAY: .072 X .038										
	78300	on off	DPST	20*	10*	1 1/2	bat	brass/nickel	screws	5
DIMENSIONS IN INCHES A: .687 B: .465 C: .895 D: 1.000 E: 2.093										
	78325	on off	DPST	16	8	1	bat	nylon**	screws	5
DIMENSIONS IN INCHES A: .674 B: .468 C: .780 D: .810 E: 1.870										
	78310	on off	3PST	15	10	3/4@250	bat	brass/nickel	screws	5
	78315	on off on	3PDT	15	10	3/4@250	bat	brass/nickel	screws	5
DIMENSIONS IN INCHES A: .688 B: .469 C: .965 D: .300 THREAD: 15/32										
	78330	on off	4PST	15	10	3/4@250	bat	brass/nickel	screws	5
	78320	on on	4PDT	15	10	3/4@250	bat	brass/nickel	screws	5
	78340	on off on	4PDT	15	10	3/4@250	bat	brass/nickel	screws	5
DIMENSIONS IN INCHES A: .687 B: .465 C: 1.436 D: .803 E: .422 F: 1.308 THREAD: 15/32-323UNS-2A KEYWAY: .072 X .038										
	78170	off (on)	SPST	15	10	3/4	bat	brass/nickel	screws	5
	78180	on off (on)	SPDT	15	10	3/4	bat	brass/nickel	screws	5
	78190	(on) off (on)	SPDT	15	10	3/4	bat	brass/nickel	screws	5
DIMENSIONS IN INCHES A: .687 B: .465 C: .670 D: .348										
	79300	rubber cover for toggles								5
DIMENSIONS IN INCHES A: .950 B: .812										

*Amperage and voltage are also valid for D.C. Rating () Indicates momentary position

**Double-insulated for shock proof requirements

ROCKER, ROTARY & MISCELLANEOUS SWITCHES



CAT. NO.	UPC CODE	CIRCUIT FUNCTIONS	POLES & THROWS	RATINGS			H.P. 125-250 VAC	VOLTAGE	LAMP COLOR	ACTUATOR CONTACT	CONNECTION TYPE	CTN. QTY.	
				AMPS 125 VAC	AMPS 250 VAC								
	77010RQ	77010	on off	DPST	20	10	1 1/2@125,2@250	non-lighted	black	maintained	.250 quikconnect	5	
	77040RQ	77040	on on	DPDT	20	10	1 1/2@125,2@250	non-lighted	black	maintained	.250 quikconnect	5	
	77060RQ	77060	on off on	DPDT	20	10	1 1/2@125,2@250	non-lighted	black	maintained	.250 quikconnect	5	
	77090RQ	77090	(on) off	DPST	15	10	3/4	non-lighted	black	momentary	.250 quikconnect	5	
	77100RQ	77100	(off) on	DPST	15	10	3/4	non-lighted	black	momentary	.250 quikconnect	5	
	77110RQ	77110	(on) on	DPDT	15	10	3/4	non-lighted	black	momentary	.250 quikconnect	5	
	77120RQ	77120	(on) off on	DPDT	15	10	3/4	non-lighted	black	momentary	.250 quikconnect	5	
	77130RQ	77130	(on) off (on)	DPDT	15	10	3/4	non-lighted	black	momentary	.250 quikconnect	5	
DIMENSIONS IN INCHES				A: 1.348	B: .750	C: .762	D: .422						
	77140RQ	77140	on off	SPST	15	10	—	non-lighted	black	maintained	.250 quikconnect	5	
DIMENSIONS IN INCHES				A: 1.250	B: .625	C: .828	D: .406						
	77150RQ	77150	on off	SPST	15	7.5	—	—	red	maintained	.250 quikconnect	5	
DIMENSIONS IN INCHES				A: 1.250	B: .625	C: .828	D: .406						
	77030RQ	77030	on off	DPST	15	10	3/4@250	125V incand.	1 st lens red	2 nd lens —	maintained	.250 quikconnect	5
	77020RQ	77020	on off	DPST	15	10	3/4@250	125V neon	amber	—	maintained	.250 quikconnect	5
	77050RQ	77050	on on	DPDT	15	10	3/4@250	125V incand.	red	amber	maintained	.250 quikconnect	5
	77070RQ	77070	on off on	DPDT	15	10	3/4@250	125V neon	amber	amber	maintained	.250 quikconnect	5
	77080RQ	77080	on off on	DPDT	15	10	3/4@250	125V neon	red	red	maintained	.250 quikconnect	5
	DIMENSIONS IN INCHES				A: .426	B: 1.088	C: .709	D: .345	E: 1.302				
	77300RW	77300	on off	SPST	3	1	non-lighted	Description rotary canopy		maintained	wire leads	5	
DIMENSIONS IN INCHES				A: .718	B: .600	C: .265							
	77340RW	77340	on off	SPST	6	3	non-lighted	rotary canopy		maintained	wire leads	5	
	77320RW	77320	off on on on	SPST	3	1	non-lighted	rotary canopy		maintained	wire leads	5	
DIMENSIONS IN INCHES				A: 1.000	B: .844								
	79100MS	79100	on off	SPST	6	3	—			feed through switch	screws	5	
DIMENSIONS IN INCHES				A: .844	B: .594	C: 1.375							
	79200MS	79200	N.C. & N.O.	SPDT	5	—	—			magnetic feed switch	screws	5	
DIMENSIONS IN INCHES				A: 2.500	B: .531								

() Indicates momentary position All rocker switches are black phenolic bases with a black snap-in bezel and nylon actuator.



Indicator Lights

SNAP-IN RECTANGULAR INDICATOR LIGHTS (WITH NON-REPLACEABLE LAMPS)

SNAP-IN RECTANGULAR INDICATOR LIGHTS

CATALOG NO.	UPC NO.	PANEL CUTOUT	PANEL THICKNESS	LENS COLOR	LENS TYPE	BEZEL COLOR	CONNECTION TYPE	CTN. QTY.	
	79500LQ	79500	.375 x 1.28	.03 - .10	green	diamond	stainless	.250 quikconnect	5
	79505LQ	79505	.375 x 1.28	.03 - .10	red	diamond	stainless	.250 quikconnect	5
	79510LQ	79510	.375 x 1.28	.03 - .10	amber	diamond	stainless	.250 quikconnect	5
	79515LQ	79515	.375 x 1.28	.03 - .10	green	diamond	white	.250 quikconnect	5
	79520LQ	79520	.375 x 1.28	.03 - .10	red	diamond	white	.250 quikconnect	5
	79525LQ	79525	.375 x 1.28	.03 - .10	amber	diamond	white	.250 quikconnect	5
DIMENSIONS IN INCHES A: 1.080 B: .290 C: 1.380 D: .460 E: .500 F: .370 G: .120									
	79530LQ	79530	.550 x 1.125	.020 - .250	green	diamond	black	.250 quikconnect	5
	79535LQ	79535	.550 x 1.125	.020 - .250	red	diamond	black	.250 quikconnect	5
	79540LQ	79540	.550 x 1.125	.020 - .250	amber	diamond	black	.250 quikconnect	5
DIMENSIONS IN INCHES A: .810 B: .420 C: 1.240 D: .670 E: .820									
	79545LQ	79545	1.00 x 1.125	.020 - .250	green	diamond	black	.250 quikconnect	5
	79550LQ	79550	1.00 x 1.125	.020 - .250	red	diamond	black	.250 quikconnect	5
	79555LQ	79555	1.00 x 1.125	.020 - .250	amber	diamond	black	.250 quikconnect	5
DIMENSIONS IN INCHES A: .860 B: .810 C: 1.240 D: 1.150 E: 1.240									
	79560LQ	79560	.830 x 1.450	.030 - .240	green	diamond	black	.250 quikconnect	5
	79565LQ	79565	.830 x 1.450	.030 - .240	red	diamond	black	.250 quikconnect	5
	79570LQ	79570	.830 x 1.450	.030 - .240	amber	diamond	black	.250 quikconnect	5
DIMENSIONS IN INCHES A: 1.240 B: .670 C: 1.700 D: .960 E: 1.230 F: .940 G: .820									
	79575LQ	79575	.550 x 1.125	.025 - .187	green	Frost	white	.250 quikconnect	5
	79580LQ	79580	.550 x 1.125	.025 - .187	red	Frost	white	.250 quikconnect	5
	79585LQ	79585	.550 x 1.125	.025 - .187	amber	Frost	white	.250 quikconnect	5
DIMENSIONS IN INCHES A: 1.240 B: .680 C: .730 D: 1.07									

High quality indicator lights made of nylon with polycarbonate lens material and neon lamps. 125-Volt Rated. Available in many other styles and finishes. Also available with incandescent lamps. Contact NSi for price and delivery.




Indicator Lights

ROUND INDICATOR LIGHTS (WITH NON-REPLACEABLE LAMPS)

ROUND INDICATOR LIGHTS (WITH NON-REPLACEABLE LAMPS)



CAT. NO.	UPC NO.	PANEL CUTOUT	PANEL THICKNESS	LENS STYLE	LENS COLOR	LENS TYPE	BEZEL COLOR	TYPE OF FIT	MTNG. HOLE DIA.	CTN. QTY.
79700LW	79700	.312	.030 Min.	flush	white	translucent	white	press	.312	5
79705LW	79705	.312	.030 Min.	flush	blue	diamond	white	press	.312	5
79710LW	79710	.312	.030 Min.	flush	green	diamond	white	press	.312	5
79715LW	79715	.312	.030 Min.	flush	clear	diamond	white	press	.312	5
79720LW	79720	.312	.030 Min.	flush	red	diamond	white	press	.312	5
79725LW	79725	.312	.030 Min.	flush	amber	diamond	white	press	.312	5

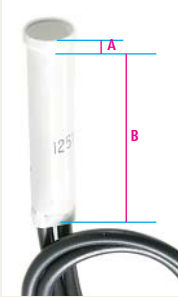

DIMENSIONS IN INCHES A: .130 B: 1.430 MOUNTING HOLE: .312 PANEL THICKNESS: .030 MIN.

79730LW	79730	.500	.030 - .093	.09 Cyl	white	translucent	stainless	press	.500	5
79735LW	79735	.500	.030 - .093	.09 Cyl	blue	diamond	stainless	press	.500	5
79740LW	79740	.500	.030 - .093	.09 Cyl	green	diamond	stainless	press	.500	5
79745LW	79745	.500	.030 - .093	.09 Cyl	clear	diamond	stainless	press	.500	5
79750LW	79750	.500	.030 - .093	.09 Cyl	red	diamond	chrome	press	.500	5
79755LW	79755	.500	.030 - .093	.09 Cyl	amber	diamond	stainless	press	.500	5



DIMENSIONS IN INCHES A: .210 B: .100 C: .910 MOUNTING HOLE: .500 PANEL THICKNESS: .030 TO .093

79760LW	79760	.500	.030 - .093	.25 Cyl	white	translucent	stainless	press	.500	5
79765LW	79765	.500	.030 - .093	.25 Cyl	blue	diamond	stainless	press	.500	5
79770LW	79770	.500	.030 - .093	.25 Cyl	green	diamond	stainless	press	.500	5
79775LW	79775	.500	.030 - .093	.25 Cyl	clear	diamond	stainless	press	.500	5
79780LW	79780	.500	.030 - .093	.25 Cyl	red	diamond	stainless	press	.500	5
79785LW	79785	.500	.030 - .093	.25 Cyl	amber	diamond	stainless	press	.500	5



DIMENSIONS IN INCHES A: .210 B: .100 C: .910 MOUNTING HOLE: .500 PANEL THICKNESS: .030 TO .093

79790LW	79790	.500	.030 - .093	shield	clear	diamond	none	press	.500	5
---------	-------	------	-------------	--------	-------	---------	------	-------	------	---



DIMENSIONS IN INCHES A: .210 B: .100 C: .910 MOUNTING HOLE: .500 PANEL THICKNESS: .030 TO .093

79795LW	79795	.500	.040 - .110	semi-dome	green	rings	none	snap in	.500	5
79800LW	79800	.500	.040 - .110	semi-dome	red	rings	none	snap in	.500	5
79805LW	79805	.500	.040 - .110	semi-dome	amber	rings	none	snap in	.500	5
79810LW	79810	.500	.040 - .110	semi-dome w/bezel	green	rings	chrome	snap in	.500	5
79815LW	79815	.500	.040 - .110	semi-dome w/bezel	red	rings	chrome	snap in	.500	5
79820LW	79820	.500	.040 - .110	semi-dome w/bezel	amber	rings	chrome	snap in	.500	5



DIMENSIONS IN INCHES A: 1.130 MOUNTING HOLE: .500 PANEL THICKNESS: .040 TO .110

High quality indicator lights made of nylon with polycarbonate lens material and neon lamps. 125-volt rated. Connection with 6 inch wire leads. Available in many other styles and finishes. Also available with incandescent lamps. Contact NSi for price and delivery.

20-240 V MULTI-VOLTAGE PILOT LIGHT



This state of the art indicating light unit features Super-Bright LEDs and printed circuit boards, which allow it to handle any voltage from 20 to 250 V – either AC or DC – without losing any light intensity. Provided with polyester clamp ring. Thin and compact design is NEMA 4X rated. Available with flashing bulb – please contact NSi.

CATALOG NO.	UPC NO.	VOLTAGE	LENS COLOR	CARTON QTY.
MVPL240A	92120	20-240V	amber	3
MVPL240B	92121	20-240V	blue	3
MVPL240C	92122	20-240V	clear	3
MVPL240G	92123	20-240V	green	3
MVPL240R	92124	20-240V	red	3
MVPL240W	92125	20-240V	white	3

EMERGENCY STOP BUTTON - TWO POSITION PUSH-PULL MAINTAINED






This unit features a solid brass detent mechanism that provides durability and reliability as well as an outstanding feel. The rugged design ensures 100% reliability and a longer life. It is maintained in both the push and pull positions. Primary application is 'push' to stop and 'pull' to start. U-cup seal is infused with 15% teflon to eliminate cracking when exposed to heat, dryness and sunlight. This seal forms a permanent watertight seal that meets and exceeds Type

4/4X testing. Supplied with polyester clamp ring and mushroom cap. Optional aluminum clamp ring is available. NEMA 4X rated and UL Listed. 10 amp, 600 volt.

MAINTAINED IN/ MAINTAINED OUT	CATALOG NO.	UPC NO.	LENS COLOR	CARTON QTY.						
1 Circuit (1 NC)										
	ESB2-INC-B	32130	black	6						
	ESB2-INC-G	32131	green	6						
	ESB2-INC-R	32132	red	6						
	ESB2-INC-Y	32133	yellow	6						
<table border="1"> <tr> <td>NC</td> <td>X</td> <td>O</td> </tr> </table>	NC	X	O							
NC	X	O								
2 Circuit (1 NC/1 NO)										
	ESB2-INOINC-B	32134	black	6						
	ESB2-INOINC-G	32135	green	6						
	ESB2-INOINC-R	32136	red	6						
	ESB2-INOINC-Y	32137	yellow	6						
<table border="1"> <tr> <td>NC</td> <td>X</td> <td>O</td> </tr> <tr> <td>NO</td> <td>O</td> <td>X</td> </tr> </table>	NC	X	O	NO	O	X				
NC	X	O								
NO	O	X								
2 Circuit (2 NC)										
	ESB2-2NC-B	32138	black	6						
	ESB2-2NC-G	32139	green	6						
	ESB2-2NC-R	32140	red	6						
	ESB2-2NC-Y	32141	yellow	6						
<table border="1"> <tr> <td>NC</td> <td>X</td> <td>O</td> </tr> <tr> <td>NC</td> <td>X</td> <td>O</td> </tr> </table>	NC	X	O	NC	X	O				
NC	X	O								
NC	X	O								

"F" CONNECTORS

	CATALOG NO.	UPC CODE	DESCRIPTION	CARTON QTY.
	FC59C	09200	"F" connector for RG59/U cable. Conductor of cable becomes male pin of connector supplied with 1/4 inch crimping ring.	25
	FC59T	09202	"F" connector for RG59/U cable twist-on style	25
	FC6C	09201	crimp-on "F" connector for standard shield RG6/U cable	25
	FC6C-Q	09226	foil shield crimp-on "F" connector for quad shield RG6/U cable	25
	FC6T	09203	twist on "F" connector for standard shield RG6/U cable	25
	FC6T-Q	09228	twist on "F" connector for quad shield RG6/U cable	25
	FCF	09204	female adapter supplied complete with locknut and washer	25




SPLITTERS



CATALOG NO.	UPC CODE	DESCRIPTION	CARTON QTY.
CS-2	09220	two-way splitter – includes mounting hardware. (5-900 MHz)	10
CS-3	09221	three-way splitter – includes mounting hardware. (5-900 MHz)	10
CS-4	09222	four-way splitter – includes mounting hardware. (5-900 MHz)	10
CS-8	09224	eight-way splitter – includes mounting hardware. (5-900 MHz)	5
CS-2HF	09230	two-way high frequency satellite splitter (1000-2050 MHz)	10
CS-3HF	09231	three-way high frequency satellite splitter (1000-2050 MHz)	10
CS-4HF	09232	four-way high frequency satellite splitter (1000-2050 MHz)	10






"F" TYPE & COMBINATION WALL PLATES



	CATALOG NO.	UPC CODE	DESCRIPTION	CARTON QTY.
 <p>"F" Type TV/FM Wall Plates Designed for 75 ohm antenna and/or cable systems. These wall plates may be used flush or without box. A female adapter is mounted in the plate. Supplied complete with mounting screws.</p>	FCF-WP	09205	ivory	25
	FCF-WP-1	09206	white	25
 <p>Dual "F" Type TV/FM Wall Plates Designed for 75 ohm antenna and/or cable systems. These wall plates may be used flush or without box. Two female adapters are mounted in the plate. Supplied complete with mounting screws.</p>	FCF2-WP	82130	ivory	25
	FCF2-WP-1	82131	white	25
 <p>Combination Telephone/"F" Type Wall Plates Contains one 4 wire modular phone jack to accept a modular telephone plug and a female "F" type adapter for attaching 75 ohm antenna and/or cable systems. Supplied with mounting screws.</p>	FCFT-WP	82132	ivory	25
	FCFT-WP-1	82133	white	25

TELEPHONE ACCESSORIES



	CATALOG NO.	UPC CODE	DESCRIPTION	CARTON QTY.
 <p>Single Mount Wall Jacks Converts a 4, 6 or 8 wire location to a modular telephone outlet. The mounting block is wire to the modular jack. Screw mount the block and attach existing color-coded wire to the screw terminals. Snap on cover.</p>	SMWJ-4	82135	4 conductor - ivory	25
	SMWJ-41	82136	4 conductor - white	25
	SMWJ-6	82137	6 conductor - ivory	25
	SMWJ-61	82138	6 conductor - white	25
	SMWJ-8	82139	8 conductor - ivory	25
 <p>Modular Extension Couplers Modular cord extension couplers have female adapter jacks at either end and allow two separate modular cords to be connected.</p>	MEC-4	82140	4 conductor - ivory	25
	MEC-41	82141	4 conductor - white	25
	MEC-6	82142	6 conductor - ivory	25
	MEC-61	82143	6 conductor - white	25
	MEC-8	82144	8 conductor - ivory	25
 <p>Telephone Line Junction Box A convenient method of interfacing modular telephones to the system in the home, without going through complicated wiring. Attachments are made at one to four color coded connecting points. A modular plug and 24" cable connects to a standard interface jack.</p>	TLJB	82145	ivory	25
	TLJB-1	82146	white	25
 <p>5 Way Modular Outlet Box Connects up to 5 telephones or related equipment to an existing single modular jack. 4 contacts. Self-adhesive backing for easy installation.</p>	MOB	82147	—	25
 <p>Telephone Extension Cable Telephone extension cable for 4 conductor systems.</p>	TEC-25	82148	ivory	10
	TEC-25-1	82149	white	10

TELEPHONE WALL PLATES

	CAT. NO.	UPC CODE	DESCRIPTION	CARTON QTY.
 <p>Modular Telephone Wall Plates For standard electrical boxes, supplied with matching screws. Smooth plate finish. Color-coded wires connect jack to connecting block.</p>	MWP-4	82101	4 conductor - ivory	25
	MWP-41	82102	4 conductor - white	25
	MWP-6	82103	6 conductor - ivory	25
	MWP-61	82104	6 conductor - white	25
	MWP-8	82105	8 conductor - ivory	25
	MWP-81	82106	8 conductor - white	25
 <p>Dual Modular Telephone Wall Plates For standard electrical boxes, supplied with matching screws. Smooth plate finish. Color-coded wires connect jack to connecting block.</p>	DMWP-4	82107	4 conductor - ivory	25
	DMWP-41	82108	4 conductor - white	25
	DMWP-6	82109	6 conductor - ivory	25
	DMWP-61	82110	6 conductor - white	25
	DMWP-8	82111	8 conductor - ivory	25
	DMWP-81	82112	8 conductor - white	25
 <p>Wall Phone Modular Jack Designed to mount on a standard junction box or flat on a wall surface. Sturdy supports for mounting the wall phone are molded in. All have screw terminals for wire connection.</p>	WPMJ-P	82113	all plastic - ivory	25
	WPMJ-P1	82114	all plastic - white	25
	WPMJ-SS	82115	stainless steel	25
 <p>Mid Size Flush Mount Telephone Wall Plate Over-size flush mount plastic telephone wall plate.</p>	MSWP-4	82116	4 conductor - ivory	25
	MSWP-41	82117	4 conductor - white	25
 <p>Flush Mount Outdoor Modular Telephone Jack Flush mount weather-proof RJ11/RJ14. Mounts in any standard electrical box. Mounting hardware provided.</p>	OMJ-4	82118	4 conductor	25
 <p>Wall Mount Jack with Dual Side Jack Wall mount phone jack that provides dual side jacks that can be used to hook up answering machines, modems, faxes, extension phones, etc.</p>	WMDS-4	82119	4 conductor - ivory	25
	WMDS-41	82120	4 conductor - white	25
 <p>Blank Wall Plate Gang blank wall plate</p>	BWP	82121	ivory	25
	BWP-1	82122	white	25

Alphanumeric Index

CATALOG NUMBER	PAGE
250-3	1
751, 760, 761	11
770, 771, 773	14
780, 781, 782, 783, 793	12, 13
791, 792	14
795	15
797, 798	16
ATC	10
B	1, 6, 8, 9
BWP	20
C	8, 9
CS	18
CTK	7
DFR	6
DMT	1
DMWP	20
ESB	17
F	2, 5, 8, 9
FC	18
FCF	18, 19
FCFT	19
FCT	1
HTF	7
HTM	7
HTP	7
HTR	7
HTSF	7
IF	5
IFL	5
IFS	5
IM	5
M	2, 5
MEC	19
MOB	19
MSWP	20
MTK	10
MVPL	17
MWP	20
NSi	7
OMJ	20
P	2, 5
PF	2, 6
PFS	6
PM	2, 6
PT	6
PTC	6
R	1, 3, 8, 9
S	2, 4, 6, 8, 9
SB	6
SF	1
SMWJ	19
TEC	19
TJJB	19
WMDS	20
WPMJ	20

NSi Industries LLC



9730 Northcross Center Ct.
Huntersville
North Carolina, USA
28078



Phone Toll Free:
800.321.5847



Fax Toll Free:
800.841.5566



Email:
nsi@nsiindustries.com



Website:
www.nsiindustries.com

Terms of Sale

Vendor Number: 662381

1. Prices are F.O.B. our plant.
2. Prices do not include any sales tax.
3. Freight charges will be prepaid on all orders \$250.00 and over shipping within continental USA using standard shipping methods and service.
4. Minimum order – \$100.00.
5. Claims for shortage, erroneous charges or price corrections shall be deemed waived unless made in writing, delivered to NSi within 30 days of invoice.
6. Terms of payment – 2% 10th prox. net 25th following.
7. Warranties – NSi guarantees all products to be free of defects in material and workmanship for a period of 90 days from date of sale. Any claims for defective material must be agreed to in writing by NSi. Defective material will be replaced on an F.O.B. – our factory basis. NSi disclaims the implied warranty of fitness for a particular application.

Other Products Available

NSi can provide many other products for special applications which are not listed in this catalog. If you require an item which you do not find listed, please contact us. We would be pleased to provide a quotation upon receipt of a drawing or a sample.

Guarantee

It is our goal to provide extraordinary products and service on a daily basis. If our products or service do not meet with your satisfaction, please let us know immediately and we promise to make every reasonable effort to remedy the situation.



MAKING AN **EASY** CONNECTION

Using our products on your terms!

- Vinyl-Insulated Terminals
- Insulated Disconnects
- High Temp. Ring Terminals
- Toggle Switches
- "F" Connectors & Splitters
- Telephone Wall Plates
- Miniterm Kits
- Terminal Kits
- Pushbuttons
- Coax Accessories
- Alligator Test Clips

Thousands of quality products that make life in the field easier and safer.

YOUR REPRESENTATIVE:



NSi Industries, LLC • USA • 800.321.5847 • Fax: 800.841.5566 • www.nsiindustries.com

TORK