

OAC Commercial Wall Heater



Features

Color

- Standard: white, almond.
- Optional: metallic silver, bronze, metallic charcoal, textured black, beige-grey, aluminum, semi-gloss black (10% upcharge).
- Custom colors available upon request.

Finish

- Standard: epoxy/polyester powder paint.

Voltage

- 120V, 208V, 240/208V, 277V, 347V, 480V, 600V, 1 or 3-phase.

Construction

- 18-gauge steel front cover. 1
- Bottom air outlet.
- High-limit temperature control with automatic reset.

Fan

- Closed, factory-lubricated motor. 2
- 160 cfm fan (single unit: 55 dBA); 2 X 160 cfm fan (double unit: 58 dBA); 3 X 160 cfm fan (triple unit: 61 dBA).
- Fan delay purges heater of residual heat.

Heating element

- Durable tubular heating element with fins. 3

Control

- Built-in thermostat included with control knob or tamperproof. 4
- 24V relay, with or without transformer available.

Note: Thermostat is not included in heater with factory installed relay. Any remote thermostat or relay must be connected to the heater control terminal block.

Installation


- Minimum clearance from the floor and adjacent walls: 10 in. (25.4 cm).
- Adaptor for surface mounting available. 5

Warranty

- 1-year warranty against defects.

Application

- Apartment building, commercial building, entrance way, stairwell, garage.

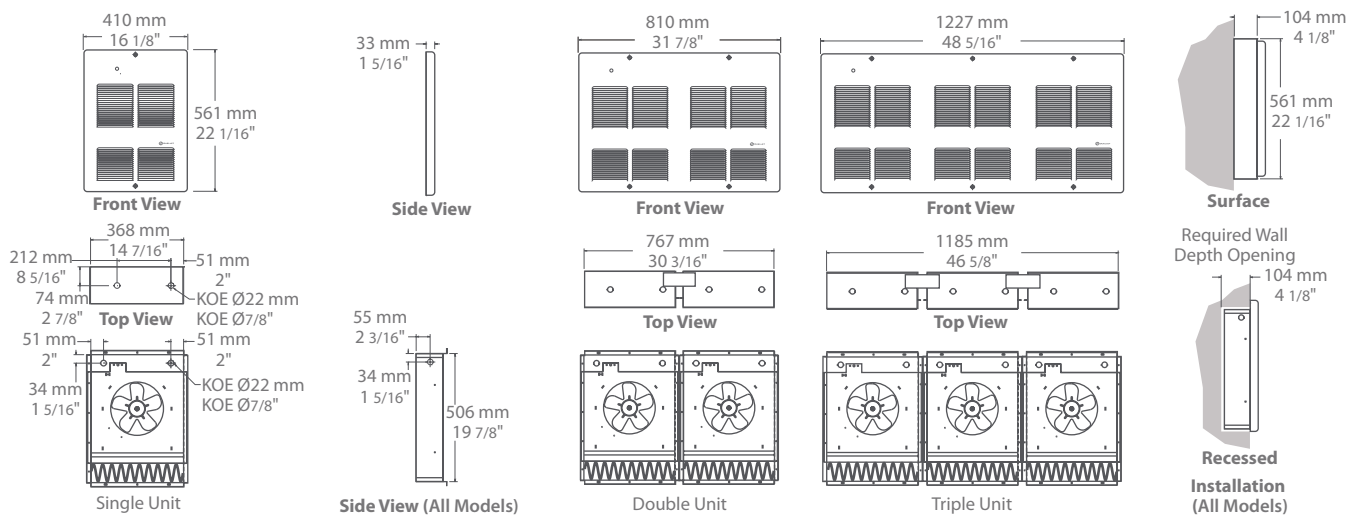

OAC

Models

Watts	Volts (ph)	Product # ¹	Price	Unit	Weight	
					lb	kg
1500	120 (1)	OAC01502	440.00	single	24.0	10.9
2000	208 (1)	OAC02008	528.00	single	24.0	10.9
4000	208 (1)	OAC04008	528.00	single	24.0	10.9
4800	208 (1)	OAC04808	557.00	single	24.0	10.9
6000	208 (3)	OAC06038	1130.00	triple	90.0	40.9
8000	208 (1)	OAC08008	1211.00	double	50.0	22.7
9000	208 (3)	OAC09038	1516.00	triple	90.0	40.9
12000	208 (1)	OAC12008	1834.00	triple	90.0	40.9
12000	208 (3)	OAC12038	1834.00	triple	90.0	40.9
1500/1125 ²	240/208 (1)	OAC01500	440.00	single	24.0	10.9
2000/1500 ²	240/208 (1)	OAC02000	440.00	single	24.0	10.9
3000/2250 ²	240/208 (1)	OAC03000	453.00	single	24.0	10.9
4000/3000 ²	240/208 (1)	OAC04000	482.00	single	24.0	10.9
4800/3600 ²	240/208 (1)	OAC04800	509.00	single	24.0	10.9
6000/4500 ²	240/208 (1)	OAC06000	1070.00	double	50.0	22.7
8000/6000 ²	240/208 (1)	OAC08000	1147.00	double	50.0	22.7
12000/9000 ²	240/208 (1)	OAC12000	1778.00	triple	90.0	40.9
1500	347 (1)	OAC01507	634.00	single	28.0	12.7
2000	347 (1)	OAC02007	634.00	single	28.0	12.7
3000	347 (1)	OAC03007	655.00	single	28.0	12.7
4000	347 (1)	OAC04007	677.00	single	28.0	12.7
4800	347 (1)	OAC04807	715.00	single	28.0	12.7
6000	347 (1)	OAC06007	1397.00	double	50.0	22.7
8000	347 (1)	OAC08007	1607.00	double	50.0	22.7
12000	347 (1)	OAC12007	2312.00	triple	90.0	40.9
1500	480 (1)	OAC01504	665.00	single	28.0	12.7
2000	480 (1)	OAC02004	665.00	single	28.0	12.7
3000	480 (1)	OAC03004	684.00	single	28.0	12.7
4000	480 (1)	OAC04004	708.00	single	28.0	12.7
4800	480 (1)	OAC04804	747.00	single	28.0	12.7
6000	480 (1)	OAC06004	1399.00	double	50.0	22.7
8000	480 (1)	OAC08004	1607.00	double	50.0	22.7
12000	480 (1)	OAC12004	2312.00	triple	90.0	40.9
12000	480 (3)	OAC12034	2312.00	triple	90.0	40.9
1500	600 (1)	OAC01506	665.00	single	28.0	12.7
2000	600 (1)	OAC02006	665.00	single	28.0	12.7
3000	600 (1)	OAC03006	684.00	single	28.0	12.7
4000	600 (1)	OAC04006	708.00	single	28.0	12.7
4800	600 (1)	OAC04806	747.00	single	28.0	12.7
6000	600 (1)	OAC06006	1399.00	double	50.0	22.7
6000	600 (3)	OAC06036	1422.00	triple	90.0	40.9
8000	600 (1)	OAC08006	1607.00	double	50.0	22.7
9000	600 (3)	OAC09036	1908.00	triple	90.0	40.9
12000	600 (1)	OAC12006	2312.00	triple	90.0	40.9
12000	600 (3)	OAC12036	2312.00	triple	90.0	40.9

Options

Product #	Price	Description	Factory Installed	Kit
OAC-BS1	50.00	Surface mounting box, single unit	-	✓
OAC-BS2	102.00	Surface mounting box, double unit	-	✓
OAC-BS3	149.00	Surface mounting box, triple unit	-	✓
OAC-DIS20	97.00	Disconnect switch, double-pole, 20A at 277V and less	✓	✓
OAC-DIS40	114.00	Disconnect switch, triple-pole, 40A at 600V max.	✓	✓
OAC-DIS80	138.00	Disconnect switch, triple-pole, 80A at 600V max.	✓	✓
OAC-IV	95.00	Fan switch	✓	-
OAC-O/O	101.00	On/Standby heating switch	✓	-
OAC-R	101.00	24V control relay, without transformer	✓	-
OAC-RT	109.00	24V control relay with transformer	✓	-

¹ Built-in thermostat included.

² 208V = 75% of wattage at 240V.

Add "BL" for white, "AM" for almond. Optional colors shown in the color chart section (page 105) are available with a 10% upcharge.

For options available as factory installed and kit, if not mentioned on the order, will automatically be shipped as a kit.

277V available upon request.