## User's manual DM521/DM521-2

# Safe & Sound® **Digital Audio Monitor**







# Congratulations

on purchasing your new VTech product. Before using this product, please read Important safety instructions.


For support, shopping, and everything new at VTech, visit our website at www.vtechphones.com.

Register online to get an additional 3-month warranty!

Visit www.vtechphones.com.




Register your product online for enhanced warranty support.



Learn about the latest VTech products.

### What's in the box











1 set for DM521; 2 sets for DM521-2

AC power. To continuously monitor your baby, make sure you use both battery and AC power at the same time. With the battery alone, the parent unit can cordlessly run for a short time


- possible leakage. · Without AC power charging, the battery gradually


# Install the battery as shown below.





· Make sure the supplied rechargeable battery with the label THIS SIDE UP facing up.





### Replace the battery

To replace the battery, unplug the battery connector from the socket, and then pull the battery out of the battery compartment. Follow the steps above to install the battery.

Parent unit display icons

Connection status

displays when strong signal

baby unit and the parent unit.

i displays when good signal

baby unit and the parent unit.

baby unit and the parent unit.

baby unit and the parent unit.

strength is detected between the

strength is detected between the

displays when moderate signal

strength is detected between the

▲ displays when the weak signal

strength is detected between the

1 flashes when the link between the


baby unit and the parent unit is lost.

# Connect and charge the battery

### **O**NOTES

- Use only the power adapters supplied with this product
- Make sure the electrical outlets are not controlled by wall switches
- The power adapters are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet
- Make sure the parent unit, the baby unit and the power adapter cords are out of reach of children

### Connect the baby monitor

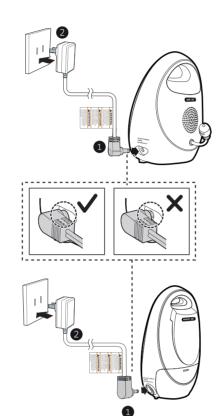

# Charge the parent unit battery

Once you have connected the parent unit or installed its battery, it powers on automatically. The battery icon indicates the battery status (see the following table).

### **O**NOTES

The parent unit battery is fully charged after 11 hours of continuous charging.

Action

- It takes longer to charge the battery when the parent unit is turned on. To shorten the charging time, turn the parent unit off while charging.
- The standby time varies depending on the sensitivity level you set, your actual use and the age of the battery

Battery Battery

indicators	status	
The battery icon is off.	No battery is installed. The parent unit can be used only when it is connected to AC power.	Install the parent unit battery. Charge without interruption (at least 30 minutes).
LOW BATTERY and Glash on the screen. The iii light flashes.	The battery has very little charge and may be used for only a short time.	Charge without interruption (about 30 minutes).
The battery icon becomes solid	The battery is fully charged.	To keep the battery charged, connect it to AC power when not in use.


## Before use

This baby monitor is intended as an aid. It is not a substitute for proper adult supervision, and should not be used as such

# Test your audio monitor

You may test the baby monitor before initial use, and at regular times thereafter.

 For hearing protection, make sure the parent unit is more than 2 meters (6.5 feet) away from both baby units. If you hear any high-pitched noise, move the parent unit further until the noise stops. You can also press  $\nabla$  on the parent unit to lower or mute the noise



- 1. Make sure your baby unit and parent unit
- · If no connection between them, the parent unit displays NOT LINKED and 1 flashes.
- Move the parent unit closer to the baby unit to re-link. Speak towards the microphone of the baby
- · You will hear the sound at the parent unit, and see the visual sound indicators light up.



 Increase the speaker volume of the parent unit if you cannot hear the sounds transmitted from the baby units.

### Positioning the baby monitor () CAUTIONS

Keep the baby unit out of the reach of the baby.

Never place or mount the baby unit inside the

Place the baby unit more than 1 meter

(3 feet) away from your baby.

baby's crib or playpen.

# Baby unit overview

Overview



|--|

(b) Power on/off

**▼** Volume down

Night light

silence

**▲** Volume up

**▶**■ Lullaby

lullaby.

Microphone

12 Temperature sensor

10 | Power jack

Speaker

'Ö' Night light on/off

Light on when the baby unit is turned

Press and hold to power on or off.

Press to start playing the lullaby.

transmitted from your parent unit.

On when night light is turned on

manually or triggered by sound.

Off when night light is turned off

manually or after 15 minutes of

Press to increase the talkback volume

transmitted from your parent unit.

Press to start playing the lullaby.


Press again to stop playing the

Press to turn the night light on or off.

Press again to skip to the next lullaby.

Press to decrease the talkback volume

2. Place the parent unit more than 2 meters (6.5 feet) away from the baby unit.

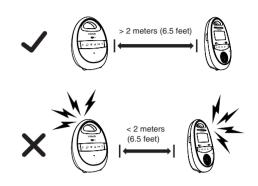

### **D**CAUTION

- The default volume of your parent unit is **VOLUME 3.** If you experience high-pitched screeching noise from your baby monitor while
- more than 2 meters (6.5 feet) apart, OR
- Turn down the volume of your parent unit

# Operating range

The operating range of the baby monitor is up to 300 meters (1,000 feet) outdoors or 50 meters (160 feet) indoors. The actual operating range may vary depending on the environmental conditions, and other interferences such as walls, doors, and other obstructions.

- Make sure your baby units and parent unit are

• The sound alert setting on each parent unit is

You can turn on or off the night light by pressing the O button manually on the baby unit. You can also use the parent unit to set the night light on the baby unit to automatically turn on when

When the night light auto-on setting is turned on, 🖣 displays. The default setting is preset to

- 3. Press **OK** to select **ON?** when the current night light setting is OFF; or to select OFF? when the current night light setting is **ON**. The screen displays **SAVED** and you hear a confirmation tone

- the baby unit must be turned on.
- · Night light will automatically turn off after 15 minutes of silence.

# **Temperature**

Your baby unit measures the surrounding temperature. If the detected temperature falls beyond a desired temperature range, the parent unit will emit an alert tone. The screen will also display HI TEMP or LOW TEMP.


format and range, or turn on or off the temperature alert

### Set the temperature format

You can set the temperature format to celsius (°C) or Fahrenheit (°F).

- Press ♠ or ▼ to choose TEMPERATURE, then press **OK**
- Press **OK** to select **FORMAT**.
- the current temperature format is **FAHRENHEIT**; or to select **FAHRENHEIT?** when the current temperature format is **CELSIUS**. The screen displays **SAVED** and you hear a confirmation tone.

# Parent unit overview

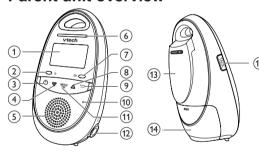

- LCD display
  - ◆ Power indicator
  - Light on when the parent unit is powered on. Light flashes when there is no link between baby unit and parent unit or

parent unit is out of range from the

- baby unit. **也 Power on/off**
- Press and hold to power on or off. While in a menu, press to return to idle
- screen. **▼** Volume down
- While in a menu, press to scroll down. Speaker

### Visual sound indicator 0 0 0 0

The visual sound indicator has two functions. One is to show the sound level detected by the baby unit. The other one is to show the volume level during speaker volume setting.

### Sound level detected by the baby unit One to three green lights indicate a moderate sound level

Additional red lights indicate a higher sound level detected by the baby unit (e.g. baby crying loudly).

detected by the baby unit.

Speaker volume level

lights indicate Level 1 to Level 3 of the speaker volume setting. Additional red lights indicate Level 4 to Level 5 of

the speaker volume setting.

One to three green

### Battery level indicator Light on when the battery is being

- Light flashes when the battery is low
- and needs charging. Light off when no battery is installed.
- - Press to increase the speaker volume While in a menu, press to scroll up.
- While in a menu, press to return to the

previous screer

- Press to return to idle screen.
- 10 Microphone

12 | Power jack


- MENU/OK Press to enter the menu while idle.
- While in a menu, press to choose an item, or save a setting.
- 13 | Belt clip 14 | Battery compartment cover
- 15 TALK
- Press and hold to talk to the baby unit; release to stop talking. While in a menu, press to return to

# Displays when the lullaby is playing

# Sound alert

Lullaby

- Displays when the sound alert of the parent unit is turned on.
- Flashes when there are loud sounds detected from the baby unit and the parent unit is in mute.



Displays when the volume is turned

**Battery status**  $\rightarrow \square \rightarrow \square \rightarrow \square \rightarrow \square$  animates when the battery is charging.

Displays when the night light is

- **u** displays solid when the battery is fully charged.
- flashes when the battery is charged with AC adaptor, or charging ☐ flashes when the battery is in low
- level and needs charging. No battery icon displays when there is no battery installed.

### Parent unit display screen messages

	BATTERY	rechargeable battery pack and it needs to be recharged.
	NOT LINKED	The link between the parent unit and the baby unit is lost continuously for over 10 seconds.
	SAVED	Your selection has been saved.
	SEARCHING	The parent unit is out of range of the baby unit, or the baby unit is out of power.
	TALK	The parent unit is talking to the baby unit.
	TALKBACK	The other parent unit is talking to the baby unit.
	HI TEMP	The temperature detected from the selected baby unit is above the set maximum temperature.
5	LOW TEMP	The temperature detected from the selected baby unit is below the set minimum temperature.
	°F/°C	The real-time temperature detected by the baby unit in Celcius (°C) or Fahrenheit (°F) (e.g. 14°C or 57°F).

# Power on or off the baby unit


Using the baby monitor

• Press and hold  $\Phi$  to power on the baby unit. The power indicator up turns on.

Press and hold  $\Phi$  again to power off the baby unit. The power indicator up turns off.

# Power on or off the parent unit

- Press and hold  $\odot$  to power on the parent unit. The power indicator  $\Phi$  and the screen
- Press and hold  $\Phi$  again to power off the parent unit. The power indicator  $\Phi$  and the screen turns off.



The parent unit powers on automatically once it is connected to AC power or battery installed. The baby unit also powers on automatically once connected to AC power.

# unit

You can adjust the speaker volume from **VOLUME 1** to **VOLUME 5**, or turn it off. The

 Press ▲ or ▼ when the parent unit is not in use. When the speaker volume is set to off, the screen displays .

# Adjust the sound sensitivity of the baby unit

unit all the time, or to hear sounds that exceed a certain level. You can use the parent unit to adjust the microphone sensitivity of your baby unit. The higher the sensitivity level, the more sensitive the baby unit is in detecting sounds for transmitting to the parent unit. The sound

Sensitivity | Description

High sensitivity level

The parent unit speaker is

constantly on, and you will

### sensitivity is preset to **LEVEL 5**. Sound sensitivity table for reference

sensitivitv

	hear all sounds (including background noises) from your baby's room.
Level 4	Medium high sensitivity level The parent unit speaker turns on for soft babbling and louder sounds from your baby. It remains quiet when your baby sleeps soundly.
Level 3	Medium sensitivity leve The parent unit speaker turns on for loud babbling and louder sounds from your baby. It remains quie when your baby makes soft sounds.
Level 2	Medium low sensitivity level The parent unit speaker turns on for crying and louder sounds from your baby. It remains quiet when your baby makes soft sounds.
Level 1	Low sensitivity level The parent unit speaker turns on for loud crying or screeching sounds from your baby. It remains quie

Press ♠ or ▼ on the baby unit at any time.

Adjust the speaker volume for baby

# Adjust the speaker volume for parent unit

speaker volume is preset to **VOLUME 3**.

# You can choose to hear sounds from the baby

		your baby o rooms
Level 4		Medium high sensitivity level The parent unit speaker turns on for soft babbling and louder sounds from your baby. It remains quiet when your baby sleeps soundly.
Level 3		Medium sensitivity level The parent unit speaker turns on for loud babbling and louder sounds from your baby. It remains quiet when your baby makes soft sounds.
Level 2		Medium low sensitivity level The parent unit speaker turns on for crying and louder sounds from your baby. It remains quiet when your baby makes soft sounds.
Level 1	Low sensitivity	Low sensitivity level The parent unit speaker turns on for loud crying or screeching sounds from your baby. It remains quiet when your baby makes soft sounds.

- 1. Press **MENU** when the parent unit is not Press OK to select SENSITIVITY.
- 3. Press ♠ or ▼ to choose the sensitivity level.
- 4. Press **OK** to confirm your selection. The screen displays SAVED and you hear a confirmation tone.

# To enter the sensitivity menu of the parent unit,

Language You can select a language (English, French or Spanish) to be used in all screen displays. The

language is preset to ENGLISH. 1. Press **MENU** when the parent unit is not in

the baby unit must be turned on

2. Press ♠ or ▼ to choose LANGUAGE, then

### press OK. 3. Press ♠ or ▼ to choose ENGLISH,

FRANCAIS or ESPANOL 4. Press **OK** to confirm your selection. The screen displays SAVED and you hear a

### confirmation tone. **⊘**NOTE

independent.

Lullaby You can select your desired lullaby to play on the baby unit. There are 5 lullabies for you to

The language setting on each parent unit is

choose from. 1. Press **MENU** when the parent unit is not in

4. Press OK to select PLAY when the lullaby

2. Press ♠ or ▼ to choose LULLABY, then 3. Press ♠ or ▼ to choose your desired

### is not playing, or to select STOP when the lullaby is playing. The screen displays **SAVED** and you hear a confirmation tone.

Sound alert

lullaby, the press **OK**.

Sound alert feature works only when the parent If you turn on the sound alert, the parent unit beeps

when the baby unit detects sounds which light up four sound level indicators on the parent unit. When the sound alert of the parent unit is turned on, displays. The sound alert is preset to **OFF**. 1. Press **MENU** when the parent unit is not in

- Press ♠ or ▼ to choose SOUND ALERT, then press OK.
- 3. Press OK to select ON? when the current sound alert setting is **OFF**; or to select **OFF?** when the current sound alert setting is **ON**. The screen displays **SAVED** and you

hear a confirmation tone.

Night light

# the baby unit detects a sound.

- 1. Press **MENU** when the parent unit is not in
- 2. Press ♠ or ▼ to choose NIGHTLIGHT, then press **OK**

To enter the night light menu of the parent unit,

# You can change the settings for the temperature

Press **MENU** when the parent unit is not in

- Press OK to select CELSIUS? when








The parent unit runs on rechargeable battery or

# **P**NOTES

- Use only the battery supplied with this product. • If the parent unit will not be used for a long time, disconnect and remove the battery to prevent
- discharges, even when the parent unit is switched



LOW BATTERY	The parent unit uses only the rechargeable battery pack and it needs to be recharged.	
NOT LINKED	The link between the parent unit and the baby unit is lost continuously for over 10 seconds.	
SAVED	Your selection has been saved.	
SEARCHING	The parent unit is out of range of the baby unit, or the baby unit is out of power.	
TALK	The parent unit is talking to the baby unit.	
TALKBACK	The other parent unit is talking to the baby unit.	
HI TEMP	The temperature detected from the selected baby unit is above the set maximum temperature.	
LOW TEMP	The temperature detected from the selected baby unit is below the set minimum temperature.	
°F/°C	The real-time temperature detected by the baby unit in	

# Set the temperature range

is too high or too low

You can set the desired minimum and maximum room temperature of the baby unit, so that the parent unit will alert you when the temperature

### To set the minimum temperature:

- 1. Press **MENU** when the parent unit is not in
- 2. Press ♠ or ▼ to choose TEMPERATURE, then press **OK**.
- 3. Press ♠ or ▼ to choose MINIMUM. then press **OK**.
- Press ♠ or ▼ to adjust the minimum temperature between 52 F and 69 F (11 C and 20 C).
- 5. Press **OK** to confirm your selection. The screen displays Saved and you hear a confirmation tone.

### To set the maximum temperature:

- 1. Press **MENU** when the parent uni:t is not in
- 2. Press ♠ or ▼ to choose TEMPERATURE, then press **OK**.
- 3. Press ♠ or ▼ to choose MAXIMUM, then press **OK**. 4. Press ♠ or ▼ to adjust the maximum
- (21 C and 30 C). 5. Press **OK** to confirm your selection. The screen displays Saved and you hear a confirmation tone

temperature between **70 F** and **86 F** 

### Set the temperature alert You can set whether the parent unit beeps

then press **OK**.

whenever the temperature is out of the preset temperature range 1. Press **MENU** when the parent unit is not in

- 2. Press ♠ or ▼ to choose TEMPERATURE,
- then press **OK**. Press ♠ or ▼ to choose ALERT ON/OFF,
- 4. Press **OK** to select **ON?** when the current temperature alert setting is **OFF**; or to select **OFF?** when the current temperature alert setting is **ON**. The screen displays **SAVED** and you hear a confirmation tone.

### Reset to default

Use this feature to restore to the default settings. Restoring the default settings on one parent unit will also reset the shared settings for sensitivity and night light auto-on feature of the other parent unit.

- 1. Press **MENU** when the parent unit is not in
- 2. Press ♠ or ▼ to choose **RESET**, then press
- When the parent unit displays CONFIRM?, press **OK**. The screen return to idle and you hear a confirmation tone.

### Talk to the baby unit

You can broadcast messages from a parent unit to the baby unit and the other parent unit. If you have two parent units, you can use both of them at the same time to talk to the baby unit.

Press and hold TALK on the side of the parent unit. The screen displays **TALK** when the voice connection to the baby unit is made. Speak towards the Microphone on the parent unit. Your voice is broadcast to the baby unit and the other parent unit.

When a parent unit is talking to the baby unit, it is also broadcast to the other parent unit. However, sounds from the baby unit cannot be transmitted to the parent units at the moment.

### General product care

To keep this product working well and looking good, follow these guidelines:

- Avoid putting it near heating appliances and devices that generate electrical noise (for example, motors or fluorescent lamps)
- DO NOT expose it to direct sunlight or moisture. Avoid dropping the product or treating it roughly.
- Clean with a soft cloth.
- DO NOT immerse the parent unit and the baby unit in water and do not clean them under the tap. DO NOT use cleaning spray or liquid cleaners.
- Make sure the baby unit and parent unit are dry before you connect them to the mains again.

6. MISE EN GARDE: Il peut y avoir un risque

# Storage

When you are not going to use the baby monitor for some time, remove the rechargeable battery from the parent unit. Store the parent unit, the baby unit and the adapters in a cool and dry place

### Why don't I Frequently asked questions hear a sound/ Why can't I hear I to increase the volume level.

connected to the power. Connect

he baby unit to the power

The units may be too close to

Move the parent unit away from

the baby unit until the noise

Turn down the volume of your

The baby unit also detects other

sounds than those of your baby

Adjust the sensitivity level to a

volume on the parent unit.

lower level or adjust the speaker

ach other

stops: OR

parent unit.

Below are the questions most frequently asked about the baby monitor. If you cannot find the answer to your question, visit of or call 1 (800

unit?

POWER light

of the baby unit

go on when I

switch on the

Why does the

baby monitor

high-pitched

Why does the

too quickly to

other sounds?

parent unit react

produce a

noise?

question, visit our website at www.vtechphones.com or call 1 (800) 595-9511 for customer service.					sensitivity level. See Adjust the sound sensitivity of the baby unit to change the setting.
ba	Why does the baby monitor not respond normally?	listed) for common cure:  1. Disconnect the power to the baby unit and the parent units.  2. Remove the batteries in the parent units. Then, install the batteries again.  3. Wait a few minutes before connecting power back to the		Why does the parent unit beep?	If the parent unit is in mute and the sound alert feature is on, there is sound detected from the baby unit.
				The baby units may be out of range. Move the parent unit closer to the baby units (but not less than 6.5 feet).	
		baby units and the parent unit.  4. Turn on the baby unit and the parent units.  5. Wait for the parent units to synchronize with the baby unit. Allow up to one minute for this to take place.			If the parent unit is powered by the provided battery, it may not have enough charge for the parent unit to perform normally. Charge the battery in the parent unit for up to 11 hours.
the scree the paren go on who	Why doesn't the screen of the parent unit go on when I	n of of the parent unit is empty and the parent unit is not connected to the power. Insert the appliance plug		Why can't I establish a connection? Why is the connection lost every now and then? Why are there sound	The baby units may be out of range. Move the parent unit closer to the baby units (but not less than 6.5 feet).
	switch on the		every now then? Whathere sou		Other electronic products may cause interference with your baby monitor. Try installing your baby monitor as far away from these
	Why doesn't the	Perhaps the baby unit is not		interruptions?	electronic devices as possible.

my baby cry?

## Important safety nstructions

When using your equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following

The volume of the parent unit

may have set too low. Press 🕰

You may have set a low sound

- 1. Follow all warnings and instructions marked on the product.
- Adult setup is required. 3. This product is intended as an aid. It is not a substitute for responsible and proper adult
- 4. This product is not intended for use as a medical monitor. 5. Do not use this product near water. For example, do not use it next to a bath tub, wash

supervision and should not be used as such.

pool, or in a wet basement or shower 6. **CAUTION**: Use only the batteries indicated in this manual. There may be a risk of explosion

bowl, kitchen sink, laundry tub or swimming

or replacement battery pack (BT186692/ BT286692) for the parent unit. Do not dispose of batteries in a fire. They may explode. Dispose of used battery according to the information in The RBRC® seal 7. Use only the adapters included with this

if a wrong type of battery is used for the parent

unit. Use only the supplied rechargeable battery

- product. Incorrect adapter polarity or voltage can seriously damage the product. Baby unit power adapter: Input 100-120V AC 150mA 60Hz; Output: 6V DC 400mA; Parent unit power adapter: Input 100-120V AC 150mA 60Hz; Output: 6V DC 400mA.
- 8. The power adapters are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet outlet
- 9. For pluggable equipment, the socket-outlet shall be installed near the equipment and shall be easily accessible 10. Unplug this product from the wall outlet
- before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning. 11. Unplug the power cords before replacing
- batteries. 12.Do not cut off the power adapters to replace
- hazardous situation 13.Do not allow anything to rest on the power cords. Do not install this product where the

them with other plugs, as this causes a

- cords may be walked on or crimped. 14. This product should be operated only from
- the type of power source indicated on the marking label. If you are not sure of the type of power supply in your home, consult your dealer or local power company.
- 15.Do not overload wall outlets or use an extension cord.
- 16.Do not place this product on an unstable table, shelf, stand or other unstable surfaces.
- 17. This product should not be placed in any area where proper ventilation is not provided. Slots and openings in the back or bottom of this product are provided for ventilation. To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a radiator or heat register.
- 18. Never push objects of any kind into this product through the slots because they may touch dangerous voltage points or create a short circuit. Never spill liquid of any kind on the product.

19.To reduce the risk of electric shock, do not disassemble this product, but take it to an authorized service facility. Opening or removing parts of the product other than specified access doors may expose you to dangerous voltages or other risks. Incorrect reassembling can cause electric shock when the product is subsequently used

- 20. You should test the sound reception every time you turn on the units or move one of the components
- 21.Periodically examine all components for damage.
- 22.Be aware of possible loss of privacy while using public airwaves. Conversations may be picked up by other nursery monitors. cordless phones, scanners, etc.
- 23. Children should be supervised to ensure that they do not play with the product.
- 24. The product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities. or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

### SAVE THESE INSTRUCTIONS

### Cautions

- 1. Use and store the product at a temperature between 32°F and 104°F
- Do not expose the product to extreme cold, heat or direct sunlight. Do not put the product close to a heating source.
- 3. Batteries should not be exposed to excessive heat such as bright sunshine or fire
- Make sure the baby unit(s) and the adapter cord(s) are always out of reach of the baby. at least 3 feet away from the baby or crib, to avoid a possible strangulation hazard. 5. Never place the baby unit(s) inside the
- baby's crib or playpen. Never cover the baby unit(s) or parent unit with anything such as a towel or a blanket 6. Other electronic products may cause
- interference with your baby monitor. Try installing your baby monitor as far away from these electronic devices as possible: wireless routers, radios, cellular telephones. intercoms, room monitors, televisions, personal computers, kitchen appliances and cordless telephones.

## Precautions for users of implanted cardiac pacemakers

Cardiac pacemakers (applies only to digital cordless devices):

Wireless Technology Research, LLC (WTR), an independent research entity, led a multidisciplinary evaluation of the interference between portable wireless devices and implanted cardiac pacemakers. Supported by the U.S. Food and Drug Administration, WTR recommends to physicians that:

### Pacemaker patients

- Should keep wireless devices at least six inches from the pacemaker.
- Should NOT place wireless devices directly over the pacemaker, such as in a breast pocket, when it is turned ON.

WTR's evaluation did not identify any risk to bystanders with pacemakers from other persons using wireless devices

### Electromagnetic fields (EMF)

This VTech product complies with all standards regarding electromagnetic fields (EMF). If handled properly and according to the instructions in this user's manual, the product is safe to be used based on scientific evidence available today.

### The RBRC® seal

The RBRC® seal on the nickel-metal battery indicates that VTech Communications, Inc. is voluntarily participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service within the United States and Canada.

The RBRC® program provides a convenient alternative to placing used nickel-metal batteries into the trash or municipal waste, which may be illegal in your area. VTech's participation in RBRC® makes it easy for you to drop off the spent battery at local retailers participating in the RBRC® program or at authorized VTech product service centers. Please cal 1 (800) 8 BATTERY® for information on Ni-MH battery

recycling and disposal bans/restrictions in your area. VTech's involvement in this program is part of its commitment to protecting our environment and conserving natural resources. RBRC® and 1 (800) 8 BATTERY®



are registered trademarks of **Rechargeable Battery Recycling** Corporation.

## FCC Part 15

This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which car be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna. Increase the separation between the equipment
- Connect the equipment into an outlet on a circuit
- Consult the dealer or an experienced radio/TV
- technician for help

expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

To ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by a user or bystander according to the intended usage of the product. This product has been tested and found to comply with the FCC criteria. The baby unit shall be installed and used such that parts of all persons' body are maintained at a distance of approximately 8 in (20 cm) or more The transmitter and antenna of the parent unit shall be held at least 1 in (2.5 cm) from your face.

This Class B digital apparatus complies with Canadian requirement CAN ICES-3 (B)/NMB-3(B)

Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference, including interference that may cause undesired operation. The term "IC:" before the certification/registration

number only signifies that the Industry Canada technical specifications were met. This product meets the applicable Industry Canada technical specifications.

# RF radiation exposure statement

The baby unit complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. The baby unit should be installed and operated with a minimum distance of 8 in (20 cm) between the baby unit and all persons' body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment complies also with Industry Canada RSS-102 with respect to Canada's Health Code 6 for Exposure of Humans to RF Fields.

# California Energy Commission pattery charging testing mode

This baby monitor meets the California Energy Commission (CEC) regulations for energy consumption Your baby monitor is set up to comply with the energyconserving standards right out of the box Follow the instructions to install and charge the

activated while charging Even if the parent unit is paired to baby units, the CEC battery charging testing mode is activated while it is powered off and charging.

battery. The CEC battery charging testing mode is

# For cETL compliance only

### Mesures de sécurité importantes

Lorsque vous utilisez votre appareil, vous devriez toujours suivre certaines mesures de précaution de base afin de réduire les risques d'incendie, d'électrocution et de blessures corporelles, dont ceux aui suivent:

1. Observez toutes les instructions et mises en garde

- inscrites sur l'appareil. 2. L'installation par un adulte est requise.
- 3. Ce produit a été conçu pour être un dispositif d'appoint seulement. Il n'est pas le remplacement
- d'une supervision responsable et adéquate par un adulte et ne devrait pas être utilisé comme telle. 4. Ce produit n'est pas conçu pour être utilisé en tant

que moniteur médical

soussol humide ou une douche.

5. N'utilisez pas cet appareil près de l'eau ni de toute autre source d'humidité, par exemple, près d'une baignoire, cuve à lessive, évier de cuisine, dans

un sous-sol humide ni près d'une piscine, dans un

- d'explosion si vous utilisez le mauvais type de piles pour l'unité du parent. N'utilisez que le bloc-piles rechargeable inclus ou le bloc-piles de rechange (BT186692/BT286692). N'incinérez pas les piles. Celles-ci risqueraient d'exploser. Jetez les piles usées selon les renseignements suivant le sceau du RBRCMD N'utilisez que les adaptateurs inclus avec ce
  - produit. L'utilisation d'un adaptateur dont la polarité ou la tension serait inadéquate risque d'endommager sérieusement le produit et mettre votre sécurité en péril. Adaptateur de l'unité du bébé: Entrée 100-120V CA 150 mA 60 Hz; Sortie: 6 V CC 400 mA. Adaptateur de l'unité du parent: Entrée 100-120V
  - CA 150 mA 60 Hz: Sortie: 6 V CC 400 mA. Lorsqu'ils sont branchés dans une prise de courant, les adaptateurs secteur ont été conçus pour être orientés correctement, soit à la verticale ou au plancher. Les broches n'ont pas été conçues pour supporter le poids du bloc d'alimentation et le maintenir en place si celuici est branché dans une prise au plafond, sous une table ou dans un
  - Pour les PRODUITS À BRANCHER À UNE PRISE DE COURANT, la prise de courant doit être installée près du produit, afin d'assurer une accessibilité sécuritaire à la prise de courant.
  - 10. Débranchez ce produit de la prise de courant avant de procéder au nettovage. N'utilisez pas de nettoyants en aérosols. Utilisez un chiffon humide pour le nettoyer
  - 11. Débranchez les cordons d'alimentation avant de remplacer le bloc-piles.
  - 12. Ne coupez pas les cordons d'alimentation pour remplacer les fiches, car ceci peut présenter un danger potentiel. 13. Ne laissez aucun objet reposer ni appuyer sur le
  - dans un endroit où l'on risque d'écraser le cordon d'alimentation ou de le piétiner 14. Ne faites fonctionner cet appareil qu'avec le type d'alimentation indiqué sur l'étiquette. Si vous

cordon d'alimentation. N'installez pas cet appareil

- ne connaissez pas le type d'alimentation que vous possédez à votre domicile, consultez votre marchand ou votre compagnie locale d'électricité. 15. Ne surchargez pas les prises de courant murales
- 16. Ne placez pas cet appareil sur un chariot, meuble trépied, support de montage ni table chancelants. 17. Les trous et ouvertures du boîtier, situés à l'arrière

ni les rallonges électriques.

de l'appareil ou sous celui-ci, servent à aérer l'appareil. Pour l'empêcher de surchauffer, ne bloquez sous aucun prétexte ces ouvertures et

n'empêchez pas l'aération adéquate de l'appareil en le placant sur un lit, divan, tapis ou toute autre surface similaire. De même, ne le positionnez pas à proximité ni au-dessus d'une source de chaleur ou d'un calorifère. De plus, ne placez pas l'appareil dans un endroit avant de vous assurer qu'il y ait une bonne circulation d'air. N'enfoncez jamais d'objets à travers les ouvertures

causer des courts-circuits qui peuvent dégénérer en incendies ou en risques d'électrocution. Ne renversez jamais de liquide dans ce produit. 19. Afin de réduire les risques d'électrocution, ne démontez pas cet appareil, mais apportez-le dans un centre de service autorisé. L'ouverture du boîtier ou le retrait de toutes pièces que contient cet appareil, à l'exception de l'accès autorisé à certaines portes ou ouvertures, risque de vous

de cet appareil, car ils pourraient entrer en

contact avec des points de tension dangereux ou

la suite présenter des risques d'électrocution. 20. Vous devriez tester la réception chaque fois que

exposer à des points de tension dangereux ou

d'autres dangers. Un remontage incorrect peut par

- vous mettez l'appareil en fonction. 21. Examinez les composantes afin de vérifier si celles-ci ne sont pas endommagées.
- 22. Sovez avisé de la perte de la confidentialité lorsque vous utilisez les ondes publiques. Les conversations peuvent être entendues par d'autres moniteurs de bébé, des téléphones sans fil, des scanneurs, etc.
- 23. Les enfants devraient être supervisés afin de vous assurer qu'ils ne jouent pas avec l'appareil.
- 24. Le produit n'est pas concu pour être utilisé par des personnes (incluant des enfants) aux capacités physiques, sensorielles ou mentales réduites ou qui manquent d'expérience et de connaissances. à moins qu'on leur ait donné suffisamment de supervision ou d'instructions relativement à l'utilisation de l'appareil par une personne responsable de leur sécurité

# CONSERVEZ CES INSTRUCTIONS

# Mises en garde

- 1. Utilisez et entreposez le produit à une température entre 0° C (32°F) et 40°C (104° F).
- 2. N'exposez pas cet appareil à des froids ou des chaleurs extrêmes, ainsi qu'à la lumière directe du soleil. Ne l'installez pas près d'une source de chauffage
- 3. Le bloc-piles ne doit pas être exposé à la chaleur excessive telle que la lumière du soleil ou au feu.

4. Assurez-vous que le moniteur et le cordon de l'adaptateur sont toujours hors de portée des enfants, à au moins 1 mètre (3 pieds) de l'enfant ou du berceau, pour éviter tout risque de strangulation.

5. Ne jamais placer le moniteur à l'intérieur du

berceau ou du parc de bébé. Ne iamais couvrir le

moniteur ou l'unité (s) portative avec un article tel

une serviette ou une couverture. 6. D'autres équipements électroniques peuvent produire des interférences sur votre moniteur vidéo et audio. Tentez d'installer votre moniteur vidéo ou audio à l'écart des appareils électroniques tels que des routeurs sans fil, radios, téléphones cellulaires, interphones, moniteurs, téléphones, ordinateurs personnels, électroménagers et

### téléphones sans fil. Stimulateurs cardiaques implantés dans l'organisme

dispositifs numériques sans fil): L'organisme 'Wireless Technology Research, LLC (WTR)', une firme de recherche indépendante. a mené une évaluation pluridisciplinaire des interférences entre les téléphones sans fil portatifs et les stimulateurs cardiaques implantés dans l'organisme. Appuyée par l'Administration des aliments et drogues (FDA) des Etats-Unis, la firme

Les simulateurs cardiaques (ne s'applique qu'aux

# Avis aux détenteurs de stimulateurs cardiaques

- · Vous devriez maintenir les dispositifs sans fil à au moins six pouces du simulateur cardiaque.
- Ils ne doivent PAS placer le téléphone sans fil directement sur le stimulateur cardiaque, tel que dans une poche de chemise, lorsque celui-ci est

### cardiaques causés par les gens qui utilisent dispositifs sans fil à proximité de ceux-ci. Champs électromagnétiques (EMF)

L'étude effectuée par l'organisme WRS n'a pas

identifié de risque pour les détenteurs de simulateurs

Ce produit de VTech est conforme à toutes les normes se rapportant aux champs électromagnétiques (EMF) standard. Si vous le manipulez correctement en suivant les instructions de ce guide, son utilisation sera sécuritaire pendant de nombreuses années, selon les meilleures évidences scientifiques dont nous disposons aujourd'hui.

# Limited warranty

What does this limited warranty cover?

United States of America and Canada.

Product")?

The manufacturer of this VTech Product warrants to the holder of a valid proof of purchase ("Consumer" or "you") that the Product and all accessories provided in the sales package ("Product") are free from defects in material and workmanship, pursuant to the following terms and conditions, when installed and used normally and in accordance with the Product operating instructions. This limited warranty extends only to the

### What will VTech do if the Product is not free from defects in materials and workmanship during the limited warranty period ("Materially Defective

Consumer for Products purchased and used in the

During the limited warranty period, VTech's authorized service representative will repair or replace at VTech's option, without charge, a Materially Defective Product. If we repair the Product, we may use new or refurbished replacement parts. If we choose to replace the Product, we may replace it with a new or refurbished Product of the same or similar design. We will retain defective parts, modules, or equipment. Repair or replacement of the Product, at VTech's option, is your exclusive remedy. VTech will return the repaired or replacement Products to you in working condition. You should expect the repair or replacement to take approximately 30 days.

### How long is the limited warranty period?

The limited warranty period for the Product extends for ONE (1) YEAR from the date of purchase. If VTech repairs or replaces a Materially Defective Product under the terms of this limited warranty, this limited warranty also applies to the repaired or replacement Product for a period of either (a) 90 days from the date the repaired or replacement Product is shipped to you or (b) the time remaining on the original one-year warranty; whichever is longer.

### What is not covered by this limited warranty? This limited warranty does not cover:

1. Product that has been subjected to misuse, accident, shipping or other physical damage, improper installation, abnormal operation or handling, neglect, inundation, fire, water or other liquid intrusion; or Product that has been damaged due to repair,

authorized service representative of VTech; or

Product to the extent that the problem experienced

is caused by signal conditions, network reliability, or cable or antenna systems: or 4. Product to the extent that the problem is caused by use with non-VTech accessories; or

5. Product whose warranty/quality stickers, product

have been removed, altered or rendered illegible; or Product purchased, used, serviced, or shipped for repair from outside the United States of America

serial number plates or electronic serial numbers

or Canada, or used for commercial or institutional

purposes (including but not limited to Products

used for rental purposes); or Product returned without a valid proof of purchase (see item 2 on the next page); or 8. Charges for installation or set up, adjustment of customer controls, and installation or repair of

### systems outside the unit. How do you get warranty service?

features may save you a service call.

To obtain warranty service in the USA, please visit our website at www.vtechphones.com or call 1 (800) 595-9511. In Canada, go to www.vtechcanada.com or call 1 (800) 267-7377 NOTE: Before calling for service, please review the

user's manual - a check of the Product's controls and

Except as provided by applicable law, you assume the risk of loss or damage during transit and transportation and are responsible for delivery or handling charges incurred in the transport of the Product(s) to the service location. VTech will return repaired or replaced Product under this limited warranty. Transportation, delivery or handling charges are prepaid. VTech assumes no risk for damage or loss of the Product in transit. If the Product failure is not covered by this limited warranty, or proof of purchase does not meet the terms of this limited warranty, VTech will notify you and will request that you authorize the cost of repair prior to any further repair activity. You must pay for the cost of repair and return shipping costs for the repair of Products that are not covered by this limited

### What must you return with the Product to get warranty service?

- including the Product to the VTech service location along with a description of the malfunction or difficulty; and 2. Include a "valid proof of purchase" (sales receipt)
- identifying the Product purchased (Product model) and the date of purchase or receipt; and

### alteration or modification by anyone other than an This warranty is the complete and exclusive

all other written or oral communications related to this Product. VTech provides no other warranties for this Product. The warranty exclusively describes all of VTech's responsibilities regarding the Product. There are no other express warranties. No one is authorized to make modifications to this limited warranty and you should not rely on any such modification State/Provincial Law Rights: This warranty gives you

specific legal rights, and you may also have other rights, which vary from state to state or province to province. Limitations: Implied warranties, including those of fitness for a particular purpose and merchantability (an unwritten warranty that the Product is fit for ordinary use) are limited to one year from the date of purchase. Some states/provinces do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. In no event shall VTech be liable for any indirect, special, incidental consequential, or similar damages (including, but not limited to lost profits or revenue, inability to use the Product or other associated equipment, the cost of substitute equipment, and claims by third parties) resulting from the use of this Product. Some states/ provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above

Please retain your original sales receipt as proof of purchase.

limitation or exclusion may not apply to you.

# Technical specifications

control Baby unit: 1921.536-1928.448 MHz frequency Parent unit: 1921.536-1928.448 MHz Channels 5 LCD 35 (x) x 20 (y) mm B&W LCD Maximum power allowed by FCC and IC. Actual operating range may vary according to environmental range conditions at the time of use. Parent unit: 2 X AAA 750mAH Ni-MH requirement rechargeable battery pack Baby unit power adapter: Input: 100-120V AC 150mA 60Hz Output: 6V DC 400mA Parent unit power adapter Input: 100-120V AC 150mA 60Hz

- 1. Return the entire original package and contents
- 3. Provide your name, complete and correct mailing address, and telephone number.

agreement between you and VTech. It supersedes

# Frequency

© 2016 VTech Communications, Inc.

All rights reserved. 02/16. DM521\_CIB\_ V1.0

FCC and IC regulations

- and receiver.
- different from that to which the receiver is connected

Changes or modifications to this equipment not

This device complies with Part 15 of the FCC rules.

## **Industry Canada**

This device complies with Industry Canada licenceexempt RSS standard(s)

Crystal controlled PLL synthesizer

Output: 6V DC 400mA

Specifications are subject to change without notice.