



at&t

User's manual

**SL82208/SL82308/SL82408**

**DECT 6.0 cordless**

**telephone/answering system**

**with caller ID/call waiting**



# Congratulations

on your purchase  
of this AT&T product.

Before using this AT&T product, please  
read the **Important safety instructions**  
on pages 53-55 of this manual.

Please thoroughly read the user's  
manual for all the feature operation  
and troubleshooting information you  
need to install and operate your new  
AT&T product. For customer service  
or product information, please visit  
our website at **www.telephones.att.com**  
or call **1 (800) 222-3111**.  
In Canada dial **1 (866) 288-4268**.

Model #: SL82208 (dual handset)/SL82308 (triple handset)/  
SL82408 (quad handset)

Type: DECT 6.0 cordless telephone/answering system

Serial #: \_\_\_\_\_

Purchase date: \_\_\_\_\_

Place of purchase: \_\_\_\_\_

Both the model and serial number of your AT&T product can be found on the  
bottom of the telephone base.


Save your sales receipt and original packaging in case it is necessary to return  
your telephone for warranty service.




The ENERGY STAR<sup>®</sup> program ([www.energystar.gov](http://www.energystar.gov)) recognizes and encourages the use of products that save energy and help protect our environment. We are proud to mark this product with the ENERGY STAR<sup>®</sup> label indicating it meets the latest energy efficiency guidelines.

# Parts checklist

Your new AT&T SL82208/SL82308/SL82408 telephone system includes:

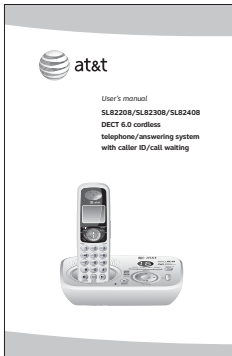

User's manual

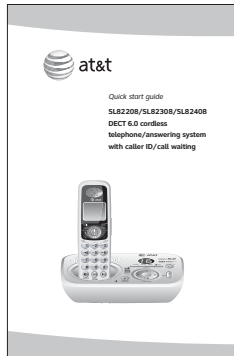

Quick start guide




Cordless handset  
(2 for SL82208)  
(3 for SL82308)  
(4 for SL82408)



Telephone base



Charger for cordless handset  
(1 for SL82208)  
(2 for SL82308)  
(3 for SL82408)



Battery for cordless handset  
(2 for SL82208)  
(3 for SL82308)  
(4 for SL82408)



Battery compartment cover  
(2 for SL82208)  
(3 for SL82308)  
(4 for SL82408)




Power adapter for telephone base



Power adapter for handset charger  
(1 for SL82208)  
(2 for SL82308)  
(3 for SL82408)



Belt clip for cordless handset  
(2 for SL82208)  
(3 for SL82308)  
(4 for SL82408)



Telephone line cord

User's manual

**SL82208/SL82308/SL82408**

**DECT 6.0 cordless**

**telephone/answering system  
with caller ID/call waiting**



Table of contents

**Getting started**

Quick reference guide ..... 2  
Installation setup ..... 4  
Telephone base and charger  
    installation ..... 5  
Battery installation & charging ... 6  
Belt clip & optional headset..... 7

**Telephone operation**

Handset operation..... 8  
Options while on calls..... 11  
Intercom ..... 14  
Intercom call transfer ..... 15  
Handset settings ..... 17

**Directory**

Directory..... 22  
New directory entries ..... 23  
Directory review ..... 25  
Directory search ..... 26  
To dial, delete or  
    edit entries..... 27

**Caller ID operation**

Caller ID operation ..... 28  
To review the call log..... 31

**Answering system operation**

Answering system operation..... 32  
Day & time announcement ..... 33  
Outgoing announcements..... 34  
Changing feature options..... 35  
Message playback..... 36  
Recording & playing memos ..... 37  
Message counter displays ..... 38  
Answering system mode..... 39  
Remote access ..... 40

**Appendix**

Screen icons, indicator  
    lights & tones..... 41  
Handset display screen  
    messages..... 42  
Troubleshooting..... 44  
Battery..... 52  
Important safety instructions.... 53  
FCC Part 68 and ACTA ..... 56  
FCC Part 15..... 58  
Limited warranty ..... 59  
Technical specifications..... 62  
Index..... 63

# Quick reference guide

## Handset

**DIR / CID**

Press **DIR** to display directory entries (page 25). Press to scroll up while in menus. While entering names or numbers, press to move the cursor to the right.

Press **CID** to display caller ID information (page 31). Press to scroll down while in menus. While entering names or numbers, press to move the cursor to the left.

**REDIAL/PAUSE**

Press to view redial memory (page 9). While entering numbers, press and hold to insert a dialing pause (page 23).

**PHONE/FLASH**

Press to make or answer a call. During a call, press to receive an incoming call if call waiting is activated (page 11).

**SPEAKER**

Press to activate handset speakerphone. Press again to resume normal handset use (page 8).

**MENU/SELECT**

Press to display the menu. Once in the menu, press to select an item or save an entry or setting.

**OFF/CLEAR**

During a call, press to hang up. While using menus, press to cancel an operation, back up to the previous menu, or exit the menu display.

**VOLUME**

Press on the side of the handset to adjust listening volume. Each press of the button increases or decreases the volume.

**MUTE/DELETE**

While on a call, press to mute microphone (page 12). While reviewing the call log, press to delete an individual entry, or press and hold to clear the caller ID log (page 31). While predialing, press to delete digits (page 8).

**INT**

Press to initiate an intercom conversation or transfer a call (pages 14-16).

## Feature menu

> Shows a highlighted item



### Feature menu

|                    |         |
|--------------------|---------|
| DIRECTORY .....    | Page 22 |
| CALL LOG .....     | Page 28 |
| RINGER VOLUME ...  | Page 17 |
| RINGER TONE .....  | Page 18 |
| KEY TONE .....     | Page 18 |
| LANGUAGE .....     | Page 19 |
| CLR VOICE MAIL.... | Page 20 |

### Using menus

Press **DIR** or **CID** to scroll through menu items.

Press **MENU/SELECT** to select or modify a highlighted item.

Press **OFF/CLEAR** to cancel an operation, back up to the previous menu, or exit the menu display.