

Go to www.vtechphones.com to register your product for enhanced warranty support and the latest Vtech product news.



DM221
DM221-2
Digital Audio Monitor
vtech
User's manual

CONGRATULATIONS

on purchasing your new Vtech product. Before using this product, please read **Important safety instructions**.

This manual has all the feature operations and troubleshooting necessary to install and operate your new Vtech product. Please review this manual thoroughly to ensure proper installation and operation of this innovative and feature-rich Vtech product.


For support, shopping, and everything new at Vtech, visit our website at www.vtechphones.com.

WHAT'S IN THE BOX



Frequency control	Crystal controlled PLL synthesizer
Transmit Frequency	Baby unit: 1921.536-1928.448 MHz Parent unit: 1921.536-1928.448 MHz
Channels	5
LCD	33 (x) x 21.2 (y) mm B&W LCD
Nominal effective range	Maximum power allowed by FCC and IC, actual operating range may vary according to environmental conditions at the time of use.
Power requirement	Baby unit power adapter: Output: 6V DC 400mA Parent unit power adapter: Output: 6V DC 400mA Parent unit power adapter: Output: 6V DC 400mA

TECHNICAL SPECIFICATIONS

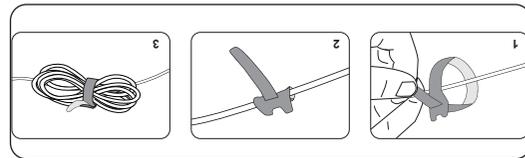

CABLE MANAGEMENT

IMPORTANT SAFETY INSTRUCTIONS

- The applied nameplate is located in the battery compartment of the baby and parent units.
- When using your equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:
- Follow all warnings and instructions marked on the product.
 - Adult setup is required.
 - CAUTION:** Do not install the baby unit at a height above 2 meters.
 - This product is not a substitute for adult supervision of the infant. Supervising the infant is the parent's or caregiver's responsibility. This product could cease operating, and therefore you should not assume it will continue working properly for any given period of time. Further, this is not a medical device and should not be used as such. This product is intended to assist you in supervising your baby.
 - Do not use this product near water. For example, do not use it next to a bath tub, wash bowl, kitchen sink, laundry tub or swimming pool, or in a wet basement or shower.
 - CAUTION:** Use only the batteries provided. There may be a risk of explosion if a wrong type of battery is used for the parent unit. The batteries should be subjected to high or low extreme temperature and low air pressure at high altitude during use, storage or transportation. Disposal of batteries into fire or a hot oven, or mechanically crushing or cutting or the batteries can result in an explosion. Leaving the batteries in an extremely high temperature surrounding environment can result in an explosion or in the leakage of flammable liquid of gas. Batteries subjected to extremely low air pressure may result in an explosion or the leakage of flammable liquid of gas. Dispose of used battery according to the information in the RBRIC seal.
 - Use only the adapters included with this product. Incorrect adapter polarity or voltage can seriously damage the product.
 - Use only adaptors and batteries listed below.


- Power adapter information:**
Output: 6V DC 400mA
VTECH TELECOMMUNICATIONS LTD.
Model: VT05U0506040
- Rechargeable battery information:**
2.4V 750mAh Ni-MH battery
YIYANG CORLIN BATTERY CO. LTD.
Model: NI-MH AAA750'2
- The power adapters are intended to be correctly oriented in a vertical or floor mounting position. The prongs are not designed to hold the plug in place if it is subjected to a ceiling, under-the-table or cabinet outlet.
 - For pluggable equipment, the socket-outlet shall be installed near the equipment and shall be easily accessible.
 - Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
 - Unplug the power cords before replacing batteries.
 - Do not cut off the power adapters to replace them with other plugs, as this causes a hazardous situation.
 - Do not allow anything to rest on the power cords. Do not install this product where the cords may be walked on or crimped.
 - This product should be operated only from the type of power source indicated on the label. If you are not sure of the type of power supply in your home, consult your dealer or local power company.
 - Do not overload wall outlets or use an extension cord.
 - Do not place this product on an unstable table, shelf, stand or other unstable surfaces.
 - This product should not be placed in any area where proper ventilation is not provided. Slots and openings in the back or bottom of this product are provided for ventilation.
- Precautions for users of implanted cardiac pacemakers**
Cardiac pacemakers (applies only to digital cordless devices): Wireless Technology Research, LLC (WTR), an independent research entity, led a multidisciplinary evaluation of the interference between portable wireless devices and implanted cardiac pacemakers. Supported by the U.S. Food and Drug Administration, WTR recommends to physicians that:
- Pacemaker patients**
- Should keep wireless devices at least six inches from the pacemaker.
 - Should NOT place wireless devices directly over the pacemaker, such as in a breast pocket, when it is turned ON. WTR's evaluation did not identify any risk to bystanders with pacemakers from other persons using wireless devices.
- Electromagnetic fields (EMF)**
This Vtech product complies with all standards regarding electromagnetic fields (EMF). If handled properly and according to the instructions in this user's manual, the product is safe to be used based on scientific evidence available today.

2 BEFORE USE (CONT'D)


Positioning the baby monitor

- CAUTION**
- Keep the baby units out of the reach of your baby. Never place or mount the baby units inside the baby's crib or playpen.

1. Place the baby units more than 3 feet (1 meter) away from your baby.



2. Place the parent unit more than 3 feet (1 meter) away from the baby unit to avoid screeching noise.

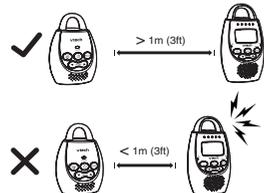

- CAUTION**
- The default volume of your parent unit is level 3. If you experience high-pitched screeching noise from your baby monitor while positioning:
 - Make sure your baby unit and parent unit are more than 3 feet (1 meter) apart, OR
 - Turn down the volume of your parent unit.

Operating range

The operating range of the baby monitor is up to 1,000 feet (300 meters) outdoors or 160 feet (50 meters) indoors. The actual operating range may vary depending on the environmental conditions, and other interferences such as walls, doors, and other obstructions.


1 CONNECT AND CHARGE THE BATTERY

Install the parent unit battery

The parent unit runs on rechargeable battery or AC power. To continuously monitor your baby, make sure you use both battery and AC power at the same time. With the battery open, the parent unit can cordlessly run for a short time only.

NOTES

- Use only the battery supplied with this product.
- If the parent unit will not be used for a long time, disconnect and remove the battery to prevent possible leakage.

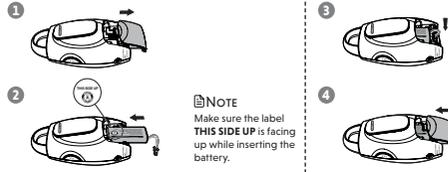


Replace the battery

To replace the battery, unplug the battery connector from the socket, and then pull the battery out of the battery compartment. Follow the steps above to install the battery.

Connect the baby monitor

NOTES

- Use only the power adapters supplied with this product.
- Make sure the baby monitor is not connected to an electric outlet that is controlled by a switch.
- The power adapters' prongs are not designed to hold the weight of your baby monitor. Make sure you connect the adapters to wall outlets that are in vertical or floor mount position. Do not connect them to undermount and ceiling outlets. Otherwise, your baby monitor would fall out of the outlets.
- Make sure the parent unit, the baby unit and the power adapter cords are out of reach of children.

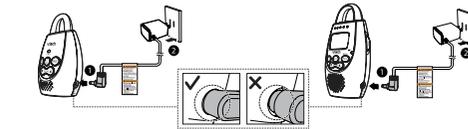

Charge the parent unit battery

When you have connected the parent unit and installed its battery for the first time or after power outage, the parent unit powers on automatically. The battery icon indicates the battery status (see the following table).

NOTES

- The parent unit battery is fully charged after 11 hours of continuous charging.
- It takes longer to charge the battery when the parent unit is turned on. To shorten the charging time, turn the parent unit off while charging.
- The standby time varies depending on the sensitivity level you set, your actual use and the age of the battery.


BATTERY INDICATORS	BATTERY STATUS	ACTION
The battery icon is off.	No battery is installed but operates using AC power.	Install the parent unit battery. Charge without interruption (at least 30 minutes).
The screen displays LOW BATTERY and Light flashes.	The battery has very little charge and may be used for only a short time.	Charge without interruption (about 30 minutes).
The battery icon becomes solid Full .	The battery is fully charged.	To keep the battery charged, connect it to AC power when not in use.

2 BEFORE USE

Test your baby monitor

You may test the baby monitor before initial use, and at regular times thereafter.

- Make sure your baby unit and parent unit are on.
- Speak towards the microphone of the baby unit. You will hear the sound at the parent unit, and see the visual sound indicators light up.



CAUTION

- For hearing protection, make sure the parent unit is more than 3 feet (1 meter) away from the baby unit. If you hear any high-pitched noise, move the parent unit further until the noise stops. You can also press **VOLUME** on the parent unit to lower or mute the noise.

NOTE

- This baby monitor is intended as an aid. It is not a substitute for proper adult supervision, and should not be used as such.
- When the parent unit displays **NOT LINKED** and **Light** flashes, move the parent unit closer to the baby unit (observe the minimum distance of 3 feet/1 meter). You can also check if the baby monitor is connected to a live power socket and switched on.


TIP

- Increase the speaker volume of the parent unit if you cannot hear the sounds transmitted from the baby unit.

3 USING THE BABY MONITOR

Power on or off the baby unit

- Press **Power** to power on the baby unit. The power light turns on.
- Press **Power** and **hold** to power off the baby unit. The power light turns off.



Power on or off the parent unit

- Press **Power** to power on the parent unit. The screen turns on.
- Press **Power** and **hold** to power off the parent unit. The screen turns off.

NOTE

- The parent unit powers on automatically once it is connected to power socket or battery installed. The baby unit also powers on automatically once connected to power socket.

Adjust the speaker volume for baby unit

- Press **VOLUME** on the baby unit at any time.

NOTE

- The speaker of baby unit cannot be muted.

Adjust the speaker volume for parent unit

You can adjust the speaker volume from **VOLUME 1** to **VOLUME 5**, or turn it off. The speaker volume is preset to **VOLUME 3**.

- Press **VOLUME** when the parent unit is not in use.
- When the speaker volume is set to **VOLUME OFF**, the screen displays **Light**.

Adjust the sound sensitivity of the baby unit

You can choose to hear sounds from the baby unit all the time, or to hear sounds that exceed a certain level. You can use the parent unit to adjust the microphone sensitivity of your baby unit. The higher the sensitivity level, the more sensitive the baby unit is in detecting sounds for transmitting to the parent unit. The VOX sensitivity level is preset to **HIGHEST**.

VOX SENSITIVITY LEVEL	HIGHEST	HIGH	MEDIUM	LOW	LOWEST
DESCRIPTION	The parent unit speaker is constantly on, and you will hear all sounds (including background noises) from your baby's room.	The parent unit speaker turns on for soft babbling and louder sounds from your baby. It remains quiet when your baby sleeps soundly.	The parent unit speaker turns on for loud babbling and louder sounds from your baby. It remains quiet when your baby makes soft sounds.	The parent unit speaker turns on for crying and louder sounds from your baby. It remains quiet when your baby makes soft sounds.	The parent unit speaker turns on for loud crying or screeching sounds from your baby. It remains quiet when your baby makes soft sounds.

- Press **MENU** when the parent unit is not in use.
- Press **SELECT** to select **VOX LEVEL**.
- Press **Up** or **Down** to choose the desired sensitivity level.
- Press **SELECT** to confirm your selection. The screen displays **SAVED** and you hear a confirmation tone.

NOTE

- To enter the **VOX LEVEL** menu of the parent unit, the baby unit must be turned on.

Sound alert

If you want the parent unit alerts you with sound, especially when the baby unit detects loud sounds, you can turn on the sound alert feature. This feature is preset to **OFF**. Once this feature is on, **Light** is shown on LCD display. When the visual sound indicator hits the red light range, i.e. the baby unit detects loud sounds, your parent unit beeps and **Light** flashes.

- Press **MENU** when the parent unit is not in use.
- Press **Up** or **Down** to choose **SOUND ALERT**, then press **SELECT**.
- Press **Up** or **Down** to choose **ON** or **OFF**.
- Press **SELECT** to confirm your selection. The screen displays **SAVED** and you hear a confirmation tone.

NOTE

- The sound alert setting on each parent unit is independent.

Vibration alert

You can set your parent unit to vibrate and alert you, whenever the baby unit detects loud sounds. This feature is preset to **OFF**.

Once this feature is on, **Light** is shown on LCD display. When the visual sound indicator hits the red light range, i.e. the baby unit detects loud sounds, your parent unit vibrates and **Light** flashes.

- Press **MENU** when the parent unit is not in use.
- Press **Up** or **Down** to choose **VIBE ALERT**, then press **SELECT**.
- Press **Up** or **Down** to choose **ON** or **OFF**.
- Press **SELECT** to confirm your selection. The screen displays **SAVED** and you hear a confirmation tone.

NOTES

- Each time you set the vibration alert to **ON**, the parent unit vibrates briefly after you press **SELECT**.
- The vibration alert setting on each parent unit is independent.

Nightlight

Both your parent unit(s) and baby unit allow you to turn on or off the nightlight on the baby unit.

Turn on/off the nightlight using the baby unit:

- Press **Light** to turn on the nightlight.
- Press **Light** to turn off the nightlight.

Turn on/off the nightlight using the parent unit:

- Press **MENU** when the parent unit is not in use.

3 USING THE BABY MONITOR (CON'T)

- Press **▲** or **▼** to choose **NIGHTLIGHT**, then press **SELECT**.
- Press **▲** or **▼** to choose **ON** or **OFF**.
- Press **SELECT** to confirm your selection. The screen displays **SAVED** and you hear a confirmation tone.

NOTES

- When the nightlight is turned on, the parent unit displays .
- The nightlight on baby unit operates even when the parent unit battery is out of charge or has been turned off.
- If the parent unit lost link, the nightlight icon on its LCD display will disappear, regardless of the nightlight status.

Language

You can select a language (**English, Spanish or French**) to be used in all screen displays. The language is preset to **English**.

- Press **MENU** when the parent unit is not in use.
- Press **▲** or **▼** to choose **LANGUAGE**, then press **SELECT**.
- Press **▲** or **▼** to choose **ENGLISH, ESPANOL, or FRANCAIS**.
- Press **SELECT** to confirm your selection. The screen displays **SAVED** and you hear a confirmation tone.

NOTE

- The language setting on each parent unit is independent.

Set default

Use this feature to restore to the default settings. Restoring the default settings on one parent unit will also reset the shared settings for VOX sensitivity level of the other parent unit.

- Press **MENU** when the parent unit is not in use.
- Press **▲** or **▼** to choose **SET DEFAULT**, then press **SELECT**.
- Press **▲** or **▼** to choose **YES** or **NO**.
- When you choose **YES**, press **SELECT** to confirm your selection. The screen displays **SAVED** and you hear a confirmation tone.

-OR-


When you choose **NO**, press **SELECT** to confirm your selection. The screen displays the previous menu.

Talk to the baby unit

You can broadcast messages from a parent unit to the baby unit and the other parent unit. If you have two parent units, you can use both of them at the same time to talk to the baby unit.

- Press and hold **TALK** on the side of the parent unit. The screen displays **TALK** when the voice connection to the baby unit is made.
- Speak towards the **MIC** on the parent unit. Your voice is broadcast to the baby unit and the other parent unit.

BABY UNIT OVERVIEW

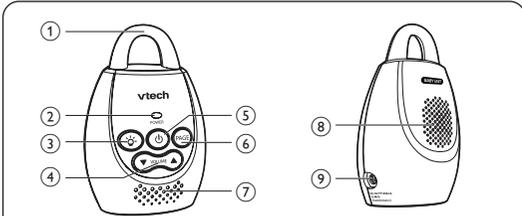

- Night light**
 - On when night light is turned on manually.
 - Off when night light is turned off manually.
- POWER light**
 - On when the baby unit is turned on.
- 
- ▼ VOLUME ▲**
 - Press to adjust the speaker volume.
- ⏻(On/off)**
 - Press to power on, and the power light turns on.
 - Press and hold to power off, and the power light turns off.
- PAGE**
 - Press to start or stop paging parent unit.
- Microphone**
- Speaker**
- Power jack**

NOTES

- If you have two parent units, and you use one of them to talk to you baby, your voice will broadcast to both the baby unit and the other parent unit. The other parent unit displays **TALKBACK**. However, no sound will transmit from the baby unit to any parent unit during broadcasting.
- If speaker volume of the parent unit has been turned off before the talk, it will change to default volume level after the talk finished.

Find/page the parent unit


Use this feature to locate misplaced parent units.

- Press **PAGE** on the baby unit. All idle parent units ring and display **PAGING**.
2. To end paging, press any key on the parent unit, or press **PAGE** on the baby unit.

NOTES

- Paging rings all parent units even if the speaker volume of parent unit is set to **VOLUME OFF**.
- The baby unit cannot page any parent unit that is turned off, out of range, or talking to the baby unit.

PARENT UNIT OVERVIEW

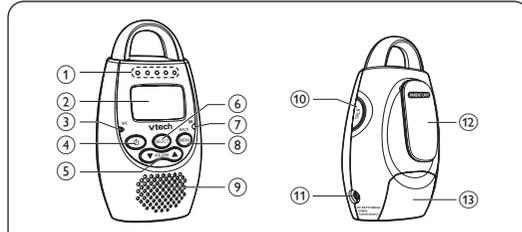

- Visual sound indicator** 
 - The visual sound indicator has two functions. One is to show the sound level detected by the baby unit. The other one is to show the volume level during speaker volume setting.
 - Sound level detected by the baby unit**
 -  One to three green light indicates a moderate sound level detected by the baby unit.
 -  Additional red lights indicate a higher sound level detected by the baby unit (e.g. baby crying loudly).
 - Speaker volume level**
 -  One to three green lights indicate **Level 1 to Level 3** of the speaker volume setting.
 -  Additional red lights indicate **Level 4 to Level 5** of the speaker volume setting.
- LCD display**
- Microphone**
 - ⏻(On/off)**
 - Press to power on, the screen turns on.
 - Press and hold again to power off, the screen turns off.
 - While in a menu, press to return to idle screen.
- ▼ VOLUME ▲**
 - Press to adjust the speaker volume.
 - While in a menu, press to scroll up or down.
- SELECT**
 - While in a menu, press to choose an item, or save a setting.
- Battery LED**
 - Light on when the battery is being charged.
 - Light flashes when the battery is low and needs charging.
 - Light off when the parent unit is running on AC power without battery installed, or the parent unit is running on battery only.
- MENU/BACK**
 - Press to enter the menu.
 - While in a menu, press to return to the previous menu.
- Speaker**
- TALK**
 - Press and hold to talk to the baby.
- Power jack**
- Belt clip**
- Battery compartment cover**

FREQUENTLY ASKED QUESTIONS

Below are the questions most frequently asked about the baby monitor. If you cannot find the answer to your question, visit our website at www.vtechphones.com or call 1 (800) 595-9511 for customer service.

Why does the baby monitor not respond normally?

- Try the following (in the order listed) for common cure:
 - Disconnect the power to the baby unit and the parent unit.
 - Remove the batteries in the parent unit. Then, install the batteries again.
 - Wait a few minutes before connecting power back to the baby unit and the parent unit.
 - Turn on the baby unit and the parent unit.
 - Wait for the parent unit to synchronize with the baby unit. Allow up to one minute for this to take place.

Why doesn't the screen of the parent unit work when I switch on the unit?

Perhaps the rechargeable battery of the parent unit is empty and the parent unit is not connected to the power. Insert the appliance plug into the parent unit and put the adapter in a wall socket.

Why doesn't the POWER light of the baby unit glow on when I switch on the unit?

Perhaps the baby unit is not connected to the power. Connect the baby unit to the power.

Why does the baby monitor produce a high-pitched noise?

The units may be too close to each other. Make sure the parent unit and the product unit are more than 3 feet (1 meter) away from each other.

Why does the parent unit react too quickly to other sounds?

The baby unit also detects other sounds than those of your baby. Adjust the VOX sensitivity level to a lower level or adjust the speaker volume of the parent unit.

Why don't I hear a sound/Why can't I hear my baby's cry?

The volume of the parent unit may have set too low. Press **VOLUME ▲** to increase the volume level.

Why does the parent unit beep?

If the sound alert feature is on, there is sound detected from the baby unit. The baby unit may be out of range. Move the parent unit closer to the baby unit (but not less than 3 feet).

If the parent unit is powered by the provided battery, it may not have enough charge for the parent unit to perform normally. Charge the battery in the parent unit for up to 11 hours.

Why can't I establish a connection? Why is the connection lost every now and then? Why are there sound interruptions?

The baby unit may be out of range. Move the parent unit closer to the baby unit (but not less than 3 feet).

Other electronic products may cause interference with your baby monitor. Try installing your baby monitor as far away from these electronic devices as possible.

The battery may not be working. Contact our customer service to purchase a new battery.

GENERAL PRODUCT CARE

To keep this product working well and looking good, follow these guidelines:

- Avoid putting it near heating appliances and devices that generate electrical noise (for example, motors or fluorescent lamps).
- DO NOT expose it to direct sunlight or moisture.
- Avoid dropping the product or treating it roughly.
- Clean with a soft cloth.
- DO NOT immerse the parent unit and the baby unit in water and do not clean them under the tap.
- DO NOT use cleaning spray or liquid cleaners.
- Make sure the baby unit and parent unit are dry before you connect them to the mains again.

FCC AND IC REGULATIONS

FCC Part 15

This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARNING: Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. This Class B digital apparatus complies with Canadian requirements. ICES-3 (B)/NMB-3(B)

The RBRC seal on the NI-MH battery indicates that VTech Communications, Inc. is voluntarily participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service within the United States and Canada.

The program provides a convenient alternative to placing used NI-MH batteries into the trash or municipal waste, which may be illegal in your area.

VTech's participation makes it easy for you to drop off the spent battery at local retailers participating in the program or at authorized VTech product service centers. Please call 1 (800) 8 BATTERY for information on NI-MH battery recycling and disposal bans/restrictions in your area. VTech's involvement in this program is part of its commitment to protecting our environment and conserving natural resources.

The RBRC Seal and 1 (800) 8 BATTERY® are registered trademarks of Call2Recycle, Inc.

CALIFORNIA ENERGY COMMISSION BATTERY CHARGING TESTING MODE

This baby monitor meets the California Energy Commission (CEC) regulations for energy consumption. Your baby monitor is set up to comply with the energy-conserving standards right out of the box. Follow the instructions to install and charge the battery. The CEC battery charging testing mode is activated while charging. Even if the parent unit is paired to baby units, the CEC battery charging testing mode is activated while it is powered off and charging.

DISCLAIMER AND LIMITATION OF LIABILITY

VTech Communications, Inc. and its suppliers assume no responsibility for any damage or loss resulting from the use of this user's manual. VTech Communications, Inc. and its suppliers assume no responsibility for any loss or claims by third parties that may arise through the use of this product.

Address: VTech Communications, Inc.
Company: 9020 SW Washington Square Road - Ste 555 Tigard, OR 97223, United States
Phone: 1 (800) 595-9511 in the U.S. or 1 (800) 267-7377 in Canada

FOR CETL COMPLIANCE ONLY

Measures de sécurité importantes

La plaque signalétique appliquée se trouve dans le compartiment à piles du unité bébé et parent. Veuillez toujours suivre certaines règles des unités bébé et parent.

- Observez toutes les instructions et mises en garde inscrites sur l'appareil.
- MISE EN GARDE:** N'installez pas l'unité du bébé à hauteur de nourrisson. Ce produit ne remplace pas la surveillance adulte du nourrisson. La supervision du nourrisson est la responsabilité du parent ou de la personne qui s'occupe du bébé. Ce produit pourrait cesser de fonctionner et, par conséquent, vous ne devriez pas laisser votre enfant continuer de fonctionner continuellement pendant une période de temps donnée. De plus, il s'agit pas d'un instrument médical et ne doit pas être utilisé comme tel. Ce produit est destiné à vous aider à superviser votre bébé.
- Ne touchez pas cet appareil près de l'eau ni de toute autre source d'humidité, par exemple, près d'une baignoire, d'une douche, d'un évier de cuisine, dans un sous-sol humide ni près d'une piscine, dans un sous-sol humide ou une piscine.
- MISE EN GARDE:** Utilisez que la pile fournie. Il peut y avoir un risque d'explosion si un mauvais type de pile est utilisé pour le dispositif apparié. La pile ne peut pas être soumise à des températures extrêmes élevées ou basses et à une faible pression atmosphérique à haute altitude pendant son utilisation, son entreposage ou son transport. Le fait de jeter la pile dans un feu ou dans un four chaud, ou d'exposer ou de couvrir mécaniquement la pile peut entraîner une explosion. Le fait de laisser la pile dans un environnement à température extrêmement élevée peut entraîner une explosion ou une fuite de liquide dans un récipient enflammable. Une fuite de liquide dans un environnement bas peut provoquer une explosion ou une fuite de liquide dans un récipient enflammable. Ne laissez pas le produit complètement au informations figurées dans la section Le seuil de sécurité.

RF radiation exposure statement
The device has been tested and complies with FCC and IC SAR limits.

To ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by a user or bystander according to the intended usage of the product. This product has been tested and found to comply with the FCC criteria. The baby unit shall be installed and used such that parts of all persons' body are maintained at a distance of approximately 20 cm (8 inches) or more.

For body worn operation, this parent unit has been tested and meets the FCC RF exposure guidelines when used with the accessories supplied or designed for this product. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

Utilisez que les adaptateurs inclus avec ce produit. L'utilisation d'un autre type de pile pourrait provoquer une explosion ou une fuite de liquide dans un récipient enflammable.

- Informations sur les adaptateurs électriques:
Sortie: 6 V CC 400mA
Vtech Telecomunications Ltd.
Modèle: VT05E05040
- Informations sur les piles rechargeables:
2xV 750mAh NI-MH battery
YIANG CORUN BATTERY CO. LTD.
Modèle: NI-MHAA750-2
- Lorsqu'il s'agit branchés dans une prise de courant, les adaptateurs se réchauffent et il est conseillé de les orienter correctement, soit à la verticale ou à plancher. Les broches n'ont pas à être en contact avec les autres broches. Utilisez un adaptateur et le maintenez en place à cet effet branché dans une prise au plafond, sous une table ou une autre surface.

Pour les PRODUITS à BRANCHER À UNE PRISE DE COURANT, la prise de courant doit être installée près du produit, afin d'assurer une accessible facilement à la prise de courant. Afin d'assurer le bon fonctionnement de l'appareil, il est recommandé de ne pas brancher le produit dans une prise de courant avant de procéder au nettoyage. Utilisez des nettoyeurs en aérosols. Utilisez un chiffon humide pour le nettoyage. Ne laissez pas le produit complètement au plafond pendant au moins 10 minutes avant de remplacer le bloc-piles.

Ne laissez pas les cordons d'alimentation pour remplacer les fiches, car ceci peut présenter un danger potentiel. Ne laissez aucun objet tomber ni appuyer sur le cordon d'alimentation. N'exposez ce produit à un incendie ou à un feu. Ne laissez pas le cordon d'alimentation ou de la plénière. Ne laissez pas fonctionner l'appareil pendant qu'il est branché à une prise de courant. Si vous ne connaissez pas le type de l'alimentation que vous devez utiliser, contactez votre fournisseur ou votre marchand ou votre compagnie locale d'électricité.

Ne surchargez pas les prises de courant murales ni les rallonges électriques.

Ne placez pas cet appareil sur un chariot, meuble, trépied, support ou montage quelconque instable ou instable.

N'empêchez pas l'aération adéquate de l'appareil en le plaçant sur un lit, dans l'égout ou toute autre surface ondulée. De même, ne le positionnez pas à proximité ni au-dessus d'une source de chaleur ou d'un radiateur. De plus, ne placez pas l'appareil dans un endroit avec de vous assurer qu'il ait un bon circulation d'air.

N'entrez jamais d'objets à travers les ouvertures de cet appareil, car ils pourraient entrer en contact avec des points de tension dangereux ou causer des courts-circuits qui peuvent provoquer des incendies ou des étincelles. Ne démontez pas cet appareil, mais appelez-le dans un centre de service autorisé.

Afin de réduire les risques d'obstruction, ne remplacez pas cet appareil à l'exception de l'accès autorisé à certaines parties ou ouvertures, risque de vous exposer à des points de tension dangereux ou d'autres dangers. Un remplacement incorrect peut faire plus présenter des risques d'électrocution.

Vous devez porter la ceinture chaque fois que vous mettez l'appareil en fonction.

Examinez les composantes afin de vérifier si celles-ci ne sont pas endommagées.

Il existe un très faible risque de perte de confidentialité avec cet appareil, car il peut émettre des signaux radio, téléphones sans fil, etc.). Pour l'éviter, s'assurer que le produit n'a jamais été utilisé avant l'achat, réinitialiser l'unité de façon périodique, éteindre l'école-bébé quand il n'est pas en cours d'utilisation.

Les enfants doivent être supervisés afin de vous assurer qu'ils ne jouent pas avec l'appareil.

Le produit n'est pas conçu pour être utilisé par des personnes ou matériels réduites ou qui manquent d'expérience et de connaissances, à moins qu'on leur ait donné un affichage de supervision ou d'instructions relativement à l'utilisation de l'appareil par une personne responsable de leur sécurité.

CONSERVER CES INSTRUCTIONS

Mises en garde:
1. Utilisez et entreposez le produit à une température entre 0 °C (32 °F) et 40 °C (104 °F).

2. N'exposez pas cet appareil à des froids ou des chaleurs extrêmes, ainsi qu'à la lumière directe du soleil. Ne l'installez pas près d'une source de feu ou de flamme.

3. Le bloc-piles ne doit pas être exposé à la chaleur excessive telle que la lumière du soleil ou un feu.

4. **Avertissement:** Risque de strangulation - Les enfants sans entrainés dans des cordons. Gardez les cordons hors de portée des enfants (à plus de 0,9 m). N'enlevez pas cette étiquette.

5. Ne jetez jamais le matériel à l'intérieur du biberon ou du parc de bébé. Ne jamais couvrir le moniteur ou l'unité (si portative) avec un étui et/ou une serviette ou une couverture.

6. D'autres équipements électroniques peuvent produire des interférences avec le moniteur et/ou l'unité audio. Évitez d'installer votre moniteur vidéo ou audio à l'écart des appareils électroniques tels que les téléphones à cordons, les téléphones cellulaires, interphones, moniteurs, téléphones, ordinateurs personnels, électromémoires et téléphones sans fil.

Stimulateurs cardiaques Implantés dans l'organisme
Les stimulateurs cardiaques ne s'appliquent qu'aux dispositifs médicaux.

L'organisme Wireless Technology Research, LLC (WTRV), une firme de recherche et développement en matière de santé, a constaté que des interférences entre les téléphones sans fil portatifs et les stimulateurs cardiaques implantés dans l'organisme. Appuyez sur l'Administration des aliments et des médicaments (FDA) de la firme WTRV.

Les personnes portant des stimulateurs cardiaques:
• Vous devez maintenir vos dispositifs sans fil à au moins six pouces (15 cm) de distance de votre téléphone sans fil.

• Si vous ne pouvez pas placer le téléphone sans fil directement sur votre corps, utilisez un kit de chargeur, tel que dans une poche de chemise, lorsque celui-ci est en service.

L'unité effectue pas l'organisme WRS n'a pas identifié de risque qui soit détecté ou rapporté par les utilisateurs. Si vous avez des questions concernant ces informations, veuillez contacter votre fournisseur ou votre marchand ou votre compagnie locale d'électricité.

Ne surchargez pas les prises de courant murales ni les rallonges électriques.

Ne placez pas cet appareil sur un chariot, meuble, trépied, support ou montage quelconque instable ou instable.

PARENT UNIT ICONS

Status icons



- Connection status**
 -  displays when strong signal strength is detected between the baby unit and the parent unit.
 -  displays when moderate signal strength is detected between the baby unit and the parent unit.
 -  displays when the weak signal strength is detected between the baby unit and the parent unit.
 -  flashes when the link between the baby unit and the parent unit is lost.



- Night light**
 - On when the night light is turned on.



- Sound alert**
 - Displays when the sound alert of the parent unit is turned on.
 - Flashes when there are loud sounds detected from the baby unit.



- Vibration alert**
 - Displays when the vibration alert of the parent unit is turned on.
 - Flashes when there are loud sounds detected from the baby unit.



- Volume off**
 - Displays when the parent unit speaker volume is turned off.



- Battery status**
 -  animates when the battery is charging.
 -  displays solid when the battery is fully charged.
 -  flashes when the battery is in low level and needs charging.
 - No battery icon displays when there is no battery installed.

Parent unit display screen messages

LINKED - The link between the parent unit and the baby unit is established.

LOW BATTERY - The parent unit uses only the rechargeable battery pack and it needs to be recharged.

NOT LINKED - The link between the parent unit and the baby unit is lost continuously for over 10 seconds.

PAGING - Both idle parent units are being paged by the baby unit.

SAVED - Your selection has been saved.

SEARCHING - The parent unit is out of range of the baby unit, or the baby unit is out of power.

TALK - You are using the parent unit to talk to your baby.

Someone is using the other parent unit to talk to the baby, and the voice is also broadcasting to your parent unit. No sound will transmit from the baby unit to any parent unit during broadcasting.

(For DM222-2 only)

LIMITED WARRANTY

What does this limited warranty cover?

The manufacturer of this VTech Product warrants to the holder of a valid proof of purchase ("Consumer" or "you") that the Product and all accessories provided in the sales package ("Products") are free from defects in material and workmanship, pursuant to the following terms and conditions, when installed and used normally and in accordance with the Product operating instructions. This limited warranty extends only to the Consumer for Products purchased and used in the United States of America and Canada.

What will VTech do if the Product is not free from defects in materials and workmanship during the limited warranty period ("Materially Defective Product")?

During the limited warranty period, VTech's authorized service representative will replace at VTech's option, without charge, a Materially Defective Product. If we choose to replace the Product, we may replace it with a new or refurbished Product of the same or similar design. We will retain defective parts, modules, or equipment. Replacement of the Product, at VTech's option, is your exclusive remedy. VTech will return the replacement Products to you in working condition. You should expect the replacement to take approximately 30 days.

How long is the limited warranty period?

The limited warranty period for the Product extends for ONE (1) YEAR from the date of purchase (90 days on products purchased as Refurbished"). This limited warranty does NOT apply to the replacement Product for a period of either (a) 90 days from the date of purchase or (b) the time remaining on the original one-year warranty (90-day limited warranty on products that are purchased as Refurbished) - whichever is longer.

Refurbished products purchased from our online store carry a 90-day replacement warranty.

What is not covered by this limited warranty?

This limited warranty does not cover:

- Product that has been subjected to misuse, accident, shipping or other physical damage, improper installation, or consequential or handling, neglect, inundation, fire, water or other liquid intrusion;
- Product that has been damaged due to repair, alteration or modification by anyone other than an authorized service representative of VTech; or
- Product to the extent that the problem experienced is caused by signal conditions, network reliability, or cable or antenna systems; or
- Product to the extent that the problem is caused by use with non-VTech accessories; or
- Product whose warranty/quality stickers, product serial numbers or electronic serial numbers have been removed, altered or rendered illegible; or
- Product purchased, used, serviced, or shipped for repair from outside the United States of America or Canada, or used for commercial or institutional purposes (including but not limited to Products used for rental purposes); or
- Product returned without a valid proof of purchase (see Change Electromagnetic Interference).

Changes for installation or set up, adjustment of customer controls, and installation or repair of systems outside the unit.

What is not covered by this limited warranty?

This limited warranty does not cover:

- Product that has been subjected to misuse, accident, shipping or other physical damage, improper installation, or consequential or handling, neglect, inundation, fire, water or other liquid intrusion;
- Product that has been damaged due to repair, alteration or modification by anyone other than an authorized service representative of VTech; or
- Product to the extent that the problem experienced is caused by signal conditions, network reliability, or cable or antenna systems; or
- Product to the extent that the problem is caused by use with non-VTech accessories; or
- Product whose warranty/quality stickers, product serial numbers or electronic serial numbers have been removed, altered or rendered illegible; or
- Product purchased, used, serviced, or shipped for repair from outside the United States of America or Canada, or used for commercial or institutional purposes (including but not limited to Products used for rental purposes); or
- Product returned without a valid proof of purchase (see Change Electromagnetic Interference).

Changes for installation or set up, adjustment of customer controls, and installation or repair of systems outside the unit.

Please retain your original sales receipt as proof of purchase.

Someone is using the other parent unit to talk to the baby, and the voice is also broadcasting to your parent unit. No sound will transmit from the baby unit to any parent unit during broadcasting.

(For DM222-2 only)