

R5

5" Shallow Recessed Incandescent Housing

New Construction Non-IC

Catalog Number: _____

Type: _____

Project: _____



Description

For new construction with installations of vertical clearance restrictions. Thermally protected, economy, shallow recessed housing. Furnished with pre-installed BH6 SURE-LOK® adjustable bar hangers. Breakaway plaster frame provides remodel capability. Fixture is UL Listed for Through-Branch Circuit Wiring and Damp Location use.

Features

- Compact size permits installation with 2" x 6" joist construction, and as close as 8" on center.
- Non-IC - 75W Maximum
- Plaster frame detachable from housing for use as remodel housing.
- Pre-installed BH6 SURE-LOK® bar hangers included.
- Thermal protection standard.
- UL Listed for Through-Branch Circuit Wiring and Damp Locations.

CATALOG SYSTEM AND OPTIONS

SAMPLE CATALOG NUMBER: R5-R238

Housing _____ Trims (choose one) _____

R5

R238 Black Baffle*
R238W White Baffle*
R249C Specular Clear Reflector*
R249G Gold Reflector*
R249BK Black Reflector*
R132W White Open Trim*
R132PB Polished Brass Open Trim*
R120W White Reflector Cone*
R120 Black Reflector Cone*
R136 Drop Round Shower Trim
R135 Albalite Shower Trim
R133W PAR30 Eyeball White
R133PB PAR30 Eyeball Polished Brass

R133BRN PAR30 Eyeball Brushed Nickel
R138BK PAR20 Eyeball White w/ Black Baffle
R138W PAR 20 Eyeball White w/White Baffle
R138PB PAR 20 Eyeball White w/White Baffle
R221 White Eyeball
R221PB Polished Brass Eyeball
R248 Wall Wash*
R134W Recessed Gimbal White Baffle*
R134BK Recessed Gimbal Black Baffle*
R134WHT Recessed Gimbal White Reflector*

R134C Recessed Gimbal Clear Reflector*
R134PB Recessed Gimbal Polished Brass Reflector*
R134BRN Recessed Gimbal Brushed Nickel Reflector*
R139W Surface Gimbal Clear Reflector*
R139PB Surface Gimbal Polished Brass Reflector*
R139BRN Brushed Nickel Surface Gimbal*

Custom colors are available on select trims. Please see the Decorative Trims link at www.caprilighting.com to download brochure and for further details.

*Bracket required for these trims.

SPECIFICATIONS

1. **Housing** - 22 gauge steel painted white. Adjusts vertically in plaster frame to accommodate ceilings 1/2" to 1-1/2" thick. Housing can be pulled through plaster frame for access to junction box. Accommodates lamps up to 75W depending on trim used. Ceiling opening 5-1/8". Fits 2" x 6" joist construction.

2. **Plaster Frame** - Die-formed galvanized steel, detachable from housing for use as remodel housing, installed through 5" hole from below ceiling.

3. **Socket** - Medium base screw shell porcelain socket, mounted to fixed bracket in top of housing.

4. **Bar Hangers** - Patented SURE-LOK® BH6 bar hangers telescope from 16" to 24". Vertical design of interlocking bar hangers prevents sagging even at full 24" extension. Bar hangers mount vertically on long axis of plaster frame.



5. **Junction Box** - Extra-large 32 cubic inch 16 gauge galvanized steel with two snap-on covers and grounding pigtail. Knockouts for 1/2" conduit. Meets all safety requirements of UL and N.E.C.

6. **Non-IC** - Insulation must be kept three inches away from housing in Non-IC applications.

7. **Thermal Protection** - Standard thermal protection device inside housing automatically takes fixture out of service if temperature becomes excessive from overlamp-ing, or wrong lamp/trim combination.

8. **c/UL Listed** for Damp Locations and Through Branch Circuit Wiring, 4 in/4 out.

DIMENSIONS

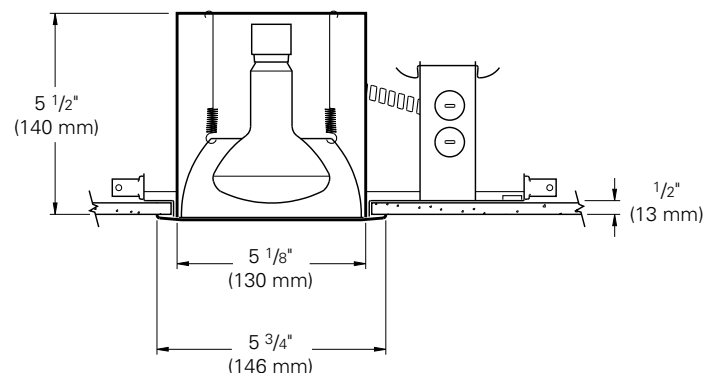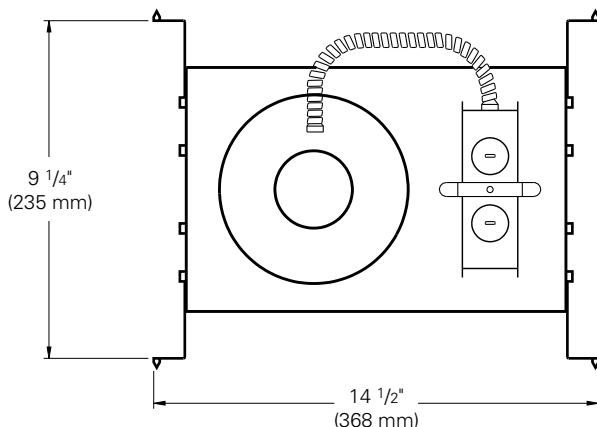

REV. 01/08

5" TRIMS



R238 (Shown)
Black Baffle Trim

R238W White Baffle Trim
Bracket Required
5 3/4" O.D. (146 mm)


Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	PAR30L	75W	75W
CRR5	R30	75W	75W
R5	PAR20	50W	
	PAR30	75W	
	R30	75W	



R249C (Shown)
Specular Clear Reflector

R249G Gold Reflector
R249BK Black Reflector
Bracket Required
5 3/4" O.D. (146 mm)


Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	R20	50W	50W
CRR5			
R5	PAR20	50W	
	R20	50W	



R132W (Shown)
White Open Trim

R132PB
Polished Brass Open Trim
Bracket Required
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	75W	75W
CR5	R30	75W	75W
CRR5			
R5	PAR30	75W	
	R30	75W	



R120W (Shown)
White Reflector Cone

R120
Black Reflector Cone
Bracket Required
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	R20	50W	50W
CRR5			
R5	PAR20	50W	
	R20	50W	



R136
Drop Round Shower Trim
Socket Supporting
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	A19		60W
CR5	PAR30	50W	75W
CRR5			
R5	A19		60W
	PAR30		75W



R135
Albalite Shower Trim
Socket Supporting
6 3/8" O.D. (162 mm)

Housing	Lamp	Non-IC
QL5	A19	60W
CR5	PAR30	75W
CRR5		
R5	A19	40W



R133W (shown)
White Par 30 Eyeball

R133PB
Par 30 Eyeball Polished Brass
R133BRN
Par 30 Eyeball Brushed Nickel
Socket Supporting
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	50W	75W
CR5			
CRR5			
R5	PAR30	75W	



R138BK
Par 20 Eyeball (shown)

R138W
Par 20 Eyeball
White with White Baffle
R138PB
Par 20 Eyeball
Polished Brass with Black Baffle
Socket Supporting

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5			
CRR5			
R5	PAR20	50W	



R221
White Eyeball

R221PB
Polished Brass Eyeball
Socket Supporting
7" O.D. (178 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	R20	50W	50W
CRR5			
R5	PAR20	50W	
	R20	50W	



R248
Wall Wash
Bracket Required
5-3/4" O.D. (146 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	R20	50W	50W
CRR5			
R5	R20	50W	



R139W (shown)
Surface Gimbal, Clear Reflector

R139PB
Surface Gimbal,
Polished Brass Reflector
Socket Supporting
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	50W	75W
CR5			
CRR5			
R5	PAR30	75W	



R134W (shown)
Recessed Gimbal, White Baffle

R134BK
Recessed Gimbal, Black Baffle
Socket Supporting
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	50W	75W
CR5			
CRR5			
R5	PAR30	75W	



R134WHT (shown)
Recessed Gimbal, White Reflector

R134C
Recessed Gimbal, Clear Reflector

R134PB
Recessed Gimbal, Polished Brass Reflector

R134BRN Recessed Gimbal Brushed Nickel Reflector
Socket Supporting
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	50W	75W
CR5			
CRR5			
R5	PAR30	75W	

Custom colors are available on select trims. Please see the Decorative Trims link at www.caprilighting.com to download brochure and for further details.

Capri Lighting reserves the right to make changes without notice.©2008

* Canadian product offering specifications and wattages may vary from those shown.

This product may be covered by one or more of the following U.S. Patents: #4,408,262, #4,703,406, #4,723,747, #4,910,651, #5,057,979. Other U.S. or Foreign Patents may apply.

RC1-10

CAPRI LIGHTING:
776 South Green St., Tupelo, MS 38804
Phone 662.842.7212 FAX 662.841.5501
www.caprilighting.com

CANADIAN DIVISION:
189 Bullock Drive, Markham, Ontario, Canada L3P 1W4
Phone 905.294.9570 FAX 800.268.0003

capri
LIGHTING