

USER MANUAL

Headset

(DECT Headset phone)

Model : OOMA-HDST01

IMPORTANT SAFETY INSTRUCTION :

When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:

- 1) Read and understand all the instructions.
- 2) Follow all warnings and instructions marked on the product.
- 3) Unplug this product from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning.
- 4) Do not use this product near water (for example, near a bath tub, kitchen sink, swimming pool).
- 5) Do not overload wall outlets and extension cords as this can result in the risk of fire or electric shock.
- 6) Unplug this product from the wall outlet and refer servicing to Vtech under the following conditions:
 - When the power supply cord or plug is damaged or frayed.
 - If the product does not operate normally by following the operating instructions.
 - If the product has been dropped and the cabinet has been damaged.
 - If the product exhibits a distinct change in performance.
- 7) Avoid using a telephone (other than a cordless type) during an electrical storm. There may be a remote risk of electric shock from lightning.
- 8) Do not use the telephone to report a gas leak in the vicinity of the leak.

SAVE THESE INSTRUCTIONS

Caution for Rechargeable battery :

- 1) The Headset is equipped with Li-ion battery. You can replace it by buying the same battery type from the retailer. Do not disassemble the battery pack.
- 2) The use of other battery types or non-rechargeable batteries/primary cells can be dangerous. These may cause interference and/or unit damages. The manufacturer will not be held liable for damage arising from such non-compliance.
- 3) Do not use third party charging bays. The batteries may be damaged.
- 4) Do not immerse the unit in water and do not place in fire.
- 5) Risk of explosion if you replace the battery by an incorrect type.
- 6) Dispose of the unit with Li-ion battery enclosed according to the instruction. Must be disposed of at the point of sale or at the appropriate collection points provided by the public waste authorities.

Package contents

The package contains the following items:

- 1 Headset unit
- 1 Charger pod
- 1 AC power adapter
- 1 User manual
- 6 Ear buds
- 2 Ear hooks
- 1 Head band
- 1 Neck band

The maximum range between the base station and the Headset is approximately 300 meters. Depending on the surrounding conditions as well as spatial and structural factors, the range may be reduced. The range indoors is normally less than outdoors.

1 INSTALLING YOUR HEADSET WITH A DECT PHONE

First to power up your Dect phone used at home.

Then power up the Headset.

Do the registration procedure with the Dect phone.

Pls use only the provided adaptor connected to the charger base.

Important : Charging the Headset unit for at least 5 hours before use.

Power adaptor information for the Headset :

Manufacturer : Tenpao

Model : S005IU0600040, Input 100-120V AC 60Hz 150mA, Output 6VDC 400mA

Manufacturer : CHOU SEN ELECTRONICS (SZ) CO., LTD.

Model : CS2A060040LUF, Input 100-120V AC 60Hz 200mA, Output 6VDC 400mA


Battery installed in the unit :

Manufacturer : BYD

Type : Lithium-ion polymer rechargeable battery


Model : BT191665

Capacity : 3.7V, 240 mAh, 0.888 Wh

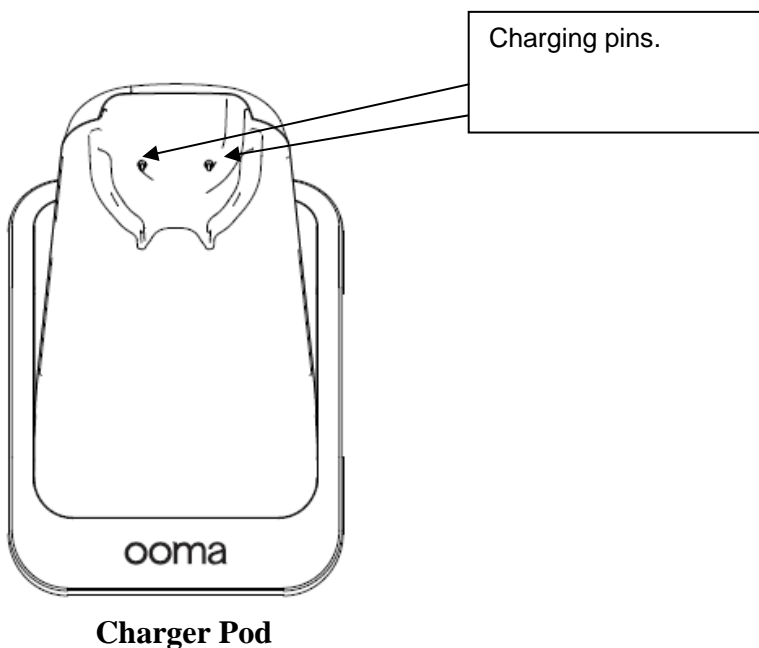


Start to know your Headset :

1. Front side :

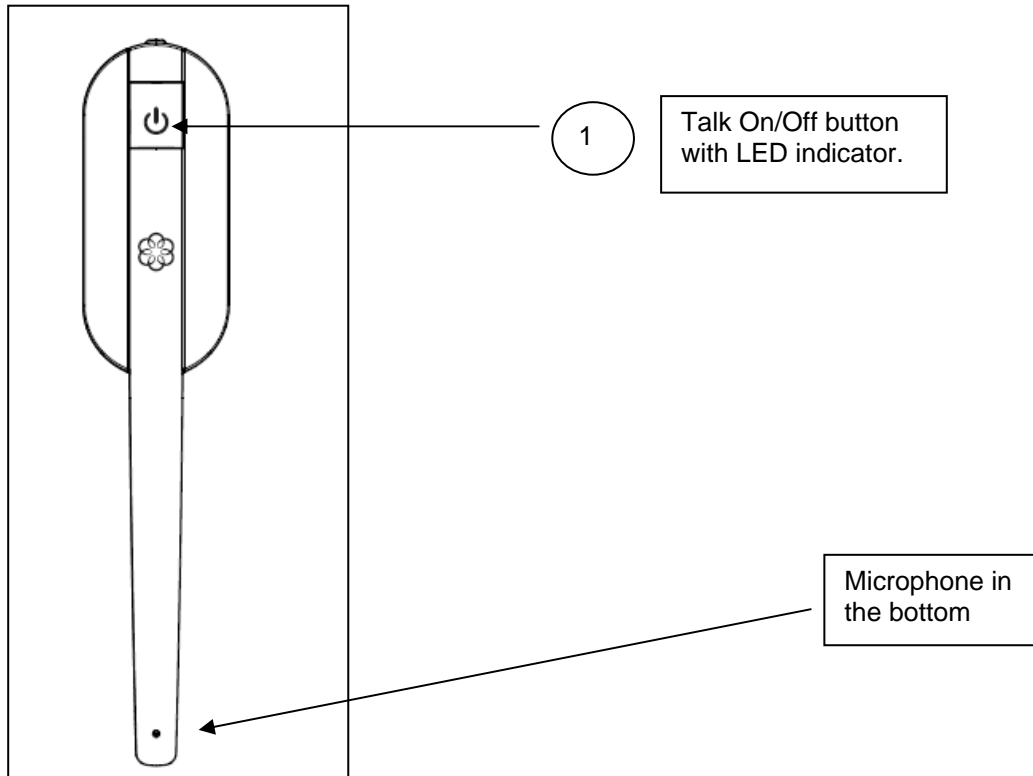

2. Top side :

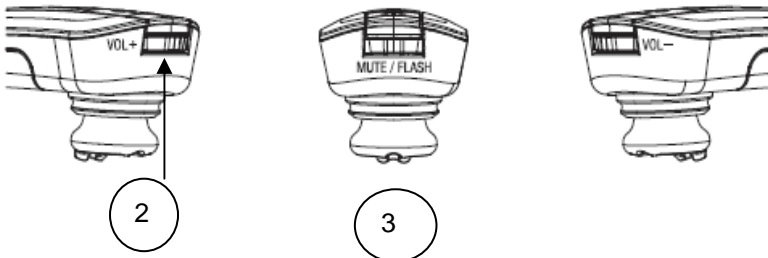

1	<p>TALK ON/OFF In idle mode: Press to place a call. During a call: Press to end the call. In idle mode: Press and hold about 4s to power the headset on or off.</p>
2	<p>SLIDER During a call: Slide to Volume + position, increase the earpiece volume. Slide to Volume - position, decrease the earpiece volume. In idle mode : Slide to Volume + position, increase the ringer volume. Slide to Volume - position, decrease the ringer volume.</p>
3	<p>MUTE/FLASH During a call: Press the slider once to mute the microphone. Press once again to unmute. Press and hold the slider for 2 seconds to do a Flash (R) function to answer a second incoming call.</p>

2. Talk On/Off LED Indicator functions :

The status LED on the Talk On/Off key can communicate information about the connection and battery status of the device. The table below shows the different LED indicator patterns of the headset uses :

Blue light : 1. Steadily on: When the Headset is placed on the charge pod and fully charged. 2. Flashing : in idle mode and not charging. 3. Double flashing : it is on and connected a phone call. 4. Triple flashing : it is power on. 5. Quadruple flashing : a call is coming, the headset is ringing, you can hear the ringer sound through the earpiece.
Red light: 1. Steadily on: it is charging on the charging cradle. 2. Flashing : Battery is low and it needs to place it back to cradle for charging. 3. Triple flashing: it is powering off.
Red/Blue light : 1. Toggling slowly : The unit is in registration mode but not registered. 2. Toggling quickly : it is in registration mode and trying to register to the base.
Off : Headset is power off or no battery is installed or the battery is dead

Registration to a base unit :

The headset is un-registered when taking out from the box.
Power up the headset by placing it on the charger pod which is connected to the charger adaptor and power on.
The power indicator is flashing with blue and red color alternatively.
Then start the registration mode of the base unit.
For the Ooma base unit, press and hold the page key of the Ooma for 3 seconds to start registration mode.
Wait until a succeed tone is heard.
The power indicator on the headset will be stable and in red color.

**Note: To register the headset unit, the system PIN of the Dect phone base should be 0000.
Or else, the registration will be failed.**

Remark :

1. It will hear the voice message from the headset in below 3 events :
 - Battery low
 - Out of range
 - Not Registered
2. Place the unit on the charger bay after use it to make sure the battery power is full.
3. If the unit is not working, try to take out the battery pack and wait for 30s before placing it back.
4. If the call is finished, press the Talk On/Off key once to release the line (Oh hook).
5. Charging the unit for at least 5 hours before use. The power indicator is in blue color and stable on.

5. Technical Specifications :

RF frequency band	1921.536MHz – 1928.448MHz
Channels	5
Operating temperature	32 deg F – 113 deg F 0 deg C – 45 deg C
Nominal effective range	300m outdoor
DC adaptor output	DC 6V @ 400mA
Operating times*	Talk time : up to nine hours Standby : up to four days

*Operating time varies depending on your actual use and the age of battery.

Li-ion battery warning :

6. Handling Instructions

Read and observe the following warnings and precautions to ensure correct and safe use of Li-ion batteries.

Danger!

Failure to observe the following precautions may result in battery leakage, overheating, explosion and/ or fire.

- Do not immerse the battery in water or allow it to get wet.
- Do not use or store the battery near sources of heat such as a fire or heater.
- Do not use any chargers other than those recommended by Danionics.
- Do not reverse the positive(+) and negative(-) terminals.
- Do not connect the battery directly to wall outlets or car cigarette-lighter sockets.
- Do not put the battery into a fire or apply direct heat to it.
- Do not short-circuit the battery by connecting wires or other metal objects to the positive(+) and negative(-) terminals.
- Do not carry or put the battery together with necklaces, hairpins or other metal objects.
- Do not strike, throw or subject the battery to sever physical shock.
- Do not pierce the battery casing with a nail or other sharp object, break it open with a hammer, or step on it.
- Do not directly solder the battery terminals.
- Do not attempt to disassemble or modify the battery in any way.
- Do not recharge the battery near a fire or in extremely hot conditions.

Warning!

Failure to observe the following precautions may result in battery leakage, overheating, explosion and/ or fire.

- Do not place the battery in a microwave oven or pressurized container.
- Do not use the battery in combination with primary batteries (such as dry-cell batteries) or batteries of different capacity, type or brand.
- Do not use the battery if it gives off an odor, generates heat, becomes discolored or deformed, or appears abnormal in any way. If the battery is in use or being recharged, remove it from the device or charger immediately and discontinue use.
- Keep the batteries out of the reach of children. If a child somehow swallows a battery, seek medical attention immediately.
- If the battery leaks or emits an odor, immediately remove it from the proximity of any exposed flame. The leaking electrolyte can ignite and cause a fire or explosion.
- If the battery leaks and electrolyte gets in your eyes, do not rub them. Instead, rinse them with clean running water and immediately seek medical attention. If left as is, electrolyte can cause eye injury.

Caution!

Do not use or store the battery where is exposed to extremely hot, such as under window of a car in direct sunlight in a hot day. Otherwise, the battery may be overheated. This can also reduce battery performance and/or shorten service life.

Use the battery only under the following environmental conditions. Failure to do so can result in reduced performance or a shorten service life. Recharging the battery outside of these temperatures can cause the battery to overheat, explode or catch fire.

Appendix

FCC, ACTA and IC regulations

FCC Part 15

This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Privacy of communications may not be ensured when using this telephone.

To ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by a user or bystander according to the intended usage of the product. This product has been tested and found to comply with the FCC criteria. The handset and headset may be safely held against the ear of the user. The telephone base shall be installed and used such that parts of the user's body other than the hands are maintained at a distance of approximately 20 cm (8 inches) or more.

This Class B digital apparatus complies with Canadian requirement : CAN ICES-3 (B)/NMB-3(B).

Appendix

FCC, ACTA and IC regulations

This equipment may not be used with Party Lines. If you have specially wired alarm dialing equipment connected to your telephone line, ensure the connection of this equipment does not disable your alarm equipment. If you have questions about what will disable alarm equipment, consult your telephone service provider or a qualified installer.

If this equipment is malfunctioning, it must be unplugged from the modular jack until the problem has been corrected. Repairs to this telephone equipment can only be made by the manufacturer or its authorized agents. For repair procedures, follow the instructions outlined under the Limited warranty.

If this equipment is causing harm to the telephone network, the telephone service provider may temporarily discontinue your telephone service. The telephone service provider is required to notify you before interrupting service. If advance notice is not practical, you will be notified as soon as possible. You will be given the opportunity to correct the problem and the telephone service provider is required to inform you of your right to file a complaint with the FCC. Your telephone service provider may make changes in its facilities, equipment, operation, or procedures that could affect the proper functioning of this product. The telephone service provider is required to notify you if such changes are planned.

If this product is equipped with a corded or cordless handset, it is hearing aid compatible.

If this product has memory dialing locations, you may choose to store emergency telephone numbers (e.g., police, fire, medical) in these locations. If you do store or test emergency numbers, please:

Remain on the line and briefly explain the reason for the call before hanging up.

Perform such activities in off-peak hours, such as early morning or late evening.

Industry Canada

Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference, including interference that may cause undesired operation.

The term "IC:" before the certification/registration number only signifies that the Industry Canada technical specifications were met.

This product meets the applicable Industry Canada technical specifications.

Privacy of communications may not be ensured when using this device.

Service Centre phone number and web site.

In USA : 1 (888) 711 6662

Web site : www.ooma.com/support

In Canada : 1 (866) 929 6662