


## **Bluetooth V3.0 Mono Headset BSHSBE18**

### **Mini Bluetooth Headset**

The Mini Bluetooth Headset is a Bluetooth device developed with the latest Bluetooth technology, which can connect to other Bluetooth devices such as mobile phone, desktop or notebook computer, PDA (with audio gateway profile supported) wirelessly.

### **Getting Started**

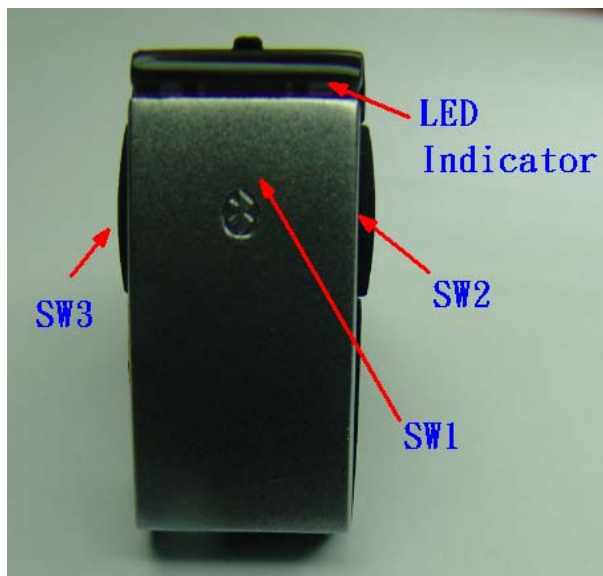

## **Bluetooth V3.0 Mono Headset BSHSBE18**

- **Charging Battery**

The Headset comes with a rechargeable battery included. The battery is not fully charged when it is new. Plug the charging cable or adapter. The red indicator on the headset will turn on as headset is charging. When the battery is full, the red indicator will turn off.

- **Turning the Headset On or Off**

To turn the Headset on

Press and hold the SW1 button for 3 seconds, then the blue indicator of the Headset flashes. The Headset is now turned on.

To turn the Headset off

Press and hold the SW1 button for 3 seconds, then the Red indicator will flash, and then the Headset will turn off.

- **Pairing the Headset**

You are required to pair the Headset with your mobile phone before using the Headset.

Step 1 : The Headset must be powered off before initiating the pairing. Hold and keep pressing the SW1 button for 6 seconds until the blue and the red indicators are flashing alternatively. The headset is now ready for pairing.

Step 2 : Initiate pairing process on your Bluetooth mobile phone to pair with the Headset. After search, you can find the device name "BSHSBE18"

Step 3 : When asked the Passkey by the mobile phone, enter 1234 and confirm it.

When pairing is successful, the red indicator will turn off and the blue indicator will flash.

## **Bluetooth V3.0 Mono Headset BSHSBE18**

### ● **Making Call**

Using voice dialing

Press the SW1, waiting for a beep, and say the name of the person you want to call.

Using Last Number Redial

Press the SW2 and SW3 together, then mobile phone will dial out the last number dialed.

Using the phone keys to make call

Dial the number on the mobile phone as you normally do. Once the call has been set up, the sound will be transmitted to your Headset automatically.

### ● **Answering Calls and Ending Call**

When the Headset is powered on, and there is an incoming call, you will hear a ring tone. When the Headset rings, press the SW1 button to answer.

Adjust the Headset volume by press the SW2 to increase the volume or SW3 to decrease the volume.

End calls by pressing SW1 or don't press any button.

### ● **Mute**

Press both SW2 and SW3 keys in the same time to enable Mute function, To press both SW2 and SW3 in the same time again to disable Mute function.

### ● **Transfer Audio**

If you want to transfer the audio from headset to phone, press SW1 and SW3 together.

## **Bluetooth V3.0 Mono Headset BSHSBE18**

### ● **Reject Call**

When the headset ring and you do not want to answer this call. To press SW2 and SW3 together to reject this call.

### ● **Three Way Call**

To short press SW1 to be able to accept waiting call and hold the active call

To press SW2 and SW3 together to accept waiting call and end the active call

To press both SW1 and SW3 to add the on hold call to three way call.

### ● **Multipoint**

1. To do pair procedure to pair with mobile phone#1 and connect it
2. To do pair procedure again to pair with mobile phone#2 and connect it.
3. Re-power on headset, the headset should connect to both mobile phone.(If headset did not connect to mobile phone, please operate Bluetooth setting of mobile phone to establish connection)
4. Now, you can use headset to pick up call for each mobile phone and be able to switch by SW1 short press between each other. By pressing both SW2 and SW3 to end the call.

Note : A2DP multipoint is only support on mobile phone.

## **Low Battery**

When the red indicator starts to flash, it indicates that the Headset is running low on battery.

Charge the Headset until the red indicator turns off.

## **Bluetooth V3.0 Mono Headset BSHSBE18**

### **Federal Communications Commission (FCC) Statement**

15.21

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) this device may not cause harmful interference, and
- 2) this device must accept any interference received, including interference that may cause undesired operation of the device.