



U2M200PP

APPLICATION

- For use as mobile home service equipment
- Single meter position
- Designed to receive watthour meters that meet ANSI C12.10
- Overhead or underground feed
- Surface mount

CONSTRUCTION

- Type 3R construction
- Padlockable disconnect cover
- AW hub provision
- Provisions for additional circuit breakers
- Snap type sealing ring included
- Ring style

STANDARDS

- UL 67 listed, complies with ANSI C12.7

FINISH

- ANSI 61 gray acrylic electrocoat finish

ACCESSORIES

- Flush trim kit — catalog #FK1430
- Screw type sealing ring — catalog #25016D
- Steel or clear lexan covers for socket opening
- Hubs


1Ø 3W

CONDUCTOR LUG RANGE

CATALOG NUMBER	MAIN DISCONNECT	AIC RATING		AMPACITY	VOLTAGE	NUMBER OF JAWS	HUB PROV.	PHASE CONDUCTOR		NEUTRAL CONDUCTOR	FIGURE NUMBER	HEIGHT (H)	WIDTH (W)	DEPTH (D)
		STD.	MAX.					LINE	LOAD					
U2M200P	200A 2P CB & 2P Prov.	10K*	22K	200	120/240	4	AW	6 AWG - 250 kcmil	CIRCUIT BREAKER	6 AWG - 250 kcmil	Fig. 1	30	14	4 5/8
U2M200PP	200A 2P CB & (2) 2P Prov.	10K*	22K	200	120/240	4	AW	6 AWG - 250 kcmil	CIRCUIT BREAKER	6 AWG - 250 kcmil	Fig. 1	30	14	4 5/8

Note: All provisions accept Westinghouse Quicklag "HQP", General Electric "THQL" and Siemens Type "QP" and "HQ" type plug-in circuit breakers.

The sum of the main disconnects may not exceed 250 amperes

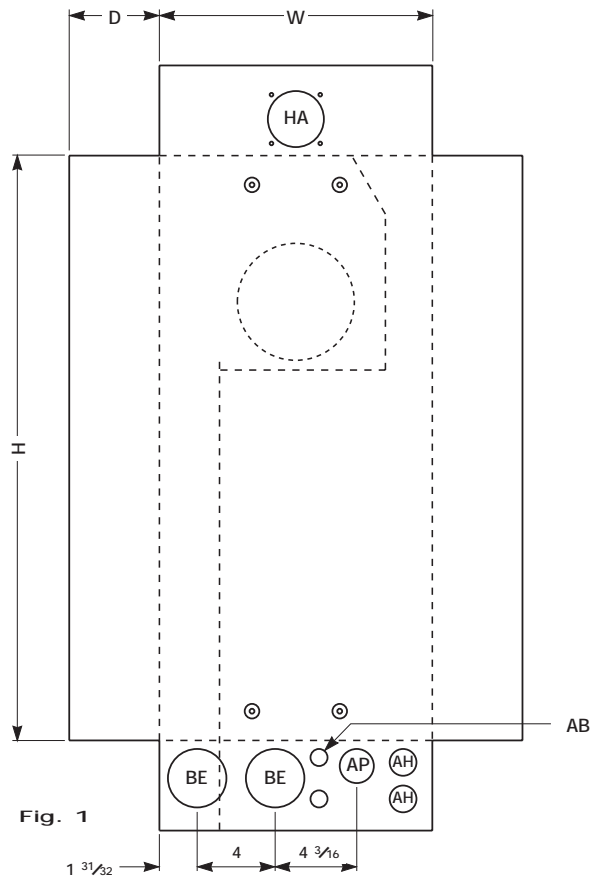

Knockouts — Conduit Sizes

- AB = 1/2"
- AH = 1" - 3/4"
- AP = 1 1/4" - 1" - 3/4" - 1/2"
- BE = 2 1/2" - 2" - 1 1/2" - 1 1/4"
- HA = AW HUB