

# Telephone



## 1. On/Off button

Press (  ) button to turn the mobile phone on or off. Press this button to finish the call. If the button is pressed for long, you will be back to the previous screen from the present screen where a certain menu is applied.

## 2. Move button

Keep pressing (  ) button to move to the mobile phone menu. Press Move button downward to display the menu where SMS message can be sent. On the basic screen press Move button upward to display the call records.

## 3. Buttons



0 ~ 9 are used for number, text and sign.

\* and # buttons have various functions, which are used on the phone menu.

## 4. Select button

Left (  ) and Right (  ) Select buttons are used to perform the option positioned right above.

**Ref)** Select button is displayed in capital letters in thick color in this manual.  
For example, **ACEPTAR (Confirm)**

## 5. Call button

Press the phone number and then Call (  ) button to start to make a call to the number.

## Introduction

### Installation of SIM card

Prior to installation of SIM card, make sure the mobile phone is powered off and then remove the battery. Since the SIM card can be easily damaged if scratched or bent, be careful when installing on or removing from the phone.



1. Let the back of the phone directed toward the user, and press the open lever (as pointed by the arrow in the figure).  
The battery is put together with the cover as a single unit.
2. Take the battery out as shown in the figure.
3. Let the yellow connector of the SIM card directed downward as shown in the figure and then put inside onto the corner.

**Ref)** Hold and take out the SIM card carefully to remove from the slot.

4. Install the battery.

## Charging the battery

1. Insert the charger as shown in the figure. (The phone is available during charging the battery.) If the mobile phone is turned off, the sign “Battery being charged” will be displayed continuously.



2. If the battery is charged, it will not blink as in the figure of the screen. In order to remove the battery, hold and press the both ends of the charger to take out.



## Phone ON/OFF

In order to turn the phone on or off, keep pressing (  ).

### Start

If the phone is turned off, 8-digit password will be required. Input the password and press **OK button**.

If the date is correct, press **OK button**, if not, input new date and time and then press **OK button**.



### Main screen

**Ref** For 1 minute and 30 seconds after the phone turned on, its image and menu may be displayed later than usual, which is because the menu setting environment needs such time when the menu is not visible. After this period of time, the speed will be back to normal condition. Stand-by screen is displayed if the phone is ready to answer and make the phone call. The stand-by screen is divided into 4 icon areas.

- **Icon area:** displays each different icon used to show the state of the phone.

- **User's option screen area:** displays connection status to the communication network including service provider and service type.
- **Date & time area:** shows the present time year, month and day.
- **Functions key area:** shows Select keys.



**Directory** allows you to move to the directory if the button pressed.  
**Menu** shows the main menu if the button pressed.

Press the downward arrow to move to a new text message.

Press the upward arrow to display the calling list menu.

You will mainly use the arrow keys with these functions available.

Keep pressing End button to turn the phone off. Press Call (green) button to move to the call records screen.

Press the number you want to make a call to and then press Call (green) button. Keep pressing a number button where a phone number is saved if you want to make a call thereto.


Keep pressing \* button to set the lock.

Keep pressing # button to display Notice mode menu in the sound setting environment. You can set the notice mode as desired.

Press 1 on the basic screen to make a call to voice message box.

## Icons used on the basic screen

- 1) Battery capacity 
- 2) Frequency strength 
- 3) Receive new text message 
- 4) Notice message, message box capacity insufficient 
- 5) Receive new voice message 
- 6) Battery left 
- 7) Roaming 
- 8) Alarm & Schedule notice 
- 9) Bell mode 
- 10) Vibration mode 
- 11) Bell-vibration mode 
- 12) Mute 



## Make a call

In order to make a call, press the number on the stand-by screen and then press Call(green) (  ) button.

If a wrong number has been pressed, press Clear (CLR) button to delete the wrong number.

Press End (red) (  ) button to finish the call.



## Answer the phone

Press Call(Answer) (  ) button to answer the phone.


Press End/Start (  ) button not to answer the phone.

## Setting the manner mode

This function is designed to mute the sound of the bell or the melody for you to answer the phone while not turned off. Through the mute function, the user can make the phone call sound mute or withhold the notice function if a call comes in when the user is not available.

## Basic menu


In the stand-by state, press **Menu** button to go to the basic menu. The basic menu includes details of **Menu** with all available functions. Press Up/Down Move button to go to the desired type of menu. In addition, with the menu button being pressed, press the applicable number to go to the category for the number. Figures of icons, names of categories and description of each menu and shortcut buttons are as follows;

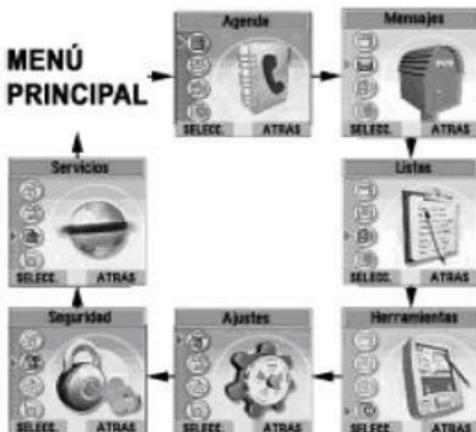


## Lock keypad



Keep pressing ( ) the button to lock the keypad.  
Press Cancel button and ( ) button to cancel **Lock**.


## Structure of function menu

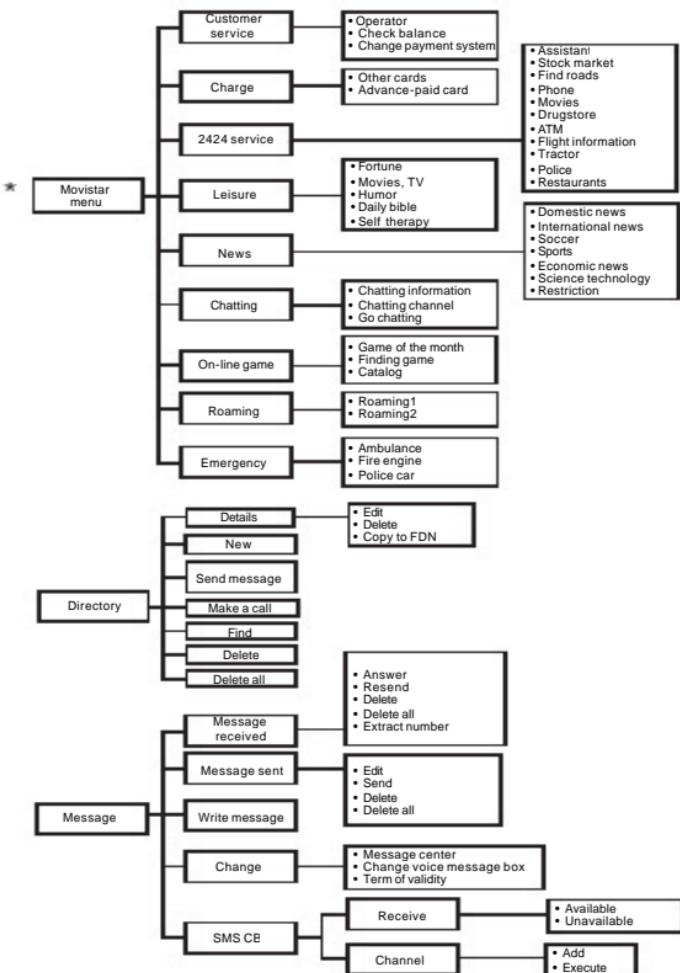

\* Contact your communication provider and ask if the service is available.

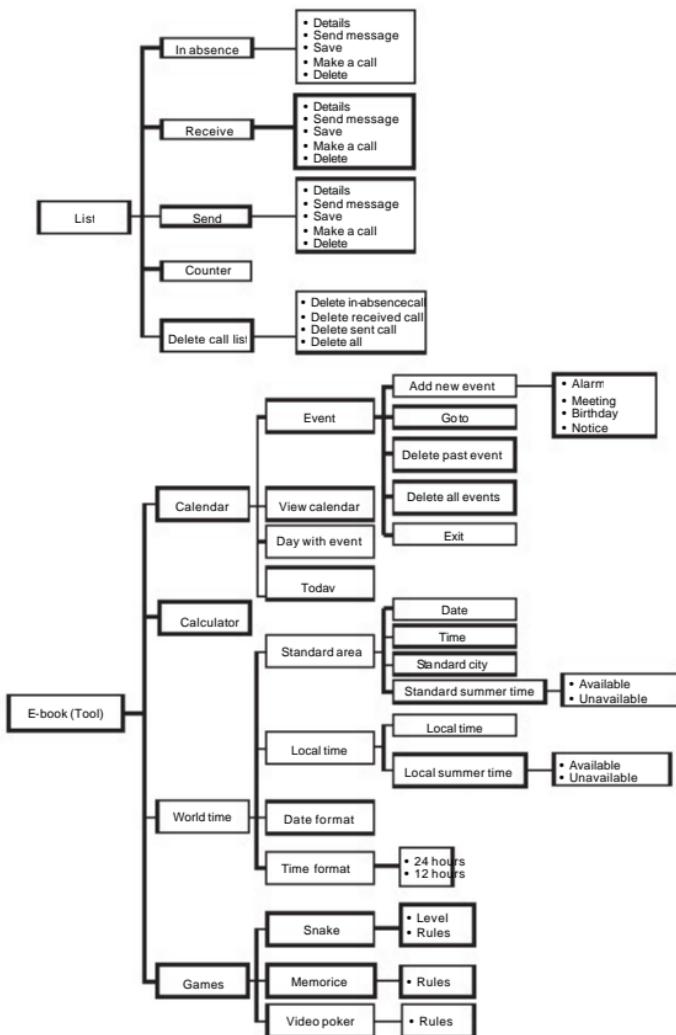

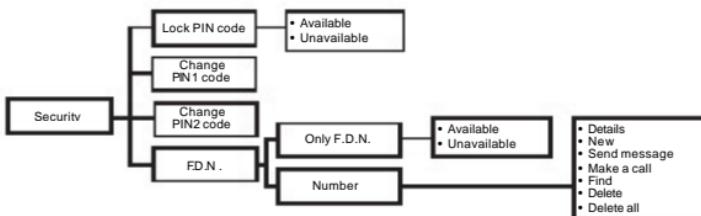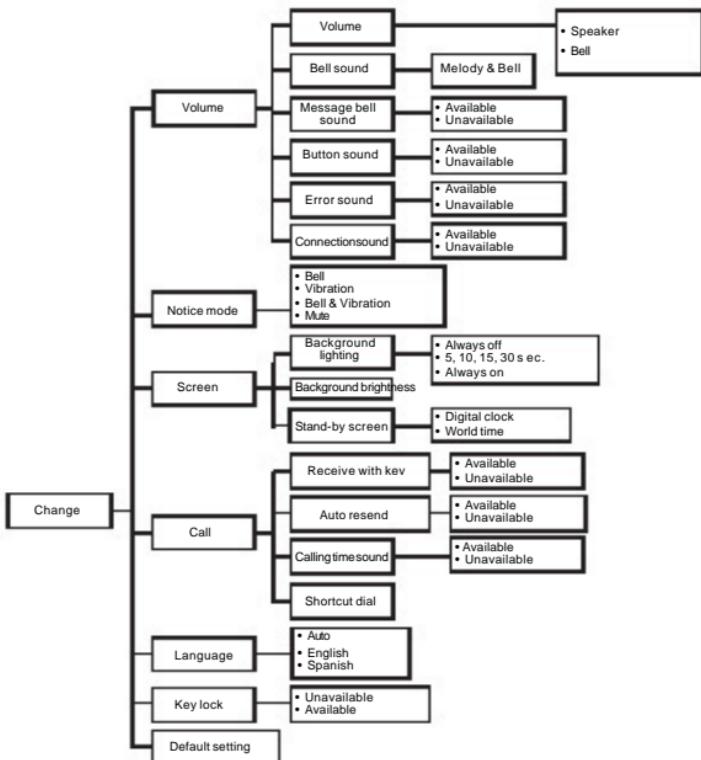

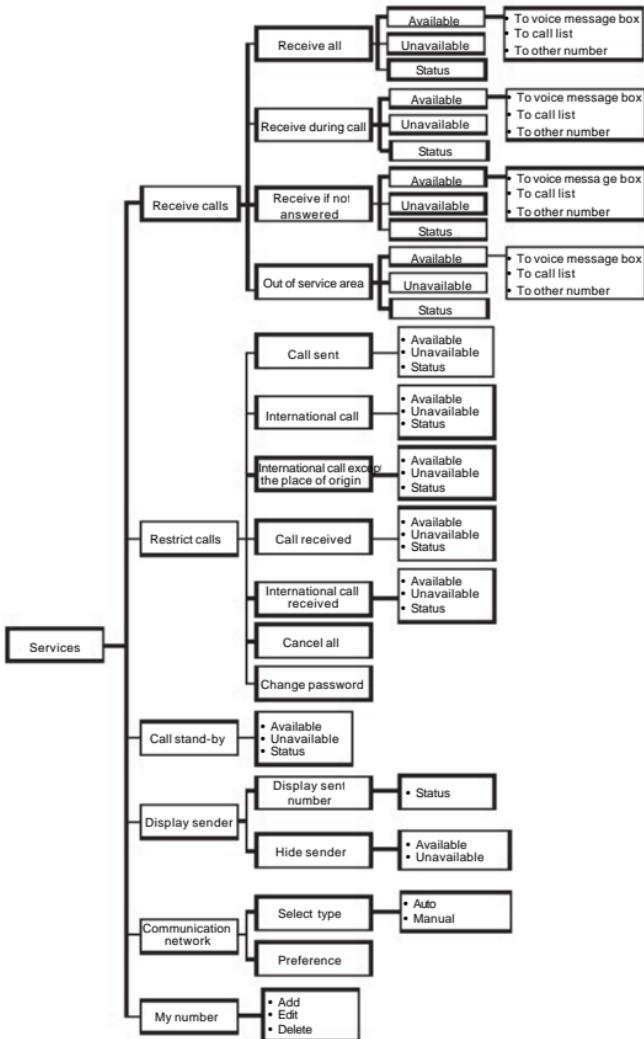

## Directory

Press **Directory** button on the menu to go to the window where the directory is saved. (or, press **Select button** after moving to the directory by pressing **Menu** button on the basic screen.)

The phone has two different directories.

1. SIM card directory
2. FDN directory (fixed the phone number)

For more information on FDN directory, refer to Chapter <Safety>.

SIM directory is composed of the following items.

- 14-character name
- 20-digit number

50 FDN phone numbers can be saved in the SIM directory of the phone.

### New save

Names and phone numbers can be saved in the SIM directory.



On the basic screen press **Menu** to move to **Directory**, and press **Select button** to display saved name list. If there is no saved name, the sign "Empty directory" will be displayed on the screen.

## If the directory is not empty



1. Press **Option** button on the directory menu.
2. Move to the new item and Press **Select button**.
3. Input the name and Press **OK button**.
  - When inputting a name, use ( - ) button. Press the button once to input the 1<sup>st</sup> text, twice to input the 2<sup>nd</sup> text, 3 times to input the 3<sup>rd</sup> text and 4 times to input the 4<sup>th</sup> text as desired.
  - Pressing ( ) button for long or short to change to a capital letter, a small letter or a number for sentence type. Select type will be displayed as in Ab, ab, AB, or 123.
  - If an empty space is needed, press ( ) button. The symbols in the ( ) stand for space, @ / 1.
  - If input incorrectly, it can be deleted to the left direction of the cursor by pressing the button ( ) as many times as desired. Keep pressing ( ) button to delete all the text on the screen.
  - Use Move button to move the cursor to the left or to the right.
4. Input the desired phone number along with its applicable district number and then press **OK button**.

## If the directory is empty



1. Press **New** on the directory menu and press **Select button**.
2. Input the name and press **OK button**.
3. Input the phone number and press **OK button**.

**Ref)** Quick save Press the phone number on the basic screen and then press **Save button**. Input the name and press **OK button**.

**Ref)** Keep pressing (  ) button to display the list of special characters.  
., ¿?\_!‘” - + \* = ( ) [ ] <> { } | # \$ % : ; ^ \ & ~ ¥ Ç @ ¡ /

Tecla	1 Press times	2 Press times	3 Press times	4 Press times	5 Press times	6 Press times
1	Space	.	,	@	/	1
2	A/a	B/b	C/c	2	Á/á	A/a
3	D/d	E/e	F/f	3	É/é	D/d
4	G/g	H/h	I/I	4	I/?	G/g
5	J/j	K/k	L/l	5	J/j	K/k
6	M/m	N/n	Ñ/ñ	O/o	6	Ó/ó
7	P/q	Q/q	R/r	S/s	7	P/p
8	T/t	U/u	V/v	8	Ú/ú	Ü/ü
9	W/w	X/x	Y/y	Z/z	9	W/w
0	Space 0	Space 0	Space 0	Space 0	Space 0	Space 0
*	Short Press: Input text type (Ab, ab, AB, 1) Long Press: makes Predictive Dictionary available or unavailable.					
#	Short Press: selects special characters.					

## View directory details



Specific details of the directory are available as specified below;

1. Select the directory menu.
2. The list of names will be displayed on the directory menu.
3. Use the move keys to select a desired item and then press **Option button**.
4. Select details item and then press **Select button**.

Names and phone numbers will be displayed.

Use the move keys to go to the next item from the directory.

Ref Press End button to return to the main screen.


## Find a specific item

You can find a specific item in the directory using the following procedures.



1. Select the menu.
2. The name list will be displayed on the directory menu.
3. Press **Option button**.
4. Select Find item and then press **Select button**.

## Edit items



1. Select the directory menu.
2. The name list will be displayed on the directory menu.
3. Select a desired item to edit and then press **Option button**.
4. Press **Select button** on the details item.
5. Press **Option button** on the details screen.
6. Move to Edit item and then press **Select button**.
7. Edit the name and then press **OK button**.
8. Edit the phone number and then press **OK button**.

## Make a call from the directory



1. Select the directory menu.
2. The name list will be displayed on the directory menu.
3. Use the move keys to select the name to make a call to.
4. Press Call (green) button to make a call.

## Send a text message through the selected item



1. The name list will be displayed on the directory menu.
2. Use the move keys to select the name to send a message to.
3. Press **Option button** and move up to Send message item.
4. For more information on Send text message, refer to Send a new text message.

## Delete one item in the SIM directory

1. Select the directory menu.
2. Press **Option button**.
3. Select Erase and then press Select button.
4. Confirmation window will be displayed.
5. Press **OK button**.


## Delete all items in the SIM directory

1. Select the directory menu.
2. Press **Option button**.
3. **Select** Erase All.
4. Confirmation window will be displayed.
5. Press **OK button**.

# Message

## Text message

### Send a new text message

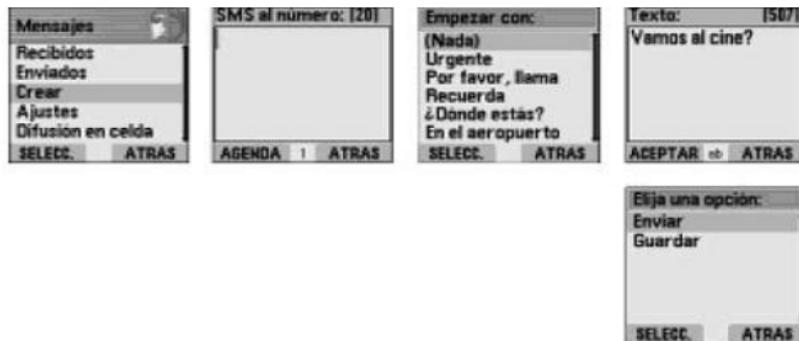

1. Press **Menu** button on the basic screen to go to the message menu and then press **Select button**.
2. Move to New Message from the message menu and then press **Select button**.
3. Input the desired number or use the directory button to find the number to input. Move to the desired item and then press **Select button**.  
Press **OK button**. And its edit is available before pressing **OK button**.
4. Select a commonly used message expression on the list and press **Select button**. If commonly used message expressions are not necessary, select None.
5. Messages can be input on the text screen. After inputting, press **OK button**.
6. Option to send and save.
  - Select **Send** if you want to send the message and then press **Select button**.
  - Select **Save** if you want not to send but to save the message and then press **Select button**.

## **View a new message**

If a message is received, the phone lets you know a text message has arrived by setting tone in the device. You can check the message promptly by pressing View button or later by pressing Previous button. Pressing Previous button will display an envelope icon to let you know there are one or more messages not read on the main screen.

## **Received box**

Received box is a place where all the received messages (SMS) are received and saved, which includes the list of received messages. The list displays the icon for message status (read, not read) and the number of the sender. Icons used to display message status in the received box are as follows:

- (  ) This icon shows that the message in the received box is not read yet.
- (  ) This icon shows that the message in the received box has been read.

## **View messages from received box**



1. Press **Menu** on the basic screen to go to Message item and then press **Select button**.
2. Move to the received message box from the message menu and then press **Select**.
3. Move to the desired message from the list and then press **Option button**.
4. Move to View and press **Select button**.


## Send a reply

1. Press **Menu** button on the basic screen to go to the message menu and then press **Select button**.
2. Move to the received box item from the message menu and then press **Select button**.
3. Move to the desired message from the list and then press **Option button**.
4. Go to View option and press **Select button**. Press **Option button** on the message details screen and move to Send a reply. Press **Select button**. Select None if you don't want to use the previously prepared message.
5. Input the message on the text input window and then press **OK button**.
6. Option to send and save.
  - Select **Send** if you want to send the message and then press **Select button**.
  - Select **Save** if you want not to send but to save the message and then press **Select button**.

## Resend the message

1. Press **Menu** button on the basic screen to go to the message menu and then press **Select button**.
2. Move to the received box item from the message menu and then press **Select button**.
3. Move to the desired message from the list and then press **Option button**.
4. Go to View option and press **Select button**. Press **Option button** on the message details screen and move to Resend. Press **Select button**. Input the message on the text input window and then press **OK button**.
5. Option to send and save.
  - Select **Send** if you want to send the message and then press **Select button**.
  - Select **Save** if you want not to send but to save the message and then press **Select button**.

## **Make a call to the number of message sender**

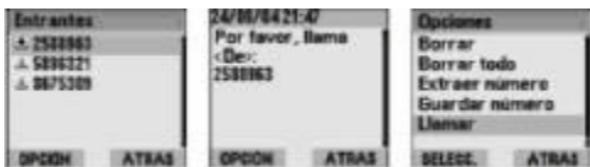

1. Press **Menu** button on the basic screen to go to the message menu and then press **Select button**.
2. Move to the received box item from the message menu and then press **Select button**.
3. Move to the desired message from the list and then press **Option button**.
4. Go to View option and press **Select button**.
5. Press **Option button** and move to Call. And press **Select button**.

## **Delete messages in the received box**

1. Press **Menu** button on the basic screen to go to the message menu and then press **Select button**.
2. Move to the received box item from the message menu and then press **Select button**.
3. Move to the desired message from the list and then press **Option button**. Go to Delete and press **Select button**.
4. Press **OK button**.

## **Extract the phone number**

This function is used to extract the desired number from the text message.

1. Press **Menu** button on the basic screen to go to the message menu and then press **Select button**.
2. Move to the received box item from the message menu and then press **Select button**.
3. Move to the desired message from the list and then press **Option button**.
4. Go to View option and press **Select button**.
5. Press **Option button** and move to Extract. If the number is once extracted, you can make a call and send a message to the number and save the number as well.

## **Sent Box**

Sent Box is a place where all the sent messages are made and saved.

Icons used to display message status in the sent box are as follows;

(  ) Message not sent.

(  ) Message sent.

### **Send the message saved in the sent box.**



1. Press **Menu** button on the basic screen to go to the message menu and then press **Select button**.
2. Move to the sent box from the message menu and then press **Select button**.
3. Move to the desired message from the list and then press **Option button**.
4. Go to View option and press **Select button**.
5. Press **Option button**.
6. Select **Send** to send the message.

### **Edit the message saved in the sent box.**

1. Press **Menu** button on the basic screen to go to the message menu and then press **Select button**.
2. Move to the sent box from the message menu and then press **Select button**.
3. Move to the desired message from the list and then press **Option button**.
4. Go to View option and press **Select button**.
5. Press **Option button**.
6. Select **Edit** Option to edit the message.

## **Setting message box environment**

Through the environment setting menu of the message box, you can specify the number of the voice messages and text messages in the box and change the term of validity of messages.

### **Change the number of text messages in the box**

1. Press **Menu** button on the basic screen to go to the message menu and then press **Select button**.
2. Go to Change menu list and press **Select button**.
3. Select the option of the message box and press **Select button**.
4. Input the desired number of messages in the box and then press **OK button**.

### **Change the number of voice messages in the box**

1. Press **Menu** button on the basic screen to go to the message menu and then press **Select button**.
2. Go to Change menu list and press **Select button**.
3. Select the option of the voice message box and press **Select button**.
4. Input the desired number of voice messages in the box and then press **OK button**.

### **Change the term of validity of messages**

1. Press **Menu** button on the basic screen to go to the message menu and then press **Select button**.
2. Go to Change menu list and press **Select button**.
3. Select the option of the term of validity and press **Select button**.
4. Input the desired term of validity and press **OK button**.

## **SMS CB (Callback)**

### **SMS CB message**

### **SMS CB environment setting**

Environment setting of SMS CB option can be specified through this menu. Check this service is available from your communication service provider. This service is available only when provided through the communication network of its provider.

### **SMS CB service available/unavailable**

1. Press **Menu** on the basic screen to move to the message item and then press **Select button**.
2. Go to SMS CB list item and press **Select button**.
3. Select Receive option and press **Select button**.
4. Select Available/Unavailable.

### **Channel available/unavailable**

1. Press **Menu** on the basic screen to move to the message item and then press **Select button**.
2. Go to SMS CB list item and press **Select button**.
3. Select Channel option and press **Select button**.
4. Select the desired channel and press **Option button**.
5. Go to Available/Unavailable menu list to make it available or unavailable.

### **Add new channel**

1. Press **Menu** on the basic screen to move to the message item and then press **Select button**.
2. Go to SMS CB list item and press **Select button**.
3. Select Channel option and press **Select button**.
4. Press the option button.
5. Select Add and press **Select button**.
6. Input the channel number and press **OK button**.
7. Input the channel name and press **OK button**.

## List

You can refer to information of previously received calls, sent calls and calls in absence.

Press **Menu** on the basic screen to move to the call list and then press **Select** button.

### Sent call list

10 sent calls are saved in the sent call list.

Select the sent call list on the call list menu to display the list of calls you have sent.

### View sent call details

You can find details of name, number, calling time, date and time.

- Use the move keys to go to the sent call list and press **Select button**.
- Move to the desired number and press **Option button**.
- Go to the details item and press **Select button**.

### Make a call from the sent call list

- Use the move keys to go to the sent call list and press **Select button**.  
Go to the desired number and press Call (green) button.

### Save the sent call list number in the directory

- Use the move keys to go to the sent call list and press **Select button**.

- Move to the selected number and press **Option button**.
- Use the move keys to go to Save item and press **Select button**.

### **Delete the sent call list number**

You can delete one or all numbers from the sent call list.

### **Delete individual number from the sent call list**

- Use the move keys to go to the desired number to delete from the sent call list, and press **Option button**.
- Go to Delete item and press **Select button**.
- If the confirmation window is displayed, press **OK button** to execute Delete.

### **Delete all numbers from the sent call list**

- Press **Select button** on the list menu.
- Move to Delete item from the call list and press **Select button**.
- Select Delete the sent calls on the list and press **Select button**.
- If the confirmation window is displayed, press **OK button** to delete all the sent calls on the list.

## **Received call list**

10 received calls are saved in the sent call list.

Select the received call list on the call list menu to display the list of calls you have received.

### **View received call details**

You can find details of name, number, calling time, date and time of the received calls.

- Use the move keys to go to the received call list and press **Select button**.
- Move to the desired number and press **Option button**.
- Go to the details item and press **Select button**.

## **Make a call from the received call list**

- Use the move keys to go to the received call list and press **Select button**. Go to the desired number and press **Call** (green) button.

## **Save the received call list number in the directory**

- Use the move keys to select the received call list number.
- And press **Option button**.
- Use the move keys to go to Save item and press **Select button**.

## **Delete the received call list number**

You can delete one or all numbers from the received call list.

### **Delete individual number from the received call list**

- Use the move keys to go to the desired number to delete from the received call list, and press **Option button**.
- Go to Delete item and press **Select button**.
- If the confirmation window is displayed, press **OK button** to execute Delete.

### **Delete all numbers from the received call list**

- Press **Select button** on the list menu.
- Move to Delete item from the call list and press **Select button**.
- If the confirmation window is displayed, press **OK button** to delete all the sent calls on the list.

## **Call list in absence**

10 calls in absence are saved in the in-absence call list.

Select the in-absence call list on the call list menu to display the list of calls you have not received.

## **View in-absence call details**

You can find details of name, number, date and time of the received calls.

- Use the move keys to go to the in-absence call list and press **Option button**.
- Go to the details item and press **Select button**.

## **Make a call from the in-absence call list**

- Use the move keys to go to the in-absence call list and press **Select button**. Go to the desired number and press **Call** (green) button.

## **Save the in-absence call list number in the directory**

- Use the move keys to select the in-absence call list number.
- Press **Select** on the desired number to save and press **Option**.
- Use the move keys to go to Save item and press **Select button**.

## **Delete the in-absence call list number**

You can delete one or all numbers from the in-absence call list.

## **Delete individual number from the in-absence call list**

- Use the move keys to go to the desired number to delete from the in-absence call list, and press **Option button**.
- Go to Delete item and press **Select button**.
- If the confirmation window is displayed, press **OK button** to execute Delete.

## **Delete all numbers from the in-absence call list**

- Move to Delete item from the call list and press **Select button**.
- Select Delete the in-absence call list and press **Select button**.
- If the confirmation window is displayed, press **OK button** to delete all the calls on the list.

## **Delete all the call records**

- Select Delete call list on the list menu.
- Use the move keys to select Delete all the list and press **Select button**.
- If the confirmation window is displayed, press **OK button** to delete all the call records on the list.


## **Calling time gauge**

Information of each calling time is displayed through the sub-menu of the calling time gauge.

Calling time of the last call and all the received/sent calls are saved in the gauge.

Press **Restart** button to initialize the calling time of the last call and received/sent calls.

If the confirmation window is displayed, press **OK button** to restart the gauge.



## E-book (tool)

### Calendar

Various kinds of alarms are available for this phone. If an alarm bell rings at a specific time, a message will be displayed on the phone.

1. Press **Menu button** on the basic screen to move to E-book and press **Select button**.
2. Go to the calendar and press **Select button**.
3. Press **Select button** on Event item.
4. Press **Add**.
5. Select Alarm option (or desired type of event).
6. Input the desired message and press **OK button**.
7. Input the desired alarm time and press **OK button**.
8. If you want a single alarm bell, select «Once», and if you want daily alarm bells at a specific time select «Daily » and then press **Select button**.

If an event is added, its details and options of Edit/Delete can be specified.

1. Press **Menu button** on the basic screen to move to E-book and press **Select button**.
2. Go to the calendar and press **Select button**.
3. Press **Select button** on Event item.
4. Move to the desired event and press **Option button**.
5. Select the desired item (Details, Send or Delete).

Additional options of the event are also available, and one or all the events can be deleted on a specific date.

1. Press **Menu button** on the basic screen to move to E-book and press **Select button**.