

3M™ Building and Contractor Specialties




Best
Sellers

Volume 3



Building productivity and efficiency from the ground up

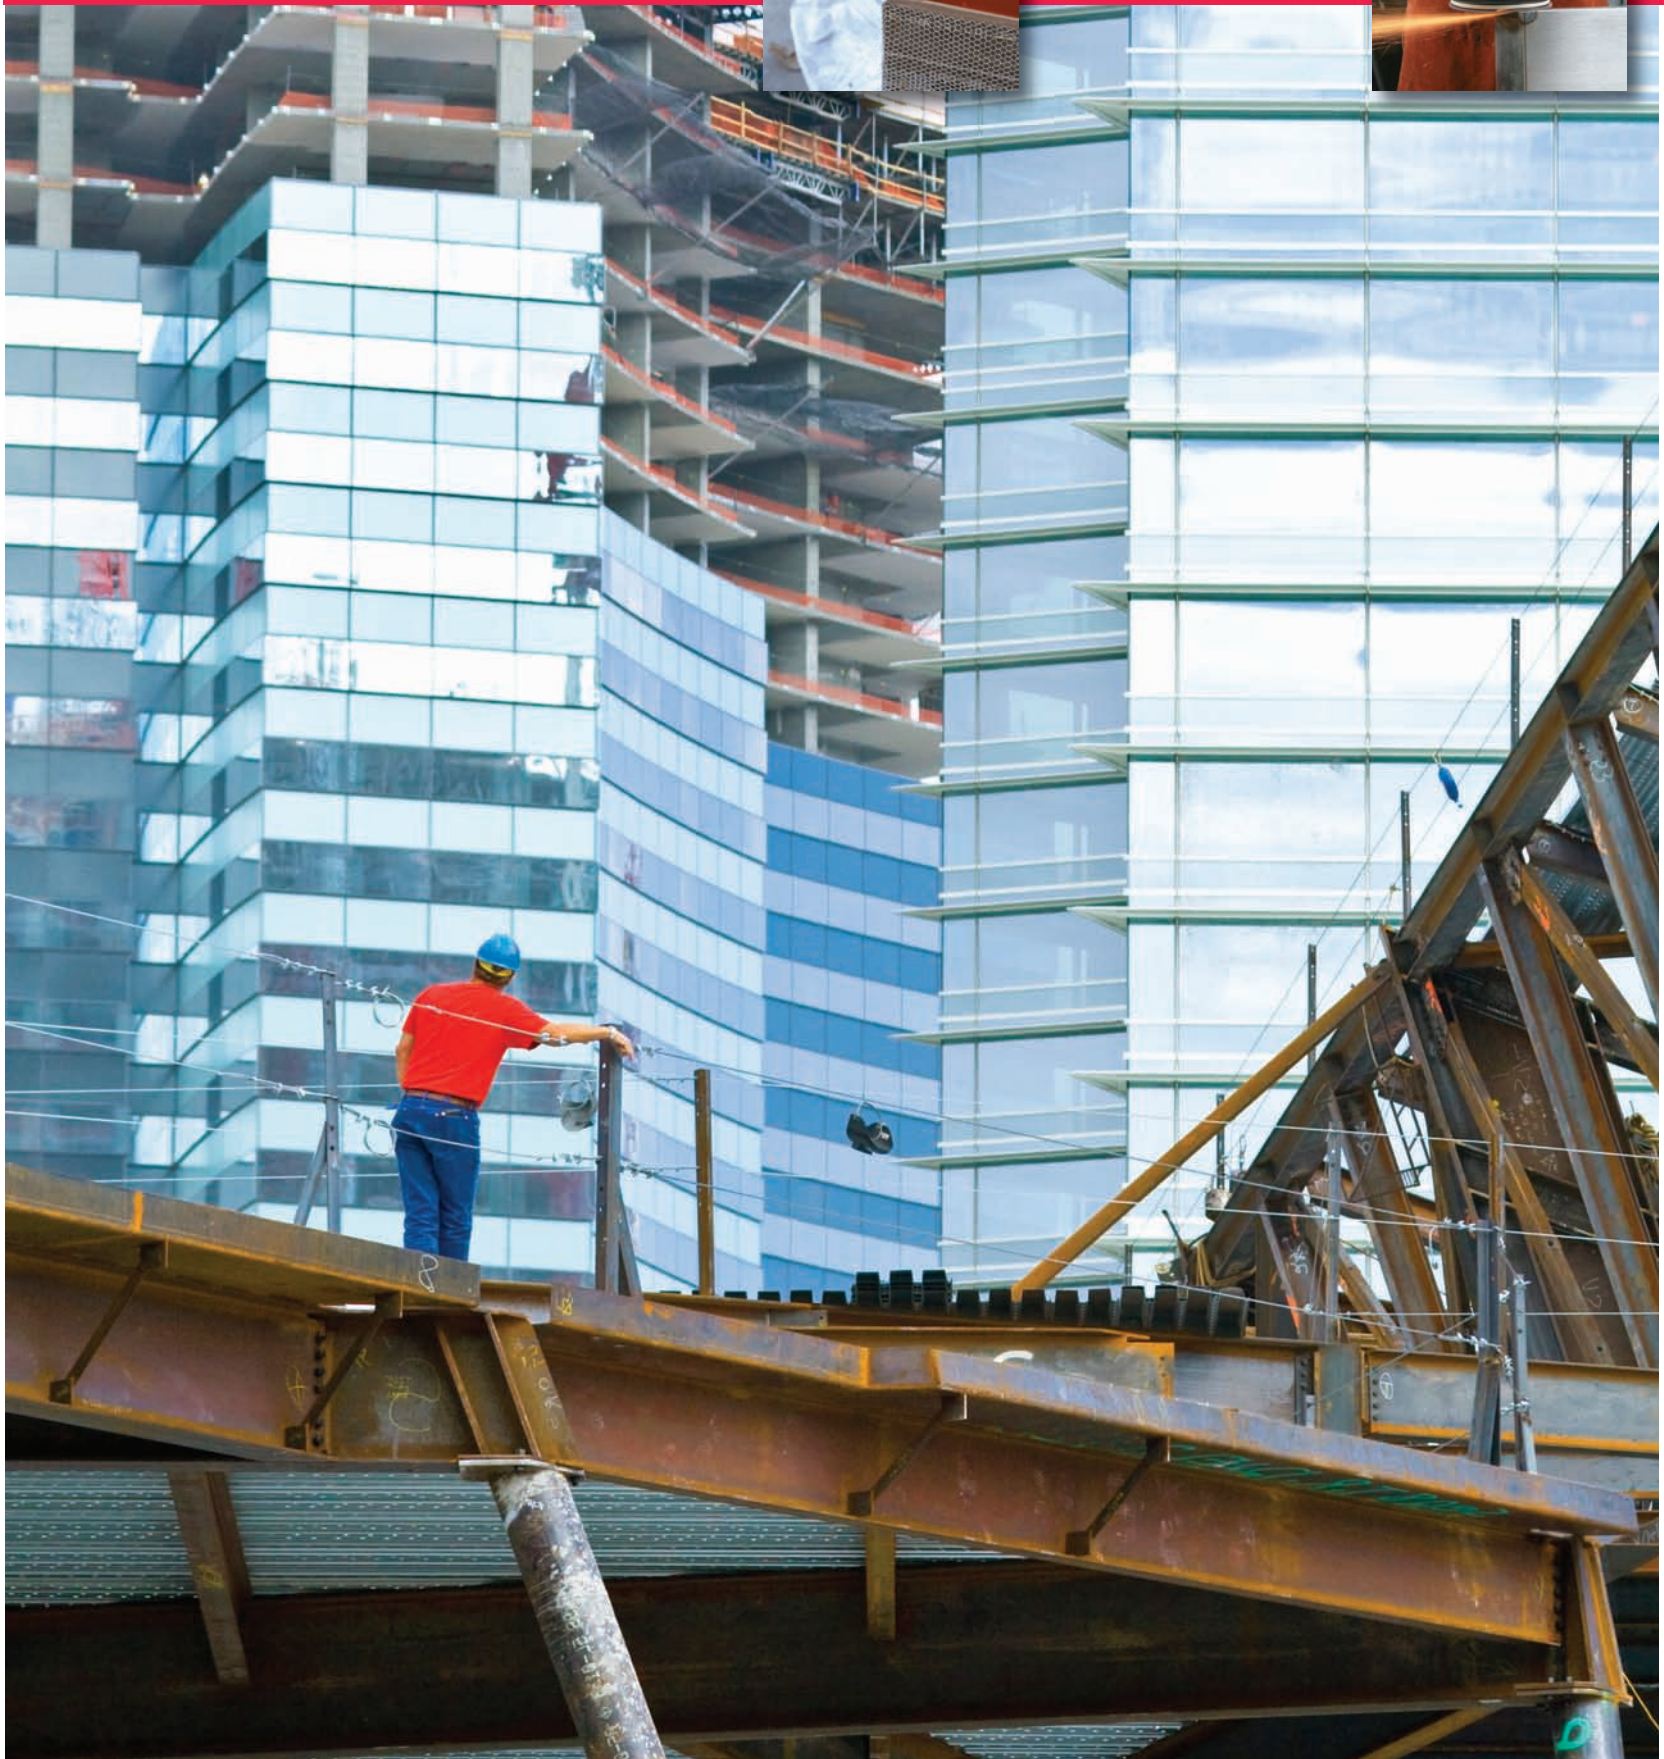



Whether you're working on new construction, renovation or demolition and clean-up, 3M has a wide range of reliable solutions to help you be more productive and efficient through each stage of the project.

3M Building and Contractor Specialties has consolidated hundreds of products from many 3M divisions into a single convenient resource to better serve contractors and contractor supply distributors.

In addition to products, you can rely on 3M for service that includes a toll-free assistance hotline staffed with technical support specialists:

1-866-513-4026

In this catalog you'll find information on solutions for many building and contractor applications. Here are just a few examples:

- Waterproofing foundations
- Concrete tilt-up
- Seaming, sealing, or repairing moisture barriers
- Stucco masking
- Sealing mineral wool insulation
- Sealing sheet metal ducts
- Sealing wall penetrations with water tight fire barrier
- Work site containment
- Custom threading and anchoring in concrete
- Removing rust and corrosion

Table of Contents

Job Site Solutions

- Roofing Solutions
 - 3M™ All Weather Flashing Tape 8067
- Waterproofing and Moisture Protection Solutions
- Thermal Protection Solutions
- Tilt-Up Solutions
 - 3M™ Clear Hybrid Sealant 730/3M™ Crystal Clear Sealant 230
- Inverted Aerosol Adhesives
 - Scotch-Blue™ Industrial Advantage Masking Tape 2750
 - Scotch® 60-Day Ultimate Paint Edge Masking Tape 2480S
 - Scotch® Ultimate Paint Edge Masking Tape 2460

Product Catalog and References	Pages
Abrasives	1-7
Adhesives	8-14
Automotive	15
Cleaners/Lubricants	16
Electrical Products	17-19
Facility Care Products	20-23
Fire Protection Products	24-29
Safety Products	30-46
Tapes	47-52
Consumer Packaged Products	53-55



3M.com/contractor

Job Site Solutions

Roofing Solutions

3M™ All Weather Flashing Tape 8067

Waterproofing and Moisture Protection Solutions

Thermal Protection Solutions

Tilt-Up Solutions

3M™ Clear Hybrid Sealant 730/3M™ Crystal Clear Sealant 230

Inverted Aerosol Adhesives

Scotch-Blue™ Industrial Advantage Masking Tape 2750

Scotch® 60-Day Ultimate Paint Edge Masking Tape 2480S

Scotch® Ultimate Paint Edge Masking Tape 2460

3M.com/contractor


3M Low Slope Roofing Solutions



Power
in high
places

Bond fast and stay tight





3M™ Polyurethane Foam Insulation Adhesive CR-20 for new construction and re-roofing




20 squares
20 minutes



Disposable plastic applicator and mixing nozzle.



Easy to use

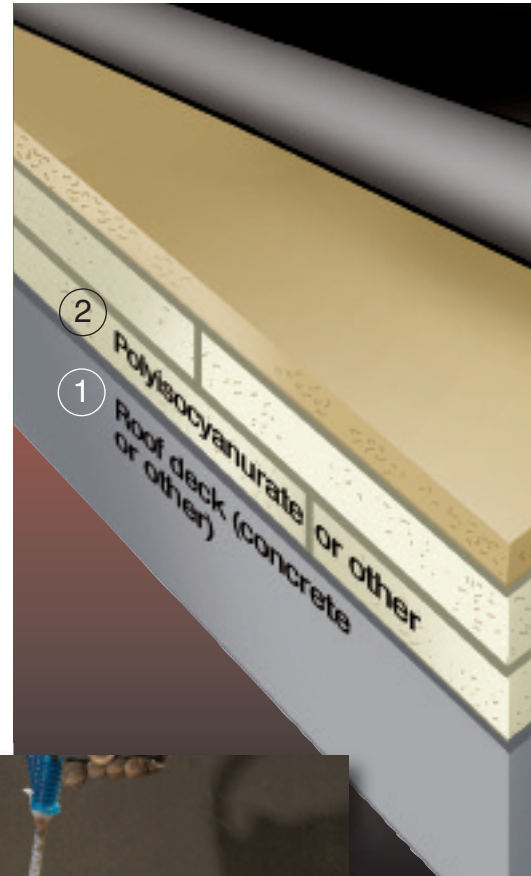

High speed for increased productivity

3M™ Polyurethane Foam Insulation Adhesive CR-20 sets a speed record for securely bonding insulation to the roof deck and to itself—up to 20 squares in 20 minutes. Fast foaming 2-part formulation fills gaps between surfaces without lifting the insulation and holds in 4-8 minutes.


Convenient, easy, and cost-effective


- Portable pressurized twin cylinder system for convenience in high places with no awkward and expensive carts and cartridges
- Simple set-up with just flipping the lids and connecting the hoses

- Economical maintenance-free system with disposable applicator, hoses and mixing nozzle—no capital equipment
- Automatic mixing in the nozzle for consistent, accurate results
- Controlled adhesive width and placement for neat application
- High coverage of 20 squares per kit for fewer changeovers compared to six to eight squares with other systems

Reliable holding power

- Factory Mutual and UL Approved
- Industry leading wind uplift resistance

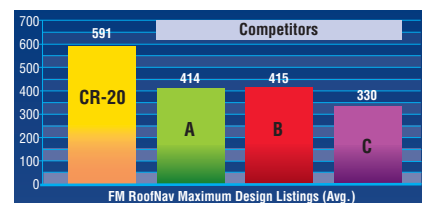

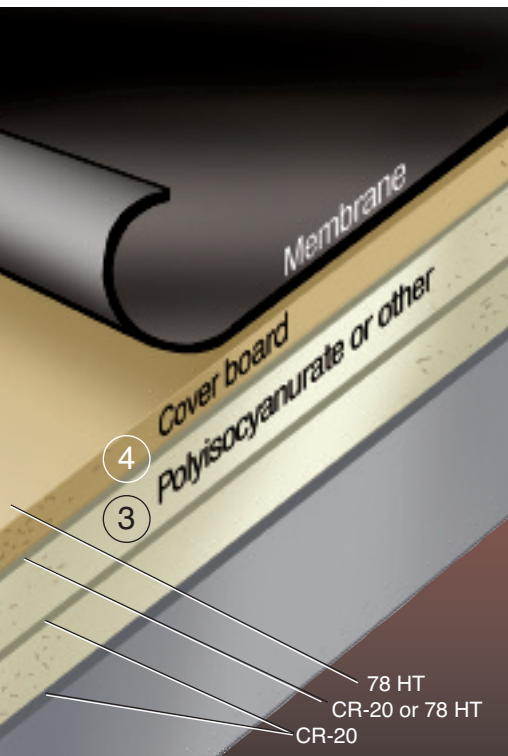

3M™ Scotch-Weld™ High Temperature Polystyrene Foam Insulation 78 HT Cylinder Spray Adhesive



High speed membrane attachment



New high output applicator with controlled wide web for fast coverage. Uniform pattern delivers effective and economic use of the adhesive.

Approved for many deck substrates, insulations, and cover boards

- Concrete (structural; some lightweight)
- 22-gauge steel
- Cementitious wood fiber
- Plywood and OSB
- Polyisocyanurate (flat or tapered)
- Extruded or expanded polystyrene
- High density wood fiber
- Gypsum or DensDeck™ Roof Boards

3M™ Scotch-Weld™ High Temperature Polystyrene Foam Insulation 78 HT Cylinder Spray Adhesive for fast membrane bonding

Self-contained pressurized cylinder helps increase productivity with fast application and no time-consuming equipment setup, cleanup, and maintenance.

Simply connect the applicator and hose and start spraying.

- Quickly bonds to most insulations and cover boards including polystyrene
- High holding power to EPDM and TPO (not recommended for PVC)
- Reliability at up to 260°F (126°C)
- Factory Mutual and UL Approved

Product Selection

Description	UPC	SKU
Insulation Adhesive		
3M™ Polyurethane Foam Insulation Cylinder Spray Adhesive CR-20 Part A	00-051111-07243-1	62-4964-8030-2
3M™ Polyurethane Foam Insulation Cylinder Spray Adhesive CR-20 Part B, includes 10 tips	00-051111-07242-4	62-4963-8030-4
3M™ 2-component Spray Polyurethane Foam Spare Tips, includes 10 tips	00-051111-07274-5	62-9884-9010-8
3M™ 2-component Spray Polyurethane Foam Applicator and Hose Assembly	00-051111-07273-8	62-9884-9930-7
Membrane Adhesive		
3M™ Scotch-Weld™ Hi-Temperature Foam Insulation Cylinder Spray Adhesive 78 HT - Mini (8.5#)	00-051115-31593-0	62-4928-8010-9
3M™ Scotch-Weld™ Hi-Temperature Foam Insulation Cylinder Spray Adhesive 78 HT - Large (28.5#)	00-051115-31594-7	62-4928-8030-7
3M™ Scotch-Weld™ Hi-Temperature Foam Insulation Cylinder Spray Adhesive 78 HT - Intermediate (138.6#)	00-051115-31595-4	62-4928-8150-3
3M™ Scotch-Weld™ Hi-Temperature Foam Insulation Cylinder Spray Adhesive 78 HT - Jumbo (287.1#)	00-051115-31596-1	62-4928-8300-4
3M™ Scotch-Weld™ Hi-Temperature Foam Insulation Cylinder Spray Adhesive 78 HT - 5-Gallon Pail	00-051111-07571-5	62-4908-8530-8
3M™ Scotch-Weld™ Hi-Temperature Foam Insulation Cylinder Spray Adhesive 78 HT - 54-Gallon Drum	00-051111-07572-2	62-4908-9530-7
3M™ Scotch-Weld™ Cylinder Spray Adhesive Applicator High Output (includes QSS Tip)	00-051111-07329-2	62-9880-9960-2
3M™ Scotch-Weld™ Cylinder Adhesive 12' Hose	00-048011-61988-0	62-9880-0012-1
3M™ Scotch-Weld™ Cylinder Adhesive 25' Hose	00-048011-61989-7	62-9880-0025-3
3M™ Scotch-Weld™ Cylinder Adhesive 50' Hose	00-051115-25782-7	62-9880-0050-1
3M™ Scotch-Weld™ Cylinder Adhesive QSS Spray Tip	00-048011-61993-4	62-9880-8148-5
Also Consider		
3M™ Polyurethane Construction Sealant 525, 1/10 Gallon Cartridge, Gray	00-048011-62823-3	62-5282-5230-7
3M™ Polyurethane Construction Sealant 535, 1/10 Gallon Cartridge, Gray	00-048011-62828-8	62-5285-5230-0
3M™ Polyurethane Construction Sealant 535, 600ML Sausage Pack, Gray	00-048011-62829-5	62-5285-3930-7
3M™ Extreme Sealing Tape 4412N 25mm x 10m	00-051115-31988-4	JT-2700-6005-9
3M™ Extreme Sealing Tape 4412N 50mm x 10m	00-051115-31985-3	JT-2700-4144-8
3M™ Extreme Sealing Tape 4412N 60mm x 10m	00-051111-18864-4	JT-2700-4939-1
3M™ Extreme Sealing Tape 4412N 75mm x 10m	00-051115-31986-0	JT-2700-4734-6

3M™ Polyurethane Foam Insulation Adhesive CR-20 Parts A and B



3M™ Scotch-Weld™ High Temperature Polystyrene Foam Insulation 78 HT Cylinder Spray Adhesive



For fast reliable sealing of concrete and flashing, **3M™ Polyurethane Construction Sealants 535 and 525** skin quickly and resist chalking, staining, and bubbling even in high temperature and humidity.



3M™ Extreme Sealing Tape 4412N sticks in contact over metal seams without drying time, dripping, oozing, and cleanup. Conforms over contours, edges, rivets and screw heads for a water tight seal.

Size	Theoretical Coverage for Bonded Squares @ 2.5 gm/sq. ft. (dry wt.) per Surface
Mini	1.1
Large	3.9
Intermediate	18.8
Jumbo	38.8

Also available in 5-gallon pails and 55-gallon drums.

Note: This technical information and data should be considered representative or typical only and should not be used for specification purposes.

Warranty, Limited Remedy and Disclaimer: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. User is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Building and Contractor Markets

3M Center, Building 225-3S-06
St. Paul, MN 55144-1000
800-362-3550 . 877-369-2923 (Fax)
www.3M.com/contractor

3M and Scotch-Weld are trademarks of 3M Company.
DensDeck is a trademark of Georgia-Pacific Gypsum, LLC.
© 2009, 3M. All rights reserved.

3M™ All Weather Flashing Tape 8067



Sticks
fast
at 0-120°F

Stays stuck
at up to 176°F



No primers, no staples, no nonsense

With unique pressure sensitive acrylic adhesive, 3M™ All Weather Flashing Tape 8067 bonds on contact to seal through-wall penetrations at application temperatures from 0°F (-18°C) up to 120°F (49°C). Around windows, doors and other openings in wood frame construction, you save the time and work of primers or staples commonly used to attach many moisture-proofing membranes.

Engineered for handling ease and performance reliability

- High tack to grab fast and tight even on damp surfaces
- Versatile to stick securely to most common building materials even at service temperature up to 176°F (80°C)
- Proprietary backing for long term confidence
 - Seals around nails and staples to prevent moisture intrusion
 - Thin for a reliable and convenient fit into corners and under siding
 - Tough to resist punctures and tears during application and service life
- Fast, convenient application
 - No adhesive melting or staining in the summer's heat
 - Split-liner for easy and accurate positioning of tape, especially long lengths
 - Choice of three widths for the coverage you need: 4", 6", 9"
- Resists UV exposure for up to 6 months
- No adverse reaction with many building sealants (preliminary data for synthetic rubber, butyl, polyurethane, silicone and silane terminated hybrids).
- Meets AAMA 711-05
- Passes Nail Sealability before and after Thermal Cycling
- Eligible for LEED® Compliance Credits



3M™ All Weather Flashing Tape 8067

Test Description	Tape Thickness (Backing & Adhesive)	Adhesion to Housewrap* oz./in. (N/100 mm)	Adhesion to Polyethylene oz./in. (N/100 mm)	Adhesion to OSB oz./in. (N/100 mm)	Nail Sealability before and after Thermal Cycling	Adhesion to Anodized Aluminum after 7 days at 176°F (80°C)	Adhesion to Anodized Aluminum after 7 days in water	Adhesion to Anodized Aluminum after Thermal Cycling	Adhesion to Anodized Aluminum after UV Exposure	Application Temperature Range °F (°C)	Service Temperature Range °F (°C)
Test Method	ASTM 3652	ASTM D-3330 per AAMA 711-05	ASTM D-3330 per AAMA 711-05	ASTM D-3330 per AAMA 711-05	ASTM E331 as modified per AAMA 711-05 Annex 1	ASTM D3330 after conditioning per AAMA 711-05	ASTM D3330 after conditioning per AAMA 711-05	ASTM D3330 after conditioning per AAMA 711-05	ASTM D3330 after conditioning per AAMA 711-05	ASTM D3330	Tested per AAMA 711-05
Results	9.9 mils (0.25 mm)	50 oz./in. (55 N/100 mm)	60 oz./in. (66 N/100 mm)	60 oz./in. (66 N/100 mm)	Pass	70 oz./in. (77 N/100 mm)	65 oz./in. (71 N/100 mm)	75 oz./in. (82 N/100 mm)	60 oz./in. (66 N/100 mm)	0 to 120°F (-18 to 49°C)	-40 to 176°F (-40 to 80°C)

Note: This technical information and data should be considered representative or typical only and should not be used for specification purposes.

* Spun bonded polyethylene



5

Size	UPC Number	Quantity per case
4 in. x 75 feet	000 511 1531 6203	12
6 in. x 75 feet	000 511 1531 6210	8
9 in. x 75 feet	000 511 1531 6227	4

3M™ Flashing Tape meets the criteria to contribute to the Environmental Quality ("EQ") Credit 4.1: Low-Emitting Materials: Adhesives & Sealants under the United States Green Building Council's Rating System for New Construction & Major Renovations (LEED-NC), Version 2.2, Core and Shell (LEED-CS), Version 2.0, and Commercial Interiors (LEED-CI), Version 2.0.

Meets AAMA 711-05, Voluntary Specification for Self Adhering Flashing Used for Installation of Exterior Wall Penetration Products

Adhesion Type Rating: Type A (no need for primer at tested conditions)

Thermal Exposure: Class 3 – Highest level (176°F/80°C for 7 days)

Warranty and Limited Remedy: 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS, INCLUDING ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If the 3M product does not conform to this warranty, the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.




Industrial Adhesives and Tapes Division

3M Center Bldg. 21-1W-10
900 Bush Ave.
St. Paul, MN 55144-1000
1-800-362-3550
www.3M.com/flashingtape

Printed in U.S.A.
Bolger 9090025
70-0711-0222-5
© 3M 2009

3M is a Trademark of 3M Company

3M Building and Contractor Specialties for Waterproofing and Moisture Protection

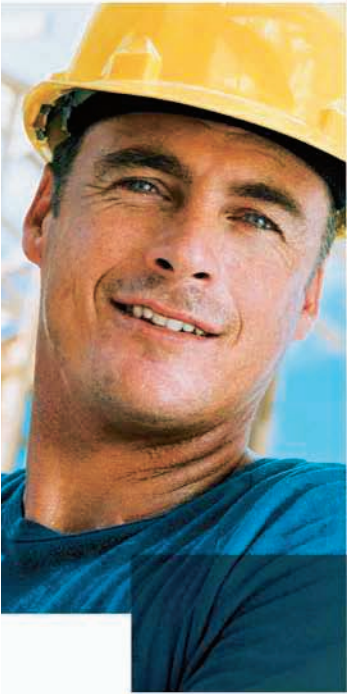

Fast
easy
drain
mats



and more



3M™ Scotch-Weld™ Cylinder Spray Adhesives... fast and easy drain board installation without nails



Simply
spray



and stick

Stick to it all...
membrane, drain board, filter
fabric, concrete, polystyrene,
and wood with your choice of
two cylinder spray adhesives.



Simplicity of 3M self-contained pressurized cylinders


- Versatile holding power to replace nails and other fasteners
- Wide spray pattern and fast coverage for vertical and horizontal surfaces
- Short dry time and long open time to work at the best pace for the job
- No cleaning or purging of hose and applicator necessary

3M™ Scotch-Weld™ HoldFast 70 Adhesive

- Very fast tacking for spray and stick speed
- Bonds polystyrene without damaging it

3M™ Scotch-Weld™ General Purpose 60 CA Adhesive (Low VOC)

- Very high coverage for great value from every cylinder
- Meets California VOC regulations
- Not recommended for use on polystyrene foam

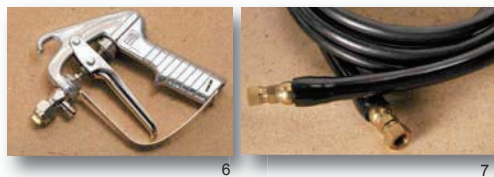

6

7



QSS

8

9501

9

3M™ Scotch-Weld™ Cylinder Spray Adhesives Product Selection

Description	UPC	3M ID
HoldFast 70 Adhesive	00-048011-61690-2	62-4983-8030-2
General Purpose 60 CA Adhesive	00-048011-61687-2	62-4952-8030-7
Adhesive applicator with 9501	00-048011-61706-0	62-9880-9930-5
Adhesive applicator tip 9501	00-048011-61707-7	62-9880-9501-4
Adhesive applicator tip QSS for 70	00-048011-61993-4	62-9880-8148-5
6' hose	00-051115-25036-1	62-9880-0006-3
12' hose	00-048011-61988-0	62-9880-0012-1
25' hose	00-048011-61989-7	62-9880-0025-3
50' hose	00-051115-25782-7	62-9880-0050-1

3M science for simplicity in seaming, draping, hanging, bundling, and more



3M™ Construction Seaming Tape 8087

(2 13/16" x 55 yds.)

Seam, seal, or repair concrete underlayment, vapor barriers, and more



- Sticks on contact at 14°F to 120°F (-10° to 49°C) for easy application

- Maintains tight seal at -40°F to 220°F (-40°C to 105°C)

UPC: 00-051115-23593-1

3M ID: 70-0064-1369-7

3M™ Hi-Strength 90 Spray Adhesive

(24 oz. aerosol)

Stick poly draping to itself, concrete, brick, metal, wood, and more

- Sticks fast
- California compliant with no methylene chloride, CFCs, or 1,1,1 trichlorethane

UPC: 00-021200-30023-3

3M ID: 62-4942-4930-3



3M™ Polystyrene Foam Insulation 78 Spray Adhesive

(24 fl. oz. aerosol)

Fast, easy pushbutton spray to attach polystyrene to concrete and cinder block

- Controlled spray pattern minimizes overspray and clean-up
- Spray adjusts 1-5" for targeted application, most efficient use of adhesive with less waste
- Bonds with strength greater than the foam itself
- Bonds without attacking the foam



UPC: 00-021200-41593-7

3M ID: 62-4951-4930-4

3M™ Polyurethane Adhesive Sealant 550 Fast Cure

- Multi-purpose adhesive sealant
- Paintable
- Above/below waterline use



600mL Sausage pack:

UPC: 00-048011-62801-1

3M ID: 62-5267-3930-5

1/10 Gallon cartridge:

UPC: 00-048011-62799-1

3M ID: 62-5267-5230-8

Scotch-Brite™ Bristle Disc

(4.5" dia., 50 grit)

Quick removal of coatings and dirt from concrete





- Long lasting abrasive
- Use with straight shaft tool or right angle grinder

UPC: 00-048011-24241-5






3M ID: 61-5001-3901-1



3M safety products designed to encourage proper use

	Description	Application	UPC	3M ID	Quantity
 18	3M™ Particulate Respirator 8210, N95	Comfortable protection when sanding and grinding	50-051138-46457-3	70-0706-1439-4	160/case
 19	3M™ Particulate Respirator 8511, N95	Valve for easy exhalation and dry comfort at hot and humid jobsites	50-051138-54343-8	70-0707-5755-7	80/case
 20	3M™ XLR8™ Hard Hat with 6-pt. Pinlock Suspension – White	Revolutionary suspension eliminates the comfort problems associated with full-shift hard hat use	10-078371-45964-9	70-0715-1306-6	20/case
 21	3M™ Virtua™ V4 Black Temple/Gray Overmold	Indoor/Outdoor Mirror Lens	10-078371-62038-4	70-0715-4040-8	20/case

More 3M good ideas for the job site

	Description	Application	UPC	3M ID	Quantity
 22	3M™ Multipurpose Duct Tape 3900	Bundle; temporarily hold forms and brackets	00-021200-49830-5	70-0063-1521-5	24/case
 23	3M™ Scotch-Weld™ Super 77™ Cylinder Spray Adhesive	Holds on contact for hanging or seaming poly	00-051115-25776-6	62-4979-8030-0	1/case
 24	Scotch-Brite™ General Purpose Hand Pad 7447	Fast, convenient cleaning of many surfaces	00-048011-04029-5	61-5001-2323-9	20 pads/box; 3 boxes/case
 25	Scotch-Brite™ Coating Removal Disc	Aggressive removal of coatings, corrosion, and other crud from metal and concrete	00-048011-18424-1	61-5001-2008-6	20/case
 26	3M™ Utility Duct Tape 2929	Bundling, labeling, and temporarily holding forms and brackets in place	00-051115-24883-2	70-0064-1634-4	24/case

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. **Warranty, Limited Remedy, and Disclaimer:** Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price. **Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

3M

Industrial Adhesives and Tapes Division

3M Center, Building 225-3S-06
St. Paul, MN 55144-1000
800-362-3550 . 877-369-2923 (Fax)
www.3M.com/construction

3M, Scotch-Weld, Super 77, and Scotch-Brite are trademarks of 3M Company.

Printed in U.S.A.
© 2010 3M
70-0711-0191-2

3M Building and Contractor Specialties for Thermal Protection

Fast
Easy

Foam Board Solutions

Productive alternatives to mechanical fasteners and sealants above or below grade



3M™ Scotch-Weld™ Holdfast 70 Cylinder Spray Adhesive

Fast, easy foam board installation – simply spray and stick

Self-contained pressurized cylinder

Eliminate or reduce mechanical fasteners



Easy foam board installation above or below grade



- Spray pattern adjusts from 4-12" to cover large surface areas quickly
 - Very fast tacking for spray and stick speed
 - Bonds without damaging the foam board
 - Bonds to concrete, waterproofing, OSB, plywood, and more
 - Bonds with strength greater than the foam itself
 - No cleaning or purging of hose and applicator necessary
- Not available in California



8



9



10



11

QSS

9501

3M™ Scotch-Weld™ Cylinder Spray Adhesive Product Selection

Description	UPC	3M ID
HoldFast 70 Adhesive	00-048011-61690-2	62-4983-8030-2
Adhesive applicator with 9501	00-048011-61706-0	62-9880-9930-5
Adhesive applicator tip QSS for 70	00-048011-61993-4	62-9880-8148-5
6' hose	00-051115-25036-1	62-9880-0006-3
12' hose	00-048011-61988-0	62-9880-0012-1
25' hose	00-048011-61989-7	62-9880-0025-3
50' hose	00-051115-25782-7	62-9880-0050-1

www.3M.com/contractor

Other Foam Board Essentials



Pushbutton convenience with targeted spray for efficient use of adhesive

3M™ Polystyrene Foam Insulation 78 Spray Adhesive

- Convenient fistful of bonding power for concrete, block, OSB, plywood, and more
- Controlled spray pattern minimizes overspray and clean-up
- Spray adjusts 1-5" for efficient use of adhesive and less waste on small area applications and patches
- Bonds with strength greater than the foam itself
- Bonds without damaging the foam

Available in California



UPC: 00-021200-41593-7 3M ID: 62-4951-4930-4

12

13

14

3M™ Adhesive Remover


- Citrus-based spray dissolves adhesive residue from applicators, also remove unwanted grease, grime, oil, tape residue, tar, ink, and more
- Replace mineral spirits, chlorinated and halogenated solvents, acetone, methyl ethyl ketone, and other volatile organic solvents
- Evaporates quickly without residue
- Convenient 24-fl.oz. aerosol for go-to-the-job portability

UPC: 00-021200-49048-4 3M ID: 62-4667-4930-6



15

Easily seam foam or foil-faced insulation board

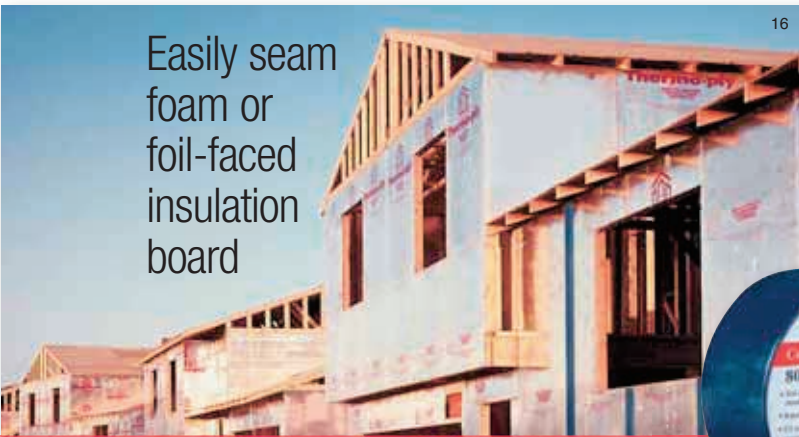

16

3M™ Construction Seaming Tape 8087

- Sticks on contact over foam board seams and conforms to irregular surfaces for a tight vapor barrier
- Sticks reliably to housewraps and poly sheeting
- Reliable adhesion over a wide temperature range








UPC: 00-051115-23593-1 3M ID: 70-0064-1369-7



17

www.3M.com/contractor

3M Job Site Essentials

Description	Application	UPC	3M ID
 18 3M™ Particulate Respirator 8210	Comfortable protection when cleaning and grinding	50-051138-46457-3	70-0706-1439-4
 19 3M™ Standard Suspension Hard Hat 1901	Comfortable head and hearing protection	50-051138-76809-1	70-0708-9179-4
 20 3M™ Protective Eyewear 1752	Stylish high impact protection with 99% UV blocking	50-051131-37115-1	70-0710-9305-1
 21 3M™ FSK Facing Tape 3320 (48mm x 45.7 m)	Vapor retardant for sealing mineral wool insulation, duct liner, sheet metal ducts, and more	00-051115-31530-5	70-0064-3542-7
 22 3M™ Outdoor Masking and Stucco Tape 5959 (48mm x 45.7 m)	90-day clean removal tape for stucco masking, hanging poly, and other indoor and outdoor construction site jobs	00-051115-25491-8	70-0064-2915-6
 23 3M™ Construction Seaming Tape 8087 (2 13/16" x 55 yds.)	Seam, seal, or repair concrete underlayment, vapor barriers, and more	00-051115-23593-1	70-0064-1369-7
 24 3M™ Utility Duct Tape 2929 (48mm x 45.7 m)	Bundling, labeling, and temporarily holding forms and brackets in place	00-051115-24883-2	70-0064-1634-4

PRODUCT USE: All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

WARRANTY AND LIMITED REMEDY: 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. **3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.** User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to repair or replace the product or refund the purchase price. **LIMITATION OF LIABILITY:** Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Building and Contractor Markets

3M Center
St. Paul, MN 55144
1-866-513-4026
www.3M.com/contractor

3M and Scotch-Weld are trademarks of 3M Company.

Printed in U.S.A.
© 2008 3M
70-0709-4144-1



Fast & Easy
Tilt-Up Solutions




3M™ Scotch-Weld™ Cylinder Spray Adhesives

An innovative construction method made easier with 3M products

3M™ Scotch-Weld™ Cylinder Spray Adhesives help improve speed and productivity for Tilt-Up contractors while decreasing the need for floor repair.

- Productivity - Just spray and adhere the reveal strips, shoe plates, chamfers and in-lays to the casting slab without nailing or mechanical fasteners
- Eliminate slab repairs needed when using mechanical fasteners or other nailing methods
- High holding power, high heat and moisture resistance
- No cleaning or purging of hose and applicator necessary

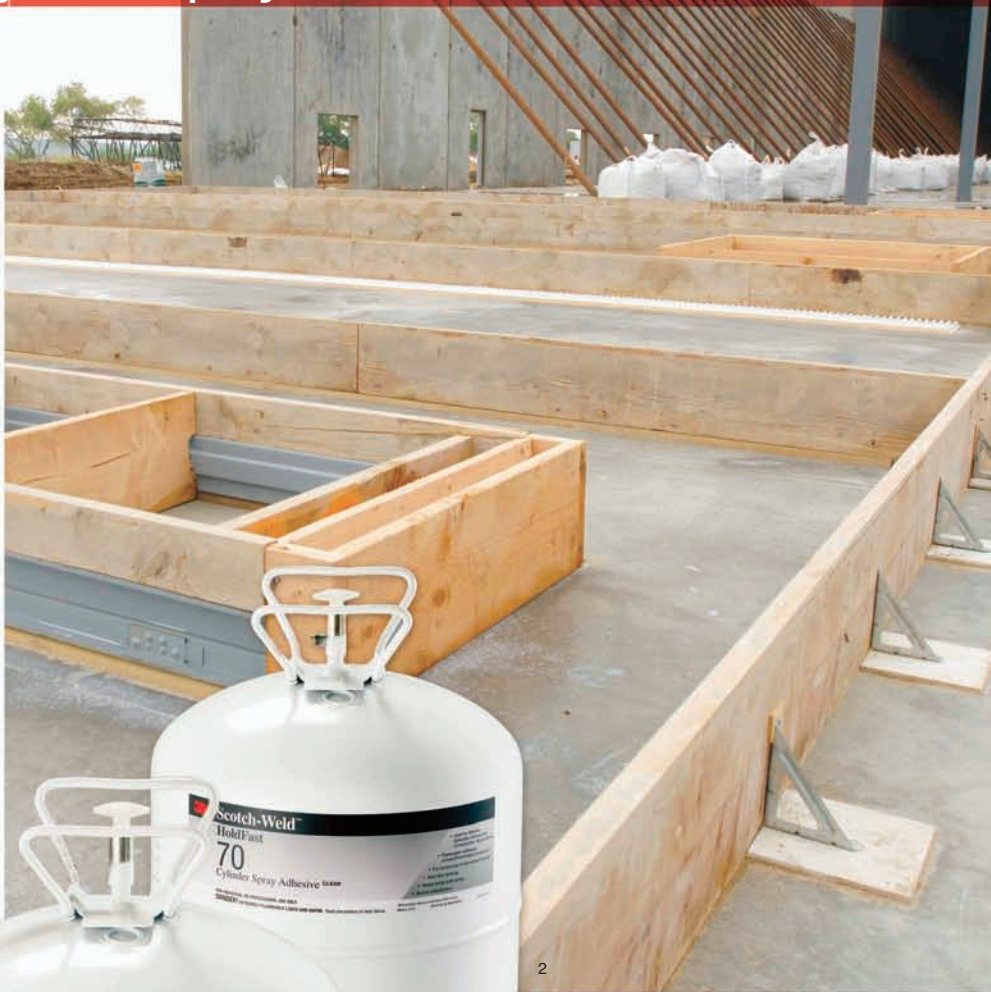

3M™ Scotch-Weld™ Hi-Strength Postforming 94 CA Clear Cylinder Spray Adhesive (Low VOC)

Formulated specifically to meet California's environmental standards.

- Use on wood reveal strips, chamfers, shoe plates, in-lays and form boards
- Fast-drying formula
- High heat and moisture resistance
- HAPS-free and MACT-compliant

UPC No. 00-048011-61703-9 3M ID No. 62-4960-8030-0



3M™ Scotch-Weld™ Hi-Strength Laminating 92 Cylinder Spray Adhesive

High strength, high heat resistance bonds exactly where you need them.

- Use on wood reveal strips, chamfers, shoe plates, in-lays and form boards
- Fast-drying formula
- High heat and moisture resistance

UPC No. 00-048011-61697-1 3M ID No. 62-4956-8030-8



3M™ Scotch-Weld™ HoldFast 70 Clear Cylinder Spray Adhesive

This industrial grade adhesive works wonders on polystyrene foams.

- Use on foam reveal strips and foam in-lays
- Fast-drying formula
- Good heat and moisture resistance
- Holds securely, does not degrade foam

UPC No. 00-048011-61690-2 3M ID No. 62-4983-8030-2



3M™ Inverted Aerosol Adhesives

Turning spray technology upside down for more stickin' per can – Virtually eliminate traditional aerosol problems of broken spray patterns and adhesive left in the can.



3M™ Hi-Strength 90 Spray Adhesive – Inverted

UPC: 00-051111-07278-3 3M ID: 62-4942-4970-9

3M™ Polystyrene Foam Insulation Adhesive 78 – Inverted

UPC: 00-051111-07279-0 3M ID: 62-4951-4970-0

Tilt-Up Essentials



8



9



10

11

Product Name	UPC	3M ID No.	Description
3M™ Polyurethane Construction Sealant 525, 600mL sausage pack	00-051111-07535-7	62-5282-3930-4	Excellent for concrete sealing. Extremely pliable and flexible.
3M™ Polyurethane Construction Sealant 525, 1/10 Gallon cartridge	00-048011-62823-3	62-5282-5230-7	
3M™ Polyurethane Construction Sealant 535, 600mL sausage pack	00-048011-62825-7	62-5283-3930-2	Excellent sealer for concrete and flashing. Paintable.
3M™ Polyurethane Construction Sealant 535, 1/10 Gallon cartridge	00-048011-62824-0	62-5283-5230-5	
Scotch-Brite™ Bristle Disc, 4 1/2" - 50 grit	00-048011-24241-5	61-5001-3901-1	Effectively removes adhesive from the floor.
Scotch-Brite™ General Purpose Hand Pad 7447	00-048011-04029-5	61-5001-2323-9	

3M™ Scotch-Weld™ Cylinder Spray Adhesives Accessories

3M™ Scotch-Weld™ Cylinder Adhesive 6' Hose

UPC No. 00-051115-25036-1

3M ID No. 62-9880-0006-3

3M™ Scotch-Weld™ Cylinder Adhesive 12' Hose

UPC No. 00-048011-61988-0

3M ID No. 62-9880-0012-1

3M™ Scotch-Weld™ Cylinder Adhesive Applicator (includes 9501 tip)

Recommended for 70, 92

UPC No. 00-048011-61706-0

3M ID No. 62-9880-9930-5

3M™ Scotch-Weld™ Cylinder Adhesive Applicator H (includes 4001 tip)

Recommended for 94 CA

UPC No. 00-051115-25039-2

3M ID No. 62-9880-9950-3

3M™ Scotch-Weld™ Cylinder Adhesive Applicator Ex

Recommended for all

UPC No. 00-051115-25779-7

3M ID No. 62-9880-9940-4

3M™ Scotch-Weld™ Cylinder Adhesive QSS Spray Tip

Recommended for 70

UPC No. 00-048011-61993-4

3M ID No. 62-9880-8148-5



12

3M™ Scotch-Weld™ Adhesive Remover Cylinder

Helps easily remove adhesive residue after the panels are lifted.

UPC No. 00-051115-25748-3 3M ID No. 62-4980-8010-0

Also Consider:

Scotch-Brite™ General Purpose Hand Pad 7447

Scotch-Brite™ Bristle Disc



Job Site Essentials



Product Name	UPC	3M ID No.	Size/Quantity
3M™ Adhesive Remover	00-021200-49048-4	62-4667-4930-6	24 fl. oz.
3M™ Duct Tape 2929 Silver <i>Also Consider: 3M™ Duct Tape 3900 - Red</i>	00-051115-24883-2	70-0064-1634-4	24/case individually wrapped
3M™ Particulate Respirator 8210, N95	50-051138-46457-3	70-0706-1439-4	160/case
3M™ XLR8™ Hard Hat with 6-pt. Pinlock Suspension – White	10-078371-45964-9	70-0715-1306-6	20/case
3M™ Virtua™ V4 Black Temple/Gray Overmold	10-078371-62038-4	70-0715-4040-8	20/case
3M™ Firedam 150+ Caulk, Limestone	00-051115-16567-2	98-0400-5461-5	20 fl.oz.sausage 12/case
3M™ Firedam 150+ Caulk	00-051115-16565-8	98-0400-5459-9	4.5 gallon pail
3M™ Duct Tape 3900 Red	00-021200-49830-5	70-0063-1521-5	24/case individually wrapped

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. **Warranty, Limited Remedy, and Disclaimer:** Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price. **Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Industrial Adhesives and Tapes Division

3M Center, Building 225-3S-06
St. Paul, MN 55144-1000
800-362-3550 . 877-369-2923 (Fax)
www.3M.com/contractor

3M, Scotch-Brite and Scotch-Weld are trademarks of 3M Company.
© 3M 2010. All rights reserved

39SA102307
70-0709-4143-3

3M™ 730 Clear Hybrid Sealant
3M™ 230 Crystal Clear Sealant



The new,
CLEAR choice
in sealants



Non-shrinking, UV-resistant formula helps reduce re-work on painted surfaces.



Crystal clear finish blends invisibly with sealed substrates, without staining.

Introducing two powerful no-shows

The advantages of 3M's new POWER Line sealants have never been *less* obvious. 3M™ 730 Clear Hybrid Sealant and 3M™ 230 Crystal Clear Sealant are designed to make sealing, filling, insulating and waterproofing more convenient—and more invisible—than ever.

- Nearly invisible sealants blend in naturally with a wide range of materials
- Eliminate re-work on already painted surfaces—no painting or touch-ups required
- Excellent cosmetic sealant properties, without the hazy finish of silicone sealants
- Eliminates complexities associated with color matching

3M™ 730 Clear Hybrid Sealant

- Excellent UV resistance
- Low VOC
- Non-shrinking
- 30-minute skin time

3M™ 230 Crystal Clear Sealant

- Very good UV resistance
- 20-minute tack-free time
- 3-minute skin time
- Controlled shrinkage



3M



Clearly, a more POWERful line.

3M™ 730 Clear Hybrid Sealant and 3M™ 230 Crystal Clear Sealant are ideal for sealing, filling, insulating and waterproofing in many industrial environments, including marine, specialty vehicles, glass applications and general construction.



Superior to filled silicones

Until now, silicone sealants were the primary choice for applications requiring a clear sealant. Now 3M™ 730 Clear Hybrid Sealant and 3M™ 230 Crystal Clear Sealant offer several advantages over filled silicone to improve product quality and reduce effort:

- superior clarity
- versatile adhesion
- paintable
- better resistance to mildew
- non-staining



3M™ 230 Crystal Clear Sealant (top) is clearly superior to competitor's silicone product (bottom).

Application Summary x = Good xx = Best Choice

	3M™ 730 Clear Hybrid Sealant	3M™ 230 Crystal Clear Sealant
Clarity	x	xx
UV resistance	xx	x
Skin time	Less than 30 minutes	3 minutes
Adhesion versatility	xx	x
Paintable	Yes	Yes
LEED compliant	Yes	No
Flammable	No	Yes
Shrink resistance	None	Controlled
Mildew resistance	x	x
Shore A	30	30
Elongation at break	300%	500%

For more information on 3M™ Polyurethane and Hybrid Adhesives & Sealants or a FREE sample of 3M™ 730 Clear Hybrid Sealant and 3M™ 230 Crystal Clear Sealant, go to www.3M.com/adhesives or call 1-800-362-3550.

WARRANTY, LIMITED REMEDY, AND DISCLAIMER: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. User is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO

OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.



**Industrial Adhesives
and Tapes Division**
3M Center
Building 225-3S-06
St. Paul, MN 55144-1000
1-800-362-3550
www.3M.com/adhesives

3M is a trademark of 3M.
Please recycle. Printed in USA.
© 3M 2009. All rights reserved.
78-9236-7209-7

3M™ Inverted Aerosol Adhesives



Best
flippin',
3M adhesives
on the market




Turning spray technology upside down for more stickin' per can

With upside down spray technology, 3M™ Inverted Aerosol Adhesives virtually eliminate traditional aerosol problems of broken spray patterns and adhesive left in the can. Whenever spraying downward is more convenient and effective, the larger comfort-designed actuator delivers a controlled spray pattern with reduced finger fatigue.

Choose from 3M™ Hi-Strength 90 Spray Adhesive, 3M™ Polystyrene Foam Insulation 78 Spray Adhesive, and 3M™ FoamFast 74 Spray Adhesive to match requirements for a wide variety of job site or in-plant applications. For example:

- 90 to hold tilt-up wood reveal strips, brackets, and form board
- 90 to seam poly
- 90 to bond rubber mats to concrete
- 90 to bond countertop HPL
- 78 to hold tilt-up foam reveal strips
- 78 to attach polystyrene insulation to concrete or wood
- 74 to secure urethane foam strips for concrete expansion joints
- 74 to bond foam to foam and fabric in cushions and mattresses

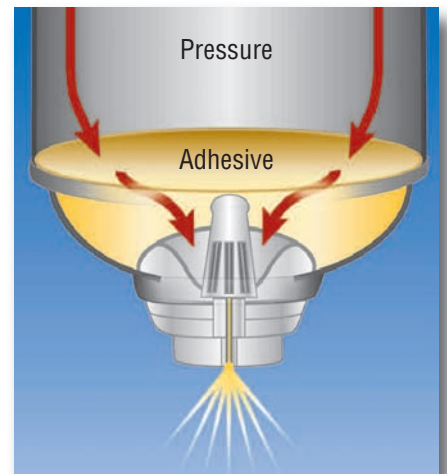

3M™ Inverted Aerosol Adhesives

3M™ Hi-Strength 90 Spray Adhesive Inverted



- Fast tacking
- High temperature resistance
- High moisture resistance
- Lace spray pattern
- Bonds combinations of many materials including concrete, wood, HPL, metal, polyethylene, and polypropylene



UPC: 00-051111-07278-3
3M ID #: 62-4942-4970-9
Quantity: 12/case

3M™ Polystyrene Foam Insulation 78 Spray Adhesive Inverted



- Does not degrade polystyrene
- Fast tacking
- Good temperature resistance
- High moisture resistance
- Lace spray pattern
- Bonds polystyrene and other insulation to themselves and other surfaces, including concrete



UPC: 00-051111-07279-0
3M ID #: 62-4951-4970-0
Quantity: 12/case

3M™ FoamFast 74 Spray Adhesive Inverted



- Fast tacking
- Soft non-dimpling glue line
- Foam-tearing strength
- Lace spray pattern
- Bonds soft foam to itself, fabric, wood, and metal



UPC: 00-051111-07277-6
3M ID #: 62-4935-4970-3
Quantity: 12/case

Our commitment to sustainability

3M has made a long-term commitment to continuously improve the environmental, health and safety impact of our products and processes. 3M™ Inverted Aerosol Adhesives provide examples of this environmental leadership with the following features:

- LEED® Compliance Credit Eligible
- California Compliant
- Does not contain ozone-depleting chlorofluorocarbons (CFCs)
- These 3M aerosol adhesives contain no methylene chloride or 1,1,1-trichloroethane (methyl chloroform)
- Please recycle

Warranty and Limited Remedy: 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS, INCLUDING ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If the 3M product does not conform to this warranty, the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.



Industrial Adhesives and Tapes Division

3M Center, Building 225-3S-06
St. Paul, MN 55144-1000
800-362-3550 (Fax) 877-369-2923
www.3M.com/adhesives

3M is a trademark of 3M company
Printed in U.S.A.
Copyright © 2009. All rights reserved.
78-9236-7196-6

3M Industrial Adhesives & Tapes
Scotch-Blue™ Industrial Advantage Masking Tape 2750



Meet the all new Scotch-Blue™



Now there's a stickier, more heat-resistant Scotch-Blue™ tape for the industrial market.

When sharp paint lines are a must in your paint bake operations, turn to Scotch-Blue™ Industrial Advantage Masking Tape 2750. It withstands bake temperatures up to 250°F for 30 minutes and offers a 3-day clean removal time from a variety of surfaces including aluminum, stainless steel, EPDM rubber and powder-coated metals.

Scotch-Blue Industrial Advantage Masking Tape 2750 provides:

- The high-performance quality of Scotch-Blue tape
- Strong holding power on most surfaces
- 3-day clean removal
- Resistance to heat and solvents
- Straight paint lines
- Flexibility to work with solvent- and latex-based paints
- Crepe paper backing to conform to curves and shapes
- ASTM D6123/D6123M-97 approval (replaces obsolete standards PPP-T-42C and CID-A-A-883B)





3



Scotch-Blue™ Industrial Advantage Masking Tape 2750




4

Good holding of smaller gross masking papers.



5

Sharp lines and 3-day clean removal.



6

Tape Size	Tape Structure (Backing/Adhesive)	Total Thickness (Mils (mm))	Adhesion oz./in. (N/100mm)	Tensile Strength lbs./in. width (N/100mm)	Elongation at Break %	Temperature Range °F	UPC	Rolls/Case
12mm x 55m	Crepe paper/Rubber	6.3 (0.16)	38 (42)	27 (472)	8%	250 °F	00-051111-07510-4	72
18mm x 55m	Crepe paper/Rubber	6.3 (0.16)	38 (42)	27 (472)	8%	250 °F	00-051111-07538-8	48
24mm x 55m	Crepe paper/Rubber	6.3 (0.16)	38 (42)	27 (472)	8%	250 °F	00-051111-07539-5	36
24mm x 55m Ind. Wrap	Crepe paper/Rubber	6.3 (0.16)	38 (42)	27 (472)	8%	250 °F	00-051111-91726-8	36
36mm x 55m	Crepe paper/Rubber	6.3 (0.16)	38 (42)	27 (472)	8%	250 °F	00-051111-07540-1	24
36mm x 55m Ind. Wrap	Crepe paper/Rubber	6.3 (0.16)	38 (42)	27 (472)	8%	250 °F	00-051111-91727-5	24
48mm x 55m	Crepe paper/Rubber	6.3 (0.16)	38 (42)	27 (472)	8%	250 °F	00-051111-07541-8	24
48mm x 55m Ind. Wrap	Crepe paper/Rubber	6.3 (0.16)	38 (42)	27 (472)	8%	250 °F	00-051111-91728-2	24
72mm x 55m	Crepe paper/Rubber	6.3 (0.16)	38 (42)	27 (472)	8%	250 °F	00-051111-07542-5	12
96mm x 55m	Crepe paper/Rubber	6.3 (0.16)	38 (42)	27 (472)	8%	250 °F	00-051111-07544-9	8

TECHNICAL INFORMATION: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

WARRANTY, LIMITED REMEDY, AND DISCLAIMER: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. User is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships

the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

LIMITATION OF LIABILITY: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Industrial Adhesives and Tapes Division

3M Center, Building 225-3S-06
St. Paul, MN 55144-1000
1-800-362-3550
www.3M.com/scotchblueindustrial

3M, Scotch-Blue, the BLUE color of the tape and the Plaid Design are trademarks of 3M.

Scotch is a registered trademark of 3M. Please recycle. Printed in USA. © 3M 2009. All rights reserved. 70-0711-0224-1

The Ultimate TAPE

For the Ultimate EDGE



The sharpest, straightest paint lines, inside or out.

Scotch® 60-Day Ultimate Paint Edge Masking Tape 2480S is much more than just another fine line, crepe or flatback tape. Featuring a unique hybrid technology, this tape is perfect for creating both the long, straight lines that usually call for flatback tapes, as well as the razor-sharp paint edges of fine line tapes. A strong acrylic adhesive holds on contact to most surfaces, yet peels away smoothly and cleanly without residue and fogging—even after 60 days in the sun or exposure to up to 200°F temperatures.

Scotch® 60-Day Ultimate Paint Edge Masking Tape

- Smooth backing produces long, straight lines
- Resists bleedthrough, even from solvent-based paints
- UV-resistant adhesive removes cleanly for up to 60 days in the sun
- Strong enough to pull through paint and caulk without tearing
- Resists lifting and curling
- Distinctive sea green color helps avoid “which tape to use” confusion and helps eliminate taping errors
- Ideal for a variety of applications ranging from, but not limited to, aerospace, specialty vehicle and commercial window glazing



Scotch® 60-Day Ultimate Paint Edge Masking Tape 2480S




Excellent adhesion to smaller gross masking papers.



Strong enough to pull through window glazing caulk for a neat, crisp edge.



Unique hybrid technology combines the long, straight lines of flatback tapes with the sharp, exceptionally low paint edges of fine line.



Tape Size	Tape Structure (Backing/Adhesive)	Total Thickness Mills (mm)	Adhesion oz./in. (N/100mm)	Tensile Strength lbs./in. width (N/100mm)	Elongation at Break %	Temperature Range °F (up to)	UPC	Rolls/Case
1/2" x 60 yds.	Flatback paper/Acrylic	4 (0.10)	13 (14.2)	18 (315)	6%	200°F	00-051111-07545-6	72
3/4" x 60 yds.	Flatback paper/Acrylic	4 (0.10)	13 (14.2)	18 (315)	6%	200°F	00-051111-07546-3	48
1" x 60 yds.	Flatback paper/Acrylic	4 (0.10)	13 (14.2)	18 (315)	6%	200°F	00-051111-07547-0	36
1" x 60 yds. Ind. Wrap	Flatback paper/Acrylic	4 (0.10)	13 (14.2)	18 (315)	6%	200°F	00-051111-91852-4	36
1-1/2" x 60 yds.	Flatback paper/Acrylic	4 (0.10)	13 (14.2)	18 (315)	6%	200°F	00-051111-07548-7	24
1-1/2" x 60 yds. Ind. Wrap	Flatback paper/Acrylic	4 (0.10)	13 (14.2)	18 (315)	6%	200°F	00-051111-91853-1	24
2" x 60 yds.	Flatback paper/Acrylic	4 (0.10)	13 (14.2)	18 (315)	6%	200°F	00-051111-07549-4	24
2" x 60 yds. Ind. Wrap	Flatback paper/Acrylic	4 (0.10)	13 (14.2)	18 (315)	6%	200°F	00-051111-91854-8	24

TECHNICAL INFORMATION: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

WARRANTY, LIMITED REMEDY, AND DISCLAIMER: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. User is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships

the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

LIMITATION OF LIABILITY: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Industrial Adhesives and Tapes Division

3M Center, Building 225-3S-06
St. Paul, MN 55144-1000
1-800-362-3550
www.3M.com/industrialtapes

3M and the Plaid Design are trademarks of 3M.
Scotch is a registered trademark of 3M.
Please recycle. Printed in USA.
© 3M 2010. All rights reserved.
70-0711-0221-7 (Rev. A)



Straight up versatile



Long, straight lines, sharp edges.

Think tough and think straight when you think Scotch® Ultimate Paint Edge Masking Tape 2460. This ultra-thin, ultra-smooth tape is ideal for creating the long, straight, smooth paint lines you need for the highest quality finished products. Yet it is strong enough to pull through paint and caulk without ripping. And it peels off clean with no adhesive residue, even when exposed to high temperatures (up to 300°F). It's the versatile gold tape that can handle many challenges.

Scotch® Ultimate Paint Edge Masking Tape 2460

- Distinctive gold color helps avoid “which tape to use” confusion and helps eliminate taping errors
- Resists elongation for true, straight paint lines
- Ultra thin for a virtually undetectable paint ridge
- Cross tears easily by hand
- Not affected by most solvents or latex paints

Scotch® Ultimate Paint Edge Masking Tape 2460




Creating long, straight paint lines is easy.

2



Ideal for paint bake operations.

3



4

Tape Size	Tape Structure (Backing/Adhesive)	Total Thickness (Mils (mm))	Adhesion oz./in. (N/100mm)	Tensile Strength lbs./in. width (N/100mm)	Elongation at Break %	Temperature Range °F (up to)	UPC	Rolls/Case
1/2" x 60 yds.	Flatback paper/Acrylic	3.3 (0.08)	9 (9.8)	17 (299)	5%	300°F	00-051111-91672-8	72
3/4" x 60 yds.	Flatback paper/Acrylic	3.3 (0.08)	9 (9.8)	17 (299)	5%	300°F	00-051111-91927-9	48
1" x 60 yds.	Flatback paper/Acrylic	3.3 (0.08)	9 (9.8)	17 (299)	5%	300°F	00-051111-91928-6	36
1-1/2" x 60 yds.	Flatback paper/Acrylic	3.3 (0.08)	9 (9.8)	17 (299)	5%	300°F	00-051111-91929-3	24
2" x 60 yds.	Flatback paper/Acrylic	3.3 (0.08)	9 (9.8)	17 (299)	5%	300°F	00-051111-91930-4	24

TECHNICAL INFORMATION: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

WARRANTY, LIMITED REMEDY, AND DISCLAIMER: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. User is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships

the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

LIMITATION OF LIABILITY: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Industrial Adhesives and Tapes Division

3M Center, Building 225-3S-06
St. Paul, MN 55144-1000
1-800-362-3550
www.3M.com/industrialtapes

3M and the Plaid Design are trademarks of 3M.
Scotch is a registered trademark of 3M.
Please recycle. Printed in USA.
© 3M 2010. All rights reserved.
70-0711-0226-6

Belts, 3M™ Belts

3M™ Cloth Belt 241E

An aluminum oxide cloth belt constructed on a XE weight, firm rayon cloth backing. Resin bonded for heat resistance.



UPC Number	Grade	Size	Case Qty	Units
00-051144-72227-3	60	½"x18"	200	BT
00-051144-72228-0	80	½"x18"	200	BT
00-051144-72229-7	120	½"x18"	200	BT
00-051144-26725-5	50	½"x24"	200	BT
00-051144-26723-1	60	½"x24"	200	BT
00-051144-26720-0	80	½"x24"	200	BT
00-051144-26719-4	100	½"x24"	200	BT
00-051144-26717-0	120	½"x24"	200	BT
00-051144-26715-6	180	½"x24"	200	BT
00-051144-14756-4	60	¾"x18"	200	BT
00-051144-14519-5	80	¾"x18"	200	BT
00-051144-14667-3	120	¾"x18"	200	BT

3M™ Cloth Belt 340D

An aluminum oxide, load-resistant, open coat cloth belt constructed on a X weight, durable cloth backing. Resin bonded for heat resistance. Good general purpose belt for woodworking, particularly on soft woods.



UPC Number	Grade	Size	Case Qty	Units
00-051144-27496-3	P100	3"x21"	50	BT
00-051144-27495-6	P120	3"x21"	50	BT
00-051144-27471-0	P100	3"x24"	50	BT
00-051144-27470-3	P120	3"x24"	50	BT
00-051144-27461-1	P100	4"x24"	50	BT
00-051144-27460-4	P120	4"x24"	50	BT

3M™ Cloth Belt 341D

An aluminum oxide cloth belt constructed on a X weight, durable cloth backing. Resin bonded for heat resistance. Good general purpose belt for woodworking, particularly on harder woods.



UPC Number	Product ID	Grade	Size	Case Qty	Units
07-891040-01428-6	341D	P120	3"x21"	40	BT
07-891040-01433-0	341D	80	3"x24"	40	BT
07-891040-01435-4	341D	P120	3"x24"	40	BT
07-891040-01442-2	341D	P120	4"x24"	40	BT

Belts, 3M™ Belts, Surface Conditioning Belts

Scotch-Brite™ Surface Conditioning Belt

A non-woven belt used for cleaning, finishing, blending and deburring applications. The reinforced backing offers good flexibility.



UPC Number	Grade	Size	Color	Case Qty	Units
00-048011-08856-3	AVFN	½"x18"	Blue	20	BT
00-048011-08857-0	AMED	½"x18"	Maroon	20	BT
00-048011-08858-7	ACRS	½"x18"	Brown	20	BT
00-048011-04299-2	AVFN	½"x24"	Blue	20	BT
00-048011-03998-5	AMED	½"x24"	Maroon	20	BT
00-048011-05741-5	ACRS	½"x24"	Brown	20	BT
00-048011-14543-3	AVFN	¾"x18"	Blue	20	BT
00-048011-15899-0	AMED	¾"x18"	Maroon	20	BT
00-048011-13639-4	ACRS	¾"x18"	Brown	20	BT

Discs, Bristle Discs

Scotch-Brite™ Bristle Disc

Brush-like bristle disc removes coarse coatings from the large, open areas of a work-piece. Works on right angle tools quickly and easily with little or no pressure.



UPC Number	Grade	Size	Color	Case Qty	Units
00-048011-33054-9	36	4½"	Brown	10	EA
00-048011-24241-5	50	4½"	Green	10	EA
00-048011-24242-2	80	4½"	Yellow	10	EA
00-048011-24243-9	120	4½"	White	10	EA

Scotch-Brite™ Roloc™ Bristle Disc

Brush-like bristle disc removes coatings from the large, open areas of a work piece. Works on right angle tools quickly and easily with little or no pressure.



UPC Number	Grade	Size	Color	Case Qty	Units
00-048011-18730-3	50	2"x5/8"	Green	40	EA
00-048011-18732-7	80	2"x5/8"	Yellow	40	EA
00-048011-18734-1	50	3"x5/8"	Green	40	EA
00-048011-18736-5	80	3"x5/8"	Yellow	40	EA

Discs, Clean and Strip Discs

Scotch-Brite™ Clean and Strip Disc

Aggressive, open web disc for cleaning welds, removing rust and paint. May be mounted on a straight shaft tool or bench motor.



UPC Number	Grade	Extra Desc	Size	Color	Case Qty	Units
00-048011-07460-3	SXCS	MOS: 6,000 RPM	4"x1/4"	Black	25	DC
00-048011-00940-7	SXCS	MOS: 6,000 RPM	4"x3/8"	Black	25	DC
00-048011-00941-4	SXCS	MOS: 6,000 RPM	4"x1/2"	Black	25	DC
00-048011-00942-1	SXCS	MOS: 6,000 RPM	4"x5/8"	Black	25	DC
00-048011-00948-3	SXCS	MOS: 4,000 RPM	6"x1/2"	Black	15	DC
00-048011-00949-0	SXCS	MOS: 4,000 RPM	6"x5/8"	Black	15	DC
00-048011-00950-6	SXCS	MOS: 4,000 RPM	6"x7/8"	Black	15	DC
00-048011-00945-2	SXCS	MOS: 4,000 RPM	6"xNH	Black	15	DC

Discs, Coating Removal Discs

Scotch-Brite™ Coating Removal Disc

Heavy duty, semi-open web used to clean rust and paint. Contains a backing that mounts to hook and loop pads.



UPC Number	Grade	Size	Case Qty	Units
00-048011-18424-1	SXCS	4 1/2"xNH	20	DC
00-048011-18355-8	SXCS	5"xNH	20	DC
00-048011-18485-2	SXCS	7"xNH	20	DC

Discs, Fibre Discs

3M™ Fibre Disc 381C

An aluminum oxide disc constructed on a fibre backing.



UPC Number	Grade	Size	Case Qty	Units
00-051144-77596-5	36	4 1/2"x7/8"	100	DC
00-051144-77597-2	50	4 1/2"x7/8"	100	DC
00-051144-77598-9	60	4 1/2"x7/8"	100	DC
00-051144-77599-6	80	4 1/2"x7/8"	100	DC
00-051144-81372-8	36	5"x7/8"	100	DC
00-051144-81375-9	50	5"x7/8"	100	DC
00-051144-01727-0	60	5"x7/8"	100	DC
00-051144-20054-2	80	5"x7/8"	100	DC
00-051144-81373-5	36	7"x7/8"	100	DC
00-051144-81376-6	50	7"x7/8"	100	DC
00-051144-01741-6	60	7"x7/8"	100	DC
00-051144-01740-9	80	7"x7/8"	100	DC

Discs, Fibre Discs, cont'd

3M™ Fibre Disc 501C

A versatile alumina zirconia disc constructed on a fibre backing works well on stainless and mild steel.



UPC Number	Grade	Size	Case Qty	Units
00-051111-50412-3	36	5"x7/8"	100	DC
00-051111-50420-8	50	5"x7/8"	100	DC
00-051111-50421-5	60	5"x7/8"	100	DC
00-051111-50422-2	80	5"x7/8"	100	DC
00-051111-50426-0	36	7"x7/8"	100	DC
00-051111-50425-3	50	7"x7/8"	100	DC
00-051111-50427-7	60	7"x7/8"	100	DC
00-051111-50428-4	80	7"x7/8"	100	DC

3M™ Fibre Disc 785C

A Cubitron™ Abrasive Grain disc constructed on a fibre backing. Features grinding aid for cooler grinding; great for working on heat-sensitive metals like stainless steel.



UPC Number	Grade	Size	Case Qty	Units
00-051144-13930-9	36	5"x7/8"	100	DC
00-051144-13928-6	50	5"x7/8"	100	DC
00-051144-13977-4	60	5"x7/8"	100	DC
00-051144-13926-2	80	5"x7/8"	100	DC
00-051144-13936-1	36	7"x7/8"	100	DC
00-051144-13934-7	50	7"x7/8"	100	DC
00-051144-13933-0	60	7"x7/8"	100	DC
00-051144-13932-3	80	7"x7/8"	100	DC

3M™ Roloc™ Fibre Disc 983C

A premium Cubitron™ abrasive grain Roloc™ disc constructed on a fibre backing.



UPC Number	Grade	Size	Case Qty	Units
00-051144-22352-7	36	2"	200	DC
00-051144-22353-4	60	2"	200	DC
00-051144-22354-1	80	2"	200	DC
00-051144-22349-7	36	3"	200	DC
00-051144-85890-3	50	3"	200	DC
00-051144-22350-3	60	3"	200	DC

Discs, Fibre Discs, cont'd

3M™ Roloc™ Fibre Disc 988C

A premium Cubitron™ abrasive grain Roloc™ Disc constructed on a fibre backing.



UPC Number	Grade	Size	Case Qty	Units
00-051144-22351-0	80	3"	200	DC

Discs, Fibre Discs, Accessories

3M™ Disc Pad Face Plate - Ribbed

Ribbed face plate results in a cooler running disc. Higher pressure at the grinding interface aids mineral breakdown resulting in prolonged disc life especially when dulling is a problem.




UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-051144-81735-1	Soft	5"	White	10	EA
00-051144-80517-4	Soft	7"	White	10	EA

Discs, Flap Discs

3M™ Abrasive Flap Disc 747D, Type 27

Contains 3M™ Cubitron™ abrasive grain constructed on a X weight, durable cloth backing. Resin bonded for heat resistance. Features grinding aid for cooler grinding. The new standard for off hand grinding and finishing of metals. Provides a consistent rate of cut for a superior finish and it provides long-life performance that improves quality and lowers cost.



UPC Number	Grade	Size	Case Qty	Units
00-051111-49613-8	36	4½"x7/8"	10	DC
00-051111-49614-5	50	4½"x7/8"	10	DC
00-051111-49615-2	60	4½"x7/8"	10	DC
00-051111-49616-9	80	4½"x7/8"	10	DC

Discs, Flap Discs, Accessories

3M™ Flap Disc Adaptor Nut 88765

Adaptor nut to be used with 3M™ Abrasive Flap Discs.



UPC Number	Product ID	Case Qty	Units
00-051144-88765-1	88755	5	EA

Discs, General Discs

3M™ Paper Disc 451N

A silicon carbide disc constructed on a E weight, heavy paper backing.



UPC Number	Grade	Size	Case Qty	Units
00-051144-21247-7	80	7"x7/8"	500	DC
00-051144-21734-2	120	7"x7/8"	500	DC
00-051144-22046-5	220	7"x7/8"	500	DC
00-051144-22229-2	320	7"x7/8"	500	DC

Discs, Roloc™ Discs

3M™ Roloc™ Cloth Disc 361F

An aluminum oxide Roloc™ Disc constructed on a YF weight, water resistant polyester cloth backing. Resin bonded for heat resistance. Can be run wet or dry.



UPC Number	Grade	Extra Desc	Size	Case Qty	Units
00-051144-22398-5	36	TR	2"	200	DC
00-051144-22399-2	50	TR	2"	200	DC
00-051144-22400-5	60	TR	2"	200	DC
00-051144-22401-2	80	TR	2"	200	DC
00-051144-22393-0	36	TR	3"	200	DC
00-051144-22394-7	50	TR	3"	200	DC
00-051144-22395-4	60	TR	3"	200	DC
00-051144-22404-3	80	TR	3"	200	DC

Discs, Surface Conditioning Discs

Scotch-Brite™ Roloc™ Surface Conditioning Disc

A non-woven abrasive product used for cleaning, finishing, blending and deburring applications. A metal attachment system screws onto the holder.



UPC Number	Grade	Extra Desc	Size	Color	Case Qty	Units
00-048011-05523-7	AVFN	TR	2"xNH	Blue	200	DC
00-048011-05527-5	AMED	TR	2"xNH	Maroon	200	DC
00-048011-05528-2	ACRS	TR	2"xNH	Brown	200	DC
00-048011-05530-5	AVFN	TR	3"xNH	Blue	100	DC
00-048011-05531-2	AMED	TR	3"xNH	Maroon	100	DC
00-048011-05532-9	ACRS	TR	3"xNH	Brown	100	DC

Discs, Surface Conditioning Discs, cont'd

Scotch-Brite™ Surface Conditioning Disc

Scotch-Brite™ Surface Conditioning Discs are best for finishing, cleaning and light deburring on flat metal surfaces.



UPC Number	Grade	Size	Color	Case Qty	Units
00-048011-27673-1	AVFN	4½"xNH	Blue	10	DC
00-048011-14099-5	AVFN	4½"xNH	Blue	50	DC
00-048011-27672-4	AMED	4½"xNH	Maroon	10	DC
00-048011-14100-8	AMED	4½"xNH	Maroon	50	DC
00-048011-27671-7	ACRS	4½"xNH	Brown	10	DC
00-048011-14101-5	ACRS	4½"xNH	Brown	50	DC
00-048011-27676-2	AVFN	5"xNH	Blue	10	DC
00-048011-04303-6	AVFN	5"xNH	Blue	50	DC
00-048011-27675-5	AMED	5"xNH	Maroon	10	DC
00-048011-00643-7	AMED	5"xNH	Maroon	50	DC
00-048011-27674-8	ACRS	5"xNH	Brown	10	DC
00-048011-00750-2	ACRS	5"xNH	Brown	50	DC
00-048011-27679-3	AVFN	7"xNH	Blue	10	DC
00-048011-04305-0	AVFN	7"xNH	Blue	25	DC
00-048011-27678-6	AMED	7"xNH	Maroon	10	DC
00-048011-00645-1	AMED	7"xNH	Maroon	25	DC
00-048011-27677-9	ACRS	7"xNH	Brown	10	DC
00-048011-00751-9	ACRS	7"xNH	Brown	25	DC

Hand Sanding Products, Flexible Diamond Products

3M™ Flexible Diamond Heavy Duty QRS Cloth Disc 6022J

For hard to grind material, stone, glass, ceramic, metal, carbide, composites. Better finish without sacrificing cut rates. Metal plated bond securely anchors micron graded diamonds to PSA (self adhesive) backing.



UPC Number	Grade	Size	Case Qty	Units
00-051115-19760-4	M300 Micron	7"x1"	1	DC
00-051115-19755-0	M250 Micron	7"x1"	1	DC
00-051115-19750-5	M125 Micron	7"x1"	1	DC
00-051115-19761-1	M300 Micron	9"x1"	1	DC
00-051115-19756-7	M250 Micron	9"x1"	1	DC
00-051115-19751-2	M125 Micron	9"x1"	1	DC
00-051115-19746-8	M74 Micron	9"x1"	1	DC
00-051115-19752-9	M125 Micron	10"x1"	1	DC
00-051115-19747-5	M74 Micron	10"x1"	1	DC
00-051115-19742-0	M40 Micron	10"x1"	1	DC

Hand Sanding Products, Hand Pads

Scotch-Brite™ Hand Pads

Most universally used in a variety of applications. Excellent starting point to clean, finish, grain, denib and defuzz. May be used by hand, with a hand pad block, or on an in-line sander.



UPC Number	Product ID	Grade	Extra Desc	Size	Color	Case Qty	Units
00-048011-04029-5	7447	AVFIN	3 Bx/Cs (60)	6"x9"	Maroon	60	PD
00-048011-04028-8	7448	SUFIN	3 Bx/Cs (60)	6"x9"	Light Gray	60	PD
00-048011-14049-0	7448B	UFIN	Bulk	6"x9"	Light Gray	60	PD
00-048011-04050-9	7440	AMED	4 Bx/Cs (40)	6"x9"	Tan	40	PD
00-048011-18451-7	7440B	MED	Bulk	6"x9"	Tan	40	PD

Hand Sanding Products, Sheets & Rolls, Sheets

3M™ Cloth Sheet 011K

Sheet constructed on a J weight, light and flexible cloth backing.



UPC Number	Grade	Size	Case Qty	Units
00-051144-02431-5	FIN	9"x11"	250	SH
00-051144-02432-2	MED	9"x11"	250	SH
00-051144-02433-9	CRS	9"x11"	250	SH

3M™ Paper Sheet 336U/346U

An aluminum oxide sheet constructed on a C weight, intermediate paper backing. Resin bonded for heat resistance.



UPC Number	Grade	Size	Case Qty	Units
00-051144-02114-7	100	9"x11"	1000	SH
00-051144-02113-0	120	9"x11"	1000	SH
00-051144-02112-3	150	9"x11"	1000	SH

Hand Sanding Products, Sheets & Rolls, Sheets, cont'd

3M™ Paper Sheet 415U

A silicon carbide sheet constructed on an A weight, light paper backing. Features an anti-loading stearate coating.



UPC Number	Grade	Size	Case Qty	Units
00-051144-14175-3	100	9"x11"	1000	SH
00-051144-14177-7	120	9"x11"	1000	SH
00-051144-14179-1	150	9"x11"	1000	SH
00-051144-14181-4	180	9"x11"	1000	SH
00-051144-14183-8	220	9"x11"	1000	SH

3M™ Wetordry™ Paper Sheet 413Q


A silicon carbide sheet constructed on an A weight light paper backing. Can be run wet or dry.



UPC Number	Grade	Size	Case Qty	Units
00-051144-02007-2	220	9"x11"	500	SH
00-051144-02006-5	240	9"x11"	250	SH
00-051144-02005-8	280	9"x11"	250	SH
00-051144-02004-1	320	9"x11"	500	SH
00-051144-02003-4	360	9"x11"	250	SH
00-051144-02002-7	400	9"x11"	500	SH
00-051144-02001-0	500	9"x11"	250	SH
00-051144-02000-3	600	9"x11"	500	SH

3M™ Wetordry™ Paper Sheet 431Q

A silicon carbide Wetordry™ abrasive product constructed on a C weight, intermediate paper backing. Can be run wet or dry.



UPC Number	Grade	Size	Case Qty	Units
00-051144-02018-8	80	9"x11"	250	SH
00-051144-02017-1	100	9"x11"	250	SH
00-051144-02016-4	120	9"x11"	250	SH
00-051144-02015-7	150	9"x11"	250	SH

Power Tools, Accessories, Compounds and Specialties, Cut-Off Wheel Tools

3M™ Green Corps™ Cut-Off Wheel

Wheel is designed to provide high cut rates and long life on most materials including fiberglass, stainless steel, mild steel and aerospace alloys. Ideal for use on a wide variety of utility type cut off tools. Do not use on tools without guards.



UPC Number	Extra Desc	Size	Case Qty	Units
00-051144-83487-7	Bulk	2"x1/16"x1/4"	50	WH
00-051144-82238-6	Bulk	3"x1/32"x1/4"	50	WH
00-051131-01989-8		3"x1/32"x3/8"	50	WH
00-051131-01985-0	Bulk	3"x1/32"x3/8"	50	WH
00-051131-01990-4		3"x1/16"x3/8"	50	WH
00-051131-01986-7	Bulk	3"x1/16"x3/8"	50	WH
00-051144-88755-2	Bulk	4"x1/32"x1/4"	50	WH
00-051131-01994-2	Bulk	4"x1/32"x3/8"	50	WH
00-051144-83488-4	Bulk	4"x1/16"x3/8"	50	WH
00-051141-20275-4	Bulk	4½"x3/64"x7/8"	200	WH
00-051141-20276-1	Bulk	5"x3/64"x7/8"	4	PH

3M™ High Performance Cut-Off Wheels

High Performance Cut-Off Wheels are designed to provide high cut rates and long life on most all materials including fiberglass, stainless steel, mild steel, and aerospace alloys. These wheels incorporate 3M's patented Cubitron™ abrasive grain.



UPC Number	Size	Case Qty	Units
00-051141-20349-2	6"x9/20"x7/8"	100	WH

3M™ General Purpose Cut-Off Wheels

General Purpose Cut-Off Wheel made with aluminum oxide mineral. For use in a variety of metal cutting applications, including carbon steel, stainless steel and aluminum.



UPC Number	Size	Case Qty	Units
00-051141-20448-2	4"x1/32"x3/8"	200	WH
00-051141-20449-9	4"x1/16"x3/8"	200	WH
00-051141-20447-5	6"x9/20"x7/8"	100	WH

Rolls, Stikit™ Refill Rolls

3M™ Stikit™ Paper Vibrator Sander Roll 415N/415U

A silicon carbide Stikit™ Vibrator Sander Roll constructed on a A weight, light paper backing. Features an anti-loading stearate coating.



UPC Number	Grade	Size	Case Qty	Units
00-051115-00395-0	80	4½"x10yds	10	RL
00-051115-00396-7	100	4½"x10yds	10	RL
00-051115-00397-4	120	4½"x10yds	10	RL
00-051115-00643-2	150	4½"x10yds	10	RL
00-051115-00398-1	180	4½"x10yds	10	RL
00-051115-00399-8	220	4½"x10yds	10	RL

Wheels, Bonded and Coated Wheels, Cut-Off Wheels

3M™ General Purpose Cut-Off Wheels

General Purpose Cut-Off Wheel made with aluminum oxide mineral. For use in a variety of metal cutting applications, including carbon steel, stainless steel and aluminum.



UPC Number	Size	Case Qty	Units
00-051141-20448-2	4"x1/32"x3/8"	200	WH
00-051141-20449-9	4"x1/16"x3/8"	200	WH
00-051141-20447-5	6"x9/20"x7/8"	100	WH

3M™ Green Corps™ Depressed Center Wheel

These ¼" thick bonded wheels contain proprietary 3M™ Cubitron™ abrasive grain and produce very high cut rates on a wide variety of metals.



UPC Number	Grade	Extra Desc	Size	Case Qty	Units
00-051111-55960-4	24		4½"x¼"x5/8"-11 INT	60	WH
00-051111-55961-1	36	5/8-11 INT	4½"x¼"	60	WH
00-051111-55991-8	24		4½"x¼"x7/8"	60	WH
00-051111-55992-5	36	With Center Hole	4½"x¼"x7/8"	60	WH
00-051111-55958-1	24		7"x¼"x5/8"-11 INT	20	WH
00-051111-55959-8	36	5/8-11 INT	7"x¼"	20	WH
00-051111-55989-5	24		7"x¼"x7/8"	20	WH
00-051111-55990-1	36	With Center Hole	7"x¼"x7/8"	20	WH

Wheels, Bonded and Coated Wheels, Cut-Off Wheels, Accessories

3M™ Cut-Off Wheel Adapter Flange

The 3M™ Cut-Off Wheel Flange allows 4½", 5", and 6" diameter x 1/8" center hole Cut-Off Wheels to be mounted on right angle grinders that have 5/8-11 internal threaded shafts. Always use the guard supplied with the tools. The flange design will drive wheels as thin as .040" thick. Flanges supplied with standard right angle grinders are not designed for Cut-Off Wheels.

UPC Number	Extra Desc	Size	Case Qty	Units
00-051141-20211-2	For 4½", 5" and 6"	1.688"	5	ST

Wheels, Bonded and Coated Wheels, Grinding Wheels

3M™ Green Corps™ Cutting/Grinding Wheel, Type 27

Bonded wheels contain proprietary Cubitron™ Abrasive Grain and produce very high cut rates on a wide variety of metals. MUST BE USED ON A TOOL WITH A GUARD.



UPC Number	Grade	Size	Case Qty	Units
00-051135-92316-0	36	4½"x1/8"x7/8"	40	WH
00-051135-92318-4	36	4½"x1/8"x5/8"-11 INT	40	WH
00-051135-92317-7	36	7"x1/8"x7/8"	20	WH
00-051135-92319-1	36	7"x1/8"x5/8"-11 INT	20	WH

3M™ Green Corps™ Flexible Grinding Wheel

These 1/8" thick bonded wheels contain proprietary Cubitron™ abrasive grain and can be used in a wide variety of metals. When grinding, wheels produce less noise and vibration. Available in threaded "Quick Change" option.



UPC Number	Grade	Extra Desc	Size	Case Qty	Units
00-051111-51164-0	36	Quick Change	4½"x1/8"x5/8"-11	40	WH
00-051111-51161-9	46	Quick Change	4½"x1/8"x5/8"-11	40	WH
00-051111-51160-2	60	Quick Change	4½"x1/8"x5/8"-11	40	WH
00-051111-50440-6	36	Regular	4½"x1/8"x7/8"	40	WH
00-051111-50442-0	46	Regular	4½"x1/8"x7/8"	40	WH
00-051111-50443-7	60	Regular	4½"x1/8"x7/8"	40	WH
00-051111-50444-4	80	Regular	4½"x1/8"x7/8"	40	WH
00-051111-51163-3	36	Quick Change	7"x1/8"x5/8"-11	40	WH
00-051111-50445-1	36	Regular	7"x1/8"x7/8"	20	WH
00-051111-50446-8	46	Regular	7"x1/8"x7/8"	20	WH
00-051111-50447-5	60	Regular	7"x1/8"x7/8"	20	WH

Wheels, Depressed Center Wheels

3M™ Depressed Center Wheel

Depressed center wheels are an excellent economical solution for general purpose grinding and cutting applications on steel. MUST BE USED ON A TOOL WITH A GUARD.



UPC Number	Grade	Size	Case Qty	Units
00-051135-92314-6	24	4½"x¼"x5/8-11 INT	40	WH
00-051135-92312-2	24	4½"x¼"x7/8"	40	WH
00-051135-92315-3	24	7"x¼"x5/8-11 INT	20	WH
00-051135-92313-9	24	7"x¼"x7/8"	20	WH

Wheels, Unitized Wheels

Scotch-Brite™ EXL Unitized Wheel

High performance and durability for deburring and finishing applications. A layered, durable unitized wheel construction.



UPC Number	Grade	Extra Desc	Size	Color	Case Qty	Units
00-048011-15532-6	2AMED	MOS: 10,000 RPM	3"x½"x¼"	Gray/Black	20	WH
00-048011-13717-9	2SFIN	MOS: 10,000 RPM	3"x½"x¼"	Gray/Purple	20	WH
00-048011-28199-5	3SFIN	MOS: 10,000 RPM	3"x½"x¼"	Gray/Pink	20	WH
00-048011-15827-3	2SFIN	MOS: 4,000 RPM	8"x¼"x½"	Gray/Purple	8	WH
00-048011-17508-9	2SFIN	MOS: 4,000 RPM	8"x¼"x5/8"	Gray/Purple	8	WH
00-048011-15844-0	2SFIN	MOS: 4,000 RPM	8"x½"x½"	Gray/Purple	4	WH

3M™ Aerosol Adhesives, 3M™ Aerosol Adhesives - Bulk

3M™ Hi-Strength 90 Spray Adhesive

High strength, fast contact-like adhesive. Fast contact strength buildup for many decorative laminates.



UPC Number	Extra Desc	Size	Case Qty	Units
00-021200-43797-7	Bulk	5 gal	1	PA

3M™ Scotch-Weld™ Hi-Strength Postforming 94 CA Bulk Adhesive

3M™ Scotch-Weld™ Hi-Strength Postforming 94 CA Clear Bulk Adhesive is a high performance, postformable industrial grade adhesive. It features a fast tacking adhesive designed for high pressure laminations, particularly decorative laminate to particle board. It can also be used for veneers, fiberglass, headliners, foams, fabrics, glass, mirrors, cork, tile, rubber and steel. This adhesive is a SCAQMD Rule 1168 Compliant Adhesive. It contains very low VOCs, is postformable, and features a low telegraphing spray pattern.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-051115-25016-3	Bulk	5 gal	Clear	1	PA
00-048011-61666-7	Bulk	5 gal	Red	1	PA
00-051115-25017-0	Bulk	55 gal	Clear	1	DR
00-048011-61667-4	Bulk	55 gal	Red	1	DR

3M™ Scotch-Weld™ FoamFast 74 Bulk Adhesive

It is used for bonding flexible urethane or latex foam together or to many other materials like wood, metal and plastics. THIS ADHESIVE IS NOT RECOMMENDED FOR BONDING VINYL PLASTICS. Its outstanding features include extra coverage, bonds immediately.

UPC Number	Case Qty	Units
00-051115-25743-8	1	DR

3M™ Scotch-Weld™ Hi-Strength Laminating 92 Adhesive Bulk

3M™ Scotch-Weld™ Hi-Strength Laminating 92 Clear Bulk Adhesive is a high performance, very high temperature resistant industrial grade spray adhesive. It features a fast tacking adhesive designed for high pressure laminations, particularly decorative laminate to particle board. It can also be used for veneers, fiberglass, headliners, foams, fabrics, glass, mirrors, cork, tile, rubber and steel.



UPC Number	Case Qty	Units
00-051115-31591-6	1	PA
00-051115-31592-3	1	DR

3M™ Aerosol Adhesives, 3M™ Aerosol Adhesives - Bulk, cont'd

3M™ Scotch-Weld™ General Purpose 60 CA Adhesive Bulk

3M™ Scotch-Weld™ General Purpose 60 CA Clear Bulk Adhesive is a general purpose industrial grade adhesive. This adhesive brings extraordinary value as it has exceptionally high solids and meets SCAQMD Rule 1168 Compliant Contact Adhesive. This adhesive is designed for temporary or permanent bonds on softer substrates like fabrics, foams, plastics, and heavy papers to wood, glass or steel. It is a proven adhesive technology for manufactured housing, RV and marine industries for ABS tubs and insulation bonding.



UPC Number	Case Qty	Units
00-051115-31589-3	1	PA
00-051115-31590-9	1	DR

3M™ Aerosol Adhesives, 3M™ Aerosol Adhesives - Cans

3M™ Hi-Strength Spray Adhesive 90

Upside down spray technology for high strength, fast tack bonding to concrete, wood, MDF, laminates, and polyethylene. Ideal for applications that require spraying down. Use when a high strength, fast tack bond to concrete, wood, MDF, laminates, or polyethylene is needed. Product is available in both regular and inverted cans.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-021200-30023-3		24 fl oz	Clear	12	CN
00-051111-07278-3	Inverted	24 fl oz		12	CN

3M™ Pressure Sensitive Spray Adhesive Blue 72

It permits wide-area bonds to be made hours after spraying and easy repositioning of bonds. Provides strong bonds for adhering plastic, foam padding, carpet backing, polyethylene, polypropylene and many other materials to fiberglass, plastics, and particle board.



UPC Number	Size	Color	Case Qty	Units
00-021200-30025-7	24 oz	Blue	12	CN

3M™ Aerosol Adhesives, 3M™ Aerosol Adhesives - Cans, cont'd

3M™ FoamFast 74 Spray Adhesive

Upside down spray technology for fast tack bonding of flexible urethane or latex foams to themselves, fabric, wood, and metal. Ideal for applications that require spraying down. Use when a fast tack bond of flexible urethane or latex foams to themselves, fabric, wood, or metal is needed.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-021200-50045-9		24 fl oz	Clear	12	CN
00-021200-82242-1		16 fl oz	Orange	12	CN
00-051111-07277-6	Inverted	24 fl oz	Orange	12	CN

3M™ Hi-Tack 76 Spray Adhesive

Quick-tacking, fast strength buildup. Aerosol, for bonding hard to hold materials like polyethylene and polypropylene. SBR rubber, fabric and felt.



UPC Number	Size	Color	Case Qty	Units
00-021200-30026-4	24 fl oz	Clear	12	CN

3M™ Polystyrene Foam Insulation 78 Spray Adhesive

Upside down spray technology for fast tack bonding to concrete, polystyrene, wood, metal, formliners, and plastics. Does not degrade polystyrene. Ideal for applications that require spraying down. Does not degrade polystyrene. Use when bonding to concrete, polystyrene, fiberglass, wood, metal, formliners, and plastics.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-021200-41593-7		24 fl oz	Clear	12	CN
00-051111-07279-0	Inverted	24 fl oz	Clear	12	CN

3M™ Rubber & Vinyl 80 Spray Adhesive

Neoprene-based contact adhesive in aerosol form. It has exceptional resistance to plasticizing oils. Bonds rubber and supported vinyls better than many typical bulk neoprene contact adhesives.



UPC Number	Size	Color	Case Qty	Units
00-021200-82618-4	24 fl oz	Yellow	6	CN

3M™ Aerosol Adhesives, 3M™ Aerosol Adhesives - Cans, cont'd

3M™ Super 77™ Multipurpose Adhesive

High tack, high coverage and fast drying for permanently attaching foils, carpeting, lightweight foams, paper, cardboard, felt and cloth to painted or unpainted metals, wood and hardboard.



UPC Number	Size	Case Qty	Units
00-021200-21210-9	16.75 fl oz	12	CN

3M™ Scotch-Weld™ Hi-Strength Woodworking Laminate 94 CA Spray Adhesive

3M™ Scotch-Weld™ Hi-Strength Woodworking Laminate 94 CA Spray Adhesive (Aerosol) is a high performance, postformable industrial grade spray adhesive. It features a fast tacking adhesive designed for high pressure laminations, particularly decorative laminate to particle board. It can also be used for veneers, fiberglass, headliners, foams, fabrics, glass, mirrors, cork, tile, rubber and steel. This adhesive is a SCAQMD Rule 1168 Compliant Adhesive. It contains very low VOC's, is postformable, and features a low telegraphing spray pattern.



UPC Number	Size	Net Weight	Color	Case Qty	Units
00-048011-61668-1	24 oz	14.8 oz	Clear	12	CN

3M™ Butyl & Misc. Sealants, Sealants - Miscellaneous

3M™ Scotch-Weld™ Nitrile Metal Sealant 2084

This metal sealant bonds and seals aluminum to glass, other metals and wood. Excellent resistance to water, oils and fuel. Ideal for bedding glass in aluminum window channels. Aluminum color. Seals after extended aging and meets requirements of AAMA Specification 801.1.



UPC Number	Size	Color	Case Qty	Units
00-021200-20227-8	5 oz	Aluminum	36	TB

3M™ Contact Adhesives, Solvent-Based Contact Adhesives

3M™ Scotch-Weld™ Neoprene Contact Adhesive 10

A brushable, neutral-colored contact adhesive for bonding many decorative laminates, aluminum, steel, plywood, panels, wood and wood veneer, masonry, rubber, canvas and other porous and non-porous materials to each other or to themselves.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-021200-20272-8		1 qt	Light Yellow	12	EA
00-021200-20276-6	Pour Spout	5 gal	Light Yellow	1	PA

3M™ Scotch-Weld™ Neoprene High Performance Contact Adhesive 1357

A high performance contact adhesive that provides a long bonding range and excellent initial strength.



UPC Number	Size	Color	Case Qty	Units
00-021200-19892-2	1 qt	Gray-Olive	12	QT
00-021200-22586-4	1 gal	Neutral	4	EA

3M™ Contact Adhesives, Water-Based Contact Adhesives

3M™ Fastbond™ Contact Adhesive 30NF

It has high immediate bond strength and long bonding range. It is non-flammable in the wet state, post-formable and heat resistant. It bonds most foamed plastics, plastic laminate, wood, plywood, wood veneer, and canvas to themselves and to each other. Non-flammable in the wet state. GreenGuard® Indoor Air Quality Certified.



UPC Number	Product ID	Size	Color	Case Qty	Units
00-021200-21185-0	30NF	1 qt	Green	12	QT
00-021200-21180-5	30NF	1 qt	Neutral	12	QT
00-021200-21186-7	30NF	1 gal	Green	4	EA
00-021200-21181-2	30NF	1 gal	Neutral	4	EA

3M™ Industrial and Insulation Adhesives, Water Based

3M™ Fastbond™ Water-based Insulation Adhesive 49

Bonds lightweight materials like fiberglass insulation, felt, shoddy, paper and other materials to metal and many other surfaces. GreenGuard® Indoor Air Quality Certified.



UPC Number	Size	Color	Case Qty	Units
00-021200-45163-8	5 gal	Clear	1	PA

3M™ Rubber & Gasket Adhesives

3M™ Scotch-Weld™ Neoprene High Performance Rubber and Gasket Adhesive 1300

A premium quality, versatile, brushable, heat resistant adhesive that develops strength rapidly. Has excellent adhesion to metal, baked enamel, wood, most plastics, neoprene, reclaim, SBR, and butyl rubber. Not for EPDM rubber.



UPC Number	Size	Color	Case Qty	Units
00-021200-19868-7	5 oz	Yellow	36	TB

3M™ Scotch-Weld™ Cylinder Spray Adhesives

3M™ Scotch-Weld™ Adhesive Remover

3M™ Scotch-Weld™ Adhesive Remover (Cylinder) is a citrus based industrial grade adhesive remover and cleaner. This product is prepackaged in convenient, portable, no maintenance aerosol cylinders and is ideal for cleaning and purging cylinder hoses and applicators. This product removes adhesives, labels, oils, greases from many substrates without leaving a residue.



UPC Number	Extra Desc	Net Weight	Case Qty	Units
00-051115-25748-3	Mini Cylinder	8.5 lbs	1	EA

3M™ Scotch-Weld™ FoamFast 74 Cylinder Spray Adhesive

It is used for bonding flexible urethane or latex foam together or to many other materials like wood, metal and plastics. THIS ADHESIVE IS NOT RECOMMENDED FOR BONDING VINYL PLASTICS. Its outstanding features include extra coverage, bonds immediately.



UPC Number	Extra Desc	Size	Net Weight	Color	Case Qty	Units
00-021200-49919-7	Cylinder	30.3 lb		Clear	1	EA
00-051115-25741-4		Intermediate Cylinder	148.5 lb	Clear	1	EA
00-051115-25742-1		Jumbo Cylinder	297 lb	Clear	1	EA

3M™ Scotch-Weld™ Cylinder Spray Adhesives, cont'd

3M™ Scotch-Weld™ Hi-Strength 90 Cylinder Spray Adhesive

3M™ Scotch-Weld™ Hi-Strength 90 Cylinder Spray Adhesive is a high strength, fast, contact-type adhesive. Fast strength buildup for many decorative laminates; 1-2 min. of drying time. Excellent for decorative laminates, particleboard, and many other materials.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-021200-41599-9	Mini Cylinder	15.6 lbs	Clear	1	EA

3M™ Scotch-Weld™ Hi-Strength Laminating 92 Cylinder Spray Adhesive

3M™ Scotch-Weld™ Hi-Strength Laminating 92 Cylinder Spray Adhesive is a high performance, very high temperature resistant industrial grade spray adhesive. This bulk adhesive is prepackaged in convenient, portable, no maintenance aerosol cylinders. It features a fast tacking adhesive designed for high pressure laminations, particularly decorative laminate to particle board. It can also be used for veneers, fiberglass, headliners, foams, fabrics, glass, mirrors, cork, tile, rubber and steel.



UPC Number	Extra Desc	Net Weight	Color	Case Qty	Units
00-048011-61697-1	Large Cylinder	29.3 lbs	Clear	1	EA
00-048011-61700-8	Large Cylinder	29.3 lbs	Red	1	EA
00-048011-61698-8	Intermediate Cylinder	139 lbs	Clear	1	EA
00-048011-61701-5	Intermediate Cylinder	139 lbs	Red	1	EA
00-048011-61699-5	Jumbo Cylinder	279 lbs	Clear	1	EA
00-048011-61702-2	Jumbo Cylinder	279 lbs	Red	1	EA

3M™ Scotch-Weld™ General Purpose 60 CA Cylinder Spray Adhesive

3M™ Scotch-Weld™ General Purpose 60 CA Clear Cylinder Spray Adhesive is a general purpose industrial grade spray adhesive. It brings extraordinary value as it has exceptionally high solids and meets SCAQMD Rule 1168 Compliant Contact Adhesive.



UPC Number	Extra Desc	Net Weight	Color	Case Qty	Units
00-048011-61687-2	Large Cylinder	27.2 lbs	Clear	1	EA
00-048011-61688-9	Intermediate Cylinder	129.2 lbs	Clear	1	EA
00-048011-61689-6	Jumbo Cylinder	276 lbs	Clear	1	EA

3M™ Scotch-Weld™ Cylinder Spray Adhesives, cont'd

3M™ Scotch-Weld™ Hi-Strength Postforming 94 CA Adhesive

3M™ Scotch-Weld™ Hi-Strength Postforming 94 CA Cylinder Spray Adhesive is a high performance, postformable industrial grade spray adhesive. This bulk adhesive is prepackaged in convenient, portable, no maintenance aerosol cylinders. It features a fast tacking adhesive designed for high pressure laminations, particularly decorative laminate to particle board. It can also be used for veneers, fiberglass, headliners, foams, fabrics, glass, mirrors, cork, tile, rubber and steel. This adhesive is a SCAQMD Rule 1168 Compliant Adhesive. It contains very low VOC's, is postformable, and features a low telegraphing spray pattern.



UPC Number	Extra Desc	Net Weight	Color	Case Qty	Units
00-051115-25014-9	Mini Cylinder	7.6 lbs.	Clear	1	EA
00-051115-25018-7	Mini Cylinder	7.6 lbs.	Red	1	EA
00-048011-61703-9	Large Cylinder	26.2 lbs.	Clear	1	EA
00-048011-61663-6	Large Cylinder	26.2 lbs.	Red	1	EA
00-048011-61704-6	Intermediate Cylinder	150 lbs.	Clear	1	EA
00-048011-61664-3	Intermediate Cylinder	150 lbs.	Red	1	EA
00-048011-61705-3	Jumbo Cylinder	300 lbs.	Clear	1	EA
00-048011-61665-0	Jumbo Cylinder	266 lbs	Red	1	EA

3M™ Scotch-Weld™ HoldFast 70 Cylinder Spray Adhesive

3M™ Scotch-Weld™ HoldFast 70 Clear Cylinder Spray Adhesive is an industrial grade spray adhesive for Marine, Specialty Vehicle and Construction Applications. This bulk adhesive is prepackaged in convenient, portable, no maintenance aerosol cylinders. It features a very fast tacking adhesive without halogenated solvents. Also it has a unique heavy body spray pattern with low soak-in ideally suited for irregular or porous substrates. This adhesive is designed for temporary or permanent bonds on softer substrates like fabrics, foams, plastics and heavy papers to themselves as well as wood, glass, concrete or steel. Formulated to bond polystyrene insulation for many contractor insulation applications. It is a proven adhesive technology for manufactured housing, RV and marine industries for ABS tubs and insulation bonding.



UPC Number	Extra Desc	Net Weight	Color	Case Qty	Units
00-051115-32201-3	Mini Cylinder	8.5 lbs.	Clear	1	EA
00-048011-61690-2	Large Cylinder	27.3 lbs.	Clear	1	EA
00-048011-61691-9	Intermediate Cylinder	139 lbs.	Clear	1	EA
00-048011-61692-6	Jumbo Cylinder	288 lbs.	Clear	1	EA

3M™ Scotch-Weld™ Cylinder Spray Adhesives, cont'd

3M™ Scotch-Weld™ Polystyrene Foam Insulation 78ET Cylinder Spray Adhesive

Aerosol adhesive designed to bond foam board insulation to exterior walls, interior walls and roof applications. Will not attack expanded or extruded polystyrene making it the ideal choice for insulation applications. It has a heat resistance of 140° F.



UPC Number	Extra Desc	Net Weight	Color	Case Qty	Units
00-048011-61693-3	Large Cylinder	29.3 lbs	Clear	1	EA
00-048011-61695-7	Large Cylinder	29.3 lbs	Green	1	EA
00-051115-25705-6	Intermediate Cylinder	139 lb	Green	1	EA
00-048011-61694-0	Jumbo Cylinder	298 lbs	Clear	1	EA
00-048011-61696-4	Jumbo Cylinder	298 lbs	Green	1	EA

3M™ Scotch-Weld™ FoamFast Non-Flammable 74NF

3M™ Scotch-Weld™ Non-Flammable FoamFast 74NF Cylinder Spray Adhesive is an ind'l grade spray adh. for foam bonding applications. It is fast tacking, forms soft bond lines that won't dimple and is designed to bond polyurethane foam to fabrics, foams, etc.

UPC Number	Extra Desc	Net Weight	Color	Case Qty	Units
00-051115-25798-8	Mini Cylinder	10.5 lbs	Clear	1	EA
00-021200-97160-0	Large Cylinder	30 lbs.	Clear	1	EA
00-021200-97161-7	Intermediate Cylinder	185.6 lbs	Clear	1	EA
00-021200-97162-4	Jumbo Cylinder	371.7 lb	Clear	1	EA

Concrete Repair, Adhesives

3M™ Concrete Repair DP600, Self Leveling

Used as a horizontal grade repair material and adhesive for numerous substrates such as concrete, ceramic, wood, metal and glass. Apply using standard caulk applicator.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-021200-56602-8	Syringe	50 mL	Gray	12	EA
00-021200-96596-8	Cartridge/2 Mix Nozzles	8.4 oz	Gray	6	CQ
00-021200-56599-1	Cartridge	12 oz	Gray	6	CQ

3M™ Concrete Repair DP600 Gray Non-Sag

Used as a rapid setting two-component polyurethane for building and construction, maintenance and repair, pool maintenance and repair, and manufacturing and assembly.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-021200-56606-6	Syringe	50 mL	Gray	12	EA
00-021200-56603-5	Cartridge	12 oz	Gray	6	CQ

Hot-Melt Systems, 3M™ Scotch-Weld™ Hot Melt Adhesives, High Temperature Hot Melt Adhesives

3M™ Scotch-Weld™ Hot Melt Adhesive 3762AE

Economical adhesive for general purpose applications. It features an excellent "hot tack" fast-setting adhesive for production speed. Designed to be used with 3M™ Hot Melt Adhesive Applicator AE II to make up an advanced hand-held system that helps improve productivity, lower cost and minimize waste.



UPC Number	Size	Color	Case Qty	Units
00-021200-82596-5	0.45"x12"	Tan	11	LB

3M™ Scotch-Weld™ Hot Melt Adhesive 3792AE

Long bonding range when dispensed at low melt temperature. Bond wood, P.O.P. displays, corrugated, furniture, upholstery, novelties and other lightweight materials.



UPC Number	Size	Color	Case Qty	Units
00-021200-82583-5	0.45"x12"	Clear	11	LB

Polyurethane and Hybrid Adhesive and Sealants, Adhesive Sealants and Sealants

3M™ Polyurethane Construction Sealant 525

3M™ Polyurethane Construction Sealant 525 is a single component polyurethane elastomeric sealant which cures under the effect of atmospheric humidity to form the most flexible and resilient joint with excellent adhesion on most materials. Elongation of over 600%, Shore A of 25, skin time of 2 hrs. 525 can be used for heavy and light precast panel expansion joints, wood, aluminum and PVC joinery seams, expansion joints, and clay and concrete roof tiles.



UPC Number	Size	Color	Case Qty	Units
00-048011-62823-3	1/10 gal	Gray	12	CQ

3M™ Polyurethane Multi-Purpose Adhesive 5010

3M™ Polyurethane Multi-Purpose Adhesive 5010 is a fast grabbing, translucent, 100% solids, one-part polyurethane-based moisture curing adhesive. Excellent water resistance for out door usage. Not recommended for bonding metal.



UPC Number	Product ID	Size	Color	Case Qty	Units
00-048011-62822-6	5010	1/10gal	Clear	12	CQ

Polyurethane and Hybrid Adhesive and Sealants, Adhesive Sealants and Sealants, cont'd

3M™ Polyurethane Construction Sealant 535

3M™ Polyurethane Construction Sealant 535 is a single component polyurethane elastomeric sealant which cures under the effect of atmospheric humidity to form a flexible and resilient joint with strong adhesion on most materials. Elongation of over 600%, Shore A of 40, skin time of 90 min. In traditional construction, 535 can be used for heavy and light precast panel expansion joints, wood, aluminum and PVC joinery seams, expansion joints, and clay and concrete roof tiles.



UPC Number	Size	Color	Case Qty	Units
00-048011-62826-4	1/10 gal	White	12	CQ
00-048011-62824-0	1/10 gal	Off-White	12	CQ
00-048011-62828-8	1/10 gal	Gray	12	CQ
00-048011-62827-1	600 mL	White	12	PH
00-048011-62825-7	600 mL	Off-White	12	PH
00-048011-62829-5	600 mL	Gray	12	PH

3M™ Polyurethane Adhesive Sealant 550 Fast Cure

3M™ Polyurethane Adhesive Sealant 550 FC is a fast curing polyurethane designed to cosmetically seal and bond in a variety of applications. It provides excellent adhesion to concrete, wood, aluminum, most lacquered metals, polyester, glass, and stone. Used extensively in the marine, and specialty vehicle markets, it performs both above and below the water line in marine applications.



UPC Number	Size	Color	Case Qty	Units
00-048011-62791-5	1/10 gal	White	12	CQ
00-048011-62792-2	400 mL	White	12	PH

3M™ Polyurethane Adhesive Sealant 560

3M™ Polyurethane Adhesive Sealants are one component, moisture curing products which form permanently elastic bonds.



UPC Number	Product ID	Size	Color	Case Qty	Units
00-021200-49056-9		10.5 fl oz	White	12	CQ
00-021200-41597-5	560	1/10 gal	Black	12	CQ
00-021200-41596-8	560	1/10 gal	Gray	12	CQ
00-021200-96282-0		400 mL	White	12	PH
00-021200-96279-0		400 mL	Black	12	PH
00-021200-96281-3	560	400 mL	Gray	12	PK

Polyurethane and Hybrid Adhesive and Sealants, Adhesive Sealants and Sealants, cont'd

3M™ Polyurethane Sealant 540

3M™ Polyurethane Sealants are one component, moisture curing products which form permanently elastic bonds.



UPC Number	Size	Color	Case Qty	Units
00-021200-41595-1	10.5 fl oz	Black	12	CQ
00-021200-41594-4	10.5 fl oz	Gray	12	CQ
00-021200-96276-9	400 mL	Black	12	PH
00-021200-96277-6	400 mL	Gray	12	PH
00-021200-56562-5	600 mL	Gray	12	PH

3M™ Hybrid Sealant 730

3M™ Hybrid Sealant 730 is a clear cosmetic sealant with excellent UV resistance.



UPC Number	Product ID	Size	Color	Case Qty	Units
00-051111-08026-9	730	310 mL	Clear	12	CQ
00-051111-08027-6	730	600 mL	Clear	20	PK

3M™ Crystal Clear Sealant 230

3M™ Crystal Clear Sealant 230 is an excellent solvent based thermoplastic cosmetic sealer.



UPC Number	Product ID	Size	Color	Case Qty	Units
00-051111-08028-3	230	310 mL	Clear	12	CQ
00-051111-08029-0	230	600 mL	Clear	20	PK

Applicators and Parts, Concrete Repair

3M™ Tapered Mixer Tip 04902

Applies a fine bead for use in bonding impact strips and sealing small seams as well as many other applications where a fine bead is required. Tip can be cut for desired bead thickness. Mix ratio: 1:1 or 2:1. 12 tips/bag.



UPC Number	Size	Case Qty	Units
00-051131-04902-4	12 oz	3	BG

Applicators and Parts, Cylinder Spray Adhesive Applicators and Parts

3M™ Scotch-Weld™ Cylinder Adhesive Hoses

3M™ Scotch-Weld™ Cylinder Adhesive 6-50 Foot Hose, 1 per case.



UPC Number	Size	Case Qty	Units
00-051115-25036-1	6'	1	EA
00-048011-61988-0	12'	1	EA
00-048011-61989-7	25'	1	EA
00-051115-25782-7	50'	1	EA

3M™ Scotch-Weld™ Cylinder Adhesive Applicator

3M™ Scotch-Weld™ Cylinder Adhesive Applicator - Standard Output - includes Cylinder Adhesive 9501 Spray Tip, 1 per case.



UPC Number	Product ID	Case Qty	Units
00-048011-61706-0	9501	1	EA

3M™ Scotch-Weld™ Cylinder Adhesive Hose Swivel

3M™ Scotch-Weld™ Cylinder Adhesive Hose Swivel, 1 per case.



UPC Number	Case Qty	Units
00-048011-61992-7	1	EA

Applicators and Parts, Cylinder Spray Adhesive Applicators and Parts, cont'd

3M™ Scotch-Weld™ Cylinder Adhesive T-Fitting

3M™ Scotch-Weld™ Cylinder Adhesive T-Fitting, 1 per case.



UPC Number	Case Qty	Units
00-048011-61987-3	1	EA

3M™ Scotch-Weld™ Cylinder Adhesive Spray Tips

3M™ Scotch-Weld™ Cylinder Adhesive Spray Tip, 1 per case.



UPC Number	Product ID	Case Qty	Units
00-048011-61990-3	4001	1	EA
00-048011-61991-0	6501	1	EA
00-048011-61707-7	9501	1	EA
00-048011-61993-4	QSS	1	EA

Applicators and Parts, Hot Melt/PUR Systems, Hot Melt Applicators

3M™ Scotch-Weld™ Hot Melt Adhesive Applicator AE II

Combines the best features of a high volume industrial system into a compact, self-contained applicator. Dispenses ½" x 12" size Scotch-Weld™ Hot Melt Adhesive AE sticks. Includes stand.



UPC Number	Extra Desc	Case Qty	Units
00-021200-96594-4	Electric with a trigger switch	5	EA

3M™ Scotch-Weld™ Hot Melt Applicator AE II LT

3M™ Scotch-Weld™ Hot Melt Applicator AE II LT

UPC Number	Product ID	Case Qty	Units
00-051115-25567-0	AEII	5	EA

Applicators and Parts, Two Part Curing

3M™ Scotch-Weld™ EPX Plus II Mixing Square Nozzle Gold

Features a unique design that allows the two parts of the adhesive to cascade through the nozzle with low pressure. Mix ratio: 1:1 or 2:1. 72 per box, 24 per bag, 12 per case.



UPC Number	Size	Case Qty	Units
00-021200-50008-4	5.3 mm	72	EA

Tapes, Masking Tapes

Scotch® Performance Masking Tape 233+

Highly conformable, provides the best adhesive transfer resistance, hugs curves, contours and provides outstanding paint lines. Goes on quickly and easily, sticks at a touch and stays put. Perfectly balanced to give outstanding masking results. Color: Green.



UPC Number	Size	Case Qty	Units
00-051131-26334-5	18mmx55m	48	RL
00-051131-26338-3	36mmx55m	16	RL
00-051131-26340-6	48mmx55m	12	RL

Body Repair, Fillers

Bondo® Lightweight Filler, 261

Bondo® Body Filler cures fast, shapes in minutes and is formulated to be a non-shrinking and permanently durable material for repairing metal, wood, steel, aluminum, fiberglass, and concrete.



UPC Number	Product ID	Size	Case Qty	Units
00-076308-00261-9	261	1 pt	12	CN

Industrial Cleaners

3M™ Citrus Base Cleaner

A liquid cleaner/degreaser that can be used to dissolve and remove dirt, grease, tar, and many non-curing type adhesives. It can also be used to degrease substrates for adhesive bonding in place of many chlorinated or petroleum-based solvents.



UPC Number	Net Weight	Case Qty	Units
00-021200-76394-6	24 fl oz	12	CN

Lubricants

3M™ Silicone Lubricant

Dries fast to eliminate squeaks, prevent sticking, and seal out moisture, protecting against rust and corrosion. Preserves plastic, rubber and leather. It prolongs machine and cutting tool life by helping to prevent glue, wax, ink and paint buildup. Does 101 tasks. The silicone polymer is effective between -28°F and 350°F. Adheres to parts exceptionally well, reducing reapplication. Ingredients FDA listed. Comes with a handy snorkel tube for small, hard-to-reach areas.



UPC Number	Size	Color	Case Qty	Units
00-021200-85822-2	24 fl oz	Clear	12	CN

Fastening Products, Cable Ties

3M™ Heavy Duty Cable Tie, 06229

Secure wire bundles and harnesses components quickly, without slipping. The self-locking head with heavy double teeth on the one-piece lock mechanism assures the 3M reliability you've come to expect. Will meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C).



UPC Number	Product ID	Size	Color	Case Qty	Units
00-054007-06206-6	06206	8"	Black	100	EA
00-054007-06229-5	06229	8"	Natural	100	EA

3M™ Miniature Cable Tie 06200

Secure wire bundles, harnesses and components quickly, without slipping. The self-locking head with heavy double teeth on the one-piece lock mechanism assures the 3M reliability you've come to expect. Will meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C).



UPC Number	Size	Color	Case Qty	Units
00-054007-06200-4	0.1"x4"x0.04"	Black	100	EA

3M™ Weather Resistant Cable Ties - Extra Heavy Duty

Designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Molded of one-piece nylon for durability with the locking head designed with a double tooth pawl for maximum security. Accommodates bundle diameters from 1/8" to 4" and has a tensile strength of 175 lb.



UPC Number	Size	Color	Case Qty	Units
00-051128-53228-7	24"	Black	100	EA
00-051128-53227-0	24"	Natural	100	EA

3M™ Weather Resistant Cable Ties - Heavy Duty

Designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Molded of one-piece nylon for durability with the locking head designed with a double tooth pawl for maximum security. Accommodates bundle diameters from 1/8" to 4" and has a tensile strength of 120 lb.



UPC Number	Size	Color	Case Qty	Units
00-054007-06207-3	15"	Black	100	EA
00-054007-06240-0	15"	Natural	100	EA

3M™ Weather Resistant Cable Ties - Heavy Duty Mounting

Designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Molded of one-piece nylon for durability with the locking head designed with a double tooth pawl for maximum security. Accommodates bundle diameters from 1/8" to 4" and has a tensile strength of 120 lb.



UPC Number	Size	Color	Case Qty	Units
00-054007-06243-1	15"	Natural	50	EA

Fastening Products, Cable Ties, cont'd

3M™ Weather Resistant Cable Ties - Intermediate

Designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Molded of one-piece nylon for durability with the locking head designed with a double tooth pawl for maximum security. Accommodates bundle diameters from 1/8" to 4" and has a tensile strength of 40 lb.



UPC Number	Size	Color	Case Qty	Units
00-054007-06201-1	0.14"x6"	Black	100	EA
00-054007-06225-7	0.14"x6"	Natural	100	EA

3M™ Weather Resistant Cable Ties - Mini

Designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Molded of one-piece nylon for durability with the locking head designed with a double tooth pawl for maximum security. Accommodates bundle diameters from 1/8" to 4" and has a tensile strength of 18 lb.



UPC Number	Size	Color	Case Qty	Units
00-051128-53172-3	0.1"x8"	Natural	100	EA

3M™ Weather Resistant Cable Ties - Standard

Designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Molded of one-piece nylon for durability with the locking head designed with a double tooth pawl for maximum security. Accommodates bundle diameters from 1/8" to 4" and has a tensile strength of 50 lb.



UPC Number	Size	Color	Case Qty	Units
00-054007-06202-8	0.18"x8"	Black	100	EA
00-054007-06226-4	0.18"x8"	Natural	100	EA
00-054007-06203-5	0.18"x11"	Black	100	EA
00-054007-06227-1	0.18"x11"	Natural	100	EA
00-054007-06204-2	0.18"x15"	Black	100	EA
00-054007-06228-8	0.19"x15"	Natural	100	EA

3M™ Weather Resistant Cable Ties - Standard Mounting

Designed to meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Molded of one-piece nylon for durability with the locking head designed with a double tooth pawl for maximum security. Accommodates bundle diameters from 1/8" to 4" and has a tensile strength of 50 lb.



UPC Number	Size	Color	Case Qty	Units
00-054007-06232-5	0.18"x8"	Natural	100	EA
00-054007-06205-9	0.18"x8"	Black	100	EA

Fastening Products, Assortment Packs

3M™ Cable Tie Assortment Pack 06220

Secure wire bundles and harness components quickly, without slipping. Self-locking head with heavy double teeth on the one-piece lock mechanism assures the 3M reliability you've come to expect. Will meet a wide range of temperatures from -40°F (-40°C) to 185°F (85°C). Cable tie assortment pack contains 100 of the most commonly used ties. Contains three sizes, four lengths and two colors.



UPC Number	Extra Desc	Case Qty	Units
00-054007-06220-2	100 per pack	10	PH

Lubricants and Coatings, Coatings and Protectants

3M™ Scotchkote™ Electrical Coating

Brush onto vinyl tape for an extra protective layer of flexible material. Fast drying sealant resists oil, moisture and corrosion. Works great on electrical applications when a little extra protection is needed.



UPC Number	Size	Case Qty	Units
00-054007-14853-1	15 oz	10	CN

Tapes, Vinyl Electrical Tapes

3M™ Tartan™ General Use Vinyl Electrical Insulating Tape 1710

General purpose electrical insulating tape. Economical and durable with excellent resistance to a wide range of contaminants and weather conditions.



UPC Number	Size	Case Qty	Units
00-054007-49656-4	¾"x60'	100	RL

3M™ Temflex™ General Use Vinyl Electrical Tape 1700

The economical solution for less demanding indoor jobs. On a 1½" core, this black, 7 mil economy-grade vinyl tape serves as a general purpose tape. UL listed. CSA approved.



UPC Number	Size	Case Qty	Units
00-054007-69764-0	¾"x60'	100	RL
00-054007-49700-4	¾"x36yds	100	RL
00-054007-43962-2	1"x66'	99	RL

Tapes, Vinyl Electrical Tapes, cont'd

Scotch® Premium Vinyl Electrical Tape Super 88

Scotch® Super 88 Premium Vinyl Electrical Tape offers better mechanical/abrasion resistance, and is thicker for quicker buildup. For professional use, this 8.5 mil tape combines the flexibility of a PVC backing with excellent electrical insulating properties to provide primary electrical insulation for splices up to 600V and protective jacketing. UL Listed and CSA Certified. Excellent resistance to UV rays, abrasion, moisture, copper corrosion, alkalis and acids. Excellent all-weather performance in cold to 0°F (-18°C) or hot to 221°F (105°C).



UPC Number	Size	Case Qty	Units
00-054007-10307-3	¾"x44'	100	RL
00-054007-06143-4	¾"x66'	100	RL
00-054007-10323-3	¾"x36yds	48	RL
00-054007-10331-8	1"x36yds	48	RL
00-054007-10364-6	1½"x44'	100	RL
00-054007-10349-3	1½"x36yds	12	RL
00-054007-10356-1	2"x36yds	12	RL

Scotch® Vinyl Electrical Tape 35

Identify wires, leads, splices and terminations. Abrasion and weather resistant 7 mil tape. Excellent mechanical and electrical insulation properties. Wraps smoothly and holds tightly over a wide range of temperatures. Mark safety areas. UL listed. CSA approved.



UPC Number	Size	Color	Case Qty	Units
00-054007-10240-3	½"x20'	Blue	100	RL
00-054007-10299-1	½"x20'	Brown	100	RL
00-054007-10281-6	½"x20'	Gray	100	RL
00-054007-10265-6	½"x20'	Green	100	RL
00-054007-10273-1	½"x20'	Orange	100	RL
00-054007-10224-3	½"x20'	Red	100	RL
00-054007-10232-8	½"x20'	White	100	RL
00-054007-10257-1	½"x20'	Yellow	100	RL
00-054007-10836-8	¾"x66'	Blue	100	RL
00-054007-10885-6	¾"x66'	Brown	100	RL
00-054007-00072-3	¾"x66'	Gray	100	RL
00-054007-10851-1	¾"x66'	Green	100	RL
00-054007-10869-6	¾"x66'	Orange	100	RL
00-054007-10810-8	¾"x66'	Red	100	RL
00-054007-11271-6	¾"x66'	Violet	100	RL
00-054007-10828-3	¾"x66'	White	100	RL
00-054007-10844-3	¾"x66'	Yellow	100	RL

Tapes, Vinyl Electrical Tapes, cont'd

Scotch® Super 33+™ Vinyl Electric Tape

Scotch® Super 33+™ Vinyl Electric Tape, a black, 7 mil tape, on a 1" core, combines the flexibility of a PVC backing with excellent electrical insulating properties to provide primary electrical insulation for splices up to 600V. Abrasion, corrosion, and UV-resistant, it makes an excellent protective jacketing for high-voltage cables and wire harnessing. UL Listed and CSA Certified, it resists alkalis and acids, and is flame-retardant. Excellent all-weather performance in cold to 0°F (-18°C) or hot to 221°F (105°C).



UPC Number	Size	Case Qty	Units
00-054007-06130-4	¾"x20'	100	RL
00-054007-10075-1	¾"x44'	100	RL
00-054007-06133-5	¾"x52'	100	RL
00-054007-06132-8	¾"x66'	20	RL
00-054007-00053-2	¾"x36yds	48	RL
00-054007-08949-0	1"x36yds	48	RL
00-054007-50236-4	1½"x36yds	50	RL

Tapes, Insulating and Splicing Tapes

Scotch® Linerless Rubber Splicing Tape 130C

Scotch® Linerless Rubber Splicing Tape 130C is high voltage, insulating, thermally conductive and self-bonding. Typical applications include primary electrical insulation for splicing all solid dielectric cables through 69kV.




UPC Number	Size	Case Qty	Units
00-054007-41717-0	¾"x30'	24	RL
00-054007-41751-4	1"x10'	24	RL
00-054007-41753-8	1"x30'	24	RL
00-054007-41718-7	1½"x30'	12	RL
00-054007-41754-5	2"x30'	12	RL

Tapes, Corrosion Protection Tapes

3M™ Scotchrap™ All-Weather Corrosion Protection Tape 50

This 10 mil polyvinyl chloride (PVC) tape with a high tack adhesive provides a corrosion and impact resistant seal for all-weather protection of metal piping systems above and below ground.



UPC Number	Size	Case Qty	Units
00-054007-11149-8	1"x100'	10	RL
00-054007-00014-3	1"x100'	48	RL
00-054007-11156-6	2"x100'	10	RL
00-054007-10638-8	2"x100'	24	RL
00-054007-09468-5	3"x100'	16	RL
00-054007-10646-3	4"x100'	12	RL
00-054007-15785-4	6"x100'	8	RL

Wire Marking and Identifying Products

3M™ ScotchCode™ STD Wire Marker Tape Dispenser

½ The 3M™ ScotchCode™ Tape Dispenser STD is a compact, carry-along dispenser with ten refillable compartments that hold 8' rolls of non-smear polyester tape. Dispenser only. Case quantity 25. Used for marking binder groups, wire or cable, the tapes' high tack, acrylic adhesive resists solvents, oil and water, and adheres firmly to insulation surfaces. An end-loop hooks the dispenser easily to a tool pouch or belt.



UPC Number	Product ID	Case Qty	Units
00-054007-12172-5	STD	25	EA

3M™ Easy Clean System

3M™ Easy Trap Flip Holder

Holder works with standard threaded U.S. broom handle. Easy to flip holder clamps onto the 3M™ Easy Trap Duster and allows the customer to easily use both sides of the cloth without bending over. The “A” shape allows the user to plow large debris without it tumbling over the holder.



UPC Number	Size	Case Qty	Units
50-048011-59247-8	23"	6	EA

3M™ Easy II Holder

Holder allows use of both sides of the duster without need to touch.



UPC Number	Size	Case Qty	Units
50-048011-55934-1	17"	6	EA
50-048011-55936-5	35"	4	EA

3M™ Easy Trap Duster

For dust, dirt and sand removal.



UPC Number	Extra Desc	Size	Case Qty	Units
50-048011-59032-0	60 Shts/Bx	5"x6"x30'	8	BX
00-048011-55655-0	500 Shts/Bx	5"x6"x125'	2	BX
50-048011-59152-5	60 Shts/Bx	8"x6"x30'	8	BX
00-048011-55654-3	250 Sheets	8"x6"x125'	1	BX

3M™ Easy Scrub Express Flat Mop Tool

Flat mop tool used to apply solution to the floor with easy-to-use dispense button.



UPC Number	Extra Desc	Size	Case Qty	Units
00-048011-59051-6	Adjustable tool, 38" - 59½"	16"	1	EA

3M™ Easy Clean System, cont'd

3M™ Easy Scrub Flat Mop

Flat mops for 3M™ Easy Scrub Flat Mop System.



UPC Number	Size	Case Qty	Units
00-048011-55594-2	18"	10	BG

3M™ Easy Shine Fill Station Kit

5 reusable pouches and 1 fill system for use with the 3M™ Easy Shine System. Allows you to easily fill 3M™ Easy Shine Reusable Pouches directly from containers such as a 2.5 gallon bottle. Comes with blank labels and 5 pouches.



UPC Number	Product ID	Case Qty	Units
00-048011-59175-9	55441	1	KT

3M™ Easy Shine Reusable Pouch

Empty reusable pouches to hold most conventional floor finishes and cleaning chemicals. Designed for use with 3M™ Easy Shine Applicator. Comes with blank labels.



UPC Number	Case Qty	Units
00-048011-55440-2	5	EA

3M™ Easy Scrub Express Bottles

12 empty bottles per bag, 6 bags per case. Squeezeable bottle holds 11.5 oz. of solution.



UPC Number	Extra Desc	Size	Case Qty	Units
50-048011-59056-6	12 empty bottles per bag	11.5 oz	6	BG

3M™ Easy Scrub Express Caddy

6 caddies per case, each labeled and in bag.



UPC Number	Case Qty	Units
50-048011-59054-2	6	EA

3M™ Easy Clean System, cont'd

3M™ Easy Scrub Express Starter Kit - FS

Includes 3M™ Easy Scrub Express Flat Mop Tool, 12 3M™ Easy Scrub Express Bottles, 1 3M™ Easy Scrub Express Caddy, 10 18" 3M™ Flat Mops, 1/2 gallon 3M™ Easy Scrub Pour Jug, Training DVD, 3 Blank Sheets Label Stock and Label CD.

UPC Number	Product ID	Product	Extra Desc	Case Qty	Units
00-048011-59196-4	59194	3M™ Easy Scrub Express Starter Kit - FS	1 tool, 1 caddy, 12 bottles, 10 flat mops - 18", 1 half gallon pour jug, training DVD, and bottle labels.	1	CA



Cleaning Chemicals, General and Specialty Cleaners

3M™ Sharpshooter™ Extra Strength No-Rinse Mark Remover

No-rinse formula cleaner for quick, easy removal of soil and grease. This powerful cleaner penetrates and loosens buildup quickly. Convenient and effective.



UPC Number	Size	Case Qty	Units
50-048011-16861-1	1 qt	12	EA

Cleaning Chemicals, Degreasers

3M™ Heavy Duty Degreaser Concentrate

A powerful degreaser concentrate developed for extremely tough jobs. Ideal for cleaning machinery, engines, factory floors, tools, trucks and metal parts. Quickly penetrates grease, oil and a variety of soils.




UPC Number	Size	Case Qty	Units
50-048011-34782-5	1 gal	4	EA

Floor Care Products, Floor Pads

3M™ Aqua Burnish Pad 3100

The problem solver for soft finishes. Produces a brilliant gloss. Exceptional durability and life. Color: Aqua



UPC Number	Size	Case Qty	Units
50-048011-08753-0	20"	5	PD

Floor Care Products, Floor Pads, cont'd

3M™ Black Stripper Pad 7200


The industry standard against which all other stripping pads are compared. Maintains consistent high performance throughout the life of the pad. Color: Black.



UPC Number	Size	Case Qty	Units
50-048011-08379-2	17"	5	PD
50-048011-08381-5	19"	5	PD
50-048011-08382-2	20"	5	PD

3M™ Blue Cleaner Pad 5300

For heavy-duty scrubbing prior to recoating. Can also be used for heavy-duty spray cleaning or foam scrubbing. Removes dirt, spills, and scuffs, leaving a clean surface ready for recoating. Color: Blue.



UPC Number	Size	Case Qty	Units
50-048011-08410-2	17"	5	PD
50-048011-08412-6	19"	5	PD
50-048011-08413-3	20"	5	PD

3M™ Eraser™ Burnish Pad 3600

Removes black marks in fewer passes than other pads and retains excellent gloss and image clarity. Excellent durability; minimal finish removal.



UPC Number	Size	Case Qty	Units
50-048011-25858-9	20"	5	PD

Floor Care Products, Floor Pads, cont'd

3M™ High Productivity Stripper Pad 7300

Quickly and thoroughly removes old floor finish, dirt and buildup. Unique, open web construction allows stripping solution to flow through pad to rinse out dirt and reduce loading for increased pad-to-floor contact and more efficient stripping.



UPC Number	Size	Case Qty	Units
50-048011-08275-7	17"	5	PD
50-048011-08277-1	19"	5	PD
50-048011-08278-8	20"	5	PD

3M™ Natural Blend Tan Pad 3500

Natural hair and synthetic fiber pad designed for best mark removal. For use on harder finishes or in high traffic areas. Removes marks and scratches while it polishes. Color: Tan.



UPC Number	Size	Case Qty	Units
50-048011-19008-7	20"	5	PD

3M™ Natural Blend White Pad 3300

Natural hair and synthetic fiber pad designed for best gloss. Provides excellent results on a wide variety of floor finishes and traffic conditions. Color: White.



UPC Number	Size	Case Qty	Units
50-048011-18210-5	20"	5	PD

3M™ Red Buffer Pad 5100

Specially designed for spray buffing. Cleans when damp; buffs when dry. Quickly cleans and removes scuff marks and enhances floor appearance. Color: Red.



UPC Number	Size	Case Qty	Units
50-048011-08392-1	17"	5	PD
50-048011-08394-5	19"	5	PD
50-048011-08395-2	20"	5	PD

Floor Care Products, Floor Pads, cont'd

3M™ Super Polish Pad 4100


For buffing very soft finishes or for polishing soft waxes on wood floors. Removes scuffs and black heel marks and enhances floor appearance. Color: White



UPC Number	Size	Case Qty	Units
50-048011-08481-2	17"	5	PD
50-048011-08483-6	19"	5	PD
50-048011-08484-3	20"	5	PD

3M™ Tan Burnish Pad 3400

For use with ultra high speed machines (1500-3000 RPM) on harder finishes or in high traffic areas. Produces brilliant wet-look in gloss. Designed for exceptional durability, life and best mark removal. Color: Tan.



UPC Number	Size	Case Qty	Units
50-048011-05606-2	20"	5	PD

3M™ TopLine Speed Burnish Pad 3200

Restores gloss to dull floors in a single pass. Optimizes ultra high speed floor care on a wide variety of floor finishes. Minimizes finish removal. Color: White.



UPC Number	Size	Case Qty	Units
50-048011-18066-8	20"	5	PD

Scotch-Brite™ Surface Preparation Pad

Prepare hardwood floors for finish applications by diffusing scratches, conforming to uneven surfaces, and scuffing the surface to create optimal bonding of finish. Designed to leave less hazing and scratching than used sanding screens. Not intended for use on bare wood floors.



UPC Number	Size	Case Qty	Units
00-048011-29592-3	20"	10	PD

Scotch-Brite™ Purple Diamond Floor Pad Plus

Diamond coated floor pads for cleaning and polishing marble, terrazzo, slate, and polished concrete flooring.



UPC Number	Size	Color	Case Qty	Units
53-134375-48065-4	20"	Purple	5	PD

Floor Care Products, Floor Pads, cont'd

Scotch-Brite™ Sienna Diamond Floor Pad Plus

Diamond-coated floor pads for cleaning and conditioning worn and dull marble, terrazzo, slate and polished concrete flooring. When floor appearance reaches a medium shine, the Scotch-Brite™ Purple Diamond Floor Pad Plus can be used to further enhance the floor appearance.



UPC Number	Size	Color	Case Qty	Units
54-046719-10027-4	20"	Sienna	5	PD

Floor Care Products, Marble Floor Care Products

Scotchgard™ Stone Floor Protector

High performance floor surface hardener and protective clear coat for concrete, marble, terrazzo, and other porous stone surfaces. Produces a glossy, very hard, dust repellent, chemical-resistant and watertight surface.



UPC Number	Case Qty	Units
50-048011-59379-6	2	BG

Floor Care Products, Hard Floor Maintenance Products, Floor Cleaners and Maintenance Products

3M™ All Purpose Cleaner Concentrate

For daily cleaning of medium-soiled floors. Also applicable for cleaning walls, counters, desks and painted surfaces. Dilution rate: 1:5 – 1:100



UPC Number	Size	Case Qty	Units
50-048011-34747-4	1 gal	4	EA

Sponges & Pads, Scrubbing Sponges

Scotch-Brite™ Medium Duty Scrubbing Sponge No. 74

Dual action green cleaning pad/yellow sponge works well on walls, tables, fixtures, countertops and floors.



UPC Number	Size	Case Qty	Units
50-048011-20688-7	6.1"x3.6"x0.7"	20	EA

Sponges & Pads, Light-Duty Hand Pads

Scotch-Brite™ Light Duty Cleansing Sponge No. 63

Combination white cleansing pad and yellow sponge will not scratch or mar most surfaces. Ideal for stainless steel, glass, ceramic, fine china, porcelain, Teflon™, Silverstone™ and Formica™.




UPC Number	Size	Case Qty	Units
50-048011-08251-1	6.1"x3.6"x0.7"	20	EA

Sponges & Pads, Medium-Duty Hand Pads

Scotch-Brite™ General Purpose Scouring Pad No. 96

Synthetic scouring pad is excellent for common cleaning jobs. Performs well on kitchen equipment, walls, railings, floors, desks, stairways, counters and maintenance equipment.



UPC Number	Product ID	Size	Color	Case Qty	Units
50-048011-08293-1	96	6"x9"	Green	60	PD

Sponges & Pads, 3M™ and Scotch-Brite™ Sponges

3M™ Commercial Sponge C31

A long-lasting industrial product sized for big jobs.



UPC Number	Extra Desc	Size	Case Qty	Units
50-053200-07449-9	Large	6"x4¼"x1-5/8"	24	EA

3M™ Extra Large Commercial Sponge C41

Institutional-size for tough jobs that require super absorbency and strength. For longest wear, rinse thoroughly after every use, especially when using with chlorinated cleaners.



UPC Number	Extra Desc	Size	Case Qty	Units
50-053200-07456-7	Extra Large	7.5"x4.375"x2.0625"	24	EA

Fire Barrier Caulks & Sealants

3M™ Fire Barrier Sealant CP 25WB+ Caulk

Our premium firestop sealant for use in up to 4-hour tested & listed systems. Water-based for easy clean-up. Intumescent and endothermic.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-051115-11638-4	Cartridge	10.1 oz	Red-Brown	12	CQ
00-051115-11642-1	Sausage Pack	20 oz	Red-Brown	10	EA
00-051115-11641-4	Cartridge	27 oz	Red-Brown	6	CQ
00-051115-11639-1	Pail	2 gal	Red-Brown	1	PA
00-051115-11640-7	Pail	5 gal	Red-Brown	1	PA

3M™ Fire Barrier Sealant IC 15WB+ Caulk

General purpose firestop sealant for up to 2-hour rated tested & listed systems.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-051115-16557-3	Cartridge	10.1 oz	Yellow	12	CQ
00-051115-16560-3	Sausage Pack	20 oz	Yellow	10	EA
00-051115-16559-7	Cartridge	27 oz	Yellow	6	CQ
00-051115-16558-0	Pail	4.5 gal	Yellow	1	PA

3M™ Fire Barrier 2000+ and 2000 Silicone Sealants

Premium silicone firestop sealant. Superior adhesion and movement capabilities. Weather-resistant.



UPC Number	Product ID	Extra Desc	Size	Case Qty	Units
00-051115-11558-5	2000+	Cartridge	10.3 oz	12	CQ
00-051115-11556-1	2000	Cartridge	10.3 oz	12	CQ
50-051115-11559-7	2000+	Pail	4.5 gal	1	PA

3M™ Fire Barrier Water Tight 3000 WT Silicone Sealants

Achieve the benefits of a firestop and water tight seal in one easy-to-use product! This intumescent silicone also meets the new UL Water Leakage Test, W Rating – Class 1 requirements for systems tested and listed in accordance with ANSI/UL 1479. Provides up to a 4-hour fire rating in tested and listed systems.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-051115-18788-9	Sausage Pack	20 oz	Gray	12	EA
50-051115-16594-3	Pail	4.5 gal	Gray	1	PA

Fire Barrier Caulks & Sealants, cont'd

3M™ Fire Barrier Water Tight Silicone Sealant 1000 NS

A non-slump silicone sealant ready-to-use, one component, silicone elastomer used to fire stop openings and penetrations through floor slabs, walls and other fire-related building partition and assemblies.



UPC Number	Extra Desc	Size	Case Qty	Units
00-051115-11535-6	Cartridge	10.1 oz	12	CQ
00-051115-18790-2	Sausage Pack	20 oz.	12	EA
50-051115-11537-5	Pail	4.5 gal	1	PA

3M™ Fire Barrier Water Tight Silicone Sealant 1003 SL

A self-leveling silicone sealant. Ready-to-use, one component, silicone elastomer used to firestop openings and penetrations through floor slabs, walls and other fire-related building partitions and assemblies.



UPC Number	Extra Desc	Size	Case Qty	Units
00-051115-11538-7	Tube	10.1 oz	12	CQ
00-051115-18789-6	Sausage Pack	20 oz.	12	EA
50-051115-11540-5	Pail	4.5 gal	1	PA

3M™ Fire Block Sealant FB136

Ideal for use in residential (single, two-family and combustible) construction in areas that require sealing to maintain the integrity of a fireblock. Adheres to virtually any material, including wood, masonry, metal and plastic.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-051115-16591-7	Cartridge	10.1 oz	Gray	12	CQ

3M™ Fire Barrier Sealant FD 150+

Acrylic Latex caulk used to firestop metal pipes and cables through concrete or gypsum and for use in dynamic head-of-wall systems.

UPC Number	Product ID	Extra Desc	Size	Color	Case Qty	Units
00-051115-18812-1	150+		10.1 fl oz	Red	12	CQ
00-051115-18810-7	150+		20 fl oz	Red	12	PK
00-051115-18811-4	150+		28 fl oz	Red	6	CQ
00-051115-18813-8	150+		4.5 gal	Red	1	PA
00-051115-16564-1		Cartridge	10.1 oz	Limestone	12	TB
00-051115-11574-5		Cartridge	10.1 oz	Blue	12	TB
00-051115-16567-2		Sausage Pack	20 oz	Limestone	12	EA
00-051115-11634-6		Sausage Pack	20 oz	Blue	12	EA
00-051115-11602-5		Cartridge	28 oz	Blue	6	CQ
00-051115-16565-8		Pail	4.5 gal	Limestone	1	PA

Fire Barrier Caulks & Sealants, cont'd

3M™ Fire Barrier Sealant FD 150+ (cont.)

UPC Number	Product ID	Extra Desc	Size	Color	Case Qty	Units
50-051115-11575-7		Pail	4.5 gal	Blue	1	PA
00-051115-18812-1		Cartridge	10.1 oz	Red	12	CQ
00-051115-18810-7		Sausage Pack	20 oz	Red	12	PK
00-051115-18811-4		Cartridge	28 oz	Red	6	CQ
00-051115-18813-8		Pail	4.5 gal	Red	1	PA

Packing Material

3M™ Fire Barrier Packing Material PM4

Introducing the first in an integrated combination of convenience, accessibility and performance for a firestop packing material. It is easy to store, transport and carry and less irritating to skin, eyes and lungs. Also offers convenient hand-tear dispensing and fast and easy packing of penetrations (no crumbling).



UPC Number	Size	Case Qty	Units
00-051115-18764-3	4"x20½"	5	RL

Devices

3M™ Fire Barrier Ultra Plastic Pipe Device

A one-piece metal collar assembly encasing 3M's heat expanding 3M™ Interam™ Ultra GS intumescent material. Used to firestop penetrating items such as plastic pipe and cables in new and retrofit installations. Provides up to a 3-hour fire rating in tested and listed systems.



UPC Number	Product ID	Size	Case Qty	Units
00-051115-08378-5	UPPD	1½"	10	EA
00-051115-08379-2	UPPD	2"	10	EA
00-051115-08380-8	UPPD	3"	10	EA
00-051115-08381-5	UPPD	4"	10	EA

3M™ Ultra Fast Anchors 16"

16" Anchors used to install PPD's in up to 12" concrete or 12" gypsum walls. Install an Ultra PPD in about one minute using Ultra Fast Anchors.



UPC Number	Size	Case Qty	Units
00-051115-11530-1	16"	400	EA

Devices, cont'd

3M™ Fire Barrier Cast-In Device for Metal Pipes

Height-adjustable 3M™ Fire Barrier Cast-In Devices are installed before the concrete is poured and attached directly to the wood forms. After the concrete cures, the penetrating item is passed through the cast-in device. Provides up to a 3-hour fire rating in tested and listed systems.



UPC Number	Product ID	Size	Case Qty	Units
00-051115-16540-5	2MCID	2"	12	EA
00-051115-16541-2	3MCID	3"	12	EA
00-051115-16542-9	4MCID	4"	6	EA
00-051115-16543-6	6MCID	6"	2	EA

3M™ Fire Barrier Cast-In Device for Plastic Pipes

Height-adjustable 3M™ Fire Barrier Cast-In Devices are installed before the concrete is poured and attached directly to the wood forms. After the concrete cures, the penetrating item is passed through the cast-in device. Provides up to a 3-hour fire rating in tested and listed systems.



UPC Number	Product ID	Size	Case Qty	Units
00-051115-16536-8	2PCIP	2"	12	EA
00-051115-16537-5	3PCID	3"	12	EA
00-051115-16538-2	4PCID	4"	6	EA
00-051115-16539-9	6PCID	6"	2	EA

3M™ Fire Barrier Cast-In Height Adaptor

Devices that adjust to any height. One-step firestopping, no need to core drill holes and firestop later. Up to three hour UL listed systems. Devices for both metal and plastic pipes. Height adaptor snaps onto MCID or PCID and extends devices height from 8" to 12".



UPC Number	Size	Case Qty	Units
00-051115-16548-1	2"	12	EA
00-051115-16549-8	3"	12	EA
00-051115-16550-4	4"	12	EA
00-051115-16551-1	6"	12	EA

Devices, cont'd

3M™ Fire Barrier Cast-In Metal Deck Adaptor

Metal Deck Adaptor for a 2" Cast-In Device to be attached to a fluted metal deck.



UPC Number	Size	Case Qty	Units
00-051115-16544-3	2"	12	EA
00-051115-16545-0	3"	12	EA
00-051115-16546-7	4"	12	EA
00-051115-16547-4	6"	12	EA

3M™ Fire Barrier Cast-In Tub Box Assembly

The Cast-In-Tub Adaptor fastens to Cast-In-Device and creates a void for plumbing access when installing the plumbing for a bath tub. The adaptor contains a 2" or 3" foam insert, thus creating a void on the top surface of the concrete slab, for bath tub overflow plumbing.



UPC Number	Product ID	Extra Desc	Case Qty	Units
00-051115-16552-8	2TB	2" Foam	6	EA
50-051115-16586-8	3TB	3" Foam	6	EA

3M™ Fire Barrier Pass-Through Devices

A complete solution for preventing the spread of fire and smoke where electrical, data, communications cable or pipes penetrate floors or walls. Hinged design is perfect for high traffic areas where cables are constantly being added and removed.



UPC Number	Extra Desc	Size	Case Qty	Units
00-051115-18773-5	Round	2"	6	EA
00-051115-16598-6	Round	4"	6	EA
00-051115-16596-2	Square	2½"	6	EA
00-051115-16597-9	Square	4"	6	EA

3M™ Fire Barrier Pass-Through Mounting Brackets

3M™ Fire Barrier Pass-Through Mounting Brackets are used in conjunction with 3M™ Fire Barrier Pass-Through Devices. These brackets provide additional support to the device. Simply secure the optional stud bracket to the pass-through assembly or use the sixplex mounting brackets to provide additional support when installing three devices stacked together.



UPC Number	Product ID	Extra Desc	Size	Case Qty	Units
00-051115-18774-2	PT2RMB	Round, Single Mount (Pair)	2" Mounting Bracket	24	PR
00-051115-18754-4	PT4RMB	Round, Single Mount (Pair)	4" Mounting Bracket	24	PR
00-051115-18750-6	PT2.5SMB	Square, Single Mount (Pair)	2½" Mounting Bracket	24	PR
00-051115-18752-0	PT4SMB	Square, Single Mount (Pair)	4" Mounting Bracket	24	PR
00-051115-18753-7	PT4SSB	Square, Triple Mount (Pair)	4" Mounting Bracket	24	PR
00-051115-18777-3	PT4SSMB	Square, Sixplex Mount (Pair)	4" Mounting Bracket	6	PR
00-051115-18780-3	PT4SSB	Square	4" Stud Bracket	24	EA

Devices, cont'd

3M™ Fire Barrier Ultra RC Pack

Economical firestop device. Ultra RC Pack consists of a one piece metal collar assembly encasing 3M's heat expanding 3M™ Interam Ultra GS intumescent material. Up to 2 hour UL tests. Good with most types of plastic pipe.



UPC Number	Size	Case Qty	Units
00-051115-16504-7	2"	10	EA
00-051115-16505-4	3"	10	EA
00-051115-16506-1	4"	10	EA

3M™ Fire Barrier Pass-Through Foam Plugs


Replacement foam plugs for the 4 inch round Pass-Through device.

UPC Number	Size	Case Qty	Units
00-051115-18791-9	4"	24	EA
00-051115-18792-6	2½"	24	EA
00-051115-18793-3	2"	24	EA
00-051115-18794-0	4"	24	EA

Fire Barrier Collars

3M™ Fire Barrier Restricting Collar RC-1

Works in conjunction with 3M™ FS-195+ Wrap/Strip or 3M™ Interam™ Ultra GS. No waste, roll out and cut as much as you need. Required for firestopping plastic pipes larger than 4" in diameter.



UPC Number	Size	Case Qty	Units
00-054007-08324-5	2"x25'	1	EA

Fire Barrier Foams

3M™ Fire Barrier 2001 Silicone RTV Foam

Two-part silicone foam. No ampacity derating of cables. Ideal for large openings.



UPC Number	Extra Desc	Size	Case Qty	Units
00-051115-07502-5	Part A/B	7 oz	12	KT
00-051115-08370-9	Part A	8 lb	1	EA
00-051115-08371-6	Part B	8 lb	1	EA
00-051115-07551-3	Part B	40 lb	1	EA

Fire Barrier Mortars

3M™ Fire Barrier Mortar

This lightweight cementitious firestop with excellent adhesion bonds to concrete, metals, wood, plastic and cable jacketing. Superior chemical resistance. Bonds to itself. Ideal for large floor openings.



UPC Number	Extra Desc	Size	Case Qty	Units
00-051115-07559-9	Bag	44 lb	1	BG

Fire Barrier Pillows & Putties

3M™ Fire Barrier Pillows

Highly intumescent. Slides easily into and out of the opening. Just stack into place, no tools required.



UPC Number	Product ID	Size	Case Qty	Units
00-051115-16530-6	FB249	2"x4"x9"	24	EA
00-051115-16531-3	FB269	2"x6"x9"	16	EA
00-051115-16532-0	FB369	3"x6"x9"	20	EA

3M™ Fire Barrier Self-Locking Pillows

Self-contained, highly intumescent pillow creates a firestop for a wide variety of openings, such as cable trays and conduit, in fire-rated construction. Unique interlocking strips increase versatility and allow the proper combination of sizes to fit securely and conform to most openings.



UPC Number	Product ID	Size	Case Qty	Units
50-051115-16578-3	FB249SL	2"x4"x9"	24	EA
50-051115-16579-0	FB269SL	2"x6"x9"	16	EA
50-051115-16580-6	FB369SL	3"x6"x9"	20	EA

3M™ Fire Barrier Moldable Putty+ Pads and Sticks

A synthetic elastomer designed for use as a one part, intumescent fire resistive putty used to restore the integrity of fire rated building construction. Stays pliable, allows easy access for cable mining at a later date.



UPC Number	Extra Desc	Size	Case Qty	Units
00-051115-16526-9	Sticks	¼"x11"	10	EA
00-051115-16508-5	Pads	4"x8"	100	PD
00-051115-16509-2	Pads	7"x7"	20	PD
00-051115-16510-8	Pads	9½"x9½"	20	PD

Fire Barrier Pillows & Putties, cont'd

3M™ Fire Barrier Putty Sleeve Kit

3M™ Fire Barrier Putty Sleeve Kits allow for both new and retrofit data and telecom cable installations. Kits contain what you need to manage your high traffic cable penetrations and help you pass your building inspection the first time.



UPC Number	Product ID	Size	Case Qty	Units
00-051115-18809-1	DT100	1"	1	KT
00-051115-18806-0	DT400	4"	4	KT
00-051115-18808-4	DT200	2"	1	KT

Fire Barrier Sheets & Wrap Strips

3M™ Fire Barrier FS-195+ Wrap/Strip

One-part, intumescent strip. Can be cut to fit irregular shapes. Re-enterable, no special tools required.



UPC Number	Size	Case Qty	Units
00-051115-07115-7	2"x24"	10	EA

3M™ Interam™ Ultra GS Wrap Strip

A firestop used with the 3M™ Fire Barrier RC-1 Restricting Collar. Intumescent and endothermic. No waste, roll out and cut as much as you need. Works with a wide variety of plastic pipes.



UPC Number	Size	Case Qty	Units
00-051115-16507-8	2"x40'	5	RL

3M™ Fire Barrier CS-195+ Composite Sheet

No mixing or damming required. UL testing up to 36 sq. ft. openings. Easy to install using common trade tools.




UPC Number	Extra Desc	Size	Case Qty	Units
00-051115-07437-0	Boxed	16"x28"	1	EA
00-051115-08260-3	Bulk	28"x52"	1	EA
00-051115-07220-8	Boxed	36"x24"	1	EA
00-051115-07222-2	Boxed	36"x36"	1	EA
00-051115-07224-6	Boxed	36"x41"	1	EA

Fire Barrier Sheets & Wrap Strips, cont'd

3M™ Fire Barrier Tuck-In Wrap Strip

An intumescent firestopping wrap strip that is precut for nominal plastic pipe sizes of 2- inch, 3- inch, and 4- inch. 3M™ Fire Barrier Tuck-In Wrap Strips are easily pushed into the opening around PVC pipes to provide up to a 3 hour fire rating through concrete floors.



UPC Number	Product ID	Size	Case Qty	Units
50-051115-18814-0	WS200	2"	24	EA
50-051115-18815-7	WS300	3"	24	EA
50-051115-18817-1	WS400	4"	24	EA

Fire Barrier Sprays

3M™ FireDam™ Spray 200

3M™ FireDam™ Spray 200 is a sprayable water-based material that dries to form a tough, elastomeric coating. This material, when used as part of an assembly, will firestop building joints, perimeter joints (curtain wall), and through penetration seals.



UPC Number	Size	Color	Case Qty	Units
00-051115-18797-1	5 gal	Gray	1	PA
00-051115-18798-8	5 gal	Red	1	PA

Duct Wraps

3M™ Fire Barrier Plenum Wrap 5A


Fire resistant wrap consisting of a patented inorganic blanket encapsulated with a scrim-reinforced foil, provides a flexible, non-combustible enclosure for cables and pipe in return air plenums.



UPC Number	Size	Case Qty	Units
00-051115-16513-9	½"x24"x50'	1	RL
00-051115-16514-6	½"x48"x25'	2	RL

3M™ Interam™ E-5A-4 Mat

An endothermic wrap when exposed to high temperatures keeps heat out by releasing chemically bound water to cool the outer surface used to protect structural steel, cable trays and circuits in conduits.



UPC Number	Size	Case Qty	Units
00-051115-16571-9	24½"x20'	1	RL

Duct Wraps, cont'd

3M™ Fire Barrier Duct Wrap 615+

Certified shaft alternative 1 and 2 hour fire rated duct wrap. Can be used to protect grease ducts and ventilation ducts. Certified to ASTM E2336 (including ASTM E119 engulfment) and ISO 6944 test standards among others.



UPC Number	Product ID	Size	Case Qty	Units
00-051115-18800-8	615+	48"x25'	1	RL
00-051115-18799-5	615+	24"x25'	1	RL

Duct Wraps, Accessories

3M™ Fire Barrier Grease Duct Access Door

The 3M™ Fire Barrier Grease Duct Access Door is the only tested and listed (OPL) door that has been fire tested in conjunction with 3M™ Fire Barrier Duct Wrap products.



UPC Number	Size	Case Qty	Units
00-051115-16582-5	10"x6"	3	EA
00-051115-16583-2	12"x8"	3	EA
00-051115-16584-9	20"x20"	1	EA

3M™ Fire Barrier Grease Duct Access Door Hardware Kit

Hardware kit for 3M™'s Fire Barrier Grease Duct Access Doors. 3 kits per carton.



UPC Number	Case Qty	Units
50-051115-16585-1	3	KT

Filtering Facepiece Particulate Respirators, Class 95 Particulate Respirators

3M™ Particulate Respirator 8200, N95

N95 respirator designed to help provide reliable protection against certain non-oil based particles. Low priced N95 that features Advanced Electret Media, adjustable noseclip and nose foam to help provide a custom fit and secure seal.



UPC Number	Product ID	Extra Desc	Case Qty	Units
50-051131-91913-1	8200	20/Inr	160	CA

3M™ Particulate Respirator 8210, N95

Is designed to help provide comfortable, reliable worker protection against certain non-oil based particles. Its lightweight construction helps promote greater worker acceptance and comfort and increased wear time.



UPC Number	Extra Desc	Case Qty	Units
50-051138-46457-3	20/Inr	160	CA

3M™ Particulate Respirator 8511, N95

Is uniquely designed to help provide protection against certain non-oil based particles. It is ideally suited for work settings that involve heat, humidity, or long periods of wear.



UPC Number	Extra Desc	Case Qty	Units
50-051138-54343-8	10/Inr	80	CA

3M™ Particulate Respirator 9211, N95

Is a breakthrough in comfort and convenience. This three-panel respirator with innovative design is ideally suited for work settings that involve heat, humidity, or long periods of wear.



UPC Number	Extra Desc	Case Qty	Units
50-051131-37022-2	Flat Fold, 10/Inr	120	CA

Filtering Facepiece Particulate Respirators, Class 95 Particulate Respirators, cont'd

3M™ Particulate Welding Respirator 8212, N95, with Faceseal

Is designed for applications such as welding, soldering and other operations where metal fumes may be present.



UPC Number	Extra Desc	Case Qty	Units
50-051138-54141-0	10/Inr	80	CA

3M™ Particulate Respirator 8214, N95, with Faceseal and Nuisance Level* Organic Vapor Relief

Is designed for applications such as welding, soldering and other operations where metal fumes may be present including those with ozone* and nuisance level** organic vapors.



• *3M recommended for ozone up to 10X OSHA PEL or applicable government exposure limit. Not NIOSH approved for ozone. **Nuisance level refers to concentrations below OSHA PEL or other applicable government occupational exposure limits, whichever is lower.

UPC Number	Extra Desc	Case Qty	Units
50-051138-66192-7	10/Inr	80	CA

3M™ Particulate Respirator 8512, N95

Is designed for applications such as welding, soldering and other operations where metal fumes are present.



UPC Number	Extra Desc	Case Qty	Units
50-051138-66298-6	10/Inr	80	CA

3M™ Particulate Welding Respirator 8515, N95

Is designed to help provide comfortable, reliable worker protection for applications such as welding, soldering, cutting, grinding, and sanding.



UPC Number	Extra Desc	Case Qty	Units
50-051131-07189-1	10/Inr	80	CA

Please see pages 45-46 for additional warning information.

Filtering Facepiece Particulate Respirators, Class 95 Particulate Respirators, cont'd

3M™ Particulate Respirator 8576, P95, with Nuisance Level* Acid Gas Relief

Is designed to provide comfortable, reliable worker protection against certain oil and non-oil based particles including those present with nuisance levels* of acid gases such as sulphur dioxide, hydrogen fluoride, and/or chlorine.



- *Nuisance level refers to concentrations not exceeding OSHA PEL or other applicable government occupational exposure limits, whichever is lower.

UPC Number	Extra Desc	Case Qty	Units
50-051138-54370-4	10/Inr	80	CA

Elastomeric Facepiece Respirators, Filters & Cartridges, Filters, Cartridges and Accessories

3M™ Cartridge/Filter Organic Vapor/ P100, 60921

NIOSH approved against certain organic vapors and particulates. Use with 3M™ Half and Full Facepieces 6000 Series and 3M™ Half and Full Facepieces 7000 Series with bayonet style cartridge holders.



UPC Number	Case Qty	Units
50-051138-46465-8	60	CA

3M™ Cartridge/Filter Organic Vapor/ Acid Gas/ P100, 60923

NIOSH approved against certain organic vapors, acid gases and particulates. Use with 3M™ Half and Full Facepieces 6000 Series and 3M™ Half and Full Facepieces 7000 Series with bayonet style cartridge holders.



UPC Number	Case Qty	Units
50-051138-46467-2	60	CA

Elastomeric Facepiece Respirators, Filters & Cartridges, Filters, Cartridges and Accessories, cont'd

3M™ Cartridge/Filter Multi Gas/Vapor/ P100, 60926

NIOSH approved against certain organic vapors, acid gases, ammonia, methylamine, formaldehyde* and particulates. Use with 3M™ Half and Full Facepieces 6000 Series and 3M™ Half and Full Facepieces 7000 Series with bayonet style cartridge holders.



- OSHA regulations require gas proof goggles be worn with half facepiece respirators when used against formaldehyde.

UPC Number	Case Qty	Units
50-051138-54187-8	60	CA

3M™ Multi Gas/Vapor Cartridge 6006

NIOSH approved against certain organic vapors, acid gases, ammonia, methylamine or formaldehyde*. Use with 3M™ Half and Full Facepieces 6000 Series and 3M™ Half and Full Facepieces 7000 Series with bayonet style cartridge holders.



- OSHA regulations require gas proof goggles be worn with half facepiece respirators when used against formaldehyde.

UPC Number	Case Qty	Units
50-051138-54186-1	60	CA

3M™ Organic Vapor Cartridge 6001

NIOSH approved against certain organic vapors. Use with 3M™ Half and Full Facepieces 6000 Series and 3M™ Half and Full Facepieces 7000 Series with bayonet style cartridge holders.



UPC Number	Case Qty	Units
50-051138-21674-5	60	CA

3M™ Organic Vapor/Acid Gas Cartridge 6003

NIOSH approved against certain organic vapors or acid gases. Use with 3M™ Half and Full Facepieces 6000 Series and 3M™ Half and Full Facepieces 7000 Series with bayonet style cartridge holders.



UPC Number	Case Qty	Units
50-051131-07047-4	60	CA

Please see pages 45-46 for additional warning information.

Elastomeric Facepiece Respirators, Filters & Cartridges, Filters, Cartridges and Accessories, cont'd

3M™ Particulate Filter 2071, P95

NIOSH approved for environments containing certain oil and non-oil based particles. Use with 3M™ Respirators 5000 Series or Cartridges 6000 Series with 3M™ Adapter 502.



UPC Number	Case Qty	Units
50-051138-54356-8	100	CA

3M™ Particulate Filter 2091, P100

NIOSH approved for environments containing certain oil and non-oil based particles. Use with 3M™ Respirators 5000 Series or Cartridges 6000 Series with 3M™ Adapter 502.



UPC Number	Case Qty	Units
50-051131-07000-9	100	CA

3M™ Particulate Filter with Nuisance Level Organic Vapor/Acid Gas* Relief 2078, P95

NIOSH approved for environments containing certain oil and non-oil based particles. 3M recommended for relief against nuisance levels of organic vapor/acid gases* and for ozone protection up to 10X OSHA PEL. Not NIOSH certified for use against ozone.



• *Nuisance level organic vapor/acid gas refers to concentrations not exceeding the OSHA PEL or applicable government occupational exposure limits, whichever is lower."

UPC Number	Case Qty	Units
50-051138-54368-1	100	CA

Elastomeric Facepiece Respirators, Filters & Cartridges, Filters, Cartridges and Accessories, cont'd

3M™ Particulate Filter with Nuisance Level Acid Gas* Relief 2096, P100

NIOSH approved for environments containing certain oil and non-oil based particles. 3M recommended for relief against nuisance levels of acid gases*.



• *Nuisance level acid gas refers to concentrations not exceeding OSHA PEL or applicable government occupational exposure limits, whichever is lower. Do not use for respiratory protection against acid gases.

UPC Number	Case Qty	Units
50-051138-54295-0	100	CA

3M™ Particulate Filter with Nuisance Level Organic Vapor Relief** 2097, P100

NIOSH approved for environments containing certain oil and non-oil based particles. 3M recommended for relief against nuisance levels of organic vapors** and ozone protection up to 10 times OSHA PEL. Not NIOSH certified for use against ozone.



• **Nuisance level organic vapor refers to concentrations not exceeding OSHA PEL or applicable government occupational exposure limits, whichever is lower. Do not use for respiratory protection against organic vapors.

UPC Number	Case Qty	Units
50-051131-07184-6	100	CA

3M™ Particulate Filter 5N11, N95

NIOSH approved for environments containing certain non-oil based particles. Use with 3M™ Respirators 5000 Series or 3M™ Cartridges 6000 Series, and 3M™ Filter Retainer 501.



UPC Number	Case Qty	Units
50-051138-46464-1	100	CA

Please see pages 45-46 for additional warning information.

Elastomeric Facepiece Respirators, Filters & Cartridges, Filters, Cartridges and Accessories, cont'd

3M™ Respirator Filter 5P71, P95


NIOSH approved for environments containing certain oil and non-oil based particles. Use with 3M™ Respirators 5000 Series or 3M™ Cartridges 6000 Series, and 3M™ Filter Retainer 501.



UPC Number	Case Qty	Units
50-051131-07194-5	100	CA

3M™ Retainer 501

Used to hold 3M™ Particulate Filters 5N11 and 5P71/07194(AAD) in place on top of 3M™ Respirators 5000 Series and 3M™ Cartridges 6000 Series.



UPC Number	Case Qty	Units
50-051138-17668-1	100	CA

Elastomeric Facepiece Respirators, Filters & Cartridges, Respirators 5000 Series Disposable, Respirators 5000 Series Disposable, Organic Vapor/P95 Respirator Assemblies 5000 Series

3M™ Dual Cartridge Respirator Assembly, Organic Vapor/P95

NIOSH approved against certain organic vapors and particulates. Use for a variety of applications including spray painting, pesticides, agriculture, construction and transportation.



UPC Number	Product ID	Size	Case Qty	Units
50-051138-66068-5	51P71	Small	12	CA
50-051138-66069-2	52P71	Medium	12	CA
50-051138-66070-8	53P71	Large	12	CA

Elastomeric Facepiece Respirators, Filters & Cartridges, Respirator Facepieces 6000 Series, Facepieces 6000 Series Reusable

3M™ Half Facepiece 6000 Series

Use with 3M™ Filters 2000 Series, 3M™ Filter 7093, 7093C, 3M™ Cartridges 6000 Series, or 3M™ Dual Airline Systems against a variety of gases, vapors and particulate hazards according to NIOSH approvals.



UPC Number	Product ID	Size	Case Qty	Units
50-051131-07024-5	6100	Small	24	CA
50-051131-07025-2	6200	Medium	24	CA
50-051131-07026-9	6300	Large	24	CA

3M™ Full Facepiece, 6000 Series

Use with 3M™ Filters 2000 Series, 3M™ Filter 7093, 3M™ Cartridges 6000 Series, or 3M™ Dual Airline Systems against a variety of gases, vapors and particulate hazards according to NIOSH approvals.



Elastomeric Facepiece Respirators, Filters & Cartridges, Respirator Facepieces 7000 Series, Half Facepiece 7500 Series, Ultimate Reusable

3M™ Half Facepiece 7500 Series, Ultimate Reusable

This half facepiece was designed with the wearer in mind. Its soft sealing surface, along with a uniquely designed, 3M™ Cool Flow™ Exhalation Valve, enhances wearer comfort and face fit.



UPC Number	Product ID	Size	Case Qty	Units
50-051131-37081-9	7501/37081	Small	10	CA
50-051131-37082-6	7502/37082	Medium	10	CA
50-051131-37083-3	7503/37083	Large	10	CA

Please see pages 45-46 for additional warning information.

Elastomeric Facepiece Respirators, Filters & Cartridges, Respirator Facepieces 7000 Series, Cartridges 7000 Series

3M™ Particulate Filter 7093

NIOSH approved for environments containing certain oil and non-oil based particles. Use with 3M™ Respirators 5000 Series or 3M™ Cartridges 6000 Series with 3M™ Adapter 502, 3M™ Facepieces 6000 Series, 3M™ Facepieces 7000 Series, or 3M(TM) FF-400 Series respirators.



UPC Number	Product ID	Case Qty	Units
50-051131-52705-3	7093	60	CA
50-051131-52706-0	7093B	144	CA

Elastomeric Facepiece Respirators, Filters & Cartridges, Respirator Facepiece FF-400 Series

3M™ Ultimate FX Full Facepiece Reusable Respirator FF-401, Small

Engineered to deliver maximum comfort with a wide field of view. Features a soft, silicone nose cup and a large lens that allows for superior peripheral vision. The only respirator with 3M's unique Scotchgard™ Protector, which helps the lens resist dirt, and some paint and stains, and makes it easier to clean. The 3M™ Cool Flow™ Valve helps reduce heat and moisture buildup inside the facepiece.

UPC Number	Case Qty	Units
50-051135-89418-2	4	EA

3M™ Ultimate FX Full Facepiece Reusable Respirator FF-402, Medium

Engineered to deliver maximum comfort with a wide field of view. Features a soft, silicone nose cup and a large lens that allows for superior peripheral vision. The only respirator with 3M's unique Scotchgard™ Protector, which helps the lens resist dirt, paint and stains, and makes it easier to clean. The 3M™ Cool Flow™ Valve helps reduce heat and moisture buildup inside the facepiece.

UPC Number	Case Qty	Units
50-051135-89421-2	4	EA

3M™ Ultimate FX Full Facepiece Reusable Respirator FF-403, Large

Engineered to deliver maximum comfort with a wide field of view. Features a soft, silicone nose cup and a large lens that allows for superior peripheral vision. The only respirator with 3M's unique Scotchgard™ Protector, which helps the lens resist dirt, paint and stains, and makes it easier to clean. The 3M™ Cool Flow™ Valve helps reduce heat and moisture buildup inside the facepiece.

UPC Number	Case Qty	Units
50-051135-89424-3	4	EA

Powered and Supplied Air Purifying Respirators

3M™ Adflo™ PAPR High Efficiency System, with 3M™ Hard Hat L-705SG and Wideview Faceshield and 3M™ Speedglas™ Auto-Darkening Filter 9100XX

Complete Adflo turbo system including 3M™ Hardhat L-705SG with Speedglas™ 9100 Auto-Darkening Filter, 3M™ Breathing Tube L-122SG, flow indicator, belt, spark arrestor, turbo filter cover, prefilter, HE particle filter, battery and smart charger.

UPC Number	Case Qty	Units
00-051135-89458-3	1	EA
00-051135-89457-6	1	EA

3M™ Adflo™ Powered Air Purifying Respirator High Efficiency System 16-0705-SGV, with Helmet L-705SG and Wideview Faceshield and 3M™ Speedglas™ Auto-Darkening Filter 9100V 1/ Case

Complete 3M™ Adflo™ turbo system including 3M™ Hardhat L-705SG with Speedglas™ 9100V Auto-Darkening Filter, 3M™ Breathing Tube L-122SG, flow indicator, belt, spark arrestor, turbo filter cover, prefilter, HE particle filter, battery and smart charger.



UPC Number	Case Qty	Units
00-051135-89456-9	1	EA

Powered and Supplied Air Purifying Respirators, Belt-Mounted Powered Air Purifying Respirator (PAPR) GVP-Series, GVP-Series PAPR Assemblies

3M™ Belt-Mounted Powered Air Purifying Respirator (PAPR) Paint Spray Kit GVP-PSK/07190(AAD)

This NIOSH-approved respirator system includes a comfort belt-mounted PAPR assembly, breathing tube, lightweight headgear with wide-view lens and organic vapor/high efficiency cartridge. It is ideal for use when you need mobility.



UPC Number	Product ID	Case Qty	Units
00-051131-07190-2	GVP-PSK	1	CA

Please see pages 45-46 for additional warning information.

Powered and Supplied Air Purifying Respirators, Face-Mounted Powered Air Purifying Respirators (PAPRs), Face-Mounted Powered Air Purifying Respirator (PAPR) Systems

3M™ Powerflow™ Face-Mounted Powered Air Purifying Respirators

This respirator is a lightweight, face-mounted Powered Air Purifying Respirator (PAPR). High efficiency filter for protection against dusts, mists, fumes and radionuclides. Ideal for lead, asbestos and other hazardous particulates.



• The Powerflow system with the BP17IS battery has been tested and classified for intrinsic safety by UL for use in the following Division I locations: Class I, Group D; Class II, Groups E, F, G; and Class III. Temperature Code "T3".

UPC Number	Product ID	Size	Case Qty	Units
00-051138-76712-9	6800PF	Medium	1	CA
00-051138-76714-3	6900PF	Large	1	CA

Welding Products, 3M™ Speedglas™ 100 Helmets w/ ADF

3M™ Speedglas™ American Pride Welding Helmet 100 07-0012-31AP

The Speedglas 100 American Helmet with Auto-Darkening Filter 100V is good for Stick, MIG and most TIG welding processes. User selectable dark shades 8 through 12 and viewing area of 6.05 sq.in. It has three user-selectable sensitivity levels for reliable arc detection and has excellent optical quality. It is shade 3 in the light state.



UPC Number	Product ID	Extra Desc	Case Qty	Units
00-051131-37238-2	07-0012-31AP	ADF 100V SH 8-12	1	EA

3M™ Speedglas™ Blaze Welding Helmet 100 07-0012-31BZ

The Speedglas 100 Blaze Helmet with Auto-Darkening Filter 100V is good for Stick, MIG and most TIG welding processes. User selectable dark shades 8 through 12 and viewing area of 6.05 sq.in. It has three user-selectable sensitivity levels for reliable arc detection and has excellent optical quality. It is shade 3 in the light state.



UPC Number	Product ID	Extra Desc	Case Qty	Units
00-051131-37233-7	07-0012-31BZ	ADF 100V SH 8-12	1	EA

Welding Products, 3M™ Speedglas™ 100 Helmets w/ ADF, cont'd

3M™ Speedglas™ Aces High Welding Helmet 100 07-0012-31AH

The Speedglas 100 Aces High Helmet with Auto-Darkening Filter 100V is good for Stick, MIG and most TIG welding processes. User selectable dark shades 8 through 12 and viewing area of 6.05 sq.in. It has three user-selectable sensitivity levels for reliable arc detection and has excellent optical quality. It is shade 3 in the light state.



UPC Number	Product ID	Extra Desc	Case Qty	Units
00-051131-37237-5	07-0012-31AH	ADF 100V SH 8-12	1	EA

3M™ Speedglas™ Black Welding Helmet 100 07-0012-31BL

The Speedglas 100 Black Helmet with Auto-Darkening Filter 100V is good for Stick, MIG and most TIG welding processes. User selectable dark shades 8 through 12 and viewing area of 6.05 sq.in. It has three user-selectable sensitivity levels for reliable arc detection and has excellent optical quality. It is shade 3 in the light state.



UPC Number	Product ID	Extra Desc	Case Qty	Units
00-051131-37232-0	07-0012-31BL	ADF 100V SH 8-14	1	EA

Welding Products, 3M™ Adflo™ Respiratory Protection Systems, 3M™ Adflo™ HEPA Respirator Systems, 3M™ Adflo™ HEPA Respiratory Systems, Variable

3M™ Adflo™ Powered Air Purifying Respirator High Efficiency System, 16-1101-21SW

Powered respiratory protection for welders. Lightweight, slim design eliminates external batteries and cables. Flip-up the FlexView welding filter for grinding through clear lens. System includes: Flexview HWR Helmet with SideWindows, Auto Darkening Filter 9002X (variable 9-13 shade), and High Efficiency Filter.



UPC Number	Product ID	Case Qty	Units
00-051131-92572-4	16-1101-21SW	1	CA

3M™ Adflo™ PAPR High Efficiency System, with 3M™ Hard Hat L-705SG and Wideview Faceshield and 3M™ Speedglas™ Auto-Darkening Filter 9100XX

Complete Adflo turbo system including 3M™ Hardhat L-705SG with Speedglas™ 9100 Auto-Darkening Filter, 3M™ Breathing Tube L-122SG, flow indicator, belt, spark arrestor, turbo filter cover, prefilter, HE particle filter, battery and smart charger.

UPC Number	Case Qty	Units
00-051135-89458-3	1	EA
00-051135-89457-6	1	EA

Please see pages 45-46 for additional warning information.

Welding Products, 3M™ Adflo™ Respiratory Protection Systems, 3M™ Adflo™ HEPA Respirator Systems, 3M™ Adflo™ HEPA Respiratory Systems, Variable, cont'd

3M™ Adflo™ Powered Air Purifying Respirator High Efficiency System, 16-1101-21

Powered respiratory protection for welders. Lightweight, slim design eliminates external batteries and cables. Flip-up the FlexView welding filter for grinding through clear lens. System includes: Flexview HWR Helmet, Auto Darkening Filter 9002X (variable 9-13 shade), and High Efficiency Particulate Filter.



UPC Number	Product ID	Case Qty	Units
00-051131-92576-2	16-1101-21	1	CA

Eyewear Protection Products, AOSafety Eyewear, BX Eyewear™

BX™ Dual Reader, Slvr/Blk Frame, Clear, Protective Eyewear

Safety eyewear that has three magnification diopters on the top and bottom of the lens: + 1.5, +2.0, +2.5. Designed for workers who have difficulty reading small print or who are engaged in small detail work. Meets the requirements of ANSI Z87.1-2003.



UPC Number	Product ID	Extra Desc	Color	Case Qty	Units
10-078371-11457-9	11457-00000-20	+1.5 Top/Bottom Diopter	Slvr/Blk	20	EA
10-078371-11459-3	11459-00000-20	+2.5 Top/Bottom Diopter	Slvr/Blk	20	EA

Eyewear Protection Products, AOSafety Eyewear, Fuel™ Eyewear

3M™ Fuel™ X2 Protective Eyewear, Brown AF Lens, Dark Copper Frame 11636-00000-10

An ultra efficient blend of comfort and style, Fuel X2 offers a refined look and fully charged features. An evolutionary design, the frame features bold new grooved styling, rubber over-molded adjustable temples and a fully adjustable nosebridge. The sleek frame profile and rimless lower lens help ensure that protection and performance remain uncompromised.



UPC Number	Case Qty	Units
10-078371-11636-8	10	EA

Eyewear Protection Products, AOSafety Eyewear, Fuel™ Eyewear, cont'd

3M™ Fuel™ X2 Protective Eyewear, Clear AF Lens, Dark Copper Frame 11637-00000-10

An ultra efficient blend of comfort and style, Fuel X2 offers a refined look and fully charged features. An evolutionary design, the frame features bold new grooved styling, rubber over-molded adjustable temples and a fully adjustable nosebridge. The sleek frame profile and rimless lower lens help ensure that protection and performance remain uncompromised.



UPC Number	Case Qty	Units
10-078371-11637-5	10	EA

Eyewear Protection Products, AOSafety Eyewear, Virtua™

Virtua™ V4 Black Temple/Gray Overmold, Indoor/Outdoor Mirror Lens 11674-00000-20

Virtua™ V4 Black Temple/Gray Overmold, Indoor/Outdoor Mirror Lens. Contemporary styling at an economical price. Absorbs 99.9% UV. Meets the requirements of ANSI Z87.1-2003.



UPC Number	Product ID	Case Qty	Units
10-078371-62038-4	11674-00000-20	20	EA

Virtua™ V4 Black Temple/Gray Overmold, Gray Hard Coat Lens 11671-00000-20

Virtua™ V4 Black Temple/Gray Overmold, Gray Hard Coat Lens. Contemporary styling at an economical price. Absorbs 99.9% UV. Meets the requirements of ANSI Z87.1-2003.



UPC Number	Product ID	Case Qty	Units
10-078371-62035-3	11671-00000-20	20	EA

Virtua™ V4 Black Temple/Gray Overmold, Clear Hard Coat Lens 11670-00000-20

Virtua™ V4 Black Temple/Gray Overmold, Clear Hard Coat Lens. Contemporary styling at an economical price. Absorbs 99.9% UV. Meets the requirements of ANSI Z87.1-2003.



UPC Number	Product ID	Case Qty	Units
10-078371-62034-6	11670-00000-20	20	EA

Please see pages 45-46 for additional warning information.

**Eyewear Protection Products,
AOSafety Eyewear, Virtua™, cont'd**

**Virtua™ Sport CCS, Protective eyewear
11796/11797**

Protective eyewear with a Corded Earplug Control System (CCS). This unique temple design controls and holds the cord of an earplug to keep it in place and untangled while in use. Meets the requirements of ANSI Z87.1-2003



UPC Number	Case Qty	Units
10-078371-11796-9	20	EA
10-078371-11797-6	20	EA

**Virtua™ Sport CCS, Protective eyewear
11798/11799**

Protective eyewear with a Corded Earplug Control System (CCS). This unique temple design controls and holds the cord of an earplug to keep it in place and untangled while in use. Meets the requirements of ANSI Z87.1-2003



UPC Number	Case Qty	Units
10-078371-11798-3	20	EA
10-078371-11799-0	20	EA

**Eyewear Protection Products,
AOSafety Eyewear, Smart Lens™**

**Smart Lens Photochromic Eyewear
13407-00000-5**

Smart Lens Photochromic Eyewear



UPC Number	Case Qty	Units
10-078371-62033-9	5	EA

**Eyewear Protection Products,
AOSafety Eyewear, OCC™**

**OCC™ 1200 Protective Eyewear, Gray
AF Lens, Gun Metal Gray
Frame 11780-00000-10**

Lightweight, half-frame. Polycarbonate lenses absorb 99.9% UV. Soft, adjustable nosebridge. OCC logo on temple.



UPC Number	Case Qty	Units
10-078371-11780-8	10	EA

**Eyewear Protection Products,
AOSafety Eyewear, OCC™, cont'd**

**OCC™ 1200 Protective Eyewear, I/O
Gray AF Lens, Gun Metal
Gray Frame 11779-
00000-10**

Lightweight, half-frame. Polycarbonate lenses absorb 99.9% UV. Soft, adjustable nosebridge. OCC logo on temple.



UPC Number	Case Qty	Units
10-078371-11779-2	10	EA

**OCC™ 1200 Protective Eyewear, Clear
AF Lens, Gun Metal Gray
Frame 11778-00000-10**

Lightweight, half-frame. Polycarbonate lenses absorb 99.9% UV. Soft, adjustable nosebridge. OCC logo on temple.



UPC Number	Case Qty	Units
10-078371-11778-5	10	EA

**OCC™ 1200 Protective Eyewear, Blue
Mirror Lens, Gun Metal
Gray Frame 11781-
00000-10**

Lightweight, half-frame. Polycarbonate lenses absorb 99.9% UV. Soft, adjustable nosebridge. OCC logo on temple.



UPC Number	Case Qty	Units
10-078371-11781-5	10	EA

**Eyewear Protection Products,
AOSafety Eyewear, Nitrous™**

**3M™ Nitrous™ CCS, Protective
Eyewear, 11801-00000-
20**

Protective eyewear with a Corded Earplug Control System (CCS). This unique temple design controls and holds the cord of an earplug to keep it in place and untangled while in use. Meets the requirements of ANSI Z87.1-2003



UPC Number	Product ID	Extra Desc	Color	Case Qty	Units
10-078371-11801-0	11801-00000-20	A/F Lens	Black	20	EA

Please see pages 45-46 for additional warning information.

Eyewear Protection Products, AOSafety Eyewear, Nitrous™, cont'd

3M™ Nitrous™ CCS, Protective Eyewear, 11802-00000-20

Protective eyewear with a Corded Earplug Control System (CCS). This unique temple design controls and holds the cord of an earplug to keep it in place and untangled while in use. Meets the requirements of ANSI Z87.1-2003



UPC Number	Product ID	Extra Desc	Color	Case Qty	Units
10-078371-11802-7	11802-00000-20	A/F Lens	Gray	20	EA

3M™ Nitrous™ CCS, Protective eyewear, 11803-00000-20

Protective eyewear with a Corded Earplug Control System (CCS). This unique temple design controls and holds the cord of an earplug to keep it in place and untangled while in use. Meets the requirements of ANSI Z87.1-2003

UPC Number	Case Qty	Units
10-078371-11803-4	20	EA

Eyewear Protection Products, 3M™ Eye Protection, 3M™ Glasses

3M? Fuel? X2 Protective Eyewear, Red Mirror Lens, Dark Copper Frame 11635-00000-10

An ultra efficient blend of comfort and style, Fuel X2 offers a refined look and fully charged features. An evolutionary design, the frame features bold new grooved styling, rubber over-molded adjustable temples and a fully adjustable nosebridge. The sleek frame profile and rimless lower lens help ensure that protection and performance remain uncompromised. Meets the High Impact requirements of ANSI Z87.1-2003.



UPC Number	Case Qty	Units
10-078371-11635-1	10	EA

Head and Face Protection Products, Head/Face, Headgear

3M™ TuffMaster™ H4 Headgear with WP96 Polycarbonate Faceshield Combo, Clear 82781-00000

Lightweight, comfortable and durable. TuffMaster combo systems provide a complete headgear and faceshield unit.



UPC Number	Product ID	Color	Case Qty	Units
10-078371-82781-3	82781-00000	Clear	5	EA

Head and Face Protection Products, Head/Face, Headgear, cont'd

3M™ TuffMaster™ H8A Headgear 82782-00000, with W96 Propionate Faceshield Combo

Lightweight, comfortable and durable. TuffMaster combo systems provide a complete headgear and faceshield unit.

UPC Number	Product ID	Color	Case Qty	Units
10-078371-82782-0	82782-00000	Clear	5	EA

Head and Face Protection Products, Head/Face, Hard hats

XLR8® 6-pt. Pinlock Replacement Suspension 45977-00001

Restore your hard hat's comfort in seconds! Replacement suspension snaps easily into place, to provide all the comfort and easy adjustability of the original system.



UPC Number	Product ID	Case Qty	Units
10-078371-45977-9	45977-00001	20	EA

XLR8® 6-pt. Ratchet Replacement Suspension 45978-00001

Restore your hard hat's comfort in seconds! Replacement suspension snaps easily into place, to provide all the comfort and easy adjustability of the original system.



UPC Number	Product ID	Case Qty	Units
10-078371-45978-6	45978-00001	20	EA

XLR8® Hard Hat with 6-pt. Pinlock Suspension, White 45964-00001

Features a high density polyethylene shell with universal accessory slots. Woven nylon suspension with full-cushioned, washable foam brow pad. Meets the requirements of ANSI Z89.1-2009, Type 1, Class C, G and E and CSA Z94.1 – 2005, Type 1.



UPC Number	Product ID	Color	Case Qty	Units
10-078371-45964-9	45964-00001	White	20	EA

Please see pages 45-46 for additional warning information.

Head and Face Protection Products, Head/Face, Hard hats, cont'd

XLR8® Hard Hat with 6-pt. Ratchet Suspension, Yellow 45969-00001

Features a high density polyethylene shell with universal accessory slots. Woven nylon suspension with full-cushioned, washable foam brow pad. Meets the requirements of ANSI Z89.1-2009, Type 1, Class C, G and E and CSA Z94.1 – 2005, Type 1.



UPC Number	Product ID	Color	Case Qty	Units
10-078371-45969-4	45969-00001	Yellow	20	EA

XLR8® Hard Hat with 6-pt. Ratchet Suspension, White 45995-00001

If you have to wear a hard hat, insist on the one that's built from the inside out, with real hard hat wearers in mind. Revolutionary suspension eliminates the comfort problems associated with full-shift hard hat use, so that you can approach your duties with confidence.



UPC Number	Product ID	Color	Case Qty	Units
10-078371-45995-3	45995-00001	White	20	EA

XLR8® Hard Hat with 6-pt. Pinlock Suspension, Yellow 45963-00001

Features a high density polyethylene shell with universal accessory slots. Woven nylon suspension with full-cushioned, washable foam brow pad. Meets the requirements of ANSI Z89.1-2009, Type 1, Class C, G and E and CSA Z94.1 – 2005, Type 1.



UPC Number	Product ID	Color	Case Qty	Units
10-078371-45963-2	45963-00001	Yellow	20	EA

OCC™ Hardhat, 4 PT Ratchet 46140-00001

OCC Hardhat, Black, 4 PT Ratchet



UPC Number	Product ID	Extra Desc	Case Qty	Units
10-078371-46140-6	46140-00001	Polyethylene shell	10	EA

Head and Face Protection Products, Head/Face, Hard hats, cont'd

U.S. Flag XLR8™ Hard Hat 46107-00000

Features a high density polyethylene shell with universal accessory slots. Woven nylon suspension with full-cushioned, washable foam brow pad. Meets the requirements of ANSI Z89.1-2009, Type 1, Class C, G and E and CSA Z94.1 – 2005, Type 1.



UPC Number	Case Qty	Units
10-078371-46107-9	10	EA

Mexico Flag XLR8™ Hard Hat 46108-00000

Features a high density polyethylene shell with universal accessory slots. Woven nylon suspension with full-cushioned, washable foam brow pad. Meets the requirements of ANSI Z89.1-2009, Type 1, Class C, G and E and CSA Z94.1 – 2005, Type 1.



UPC Number	Case Qty	Units
10-078371-46108-6	10	EA

Head and Face Protection Products, 3M™ Head Protection

3M™ Peltor™ G2000 Orange Hard Hat with Uvicator™ Sensor, 4-PT Pinlock Suspension PG2008ORUV

Provides a visual indicator to wearers that it's time to replace their hard hat due to extended UV exposure. The built-in indicator is shaped like a small clock. At the outset, it is bright red. As the hard hat is exposed to UV light, the indicator will gradually fade. When it has turned completely white, it's time to replace the hard hat. Peltor G2000 hard hats meet the requirements of ANSI Z89.1-2003, Type I, Class C.



UPC Number	Case Qty	Units
10-093045-93243-3	1	EA

Please see pages 45-46 for additional warning information.

Hearing Conservation Products, 3M™ Hearing Protection, 3M™ Noise Indicators

3M™ Noise Indicator NI-100

3M™ Noise Indicator NI-100 provides easy, durable noise level detection, helping identify areas where hearing protection may need to be worn.



UPC Number	Product ID	Case Qty	Units
00-051131-17453-5	NI-100	10	EA

Hearing Conservation Products, E-A-R™ Hearing Protection, Banded Hearing Protectors

E-A-R Caps® Model 200 Hearing Protector, 10 Bands 321-2101

Non-invasive, comfortable foam caps provide easy-to-wear hearing protection.



UPC Number	Product ID	Case Qty	Units
10-080529-21001-9	321-2101	100	EA

Hearing Conservation Products, E-A-R™ Hearing Protection, Disposable Ear Plugs

Classic® Plus Corded Earplugs in Poly Bag 311-1105

Classic Plus are longer than Classic earplugs to fit deeper into the ear canal and provide a higher level of protection. Slow-recovery foam helps ensure comfort and minimize pressure. Bright yellow color provides a quick visual compliance check. Dermatologically safe foam is non-irritating, nonflammable, and moisture-resistant. NRR 33dB. ANSI S3.19-1974; CSA Class AL.




UPC Number	Product ID	Case Qty	Units
10-080529-11023-4	311-1105	2000	PR

Hearing Conservation Products, E-A-R™ Hearing Protection, Disposable Ear Plugs, cont'd

E-A-Rsoft™ Yellow Neons™ Foam Earplugs 311-1250, Regular, Corded, Package of 200

The world's softest earplugs and the highest NRR available in the industry.



UPC Number	Product ID	Color	Case Qty	Units
10-080529-11033-3	311-1250	Yellow	2000	PR

E-A-Rsoft™ Yellow Neon Blasts™ Foam Earplugs 312-1252, Uncorded, Package of 200

Serious protection with a fun twist that improves voluntary compliance. The world's softest earplugs with the highest NRR available.



UPC Number	Product ID	Case Qty	Units
10-080529-12065-3	312-1252	2000	PR

E-A-Rsoft® Yellow Neons® Uncorded Earplugs in Poly Bag, Large Size 312-1251

The world's softest earplugs and the highest NRR available in the industry.



UPC Number	Product ID	Color	Case Qty	Units
10-080529-12064-6	312-1251	Yellow	2000	PR

Classic™ Uncorded Earplugs in Poly Bag 312-1201

The world's first foam earplugs and still the most widely used cylindrical earplug today.



UPC Number	Product ID	Color	Case Qty	Units
10-080529-12002-8	312-1201	Yellow	2000	PR

Please see pages 45-46 for additional warning information.

Hearing Conservation Products, E-A-R™ Hearing Protection, Disposable Ear Plugs, cont'd

E-A-Rsoft™ Yellow Neons™ Foam Earplugs 312-1250, Regular, Uncorded, Package of 200

The world's softest earplugs and the highest NRR available in the industry. Regular size fits most ear canals. Shaped, self-adjusting foam provides a comfortable, low-pressure seal. Non-irritating, dermatologically safe foam. Soft foam plugs are easy to roll down and insert, then expand within the ear canal for maximum comfort.



UPC Number	Case Qty	Units
10-080529-12063-9	2000	PR

Hearing Conservation Products, E-A-R™ Hearing Protection, Push-In Foam Ear Plugs

E-A-R™ Push-Ins™ SofTouch™ Foam Earplugs 318-4001, Corded, Package of 200

Provides the highest NRR of all Push-Ins Earplugs 31dB.



UPC Number	Product ID	Case Qty	Units
10-080529-18018-3	318-4001	2000	PR

Push-Ins SofTouch Uncorded Earplugs in Poly Bag 318-4000

Provides the highest NRR of all Push-Ins Earplugs 31dB.



UPC Number	Product ID	Case Qty	Units
10-080529-18017-6	318-4000	2000	PR

Hearing Conservation Products, E-A-R™ Hearing Protection, Reusable Ear Plugs

E-A-R™ Ultrafit™ Earplugs 340-4002, Corded w/ Carry Case

Patented curved flange design gently hugs the ear canal to provide an effective seal protecting against noise.



UPC Number	Product ID	Case Qty	Units
10-080529-40001-4	340-4002	200	PR

E-A-R™ Ultrafit™ Earplugs 340-4004, Corded

Patented curved flange design gently hugs the ear canal to provide an effective seal protecting against noise.



UPC Number	Product ID	Case Qty	Units
10-080529-40003-8	340-4004	400	PR

E-A-R™ Ultrafit™ Earplugs 340-4003, Uncorded

Patented curved flange design gently hugs the ear canal to provide an effective seal protecting against noise.



UPC Number	Product ID	Case Qty	Units
10-080529-40002-1	340-4003	400	PR

Peltor™ Communications , Integrated 2-way Radio Headsets

Intrinsically Safe PowerCom Plus™ 2-Way Radio Headset MT53H7A4620, Headband Model

Pre-programmed to 22 channels (GMRS-FRS frequencies). Up to 2 mile transmitting range. Ambient surround listening feature. Noise canceling boom microphone. Voice response mode selection confirmation selectable in English/Spanish/French. Auxiliary jack for patchcords and a remote finger PTT. 2 AA batteries required. Rechargeable battery pack compatible. Approved for use in hazardous environments to the following standards Factory Mutual Cls I, Groups C & D; Cls II, Groups E, F & G; CSA Class I, Groups A, B, C & D; Class II Group G; Class III. Headband model NRR 25dB. Hard Hat model NRR 24dB.



UPC Number	Case Qty	Units
07-318640-04461-6	1	EA

Intrinsically Safe PowerCom Plus™ MT53H7P3E4620 - Hard Hat Mount 1 EA/Case

Pre-programmed to 22 channels (GMRS-FRS frequencies). Up to 2 mile transmitting range. Ambient surround listening feature. Noise canceling boom microphone. Voice response mode selection confirmation selectable in English/Spanish/French. Auxiliary jack for patchcords and a remote finger PTT. 2 AA batteries required. Rechargeable battery pack compatible. Approved for use in hazardous environments to the following standards Factory Mutual Cls I, Groups C & D; Cls II, Groups E, F & G; CSA Class I, Groups A, B, C & D; Class II Group G; Class III. Headband model NRR 25dB. Hard Hat model NRR 24dB.



UPC Number	Case Qty	Units
07-318640-05171-3	1	EA

Hearing Conservation Products, Peltor Hearing Conservation, Ear Muffs

Intrinsically Safe PowerCom Plus™ 2-Way Radio Headset MT53H7A4620, Headband Model

Pre-programmed to 22 channels (GMRS-FRS frequencies). Up to 2 mile transmitting range. Ambient surround listening feature. Noise canceling boom microphone. Voice response mode selection confirmation selectable in English/Spanish/French. Auxiliary jack for patchcords and a remote finger PTT. 2 AA batteries required. Rechargeable battery pack compatible. Approved for use in hazardous environments to the following standards Factory Mutual Cls I, Groups C & D; Cls II, Groups E, F & G; CSA Class I, Groups A, B, C & D; Class II Group G; Class III. Headband model NRR 25dB. Hard Hat model NRR 24dB.



UPC Number	Case Qty	Units
07-318640-04461-6	1	EA

PowerCom Plus™ - Headband MT53H7A4610

Integrated 2-way radio headset is ideal for communicating in high-noise environments.

UPC Number	Product ID	Case Qty	Units
07-318640-05172-0	MT53H7A4610	1	EA

Peltor™ Optime™ 95 Earmuff w/ Headband H9A

For noise levels up to 101dBA, delivers effective protection for mid-range environments comfortably.



UPC Number	Product ID	Case Qty	Units
10-093045-08091-2	H9A	10	EA

Intrinsically Safe PowerCom Plus™ MT53H7P3E4620 - Hard Hat Mount 1 EA/Case

Pre-programmed to 22 channels (GMRS-FRS frequencies). Up to 2 mile transmitting range. Ambient surround listening feature. Noise canceling boom microphone. Voice response mode selection confirmation selectable in English/Spanish/French. Auxiliary jack for patchcords and a remote finger PTT. 2 AA batteries required. Rechargeable battery pack compatible. Approved for use in hazardous environments to the following standards Factory Mutual Cls I, Groups C & D; Cls II, Groups E, F & G; CSA Class I, Groups A, B, C & D; Class II Group G; Class III. Headband model NRR 25dB. Hard Hat model NRR 24dB.



UPC Number	Case Qty	Units
07-318640-05171-3	1	EA

Please see pages 45-46 for additional warning information.

Hearing Conservation Products, Peltor™ Hearing Protection Products

Peltor™ Optime™ 95 Cap-Mounted Earmuff H9P3E

For noise levels up to 101dBA, delivers effective protection for mid-range environments comfortably.



UPC Number	Product ID	Case Qty	Units
10-093045-08093-6	H9P3E	10	EA

In Ear MP3 Noise Isolating Earplug EARbud2600

In Ear MP3 Noise Isolating Earplug



UPC Number	Product ID	Case Qty	Units
10-078371-61273-0	EARbud2600	10	EA

Fall Protection

3M™ Carabiner with 1" opening

Steel autolock connecting device that meets ANSI Z359.1-2007 3600 lb. standards.



UPC Number	Case Qty	Units
10-078371-01307-0	1	EA

3M™ ReLoad™ Web Retractable 12' Length

Available in a broad range of lengths with webbing or cable lifelines. Impact resistant high density polymer housing. Features include frictionless braking system, 100% continuous action braking mechanisms, and even cable spooling with beveled drum design. Cable units rated at 400 lbs. and web units rated at 310 lbs. Meets OSHA 1910.66, 1926.502, ANSI Z359.1-2007 and CSA Z259.2.2



UPC Number	Case Qty	Units
10-078371-01136-6	1	EA

Fall Protection, cont'd

3M™ SafeLight™ Lightweight Lanyard, 4' Nylon Webbing, SafeStop Cover of Clear, UV Resistant Plastic

Constructed with 1" polyester webbing, stamped steel hardware and SafeStop shock absorber. Available in a variety combinations. Weight capacity rating of 310 lbs. Black. Meets OSHA 1910.66, 1926.502, ANSI Z359.1-2007 and CSA Z259.11.



UPC Number	Case Qty	Units
10-078371-00102-2	1	EA

3M™ SafeLight™ Fall Protection Kit

Portable and convenient safety kits enable a worker to maintain inventory and maintenance of the equipment. Contains: 10910 harness, 209512 connector, and 4514 bag.



UPC Number	Case Qty	Units
10-078371-00088-9	1	EA

3M™ Positioning Assembly with 13 link chain

Positioning assembly with 2.75" swivel rebar hook, 2 double locking snap hooks and 13 link chain assembly.



UPC Number	Case Qty	Units
10-078371-00382-8	1	EA

3M™ Rope Positioning Lanyard, Adjustable Length

Designed for fall restraint and positioning applications, this rope positioning lanyard has an adjustable length of 4-6'. It is made from 1" polyester and has 2 double locking snap hooks.



UPC Number	Case Qty	Units
10-078371-00022-3	1	EA

Please see pages 45-46 for additional warning information.

Fall Protection, cont'd

3M™ Professional Roofer's Fall Protection Kit 94020-00000

Professional fall protection kit includes all necessary ANSI/OSHA requirements with an upgraded lanyard and lifeline. Includes 5 Point Harness, 3 ft shock absorbing lanyard, Reusable Roof Anchor and 50' lifeline with mechanical rope grab. ANSI Z359.1

UPC Number	Product ID	Case Qty	Units
10-078371-20502-4	94020-00000	1	KT



SAFETY PRODUCT WARNINGS



EYE AND FACE PROTECTION PRODUCTS WARNING

These eye and face protection products help provide limited eye and face protection. **Misuse or failure to follow warnings and instructions may result in serious potential injury, including blindness, or death.** For proper use, selection, and applications against flying particles, optical radiation and / or splash see supervisor, read *User Instructions* and warnings on the package or call 3M OH&ESD Technical Service in the USA at 1-800-243-4630. In Canada, call 1-800-267-4414.



HEAD PROTECTION PRODUCTS WARNING

These hardhats provide limited protection only. **Misuse or failure to follow warnings and instructions may result in serious personal injury or death.** For proper use, see supervisor, read instructions and warnings on the package, or call 3M OH&ESD Technical Service in the USA at 1-800-243-4630. In Canada, call 1-800-267-4414.

Bumpcaps do not provide protection against impact from falling or glancing objects. They do not protect against electrical hazards. Bumpcaps do not meet the requirements of the American National Standard for Industrial Head Protection ANSI Z89.1-2003. When head protection is required, wear a protective hardhat or helmet that meets the requirements of ANSI Z89.1-2003.



HEARING PROTECTION PRODUCTS WARNING

These hearing protectors help reduce exposure to hazardous noise and other loud sounds. Misuse or failure to wear hearing protectors at all times that you are exposed to noise **may result in hearing loss or injury.** For proper use, see supervisor, **User Instructions**, or call 3M in U.S.A. at 1-800-243-4630. In Canada, call Technical Service at 1-800-267-4414. If there is any drainage from your ear or if you have a hole in your eardrum, consult with your physician before wearing ear plugs. Failure to do so may result in hearing loss or injury.



AIR MONITORING SYSTEMS WARNING

Do Not Use For:

- Ammonia, Carbon Monoxide; Ethylene Oxide¹; Formaldehyde²; Hydrogen Sulfide; Isocyanates; Methane; Ethane; Propane; Methyl Alcohol (Methanol); Methyl Chloride; Methyl, Dimethyl, Trimethyl Amines; Organic Solids; Sulfur Dioxide
- Reactive or polar compounds such as amines, phenols, aldehydes and low molecular weight alcohols
- Extremely low concentrations within a sampling period of less than 8 hours
- Particulates

1 Ethylene Oxide can be monitored using 3M™ 3550/3551 Ethylene Oxide Monitor.

2 Formaldehyde can be monitored using 3M™ 3720/3721 Formaldehyde Monitor.



SAFETY PRODUCT WARNINGS



RESPIRATOR WARNING



These respirators help reduce exposures to certain airborne contaminants. Before use, the wearer must read and understand the *User Instructions* provided as a part of product packaging. A written respiratory protection program must be implemented meeting all the requirements of OSHA 1910.134, including training, fit testing and medical evaluation. In Canada, CSA standards Z94.4 requirements must be met and/or requirements of the applicable jurisdiction, as appropriate. **Misuse may result in sickness or death.** For proper use, see package instructions, supervisor or call 3M OH&ESD Technical Service in USA at 1-800-243-4630 and in Canada at 1-800-267-4414.



SORBENTS WARNING

FAILURE TO PROPERLY HANDLE AND DISPOSE OF SORBENTS CONTAMINATED BY HAZARDOUS MATERIALS CAN RESULT IN SERIOUS PHYSICAL INJURY OR DEATH AND/OR ENVIRONMENTAL HARM.

For proper handling, consult the Material safety Data Sheet for the material absorbed, applicable safety and health standards, contact your supervisor, or call 3M at 1-800-243-4630.



WELDING HELMETS

These welding safety products must be used only by qualified persons trained in their use and maintenance and only in strict accordance with and adherence to the detailed instruction and precautionary statements provided in the instruction manual which accompanies each product. **Failure to comply with these instructions could result in sickness, serious bodily injury or loss of life.**

For proper use of these products read **User Instructions** and **WARNINGS** on the package. Any questions concerning proper use should be directed to your supervisor, on-site training specialist, industrial hygienist or 3M Occupational Health and Environmental Safety Division (OH&ESD) Technical Service in the U.S.A. at 1-800-243-4630. In Canada, call Technical Service at 1-800-267-4414.

Duct Tapes, Cloth Tapes

3M™ Value Duct Tape 1900

Utility cloth duct tape. Typical physical and performance properties include, adhesion to steel: 58 oz./in. width, tensile strength: 16 lbs/in width, elongation at break: 12%, thickness: 5.8 mils, temperature use range: up to 200°F (93°C.)



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-051115-23421-7	Individually Wrapped	1.88"x50yds	Silver	24	RL
00-051115-23422-4	Individually Wrapped	2.83"x50yds	Silver	12	RL

3M™ Utility Duct Tape 2929

3M™ Utility Duct Tape 2929 is a utility grade, conformable cloth duct tape made with polyethylene film over cloth scrim and rubber adhesive. A good choice for temporary repairs, sealing, holding, and marking.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-051115-24883-2	Individually Wrapped	1.88"x50yds	Silver	24	RL

3M™ Multi-Purpose Duct Tape 3900

Polyethylene coated cloth with rubber adhesive. Economy grade duct tape. A good choice for general maintenance, repair holding poly carpet and other materials, secures PVC pipes, protects surfaces from abrasion. Individually wrapped.



UPC Number	Size	Color	Case Qty	Units
00-021200-49833-6	48mmx54.8m	Black	24	RL
00-021200-49832-9	48mmx54.8m	Blue	24	RL
00-021200-49831-2	48mmx54.8m	Olive	24	RL
00-021200-49830-5	48mmx54.8m	Red	24	RL
00-051131-06976-3	48mmx54.8m	Silver	24	RL
00-021200-49829-9	48mmx54.8m	White	24	RL
00-021200-49828-2	48mmx54.8m	Yellow	24	RL

3M™ Heavy Duty Duct Tape 3939

Construction strength duct tape. Polyethylene coated cloth backing with rubber adhesive. Holds securely, sticks and stays in place. Ideal for moisture sealing, holding poly sheeting for containment and abatement and other tough protection job sites. Individually wrapped.



UPC Number	Size	Color	Case Qty	Units
00-051131-06975-6	48mmx54.8m	Silver	24	RL
00-021200-85562-7	72mmx54.8m	Silver	12	RL

Duct Tapes, Cloth Tapes, cont'd

3M™ Outdoor Masking and Stucco Tape 5959

5959 is sunlight/UV resistant removes clean with little or no adhesive residue for up to 3 months and has 3 month outdoor weathering. It is designed for masking on windows and stucco applications. Protects a variety of substrates during construction.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-051115-25491-8	Individually Wrapped	1.88"x45yds	Red	12	RL

3M™ Extra Heavy Duty Duct Tape 6969

Extra thick, extra strong duct tape. Polyethylene coated cloth backing with rubber adhesive. Strong, tight hold. Sticks well to rough surfaces for demanding applications. Individually wrapped.



UPC Number	Size	Color	Case Qty	Units
00-021200-22773-8	48mmx54.8m	Black	24	RL
00-021200-22780-6	48mmx54.8m	Olive	24	RL
00-051131-06969-5	48mmx54.8m	Silver	24	RL
00-021200-85635-8	72mmx54.8m	Silver	12	RL

3M™ Performance Plus Duct Tape 8979

8979 is designed for both permanent and temporary applications both indoors and outdoors. 8979 provides clean removal with little or no adhesive residue from most opaque surfaces up to 6 months after application. It offers sunlight UV resistance for up to 1-Year without the backing deteriorating or delaminating. Typical physical and performance characteristics include: thickness: 13 mils, adhesion to steel: 52 oz. in width, tensile strength: 36 lbs. in width, elongation at break: 21%, temperature use range: Up to 200°F (93°C).



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-048011-53922-5	Bulk	24mmx54.8m	Slate Blue	48	RL
00-048011-53918-8	Individually Wrapped	48mmx54.8m	Black	24	RL
00-048011-53916-4	Individually Wrapped	48mmx54.8m	Olive	24	RL
00-048011-53851-8	Individually Wrapped	48mmx22.8m	Slate Blue	12	RL
00-021200-56468-0	Individually Wrapped	48mmx54.8m	Slate Blue	24	RL
00-021200-56469-7	Bulk	72mmx54.8m	Slate Blue	12	RL
00-021200-56470-3	Bulk	96mmx54.8m	Slate Blue	12	RL
00-048011-58183-5	Individually Wrapped	144mmx54.8m	Slate Blue	6	RL
00-048011-53920-1	Bulk	12"x60yds	Slate Blue	2	RL
00-048011-53919-5	Bulk	22"x60yds	Slate Blue	1	RL

Duct Tapes, Vinyl Tapes

3M™ Vinyl Duct Tape 3903

Embossed vinyl film coated with rubber adhesive effective for color-coding, labeling and other light duty applications where easy unwind, easy tear and less adhesive transfer are important. Clean removal up to 6 months.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-051131-06995-4	Individually Wrapped	2"x50yds	Black	24	RL
00-051131-06978-7	Individually Wrapped	2"x50yds	Blue	24	RL
00-051131-06984-8	Individually Wrapped	2"x50yds	Gray	24	RL
00-051131-06986-2	Individually Wrapped	2"x50yds	Green	24	RL
00-051131-06992-3	Individually Wrapped	2"x50yds	Red	24	RL
00-051131-06981-7	Individually Wrapped	2"x50yds	White	24	RL
00-051131-06982-4	Individually Wrapped	2"x50yds	Yellow	24	RL
00-021200-44989-5	Bulk	3"x50yds	Gray	18	RL

Masking Products, Masking Films

3M™ Hand Masker™ Pre-Folded Masking Film MF99++

3M™ Hand-Masker™ Pre-Folded Masking Film 99 in x 90 ft. Pre-folded, high-density, nonporous film for paint masking and paint overspray protection. Flake resistant for multiple coat use. May be used with lacquers. 12 in product unfolds to 99 in.



UPC Number	Product ID	Size	Case Qty	Units
00-051131-06849-0	MF99++	99"x90'	1	RL

Masking Products, Masking Tapes

3M™ General Purpose Masking Tape 203

Cost-effective choice for bundling, attaching, holding, sealing, wrapping and masking. Construction strength for holding power, the convenience of tearing by hand, and the strength for reliable bundling, easy unwind, instant adhesion, and smooth backing.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-048011-58035-7	Bulk	18mmx55m	Beige	48	RL
00-048011-58036-4	Bulk	24mmx55m	Beige	36	RL
00-048011-58452-2	Individually Wrapped	24mmx55m	Beige	36	RL
00-048011-58037-1	Bulk	36mmx55m	Beige	24	RL
00-048011-58038-8	Bulk	48mmx55m	Beige	24	RL
00-048011-58454-6	Individually Wrapped	48mmx55m	Beige	24	RL
00-048011-58039-5	Bulk	72mmx55m	Beige	12	RL

Masking Products, Masking Tapes, cont'd

3M™ Paper Tape 200

A utility purpose paper tape for holding, bundling, sealing, non-critical masking and a vast number of other jobs where pressure sensitive tape is needed. Should not be subjected to outdoor or UV exposure. Typically used at room temperature but will function up to 200°F (93°C).



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-048011-53469-5	Bulk	12mmx55m	Natural	72	RL
00-048011-53464-0	Bulk	18mmx55m	Natural	48	RL
00-048011-53465-7	Bulk	24mmx55m	Natural	36	RL
00-048011-53470-1	Bulk	36mmx55m	Natural	24	RL
00-048011-53466-4	Bulk	48mmx55m	Natural	24	RL
00-048011-53467-1	Bulk	72mmx55m	Natural	12	RL

3M™ Paper Masking Tape 2209

A general purpose paper tape for holding, bundling, sealing, non-critical masking and a vast number of other jobs where a pressure-sensitive tape is needed.



UPC Number	Extra Desc	Size	Color	Case Qty	Units
00-051115-24810-8	Bulk	12mmx55m	Natural	72	RL
00-051115-24803-0	Bulk	18mmx55m	Natural	48	RL
00-051115-24804-7	Bulk	24mmx55m	Natural	36	RL
00-051115-24806-1	Bulk	36mmx55m	Natural	24	RL
00-051115-24807-8	Bulk	48mmx55m	Natural	24	RL
00-051115-24808-5	Bulk	72mmx55m	Natural	12	RL
00-051115-24809-2	Bulk	96mmx55m	Natural	8	RL

3M™ Paper Masking Tape 2214

Economical, quality, general purpose paper tape with rubber adhesive. Exceptional shear to corrugated boxes and exceptionally consistent adhesion. Use for bundling, sealing, holding and non-critical indoor jobs. 5.3 mil, pressure sensitive tape resists slivering. Use up to 150°F (66°C).



UPC Number	Size	Color	Case Qty	Units
00-021200-26074-2	18mmx55m	Beige	48	RL
00-021200-26075-9	24mmx55m	Beige	36	RL
00-021200-26076-6	36mmx55m	Beige	24	RL
00-021200-26077-3	48mmx55m	Beige	24	RL
00-021200-26078-0	72mmx55m	Beige	12	RL

Masking Products, Masking Tapes, cont'd

Scotch® General Purpose Masking Tape 234

A very high temperature resistant tape for use in masking and holding applications where temperatures reach 250°F (121°C) for up to 1 hour. A general purpose paper masking tape designed to be used in medium temperature paint bake operation.



UPC Number	Size	Color	Case Qty	Units
00-021200-02982-0	24mmx55m	Natural	36	RL
00-021200-04244-7	48mmx55m	Natural	24	RL
00-021200-02985-1	72mmx55m	Natural	12	RL

Scotch-Blue™ Painter's Tape For Multi-Surfaces 2090

Ideal for semi-smooth surfaces, such as: textured walls, woodwork, vinyl floors, and tile. Removes cleanly and easily for up to 14 days without leaving adhesive residue. Color: Blue.



UPC Number	Product ID	Extra Desc	Size	Color	Case Qty	Units
00-051115-03680-4			¾"x60yds		48	RL
00-051115-06817-1		Bulk	¾"x60yds		48	RL
00-051115-03681-1			1"x60yds		36	RL
00-051115-06818-8		Bulk	1"x60yds		36	RL
00-051115-03682-8			1½"x60yds		24	RL
00-051115-06819-5		Bulk	1½"x60yds		24	RL
00-051115-03683-5			2"x60yds		24	RL
00-051115-09168-1		6 roll contractor pack	2"x60yds		6	RL
00-051115-06820-1		Bulk	2"x60yds		24	RL
00-051115-06910-9	2090	Bulk	3"x60yd	Blue	16	RL
00-051115-87126-7	2090TA1510		1"x30yd	Blue	12	PK

Scotch-Blue™ Industrial Advantage Masking Tape 2750

2750 is a high performance crepe paper masking tape for use in medium temp paint bake operations. This tape removes cleanly up to 3 days, holds strong to most surfaces resulting in sharp paint lines with both solvent and latex based paints.




UPC Number	Product ID	Size	Color	Case Qty	Units
00-051111-07510-4	2750	12mmx55m	Blue	72	RL
00-051111-07538-8	2750	18mmx55m	Blue	48	RL
00-051111-07539-5	2750	24mmx55m	Blue	36	RL
00-051111-91726-8	2750	24mmx55m	Blue	36	RL
00-051111-07540-1	2750	36mmx55m	Blue	24	RL
00-051111-91727-5	2750	36mmx55m	Blue	24	RL
00-051111-07541-8	2750	48mmx55m	Blue	24	RL
00-051111-91728-2	2750	48mmx55m	Blue	24	RL
00-051111-07542-5	2750	72mmx55m	Blue	12	RL
00-051111-07544-9	2750	96mmx55m	Blue	8	RL

Masking Products, Masking Tapes, cont'd

Scotch® 60-Day Ultimate Paint Edge Masking Tape 2480S

2480S is a flatback tape featuring a unique acrylic adhesive technology. 2480S produces long razor sharp straight lines. It resists UV/sunlight for 60 days and removes cleanly from surfaces. The thin strong backing resists bleed through.



UPC Number	Product ID	Size	Color	Case Qty	Units
00-051111-07545-6	2480S	½"x60yd	Green	72	RL
00-051111-07546-3	2480S	¾"x60yd	Green	48	RL
00-051111-07547-0	2480S	1"x60yd	Green	36	RL
00-051111-91852-4	2480S	1"x60yd	Green	36	RL
00-051111-07548-7	2480S	1½"x60yd	Green	24	RL
00-051111-91853-1	2480S	1½"x60yd	Green	24	RL
00-051111-07549-4	2480S	2"x60yd	Green	24	RL

Scotch® Ultimate Paint Edge Masking Tape 2460

2460 flatback tape features a unique acrylic adhesive technology. 2460 is for paint bake operations at temps up to 300F, peels off cleanly with no adhesive residue. The thin backing produces a low paint ridge resulting in sharp smooth lines.



UPC Number	Product ID	Size	Color	Case Qty	Units
00-051111-91672-8	2460	½"x60yd	Gold	72	RL
00-051111-91927-9	2460	¾"x60yd	Gold	48	RL
00-051111-91928-6	2460	1"x60yd	Gold	36	RL
00-051111-91929-3	2460	1½"x60yd	Gold	24	RL

Packaging Products, Box Sealing Tapes, Standard

Scotch® Box Sealing Tape 371

Colored polypropylene tapes for single wall, low burst strength RSCs with high weight contents. More than 3,000 minutes adhesion to fiberboard. Tensile strength of 22 lb/in in machine direction; 44 lb/in cross direction.



UPC Number	Size	Color	Case Qty	Units
00-021200-13679-5	48mmx50m	Clear	36	RL
00-021200-15873-5	48mmx100m	Clear	36	RL

Packaging Products, Filament Tapes

Scotch® Filament Tape 893

Polypropylene backing is easy to handle and dispense. Provides excellent resistance to nicks, abrasion and moisture. Specially formulated hot melt adhesive provides good balance of adhesion properties: good initial and long term adhesion, and high shear strength to package surfaces. Color: Clear.



UPC Number	Extra Desc	Size	Case Qty	Units
00-051131-06938-1	Bulk	18mmx55m	48	RL
00-051131-06939-8	Bulk	24mmx55m	36	RL

Scotch® Filament Tape 897

High performance. Polypropylene backing reinforced with glass filaments. Typical 170 lb/in width tensile strength for light to medium-duty bundling, reinforcing, and palletizing. Good initial and long-term adhesion with good shear strength. Color: Clear.



UPC Number	Size	Case Qty	Units
00-021200-86525-1	24mmx55m	36	RL

Tartan™ Filament Tape 8934

Clear polypropylene film backing reinforced with glass yarn filaments. Light duty tensile strength, nick resistance, abrasion resistance and good handling for utility bundling, reinforcing, and pallet unitizing applications. Color: Clear.




UPC Number	Size	Case Qty	Units
00-021200-86519-0	18mmx55m	48	RL
00-021200-86520-6	24mmx55m	36	RL

Specialty Tapes, Double Coated Tapes, Foam Tapes

3M™ Double Coated Urethane Foam Tape 4008


This tape has a firm acrylic, pressure sensitive adhesive system. It features high ultimate bond strength, very good high temperature and solvent resistance and very high shear holding power. Bond strength increases substantially with natural aging. These urethane foams are soft, conformable and have high shear strength which makes them ideal for general purpose lightweight mounting and joining. 4008 short term temperature resistance: 308°F (193°C), long term temperature resistance: 220°F (104°C). Color: Off-White.



UPC Number	Size	Case Qty	Units
00-021200-06450-0	½"x36yds	18	RL
00-021200-06451-7	¾"x36yds	12	RL
00-051131-06439-3	1"x4yds	5	RL
00-021200-06452-4	1"x36yds	9	RL

3M™ Double Coated Urethane Foam Tape 4016

This tape has a firm acrylic, pressure sensitive adhesive system. It features high ultimate bond strength, very good high temperature and solvent resistance and very high shear holding power. Bond strength increases substantially with natural aging. These urethane foams are soft, conformable and have high shear strength which makes them ideal for general purpose lightweight mounting and joining. 4016 short term temperature resistance: 380°F (193°C), long term temperature resistance: 220°F (104°C). Color: Off-White.



UPC Number	Size	Case Qty	Units
00-021200-03371-1	¼"x36 yds	36	RL
00-021200-03372-8	3/8"x36yds	24	RL
00-021200-06453-1	½"x36yds	18	RL
00-021200-06454-8	¾"x36yds	12	RL
00-021200-06455-5	1"x36yds	9	RL
00-021200-03376-6	1½"x36yds	6	RL
00-021200-04865-4	2"x36yds	6	RL

Specialty Tapes, Mounting Tapes

3M™ Extra-thick Multipurpose Indoor Mounting Tape 4008

Immediately bonds to many indoor textured surfaces, fills gaps between surfaces, and permanently mounts dispensers and signs.



UPC Number	Size	Color	Case Qty	Units
00-051115-25525-0	¾"x7yds	Off-White	12	RL

Specialty Tapes, Mounting Tapes, cont'd

3M™ VHB™ Heavy Duty Clear Outdoor/Indoor Mounting Tape 4910

General purpose adhesive bonds to most higher surface energy substrates including metal, glass and high surface energy plastics.



UPC Number	Size	Color	Case Qty	Units
00-051115-25523-6	¾" x 15yds	Clear	12	RL

3M™ VHB™ Heavy Duty Outdoor/Indoor Mounting Tape 5952

A very conformable foam that bonds and seals simultaneously to withstand vibration, impact and weathering.



UPC Number	Size	Color	Case Qty	Units
00-051115-25522-9	¾" x 15yds	Black	12	RL

Specialty Tapes, Foil Tapes Aluminum

Scotch® Foil Tape 3311

Ideal for general duct sealing and MRO repair applications. Shorter roll is designed for use in tight duct work spaces. Meets UL 723 standard. Color: Silver.



UPC Number	Size	Case Qty	Units
00-051131-85492-5	2" x 10yds	24	RL
00-051131-85493-2	2" x 50yds	12	RL

Scotch® Foil Tape 3326

Scotch® Foil Tape 3326, Ideal for sealing fiberglass duct work and flexible duct systems. Meets UL 181 A/B-FX Standard. Color: Silver.



UPC Number	Size	Case Qty	Units
00-051131-85494-9	2½" x 60yds	12	RL

Specialty Tapes, Foil Tapes Aluminum , cont'd

3M™ Aluminum Foil Tape 425

3M™ Aluminum Foil Tape 425 Silver, 4.6 mil (0.12mm), Dead-soft aluminum foil tape with a pressure sensitive acrylic adhesive




UPC Number	Product ID	Size	Color	Case Qty	Units
00-051138-95074-3	425	4" x 60yd	Silver	2	RL

Specialty Tapes, Safety Tapes, Aisle Marking & Identification Tapes

3M™ Safety Stripe Tape 5702

Tape resists most common chemicals and solvents. Used to identify or mark traffic areas and physical hazards. The sharp, contrasting colors readily identify hazardous areas. The clear vinyl over the colored stripes help protect stripes from abrasion. The 5.4 mil total tape thickness resists snagging often associated with thicker products. Meet requirements of CID-A-A-1689. Color: Black/Yellow.



UPC Number	Size	Case Qty	Units
00-021200-04585-1	2" x 36yds	24	RL

3M™ Vinyl Tape 471

3M™ Vinyl Tape 471, ideal for masking, wrapping or sealing many curved or irregular surfaces, excellent for many lane and safety marking applications, ideal for color coding, abrasion protection, decoration and splicing applications. Meet requirements of CID-A-A-1689.



UPC Number	Size	Color	Case Qty	Units
00-021200-04306-2	2" x 36yds	Black	24	RL
00-021200-04308-6	2" x 36yds	Blue	24	RL
00-021200-04309-3	2" x 36yds	Brown	24	RL
00-021200-04313-0	2" x 36yds	Green	24	RL
00-021200-04312-3	2" x 36yds	Orange	24	RL
00-021200-04305-5	2" x 36yds	Red	24	RL
00-021200-04311-6	2" x 36yds	White	24	RL
00-021200-04310-9	2" x 36yds	Yellow	24	RL
00-021200-06420-3	2" x 36yds	Yellow	24	RL

Specialty Tapes, Sealing Tapes

3M™ Construction Seaming Tape 8087

Serves as an excellent house wrap / sheeting sealing tape as well as an interior sealing tape for moisture barrier applications. BOPP UV stabilized backing with acrylic adhesive. Color: Blue.



UPC Number	Extra Desc	Size	Case Qty	Units
00-021200-97338-3	Individually Wrapped	1-7/8"x55yds	16	RL
00-051115-23593-1	Individually Wrapped	2-13/16"x55yds	16	RL

Specialty Tapes, Weather Tapes

3M™ All Weather Flashing Tape 8067

3M™ All Weather Flashing Tape 8067 is a self-adhesive barrier for use in the construction industry to seal window and door openings against moisture intrusion. Tape has a unique, aggressive acrylic adhesive and thin, patented backing.



UPC Number	Size	Case Qty	Units
00-051115-31620-3	4"x75'	12	EA
00-051115-31621-0	6"x75'	8	EA
00-051115-31622-7	9"x75'	4	EA

Contractors selection

Masking tape made easy



This streamlined selection features the range of performance characteristics typically in demand at a contractor job site.

LEVELS MASKING TAPE PRODUCT PORTFOLIO



2

I

LEVEL 1 CONTRACTOR HIGH PERFORMANCE

Best-in-class contractor choices for reliable masking and clean removal for paints and coatings and heavy duty use.

Tape number	Thickness (mils)	Holding capability	Days for clean removal	UV resistance
234	6.0	High	3	Yes
2308	5.6	High	3	Yes



3

II

LEVEL 2 CONTRACTOR PERFORMANCE

Choices with clean removal for general job site hanging, sealing, bundling, attaching, and labeling.

Tape number	Thickness (mils)	Holding capability	Days for clean removal	UV resistance
203	5.2	Medium	1	No
200	4.5	Medium	1	No



4

III

LEVEL 3 CONTRACTOR VALUE

Economical choices with clean removal for light duty bundling, attaching, and labeling.

Tape number	Thickness (mils)	Holding capability	Days for clean removal	UV resistance
2214	5.3	Low/Medium	1	No
2209	5.1	Low/Medium	1	No

Note: This technical information and data should be considered representative or typical only and should not be used for specification purposes.

Answers to the following questions will probably take you to one of the above six 3M™ Masking Tapes.

1. What is the performance requirement for the job? Critical or light duty?
2. What are the environmental conditions? Consider UV, temperature range or indoor/outdoor conditions.
3. Does the job require higher or lower adhesion?
NOTE: Rough surfaces require higher adhesion, so determine surface being masked.
4. Is it important to be able to remove the tape in one piece?
Consider the correct tape for easy one piece removal.
NOTE: How many days will it be masked?



	Product/Color	Tape Size	Rolls/Case	Cases/Pallet	UPC
LEVEL I	Scotch® General Purpose Masking Tape 234				
	Natural	18mm x 55m (.70 in x 60.1 yds)	48	64	00-021200-02981-3
	Natural	24mm x 55m (.94 in x 60.1 yds)	36	64	00-021200-02982-0
	Natural	36mm x 55m (1.41 in x 60.1 yds)	24	64	00-021200-02983-7
	Natural	48mm x 55m (1.88 in x 60.1 yds)	24	48	00-021200-04244-7
	Natural	72mm x 55m (2.83 in x 60.1 yds)	12	64	00-021200-02985-1
	Scotch® Masking Tape 2308				
	Natural	18mm x 55m (.70 in x 60.1 yds)	48	64	00-051131-06545-1
	Natural	24mm x 55m (.94 in x 60.1 yds)	36	64	00-051131-06546-8
	Natural	36mm x 55m (1.41 in x 60.1 yds)	24	64	00-051131-06547-5
	Natural	48mm x 55m (1.88 in x 60.1 yds)	24	48	00-051131-06548-2
Natural	72mm x 55m (2.83 in x 60.1 yds)	12	64	00-051131-06549-9	
LEVEL II	3M™ General Purpose Masking Tape 203				
	Natural	18mm x 55m (.70 in x 60.1 yds)	48	64	00-048011-58035-7
	Natural	24mm x 55m (.94 in x 60.1 yds)	36	64	00-048011-58036-4
	Natural	36mm x 55m (1.41 in x 60.1 yds)	24	64	00-048011-58037-1
	Natural	48mm x 55m (1.88 in x 60.1 yds)	24	48	00-048011-58038-8
	Natural	72mm x 55m (2.83 in x 60.1 yds)	12	64	00-048011-58039-5
	Natural, Ind. Wrap	24mm x 55m (.94 in x 60.1 yds)	36	64	00-048011-58452-2
	Natural, Ind. Wrap	48mm x 55m (1.88 in x 60.1 yds)	24	48	00-048011-58454-6
	3M™ Paper Tape 200				
	Natural	18mm x 55m (.70 in x 60.1 yds)	48	64	00-048011-53464-0
	Natural	24mm x 55m (.94 in x 60.1 yds)	36	64	00-048011-53465-7
Natural	36mm x 55m (1.41 in x 60.1 yds)	24	64	00-048011-53470-1	
Natural	48mm x 55m (1.88 in x 60.1 yds)	24	48	00-048011-53466-4	
Natural	72mm x 55m (2.83 in x 60.1 yds)	12	96	00-048011-53467-1	
LEVEL III	3M™ Paper Masking Tape 2214				
	Natural	18mm x 55m (.70 in x 60.1 yds)	48	64	00-021200-26074-2
	Natural	24mm x 55m (.94 in x 60.1 yds)	36	64	00-021200-26075-9
	Natural	36mm x 55m (1.41 in x 60.1 yds)	24	64	00-021200-26076-6
	Natural	48mm x 55m (1.88 in x 60.1 yds)	24	48	00-021200-26077-3
	Natural	72mm x 55m (2.83 in x 60.1 yds)	12	64	00-021200-26078-0
	3M™ Paper Masking Tape 2209				
	Natural	18mm x 55m (.70 in x 60.1 yds)	48	64	00-051115-24803-0
	Natural	24mm x 55m (.94 in x 60.1 yds)	36	64	00-051115-24804-7
	Natural	36mm x 55m (1.41 in x 60.1 yds)	24	64	00-051115-24806-1
	Natural	48mm x 55m (1.88 in x 60.1 yds)	24	48	00-051115-24807-8
Natural	72mm x 55m (2.83 in x 60.1 yds)	12	64	00-051115-24808-5	

PRODUCT USE: All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application. **WARRANTY AND LIMITED REMEDY:** 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. **3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.** User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to repair or replace the product or refund the purchase price. **LIMITATION OF LIABILITY:** Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Building and Contractor Markets

3M Center, Building 21-1W-10
900 Bush Avenue
St. Paul, MN 55144
1 866 513 4026
www.3M.com/construction




Scotch is a registered trademark of 3M Company. 3M is a trademark of 3M Company.

Printed in U.S.A.

© 2007 3M
70-0711-0194-6

3M™ Duct Tapes

Classifications Guide

Classes	Product Portfolio	Adhesive and Backing Strength																		
<p>Class I</p>  <p>Best in class tapes for indoor/outdoor use, offering clean removal and long term weatherability.</p>	<p>3M™ Performance Plus Duct Tape 8979 and 8979N (Nuclear)</p>	<table border="1"> <tr><td>Strength</td><td>LO</td><td>HI</td></tr> <tr><td>Adhesive Strength</td><td colspan="2">██████████</td></tr> <tr><td>Backing Strength</td><td colspan="2">██████████</td></tr> <tr><td>Months</td><td>0</td><td>6 12</td></tr> <tr><td>Weatherability</td><td colspan="2">██████████</td></tr> <tr><td>Clean Removal</td><td colspan="2">██████</td></tr> </table>	Strength	LO	HI	Adhesive Strength	██████████		Backing Strength	██████████		Months	0	6 12	Weatherability	██████████		Clean Removal	██████	
Strength	LO	HI																		
Adhesive Strength	██████████																			
Backing Strength	██████████																			
Months	0	6 12																		
Weatherability	██████████																			
Clean Removal	██████																			
	<p>3M™ Outdoor Masking and Stucco Tape 5959</p>	<table border="1"> <tr><td>Strength</td><td>LO</td><td>HI</td></tr> <tr><td>Adhesive Strength</td><td colspan="2">██████████</td></tr> <tr><td>Backing Strength</td><td colspan="2">██████████</td></tr> <tr><td>Months</td><td>0</td><td>6 12</td></tr> <tr><td>Weatherability</td><td colspan="2">████</td></tr> <tr><td>Clean Removal</td><td colspan="2">████</td></tr> </table>	Strength	LO	HI	Adhesive Strength	██████████		Backing Strength	██████████		Months	0	6 12	Weatherability	████		Clean Removal	████	
Strength	LO	HI																		
Adhesive Strength	██████████																			
Backing Strength	██████████																			
Months	0	6 12																		
Weatherability	████																			
Clean Removal	████																			
<p>Class II</p>  <p>Heavy duty tapes for demanding contractor, MRO and industrial job site applications.</p>	<p>3M™ Extra Heavy Duty Duct Tape 6969</p>	<table border="1"> <tr><td>Strength</td><td>LO</td><td>HI</td></tr> <tr><td>Adhesive Strength</td><td colspan="2">██████████</td></tr> <tr><td>Backing Strength</td><td colspan="2">██████████</td></tr> </table>	Strength	LO	HI	Adhesive Strength	██████████		Backing Strength	██████████										
Strength	LO	HI																		
Adhesive Strength	██████████																			
Backing Strength	██████████																			
	<p>3M™ Heavy Duty Duct Tape 3939</p>	<table border="1"> <tr><td>Strength</td><td>LO</td><td>HI</td></tr> <tr><td>Adhesive Strength</td><td colspan="2">██████████</td></tr> <tr><td>Backing Strength</td><td colspan="2">██████████</td></tr> </table>	Strength	LO	HI	Adhesive Strength	██████████		Backing Strength	██████████										
Strength	LO	HI																		
Adhesive Strength	██████████																			
Backing Strength	██████████																			
	<p>3M™ Multi Purpose Duct Tape 3900</p>	<table border="1"> <tr><td>Strength</td><td>LO</td><td>HI</td></tr> <tr><td>Adhesive Strength</td><td colspan="2">██████████</td></tr> <tr><td>Backing Strength</td><td colspan="2">██████████</td></tr> </table>	Strength	LO	HI	Adhesive Strength	██████████		Backing Strength	██████████										
Strength	LO	HI																		
Adhesive Strength	██████████																			
Backing Strength	██████████																			
<p>Class III</p>  <p>Utility and general use tapes for lighter duty applications.</p>	<p>3M™ Utility Duct Tape 2929</p>	<table border="1"> <tr><td>Strength</td><td>LO</td><td>HI</td></tr> <tr><td>Adhesive Strength</td><td colspan="2">██████████</td></tr> <tr><td>Backing Strength</td><td colspan="2">██████████</td></tr> </table>	Strength	LO	HI	Adhesive Strength	██████████		Backing Strength	██████████										
Strength	LO	HI																		
Adhesive Strength	██████████																			
Backing Strength	██████████																			
	<p>3M™ Value Duct Tape 1900</p>	<table border="1"> <tr><td>Strength</td><td>LO</td><td>HI</td></tr> <tr><td>Adhesive Strength</td><td colspan="2">██████████</td></tr> <tr><td>Backing Strength</td><td colspan="2">██████████</td></tr> </table>	Strength	LO	HI	Adhesive Strength	██████████		Backing Strength	██████████										
Strength	LO	HI																		
Adhesive Strength	██████████																			
Backing Strength	██████████																			
	<p>3M™ Vinyl Duct Tape 3903</p>	<table border="1"> <tr><td>Strength</td><td>LO</td><td>HI</td></tr> <tr><td>Adhesive Strength</td><td colspan="2">██████</td></tr> <tr><td>Backing Strength</td><td colspan="2">████</td></tr> </table>	Strength	LO	HI	Adhesive Strength	██████		Backing Strength	████										
Strength	LO	HI																		
Adhesive Strength	██████																			
Backing Strength	████																			



Product information

	Product	Color	Size	Thickness	Pkg/case	UPC	3M ID	Features and Applications
Class I	3M™ Performance Plus Duct Tape							
	8979	Slate Blue	1.88 in x 25 yd (48 mm x 22.8 m)	12.6 mil	12*	00021200-53851-8	70006355385	No deterioration outdoors for up to one year <ul style="list-style-type: none"> • Patching, sealing, splicing, joining, bundling, wrapping • Hold masking materials • Surface blasting overspray protection • Corrosion protection • Temporary pipe and conduit capping • Tears easily • Non-sticky roll sides stay clean
	8979	Slate Blue	1.88 in x 60 yd		24	00021200-56468-0	70006294451	
	8979	Black	(48 mm x 54.8 m)		24	00048011-53918-8	70006356037	
	8979N	Slate Blue			24	00021200-74327-6	70006359122	
	8979N	Red			24**	00048011-53914-0	70006355997	
3M™ Outdoor Masking and Stucco Tape								
	5959	Red	1.88 in x 45 yds (48 mm x 41.1 m)	12.0 mil	12*	00051115-25491-8	70006429156	Construction, Marine, and Maintenance <ul style="list-style-type: none"> • Strong enough to pull through stucco and EIFS • Protects aluminum, steel, and painted surfaces • Protects masonry systems during construction • Holds heavy poly for protective masking • Protects gel coat from scratching and marring • Tears easily • Non-sticky roll sides stay clean
Class II	3M™ Extra Heavy Duty Duct Tape							
	6969	Silver	1.88 in x 60 yd (48 mm x 54.8 m)	10.7 mil	24*	00051131-06969-5	70006250172	Demanding industrial and construction jobs <ul style="list-style-type: none"> • Holds on sealed brick and concrete • HVAC and abatement • Splicing • Protects surfaces from abrasion • Tears easily • Secures heavy metals/pipes together • Non-sticky roll sides stay clean
	3M™ Heavy Duty Duct Tape							
	3939	Silver	1.88 in x 60 yd (48 mm x 54.8 m)	9.0 mil	24*	00051131-06975-6	70006250131	Tough projects on job sites <ul style="list-style-type: none"> • Holds poly sheeting for containment and abatement • Pulling wires and bundling • Temporary pipe and conduit capping • Maintenance and repair • Moisture proofing • Non-sticky roll sides stay clean
	3939	Silver	2.83 in x 60 yd (72 mm x 54.8 m)		12/Bulk	00021200-85562-7	70006250156	
	3M™ Multi Purpose Duct Tape							
	3900	Silver	1.88 in x 60 yd (48 mm x 54.8 m)	8.3 mil	24*	00051131-06976-3	70006250602	Multi use applications <ul style="list-style-type: none"> • Holding poly, carpet, and other materials • Facility and in-plant repairs • Securing PVC pipes • Protecting surfaces from abrasion • Tested in accordance with UL 723 • Non-sticky roll sides stay clean
	3900	Black		7.7 mil		00021200-49833-6	70006315249	
	3900	Olive		00021200-49831-2		70006315223		
	3900	Red		00021200-49830-5		70006315215		
3900	White	00021200-49829-9		70006315207				
3900	Yellow	00021200-49828-2		70006315199				
3900	Blue	00021200-49832-9		70006315231				
Class III	3M™ Utility Duct Tape							
	2929	Silver	1.88 in x 50 yd (48 mm x 45.7 m)	6.0 mil	24*	00051115-24883-2	70006416344	Light duty applications <ul style="list-style-type: none"> • Temporary repairs • Sealing, holding, labeling • Sticks to metal, concrete, and other surfaces • Resists moisture • Tears easily
	2929	Silver	2.83 in x 50 yd (72 mm x 45.7 m)	5.8 mils	12/Bulk	00051115-24885-6	70006416351	
	3M™ Value Duct Tape							
	1900	Silver	1.88 in x 50 yd (48 mm x 45.7 m)	5.8 mils	24*	00051115-23421-7	70006412426	Cost-effective applications <ul style="list-style-type: none"> • Sealing and holding • Marking • Resists moisture • Tears easily
	3M™ Vinyl Duct Tape							
3903	Blue	1.88 in x 50 yd (48 mm x 45.7 m)	6.2 mil	24*	00051131-06978-7	70006284437	All around jobs <ul style="list-style-type: none"> • Conforms well to irregular surfaces • Vinyl backing is abrasion resistant • Multiple colors for marking and color coding • Tears easily 	
3903	Green				00051131-06986-2	70006284460		
3903	Red				00051131-06992-3	70006287067		
3903	White				00051131-06981-7	70006284452		
3903	Yellow				00051131-06982-4	70006284445		
3903	Gray				00051131-06984-8	70006281110		

* Individually wrapped ** Bulk only

Note: This technical information and data should be considered representative or typical only and should not be used for specification purposes.

PRODUCT USE: All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application. **WARRANTY AND LIMITED REMEDY:** 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. **3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.** User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to repair or replace the product or refund the purchase price. **LIMITATION OF LIABILITY:** Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Building and Contractor Market

3M Center Bldg. 21-1W-10
 900 Bush Ave.
 St. Paul, MN 55144
 1-888-745-4350
 www.3M.com/contractor

3M is a trademark of 3M Company.

Printed in U.S.A.
 © 2008 3M

Low Emissions.

High Standards.

Pursue LEED® rated projects with
3M™ Adhesives that are
GREENGUARD™ Certified.



Going Green Made Easy



What does it mean to be GREENGUARD™ Certified?

“GREENGUARD” is the designation given to products that meet rigorous standards for low-emitting materials. The GREENGUARD Certification Program™ is an industry-independent, third-party testing program for low-emitting products and materials. It is administered by the GREENGUARD Environmental Institute (GEI), an ANSI authorized standards developer. GEI establishes acceptable indoor air standards for indoor products, environments and buildings; its mission is to improve public health and quality of life through programs that improve indoor air. The first GREENGUARD Certification was awarded in 2002. In 2005, GEI announced the GREENGUARD Children & Schools™ standard, which created the most rigorous product emissions criteria available today. For more information on GREENGUARD, go to www.greenguard.org.

For more information on the LEED® rating system, go to www.usgbc.org.

The “green building” revolution is spreading across the world, and builders and manufacturers everywhere are looking for products to help them meet their new green goals. 3M can help. We’ve been actively developing water-based adhesives for more than 40 years, and our portfolio of high-performance products includes a wide variety of high solids/low-VOC and GREENGUARD Indoor Air Quality Certified® adhesives. Incorporating these adhesives into your manufacturing processes can help you and your customers pursue LEED® (Leadership in Energy and Environmental Design) rated projects.

The Green Build Rating System: Measuring Greenness

Nearly everyone agrees that building green is a great idea, but how do you measure and substantiate the level of “greenness” achieved by a building? That’s what the LEED® rating system was designed to do. Developed by the United States Green Building Council (USGBC), the LEED® rating system awards points to buildings if they meet specific green criteria in five key areas of human and environmental health: sustainable site development, water savings, energy efficiency, materials selection and indoor air quality.

According to the USGBC, pursuing LEED® rated projects can benefit builders in many ways:

- Greater energy efficiency when the building is operational
- Tax relief and lower permit fees
- Lower interest and insurance rates
- Higher-appraised-value properties
- Faster occupancy rates due to greater demand
- A better image in the community

GREENGUARD Certified

Today, 3M has six adhesives that have been certified to the GREENGUARD Children & Schools™ standard—the highest certification offered by the GREENGUARD Environmental Institute’s (GEI) GREENGUARD Certification Program™. GEI is an industry-independent, nonprofit organization that tests products to ensure their chemical and particle emissions meet acceptable indoor air quality (IAQ) standards—one of the five components of the United States Green Building Council’s LEED® rating system.





Bottom-line Benefits

3M™ Adhesives that are GREENGUARD Indoor Air Quality Certified® can do more than just help manufacturers and builders pursue LEED® rated projects; they can make long-term economic sense. In addition to the benefits listed below, incorporating green 3M adhesives into your processes can be an important part of helping make your own products green—opening the door to a whole new universe of customers.

Choosing green 3M adhesives can benefit manufacturers through:

- Reduced flammability and fire marshal issues with water-based adhesives
- No transportation restrictions from using water-based adhesives
- Fewer controlled substances to manage
- Improved worker safety with low-VOC adhesives

Green 3M™ Adhesives

3M's commitment to the green movement extends far beyond GREENGUARD Certified adhesives. Our line of high-performance green products also includes a variety of high solids/low-VOC adhesives. So whatever your application, 3M has an adhesive that can help you meet your green goals. And only 3M offers comprehensive support.

3M adhesives that are GREENGUARD Certified include:

- A** 3M™ Scotch-Weld™ Cylinder Spray Adhesive 94CA—conveniently packaged, low-VOC, solvent-based contact adhesive for laminating
- B** 3M™ Fastbond™ Pressure Sensitive Adhesive 4224NF—pressure-sensitive water-based adhesive for foam, fabric and carpeting
- C** 3M™ Fastbond™ Contact Adhesive 30NF/30H—the industry standard in water-based contact adhesives
- D** 3M™ Fastbond™ Foam Adhesive 100—fast-setting water-based adhesive for foam bonding
- E** 3M™ Fastbond™ Insulation Adhesive 49—fast-setting, pressure-sensitive water-based adhesive for lightweight bonding
- F** 3M™ Fastbond™ Contact Adhesive 2000NF—immediate-bonding water-based contact adhesive for laminating

3M support makes the difference

“Going green” is often easier said than done. That's why 3M technical experts are available to work with your manufacturing engineers—to make sure our adhesives deliver the performance you need.

3M provides superior training and support for the adhesives industry. So once you make the decision to go with 3M™ Adhesives, you sign on with a partner who will work with you to make sure our adhesives perform to the highest possible standards.

For more information on 3M adhesives that are GREENGUARD Indoor Air Quality Certified®, go to www.3M.com/greenadhesives.



For more information about 3M's commitment to the green movement, go to www.3M.com/sustainability.

Opportunities for LEED® Rated Projects

Select 3M™ Adhesives are certified to the GREENGUARD Children & Schools™ product emission standard for low-emitting interior building materials in the following LEED® rating categories.

Products	LEED® Rating Categories*	Applications	Substrates
3M™ Fastbond™ Contact Adhesive 30NF/30H 3M™ Fastbond™ Contact Adhesive 2000NF 3M™ Fastbond™ Foam Adhesive 100 3M™ Fastbond™ Insulation Adhesive 49 3M™ Fastbond™ Pressure Sensitive Adhesive 4224NF 3M™ Scotch-Weld™ Cylinder Spray Adhesive 94CA	Directly contributes to LEED® EQ Credit 4.1: Low-Emitting Materials: Adhesives & Sealants (NC, CS, CI, R Option A, S Option A)	Many construction applications	Laminate, foam, fabric
3M™ Fastbond™ Contact Adhesive 30NF/30H 3M™ Fastbond™ Contact Adhesive 2000NF 3M™ Fastbond™ Pressure Sensitive Adhesive 4224NF 3M™ Scotch-Weld™ Cylinder Spray Adhesive 94CA	Addresses or contributes to LEED® EQ Credit 4.3: Low-Emitting Materials: Flooring Materials (NC, CS, CI, R Option C, S Option 3)	Flooring	Access, laminate, carpet
3M™ Fastbond™ Contact Adhesive 30NF/30H 3M™ Fastbond™ Contact Adhesive 2000NF 3M™ Scotch-Weld™ Cylinder Spray Adhesive 94CA	Addresses or contributes to LEED® EQ Credit 4.4: Composite Wood & Agrifiber Products (NC, CS, CI, R Option D)	On-site laminations, countertop laminations	HPL, veneers
3M™ Fastbond™ Contact Adhesive 30NF/30H 3M™ Fastbond™ Contact Adhesive 2000NF 3M™ Fastbond™ Foam Adhesive 100 3M™ Fastbond™ Insulation Adhesive 49 3M™ Fastbond™ Pressure Sensitive Adhesive 4224NF 3M™ Scotch-Weld™ Cylinder Spray Adhesive 94CA	Addresses or contributes to LEED® EQ Credit 4.5: Low-Emitting Materials: Furniture and Furnishings (CI, R Option E, S Option 5 – Method A)	Case goods, furniture, mattresses	Foam, fabric, wood, metal, plastic
3M™ Fastbond™ Contact Adhesive 30NF/30H 3M™ Fastbond™ Contact Adhesive 2000NF 3M™ Fastbond™ Foam Adhesive 100 3M™ Fastbond™ Insulation Adhesive 49 3M™ Scotch-Weld™ Cylinder Spray Adhesive 94CA	Addresses or contributes to LEED® EQ Credit 4.6: Low-Emitting Materials: Ceiling and Wall Systems	Displays, partitions, decorative coverings	Drywall, fabric, tile, wood

*In these categories, 3M adhesives that are GREENGUARD™ Certified as components of your products should support your LEED® compliance efforts. Project Types: NC – New Construction, CS – Core and Shell, CI – Commercial Interiors, R – Retail, S – Schools.

Other low-emitting high-solid bonding products

Product Category	Descriptor	Green Element
3M™ VHB™ Tapes	Pressure-sensitive tape to bond and seal	100% solids
3M™ Scotch-Weld™ Structural Adhesives	High-strength, two-component assembly adhesives	Low VOC, meets SCAQMD rule 1168
3M™ Rite-Lok™ Adhesives	Maintenance and repair, thread locking adhesives, assembly, pipe sealants, gasket makers and instant adhesives	Low VOC, meets SCAQMD rule 1168
3M™ Scotch-Weld™ Hot Melt Adhesives	Fast-setting assembly adhesives	100% solids
3M™ Scotch-Weld™ Polyurethane Reactive Adhesives	Fast-setting structural assembly adhesives	100% solids
3M™ Aerosol Adhesives	Conveniently packaged spray adhesives	Low VOC, meets SCAQMD rule 1168
3M™ Scotch-Weld™ Sealants	High-performance polyurethane adhesives and sealants	Low VOC, meets SCAQMD rule 1168

For more information about 3M adhesives that are GREENGUARD Indoor Air Quality Certified®, contact your local distributor or call 1-800-362-3550.

PRODUCT USE: All statements, technical information and recommendations contained in this document are based on tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

WARRANTY AND LIMITED REMEDY: 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product.

3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.

User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for a user's application. If the 3M product is defective, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to repair or replace the product or refund the purchase price.

LIMITATION OF LIABILITY: Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Industrial Adhesives and Tapes Division

3M Center, Bldg. 220-5W-06
St. Paul, MN 55144-1000
USA
1-800-362-3550
www.3M.com/greenadhesives

3M, Fastbond, Rite-Lok, Scotch-Weld and VHB are trademarks of 3M. The GREENGUARD INDOOR AIR QUALITY CERTIFIED Mark is a registered certification mark owned by Air Quality Sciences, Inc. and used under license through the Greenguard Environmental Institute.

LEED® is a registered trademark of the United States Green Building Council (USGBC).

100% post consumer waste.

Please recycle. Printed with soy inks in USA.

© 3M 2008. All rights reserved.

78-9236-7178-4

Abrasives, Packaged, Hand Sanding Products

3M™ Drywall Sanding Screen

3M™ Drywall Sanding Screen is made to fit most drywall sanding tools. Made with a sharp silicon carbide mineral for long-lasting performance. Waterproof and can be rinsed for reuse. Features an open mesh cloth backing which reduces loading.



UPC Number	Product ID	Grade	Size	Case Qty	Units
00-051131-50215-4	9089NA	FIN	4.375"x11"	40	PH
00-051131-53738-5	9090NA	MED	4.375"x11"	40	PH

Abrasives, Packaged, 3M™ Pro-Pak™ Abrasives

3M™ Pro-Pak™ Drywall Sanding Screens

3M™ Pro-Pak™ Drywall Sanding Screens are waterproof and can be rinsed for reuse. Designed for sanding drywall joints, patching compounds and plaster. Made with sharp silicon carbide mineral for long-lasting performance.



UPC Number	Product ID	Grade	Size	Case Qty	Units
00-051144-99438-0	99438	120 grit	4-3/16"x11¼"	10	PH
00-051144-99436-6	99436	200 grit	4-3/16"x11¼"	10	PH

Abrasives, Packaged, Sanding Sponges

3M™ Detail Area and Angled Sanding Sponge

3M™ Detail Area and Angled Sanding Sponge is ideal for either dry or wet sanding of wood, paint, metal, plastic and drywall. Rinse and reuse. Angled edge sands corners without affecting adjacent wall or "popcorn" textured ceilings.



UPC Number	Product ID	Grade	Size	Case Qty	Units
00-051115-07053-2	CP040	FIN	4-7/8"x2-7/8"x1"	24	PH

3M™ Drywall Sanding Sponge CP042

3M™ Detail Area/Angled Drywall Sanding Sponge is ideal for sanding drywall and plaster during spot repair. When finished, simply rinse and reuse. Available in fine grade.



UPC Number	Grade	Size	Case Qty	Units
00-051115-07056-3	FIN	4.875"x2.875"x1"	24	PH

Abrasives, Packaged, Sanding Sponges, cont'd

3M™ Full Size Sanding Sponge

3M™ Full Size Sanding Sponge is ideal for dry or wet sanding of wood, paint, metal, plastic and drywall. When finished, simply rinse and reuse. Conformable, comfortable, flexible and convenient.



UPC Number	Product ID	Grade	Size	Case Qty	Units
00-051115-00409-4	CP001	FIN	3¾"x2-5/8"x1"	24	PH
00-051115-00408-7	CP002	MED	3¾"x2-5/8"x1"	24	EA

3M™ Sanding Sponge

3M™ Sanding Sponge is for either dry or wet sanding. Ideal for sanding wood, paint, metal, plastic and drywall. Two sanding grades on one sponge in a combination of extra fine/fine. Rinse and reuse.



UPC Number	Product ID	Grade	Size	Case Qty	Units
00-051131-85076-7	900-CP	FIN/MED	3¾"x2-5/8"x1"	4	PH

3M™ Small Area Sanding Sponge 908NA

3M™ Small Area Sanding Sponge is for either dry or wet sanding. Ideal for sanding wood, paint, metal, plastic and drywall. Two sanding grades on one sponge in a combination of extra fine/fine, fine/medium, or medium/coarse. Rinse and reuse.



UPC Number	Grade	Size	Case Qty	Units
00-051131-50038-9	FIN/MED	3¾"x2-5/8"x1"	24	EA

Masking Systems

3M™ Hand-Masker™ Masking Film Plus

Pre-folded, high-density, nonporous film for paint masking and paint overspray protection. Flake resistant for multiple coat use. May be used with lacquers. Use with 3M™ Hand-Masker™ M3000 dispenser. Color: White.



UPC Number	Product ID	Size	Case Qty	Units
00-051131-06845-2	MF24+	24"x180'	12	RL
00-051131-06860-5	MF36	36"x90'	12	RL
00-051131-06848-3	MF48+	48"x180'	12	RL
00-051131-77406-3	MF72+	72"x90'	12	RL
00-051131-77407-0	MF99+	99"x90'	12	RL
00-051131-06861-2	MF144+	144"x60'	12	RL

Masking Systems, cont'd

3M™ Hand-Masker™ Pre-Folded Contractor's Plastic CP4

3M™ Hand Masker™ Pre-Folded Contractors Plastic CP4, 48" x 180' Pre-Folded, non treated high density film dispenses on M3000 and folds out to 48" for draping and covering large areas, dust containment and overspray protection with latex paints.



UPC Number	Size	Case Qty	Units
00-051131-86806-9	4'x180'	12	RL

3M™ Hand-Masker™ Pre-Folded Contractor's Plastic CP6

Pre-folded, non treated high density plastic dispenses on M3000 and folds out to 6'. For draping and covering large areas, dust containment and overspray protection.



UPC Number	Size	Case Qty	Units
00-051131-79683-6	6'x90'	12	RL

3M™ Hand-Masker™ Premium Quality Masking Paper MP18

3M™ Hand-Masker™ Masking Paper is available in two grades: general purpose or premium quality. Premium quality is designed to minimize bleed-through and general purpose paper is ideal with water-based coatings.



UPC Number	Size	Case Qty	Units
00-051115-06904-8	18"x60yds	12	RL

3M™ Hand-Masker™ Pre-Taped Drop Cloth w/ 72" General Purpose Masking Tape

3M™ Hand-Masker™ Pre-Taped Plastic Drop Cloth PT2020-72 is a pre-folded high density plastic drop cloth pre-taped with General Purpose Masking tape. The plastic drop cloth unfolds out to 72".



UPC Number	Product ID	Case Qty	Units
00-051131-80052-6	PT2020-72	8	RL

Masking Systems, cont'd

3M™ Hand-Masker™ Pre-Taped Plastic Drop Cloth PT2090

3M™ Hand-Masker™ Pre-Taped Plastic Drop Cloth PT2090. This is a pre-folded high density plastic drop cloth pre-taped with Scotch® 2090 Long-Mask™ tape. Plastic folds out.



UPC Number	Product ID	Case Qty	Units
00-051131-06696-0	PT2090-24	12	RL
00-051131-06697-7	PT2090-35	12	RL

Safety Products, Retail Packed Personal Safety Products

3M™ Class 2 Construction Safety Vest 92053-80025

The Construction Safety Vest features a 5-point tear away design that helps to protect the worker if a piece of the vest is caught on a piece of moving equipment. HiViz Orange Color. ANS107-2004, Class 2, CSA Ontario MOL.

UPC Number	Product ID	Extra Desc	Color	Case Qty	Units
10-078371-61249-5	92053-80025	Orange	Orange	5	EA

3M™ Construction/Industrial First Aid Kit 94507-80025

This ANSI approved first aid kit contains 131 pieces in an organized, weather resistant case, designed for easy storage on the jobsite or in your truck. Includes premium first aid components such as a CPR barrier and eyewash in addition the essentials.

UPC Number	Product ID	Color	Case Qty	Units
10-078371-61250-1	94507-80025	Blk/Gry	6	EA

3M™ Day/Nighttime Safety Vest, 94601-80030

This lightweight HiViz yellow safety vest with 1 in 3M Scotchlite™ reflective material and is ideal for recreational or light duty use. This breathable mesh design includes adjustable straps for one-size fits most sizing and a cell phone pocket.

UPC Number	Product ID	Case Qty	Units
10-078371-62557-0	94601-80030	8	EA

Class 2 Construction Safety Vest, 94617-80030

The Class 2 Construction Safety Vest features a 5-point tear-away design that helps to protect the worker if vest is caught on moving equipment. Includes 2 large pockets. HiViz Yellow Color & 3M Scotchlite™ Silver Tape. ANSI 107-2004, Class 2, FHWA

UPC Number	Product ID	Extra Desc	Color	Case Qty	Units
10-078371-94617-0	94617-80030	HiViz Yellow	Yellow	5	EA

Safety Products, Retail Packed Personal Safety Products, cont'd

Class 2 Construction Safety Vest, 94625-80030

The Class 2 Construction Safety Vest features a 5-point tear-away design that helps to protect the worker if vest is caught on moving equipment. Includes 2 large pockets. HiViz Orange Color & 3M Scotchlite™ Silver Tape. ANSI 107-2004, Class 2, FHWA

UPC Number	Product ID	Extra Desc	Color	Case Qty	Units
10-078371-94625-5	94625-80030	HiViz Org	Orange	5	EA

Class 2 Surveyors Safety Vest, 94618-80030

The Class 2 Surveyor's Safety Vest features 4 convenient pockets with front radio pocket with flap, 2 LG interior plus pencil pockets. Adjustable size. HiViz Yellow Color & 2 in 3M Scotchlite™ Silver Reflective Material. ANSI 107-2004, Class 2, FHWA

UPC Number	Product ID	Extra Desc	Color	Case Qty	Units
10-078371-94618-7	94618-80030	HiViz Yellow	Yellow	5	EA

Thinsulate™ Thermal Insoles

Thinsulate thermal insoles combine 3M™ Thinsulate™ Insulation with energy-return performance foams to provide exceptional warmth and minimize shock in every step. With the added features of antimicrobial and moisture management technology, Thinsulate thermal insoles reduce odor-causing bacteria and keep your feet dry while you're active outdoors.

UPC Number	Size	Color	Case Qty	Units
50-051131-17112-6	Men's 7-8; Women 9-10	Red	12	PR
50-051131-17113-3	Men's 9-10; Women 11-12	Red	12	PR
50-051131-17114-0	Men's 11-12	Red	12	PR
50-051131-17115-7	Men's 13-14	Red	12	PR
50-051131-17116-4	Women's 5-6	Red	12	PR
50-051131-17117-1	Women's 7-8	Red	12	PR

3M™ Day/Nighttime Reflective Safety Vest 94601-80025

This lightweight HiViz yellow safety vest with 1 in reflective stripes is ideal for recreational or light duty use. Design includes adjustable straps for one-size fits most sizing, a cell phone pocket and is made from a comfortable mesh material.

UPC Number	Product ID	Extra Desc	Color	Case Qty	Units
10-078371-61319-5	94601-80025	HiViz Yellow	Yellow	8	EA

3M™ Tyvek® Coveralls 92054-00000

Puncture and tear resistant Tyvek coverall with zipper closure and standard collar. Fits most wearers between 5'7" and 6'2", in height and 150lbs to 220lbs in weight.

UPC Number	Product ID	Case Qty	Units
10-078371-92054-5	92054-00000	10	EA

Safety Products, Retail Packed Personal Safety Products, cont'd

3M™ Hooded Durable Coverall 92074-80025

This Coverall with hood, zipper front and elastic ankles/wrist closures provides protection for paint and spray clean up. It is made from a breathable material that helps you stay cool and also will resist tears and punctures. One size fits most.

UPC Number	Product ID	Case Qty	Units
10-078371-62018-6	92074-80025	6	EA

Warranty, Limited Remedy, and Disclaimer: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. User is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price. **Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



**Industrial Adhesives and Tapes Division
Building and Contractor Market**

3M Center, Building 225-3S-06
St. Paul, MN 55144-1000
866-513-4026 . 877-731-3962 (Fax)
www.3M.com/contractor

3M, Scotch, Scotch-Brite, Scotch-Weld, Roloc, Green Corps, Wetordry, Stikit, Adflo, Speedglas, Super 77, Bondo, Scotchrap, ScotchCode, Tartan, ScotchKote, Temflex, Sharpshooter, Interam, Powerflo, Virtua, Mitrous, VHB, Peltor, Tuffmaster, XLR8, Uvicator, E-A-Rsoft, E-A-R, SafeLight, Push-Ins, PowerCom Plus and Pro-Pak are trademarks of 3M Company.

Orange County Choppers, OCC and the OCC logo and related indicia are trademarks of Orange County Choppers Design Properties, LLC used under license.

3M is a trademark of 3M Company.

Printed in U.S.A.
© 3M 2010